


FLOOR COVERING

INSTALLATION SYSTEMS

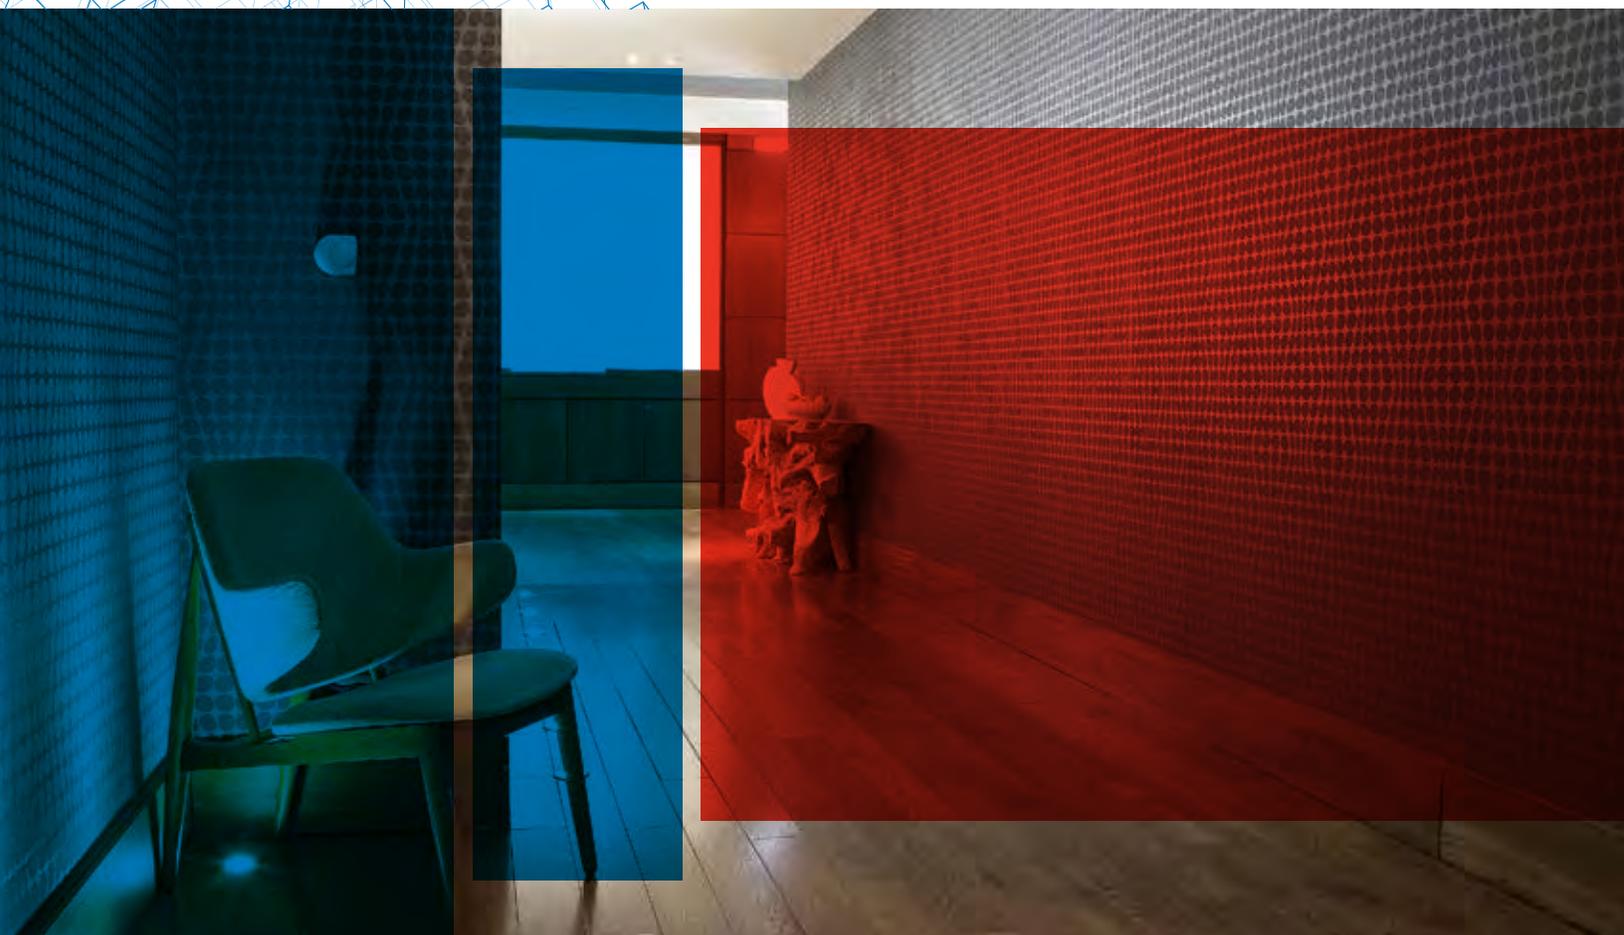

- Subfloor Treatment Products
- Patching and Skimcoating Products
- Self-Levelers
- Primers
- Slope and Deep-Fill Products
- Sound-Reduction Products

- Carpet Installation Adhesives
- Carpet Installation Accessories
- Resilient Flooring Adhesives
- Wood-Flooring Adhesives
- Wood-Flooring Installation Accessories

- Moisture-Control Products
- Decorative Toppings
- Coating and Sealer
- Densifiers
- Sealants and Joint Fillers





Product Lines of the USA

FLOOR COVERING INSTALLATION SYSTEMS

PRODUCTS FOR **SPORTS FLOORING**

CONCRETE RESTORATION SYSTEMS

TILE & STONE INSTALLATION SYSTEMS

PRODUCTS FOR **WOOD FLOORING**

PRODUCTS FOR **UNDERGROUND CONSTRUCTION**

WATERPROOFING SYSTEMS

ADMIXTURES FOR **CONCRETE**

CEMENT ADDITIVES

PRODUCTS FOR **STRUCTURAL STRENGTHENING**

PRODUCTS FOR THE **MARINE INDUSTRY**

Table of contents

Introduction	2-3
Technology Logos Index	2-3

PRODUCT SELECTION CHARTS

Patching and Skimcoating Compounds.....	4
Preparation Products for High-Moisture Concrete.....	4
Moisture Control.....	4
Self-Leveling Underlayments.....	5
Primers for Self-Leveling Materials...6	
Carpet Adhesives.....	7
Resilient Flooring Adhesives	8
Wood-Flooring Adhesives.....	9

PRODUCT INFORMATION

Subfloor Treatment Products

<i>Planiprep™ AR</i>	10
<i>Planiprep SA</i>	10
<i>Planiprep ET</i>	10

Patching and Skimcoating Products

<i>Planitex™ UNS</i>	11
<i>Planipatch®</i>	11
<i>Planipatch Plus®</i>	11
<i>Planiprep SC</i>	12
<i>Planiprep MRS</i>	12
<i>Mapecem® Quickpatch</i>	12

Self-Levelers

<i>Planitex SL</i>	13
<i>Planitex SLF</i>	13
<i>Novoplan® SP</i>	13
<i>Novoplan 2 Plus</i>	14
<i>Novoplan Easy Plus</i>	14
<i>Novoplan DPL</i>	14
<i>Ultraplan® M20 Plus</i>	15
<i>Ultraplan 1 Plus</i>	15
<i>Ultraplan Easy</i>	15
<i>Ultraplan LSC</i>	16
<i>Ultraplan Lite</i>	16
<i>Ultraplan QuickTraffic</i>	16
<i>Polyplan™ RSL</i>	17
<i>Ultraplan Extreme 2</i>	17
<i>MAPEI Self-Leveling Mixing Kit</i> ...17	
<i>MAPEI Self-Leveling Mixing Barrel Cart</i>	18

<i>MAPEI Self-Leveling Mixing Barrel</i>	18
<i>MAPEI Self-Leveling Spike Roller</i>	18

Primers

<i>Primer L™</i>	19
<i>Primer T™</i>	19
<i>Primer X™</i>	19
<i>ECO Prim Grip™</i>	20
<i>Primer WE™</i>	20
<i>Primer E™</i>	20
<i>Primer CE™</i>	21
<i>Planibond® EBA</i>	21
<i>Mapelath™</i>	21
<i>Mapesand™ Coarse</i>	22
<i>Mapesand Fine</i>	22

Slope and Deep-Fill Products

<i>Topcem™ Premix</i>	22
<i>Mapecem® Premix</i>	23

Sound-Reduction Products

<i>MAPEI SM Primer™</i>	23
<i>MAPEI SM Primer Fast</i>	23
<i>Mapeguard® 2</i>	24
<i>Mapesonic™ 2</i>	24
<i>Mapesonic RM</i>	24

Carpet Installation Adhesives

<i>Ultrabond ECO® 20</i>	25
<i>Ultrabond ECO 120</i>	25
<i>Ultrabond ECO 220</i>	25
<i>Ultrabond ECO 85</i>	26
<i>Ultrabond ECO 185</i>	26
<i>Ultrabond ECO 285</i>	26
<i>Ultrabond ECO 420</i>	27
<i>Ultrabond ECO 811</i>	27
<i>Ultrabond® Spray CTA</i>	27

Carpet Installation Accessories

<i>Ultrabond ECO 3185</i>	28
<i>Ultrabond ECO 2285</i>	28

Resilient Flooring Adhesives

<i>Ultrabond ECO 290</i>	28
<i>Ultrabond ECO 390</i>	29
<i>Ultrabond ECO 300</i>	29
<i>Ultrabond ECO 350</i>	29
<i>Ultrabond ECO 360</i>	30

<i>Ultrabond ECO 373</i>	30
<i>Ultrabond Spray RFA</i>	30
<i>Ultrabond ECO 560</i>	31
<i>Ultrabond ECO 570</i>	31
<i>Ultrabond ECO 611</i>	31
<i>Ultrabond ECO 711</i>	32
<i>Ultrabond ECO 575</i>	32
<i>Ultrabond G15</i>	32
<i>Ultrabond G17</i>	33
<i>Ultrabond G19</i>	33
<i>Ultrabond G21</i>	33
<i>Mapecontact™ MRT</i>	34
<i>Mapecontact SRT</i>	34

Wood-Flooring Adhesives

<i>Ultrabond ECO® 960</i>	34
<i>Ultrabond ECO 962</i>	35
<i>Ultrabond ECO 975</i>	35
<i>Ultrabond ECO 977</i>	35
<i>Ultrabond ECO 980</i>	36
<i>Ultrabond ECO 983</i>	36
<i>Ultrabond ECO 995</i>	36
<i>Ultrabond ECO 985</i>	37

Wood-Flooring Installation Accessories

<i>Ultrabond ECO 907</i>	37
<i>Ultrabond Urethane Cleaner</i>	37

Moisture-Control Products

<i>Planiseal® MSP</i>	38
<i>Planiseal PMB</i>	38
<i>Planiseal VS</i>	38
<i>Planiseal VS Fast</i>	39

Decorative Toppings

<i>Ultratop®</i>	39
<i>Ultratop PC</i>	39

Coating and Sealer

<i>Mapecrete™ Protector FF</i>	40
--------------------------------------	----

Densifiers

<i>Mapecrete Hard LI</i>	40
<i>Mapecrete Hard SB</i>	40
<i>Mapecrete Hard SI</i>	41

Sealants and Joint Fillers

<i>Planibond JF</i>	41
<i>Planiseal RapidJoint 15</i>	41

A WORLDWIDE LEADER

Originally established in 1937, today MAPEI is a privately owned global corporation headquartered in Milan, Italy, with 89 subsidiaries including 83 plants in 36 countries. The company specializes in manufacturing chemical products for building, including waterproofing products, specialty mortars and admixtures for concrete, products to restore historic buildings, and decorative and protective coatings for concrete surfaces. In addition, MAPEI is the world leader in the manufacturing of mortars, grouts, adhesives and complementary products for installing all types of floor and wall coverings. MAPEI Corporation, the division responsible for supporting the North American markets, is based in Deerfield Beach, Florida, and employs over 1,450 team members – ranging from Manufacturing and R&D to Technical Services and Sales. The Canadian subsidiary MAPEI Inc. supports those efforts with about 350 additional employees.

SUPERIOR PRODUCTS

A Complete Range of Products

MAPEI produces the most innovative products for the construction market. More than 5,500 products globally (adhesives, sealants, mortars, admixtures, latex, etc.) are manufactured



in MAPEI's plants, which produce the world's most complete range of building products. Diversified, high-quality chemical products – from powdered adhesives, to liquid and paste products, to polymers – are created to meet the needs of more than 66,000 customers around the world.

Quality Control

MAPEI is an ISO 9001-2000 certified company. Its products are produced according to exacting standards, strictly adhering to process and procedural guidelines with documented compliance. This rigid production format is vigilantly followed to ensure that every product is produced uniformly from batch to batch.

PROFESSIONAL SUPPORT NETWORK

Knowledgeable Sales Force

MAPEI offers the largest, most highly trained sales force within the industry to serve your needs for product application/installation recommendations. Its sales representatives are focused on supporting you with

TECHNOLOGY LOGOS INDEX



MAPEI's BioBlock technology has been added to select products to help protect them from mold and mildew after application.



Green Label Plus identifies adhesives that have been certified to meet low chemical emissions criteria for indoor air quality.



Products developed with Ultralite Technology are lightweight, high-performing and easy to use, and provide extended coverage at the same product weight as traditional products.



MAPEI's FastTrack Ready products reduce the required steps of an installation and/or perform more quickly than current methods.



product knowledge, product demonstrations, product information, marketing support materials and other relevant tools to help you generate sales.

Technical Expertise

An in-house Technical Services Call Center responds to customers' telephone inquiries with answers to installation challenges in real time. In addition, MAPEI can offer field support for job startups, product training and on-site problem resolution.

Customer Service Plus

MAPEI's standards for customer service are best-in-class. Our leadership includes such service innovations as:

- Customer-friendly, efficient processes
- One-call resolution
- Employee commitment to effective customer dialog

Innovative Research & Development

Worldwide, more than 12% of MAPEI employees



are involved in the development of new technologies and product innovations, keeping our customers at the forefront of the industry. The company has taken the additional initiative of focusing its R&D efforts on environmentally sustainable solutions.


To remain on the cutting edge of innovation, MAPEI reinvests 5% of its annual revenues into researching and developing new products and technologies; in particular, 70% of its R&D efforts are directed to develop eco-sustainable and environmentally friendly products.

Best-BackedSM Warranty Program

To bring it all together, MAPEI complements the industry's best products with simple, easy-to-understand requirements for a variety of warranty options.



Products featuring the UL Classified logo are certified for fire resistance by Underwriter Laboratories standards.

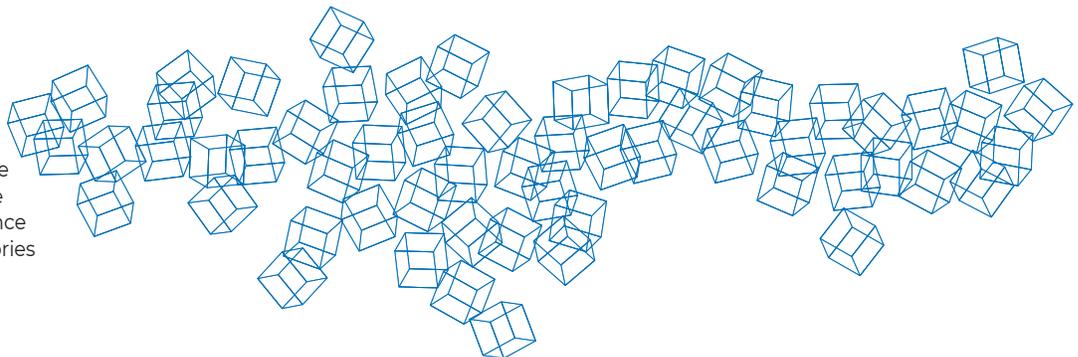

Patching and Skimcoating Compounds

	Thickness of repair	Waiting time before installation	
		Ceramic, tile and stone	Carpet, resilients and wood
Planitex™ UNS Standard gypsum-based floor-patching compound	Featheredge to 1/2" (12 mm)	40 minutes to 1 hour	40 minutes to 1 hour
Planipatch® Fast-setting, polymer-modified, cement-based patching compound	Featheredge to 1/2" (12 mm)	1 hour	1 hour
Planiprep™ SC High-performance, fiber-reinforced skimcoating compound	Featheredge to 1" (2.5 cm)	30 to 90 minutes	30 to 90 minutes
Topcem™ Premix Ready-to-use, accelerated-cure screed	1/4" to 2" (6 mm to 5 cm)	24 hours	48 hours
Mapecem® Premix Fast-setting screed mortar	1/4" to 4" (6 mm to 10 cm)	3 to 4 hours	16 to 18 hours

Preparation Products for High-Moisture Concrete

	Thickness of repair	Ceramic, tile and stone	Carpet, resilient and wood	Moisture-resistant adhesive systems
Planiprep™ MRS Moisture-resistant, high-compressive-strength skimcoating compound	Featheredge to 1/4" (6 mm)	6 hours	24 hours	2 hours
Mapecem® Quickpatch High-performance concrete patch	1/16" to 1-1/2" (1.5 mm to 3.8 cm) neat; 1-1/2" to 3" (3.8 to 7.5 cm) neat in areas no larger than 24 sq. ft. (2.23 m²)	90 minutes	16 hours	16 hours
Ultraplan® Extreme 2 Quick-setting, water-resistant, high-compressive-strength, self-leveling underlayment	1/8" to 1" (3 mm to 2.5 cm)	3 hours	24 to 36 hours	3 hours

Moisture Control

	Surface profiling requirements	Moisture reduction
Planiseal® VS Fast Fast-track, alkali-resistant, epoxy moisture-reduction barrier	CSP #3 to #4	Up to 25 lbs. (11.3 kg) MVER and 100% RH
Planiseal VS Alkali-resistant, epoxy moisture-reduction barrier	CSP #3 to #4	Up to 25 lbs. (11.3 kg) MVER and 100% RH
Planiseal PMB One-component, polyurethane moisture barrier and bonding agent	Clean and porous, or CSP #1 to #2	Up to 25 lbs. (11.3 kg) MVER and 100% RH
Planiseal MSP Moisture-control membrane, adhesive isolator, sealer, pH blocker and primer	Clean and porous, or CSP #1	Up to 15 lbs. (6.80 kg) MVER and 99% RH



Self-Leveling Underlayments

	Requires surface profiling	Single-lift application range	Waiting time before installation		Compressive strength*
			Ceramic, tile and stone	Carpet, resilients and wood	
Planitex™ SL High-flow, gypsum self-leveling underlayment	No	1" to 2" (2.5 to 5 cm) with #20 to #40 mesh sand; 2" to 3" (5 to 7.5 cm) with pea gravel	<i>Planitex SL</i> is dry when a moisture test with a Delmhorst Model G-79 or BD-2100 meter (set to the gypsum scale) reads 5% or less. This can range anywhere from 12 hours for an application thickness of 1/8" (3 mm) to 28 days for a thickness of 3" (7.5 cm).		> 4,640 psi (32 MPa)
Planitex SLF Fiber-reinforced, gypsum self-leveling underlayment	No	1/8" to 2" (3 mm to 5 cm)	<i>Planitex SLF</i> is dry when a moisture test with a Delmhorst Model G-79 or BD-2100 meter (set to the gypsum scale) reads 5% or less. This can range anywhere from 12 hours for an application thickness of 1/8" (3 mm) to 7 to 14 days for a thickness of 1" (2.5 cm).		> 5,655 psi (39 MPa)
Novoplan® SP Standard-performance self-leveling underlayment	Yes	1/8" to 1/2" (3 to 12 mm)	24 hours	24 hours	> 3,600 psi (24.8 MPa)
Novoplan 2 Plus Professional self-leveling underlayment	Yes	1/8" to 1" (3 mm to 2.5 cm)	24 hours	48 to 72 hours	> 4,200 psi (29.0 MPa)
Novoplan Easy Plus Easy-preparation, self-leveling underlayment	No	Featheredge to 1" (2.5 cm)	16 hours	36 hours	> 3,500 psi (24.1 MPa)
Novoplan DPL Deep-pour, self-leveling compound		1/4" to 4" (6 mm to 10 cm)	24 hours	48 to 72 hours	> 3,500 psi (24.1 MPa)
Ultraplan® 1 Plus High-performance, quick-setting, self-leveling underlayment	Yes	Featheredge to 1-1/12" (3.8 cm)	3 hours	16 to 24 hours	> 4,150 psi (28.6 MPa)
Ultraplan Easy High-performance, easy-preparation, self-leveling underlayment	No	1/16" to 2" (1.5 mm to 5 cm)	3 hours	16 to 24 hours	> 4,100 psi (28.3 MPa)
Ultraplan M20 Plus Quick-setting, high-compressive-strength underlayment	Yes	1/8" to 2" (3 mm to 5 cm)	3 hours	16 hours	> 5,000 psi (34.5 MPa)
Ultraplan Lite Lightweight, self-leveling underlayment	Yes	1/8" to 2" (3 mm to 5 cm)	6 hours	48 to 72 hours	> 3,500 psi (24.1 MPa)
Ultraplan LSC High-flow, fast-setting, self-leveling liquid skimcoat	Yes	1/16" to 1/2" (1.5 to 12 mm)	3 hours	12 hours	> 4,150 psi (28.6 MPa)
Ultraplan QuickTraffic Extremely fast-setting, self-leveling underlayment	Yes	1/8" to 1/2" (3 to 12 mm)	1 hour	3 hours	> 7,250 psi (50 MPa)
Polyplan™ RSL Rapid-setting, polymer-modified, self-leveling underlayment	No	1/8" to 1/2" (3 to 12 mm)	2 hours	3 hours	> 4,800 psi (33.1 MPa)
Ultraplan Extreme 2 Extremely fast-setting, self-leveling underlayment	Yes	1/8" to 1" (3 mm to 2.5 cm)	3 hours	24 to 36 hours	> 5,600 psi (38.6 MPa)

* Compressive strength at 28 days (ASTM C109)



Primers for Self-Leveling Materials

	Primer L™ Advanced-technology, acrylic latex primer for concrete	Primer WE™ Water-based epoxy primer	Primer T™ All-purpose primer for self-leveling underlayments	Primer X™ Fast-drying, textured primer for nonporous substrates	Primer E™ High-performance, 100%-solids epoxy primer	Primer CE™ Ultra low-viscosity, consolidating epoxy primer	Planibond® EBA High-modulus bonding agent (using sand broadcast method only)	ECO Prim Grip™ Multipurpose, bond-promoting primer	Planiseal® MSP Moisture-control membrane, adhesive isolator, sealer, pH blocker and primer	Planiseal PMB One-component, polyurethane moisture barrier and bonding agent
SUBSTRATES	Absorbent concrete	Yes	No	Yes	No	Yes	Yes	Yes	Yes	Yes
	Nonabsorbent concrete	No	Yes	Yes	Yes	Yes	Yes	Yes	No	No
	Gypsum	Yes	No	Yes	No	No	Yes	No	Yes	No
	Exterior-grade plywood	No	Yes	Yes	No	Yes	Yes	Yes	Yes	No
	Ceramic	No	Yes	Yes	Yes	Yes	Yes	Yes	No	No
	VCT	No	Yes	Yes	Yes	Yes	Yes	No	Yes	No
	Terrazzo	No	No	Yes	Yes	Yes	Yes	Yes	Yes	No
	Steel	No	No	No	No	Yes	Yes	Yes	No	No
	Use with epoxy moisture barriers	No	Yes	Yes	Yes	Yes	Yes	Yes	No	No
	Approximate coverage	600 to 800 sq. ft. per U.S. gal. (55.7 to 74.3 m ² per 3.79 L) (per application; many substrates require multiple applications)	200 to 400 sq. ft. per U.S. gal. (18.6 to 37.2 m ² per 3.79 L)	200 to 400 sq. ft. per U.S. gal. (18.6 to 37.2 m ² per 3.79 L)	1,200 to 1,400 sq. ft. per 2 U.S. gals. (111 to 130 m ² per 7.57 L)	150 to 200 sq. ft. per U.S. gal. (13.9 to 18.6 m ² per 3.79 L)	80 to 140 sq. ft. per U.S. gal. (7.43 to 13.0 m ² per 3.79 L)	50 to 100 sq. ft. per U.S. gal. (4.65 to 9.29 m ² per 3.79 L)	150 to 300 sq. ft. per U.S. gal. (13.9 to 27.9 m ² per 3.79 L)	400 to 600 sq. ft. (37.2 to 55.7 m ²)
Cure time at 73°F (23°C)	3 hours	> 2 hours	2 to 5 hours	1 to 2 hours	6 to 7 hours	5 to 6 hours	12 hours	15 to 60 minutes	6 hours	6 hours
Window to install self-leveling materials	3 to 18 hours	2 to 18 hours	Up to 24 hours	12 hours	Next day	Next day	24 hours	24 hours	24 hours	24 hours

While the primers listed are suitable on the substrates indicated, many variables impact final performance. Review the specific primers' Technical Data Sheets for specific instructions. On large projects, consult with a MAPEI technical consultant to ensure that the best primer is selected for your application.

Carpet Adhesives

	ActionBac	Unitary with ActionBac	Outdoor carpet	Jute	Urethane-foam-backed	Enhancer-backed	Latex unitary	Urethane unitary	Woven interlock	Woven	Hot-melt-backed	Wilton	Karastan/Karaloc backing	Vinyl-backed carpet tile	Non-PVC-backed carpet tile	Vinyl-backed carpet	Wall carpeting
Ultrabond ECO® 20 Standard flooring adhesive	○	○		○	○	○	○										
Ultrabond ECO 120 Professional flooring adhesive	◐	◐		◐	◐	◐	◐	◐	◐	◐	◐						
Ultrabond ECO 220 Premium flooring adhesive	●	●		●	●	●	●	●	●	●	●	●	●				
Ultrabond ECO 85 Standard, quick-grab carpet adhesive	○	○		○	○	○	○										
Ultrabond ECO 185 Professional carpet adhesive	◐	◐		◐	◐	◐	◐	◐	◐	◐	◐						
Ultrabond ECO 285 Premium, wet-set carpet adhesive	●	●		●	●	●	●	●	●	●	●						
Ultrabond ECO 420 Professional, outdoor carpet adhesive	●	●	●	●			●	●									
Ultrabond ECO 811 Universal carpet tile adhesive														●	●		
Ultrabond ECO 300 Professional adhesive for solid vinyl and rubber flooring																◐	
Ultrabond® Spray CTA Universal spray adhesive for carpet tile														●	●		
Ultrabond ECO 350 Professional solid vinyl flooring adhesive																◐	
Ultrabond ECO 360 Premium, high-performance adhesive for solid vinyl sheet, tile and plank																●	
Ultrabond ECO 373 Universal pressure-sensitive multi-flooring adhesive														●	●	●	
Ultrabond ECO 575 Premium wall-base adhesive																	●
Mapecontact™ MRT Moisture-resistant tape for resilient flooring installation														●	●	●	

Legend: ○ = Standard ◐ = Professional ● = Premium

Resilient Flooring Adhesives

	Vinyl composition tile (VCT)	Solid vinyl tile	Luxury vinyl tile	Solid vinyl plank	Solid vinyl sheet	Conductive flooring	Fiberglass-reinforced vinyl sheet	Felt-backed residential sheet flooring	Felt-backed commercial sheet flooring	Fibrous-backed linoleum sheet flooring	Rubber tile	Rubber sheet flooring	Rubber stair treads, stringers and risers	Rubber and vinyl wall base	Reground rubber flooring
Ultrabond ECO® 20 Standard flooring adhesive								○							
Ultrabond ECO 120 Professional flooring adhesive								◐	◐						
Ultrabond ECO 220 Premium flooring adhesive								●	●						
Ultrabond ECO 290 Professional, felt-backed vinyl sheet flooring adhesive								◐	◐						
Ultrabond ECO 390 Premium linoleum flooring adhesive										●					
Ultrabond ECO 611 Standard, black, thin-spread VCT adhesive	○														
Ultrabond ECO 711 Premium, clear, thin-spread VCT adhesive	◐														
Ultrabond ECO 300 Professional adhesive for solid vinyl and rubber flooring		◐		◐	◐						◐	◐			
Ultrabond ECO 350 Professional solid vinyl flooring adhesive		◐	◐	◐	◐										
Ultrabond ECO 360 Premium, high-performance adhesive for solid vinyl sheet, tile and plank		●	●	●	●										
Ultrabond ECO 373 Universal pressure-sensitive multi-flooring adhesive	●	●	●	●	●		●	●	●						●
Ultrabond ECO 560 Premium, universal rubber-flooring adhesive		●	●	●	●			●	●		●	●			
Ultrabond® Spray RFA Universal spray adhesive for resilient flooring	●	●	●	●	●		●	●	●						
Ultrabond ECO 811 Universal carpet tile adhesive			●				●								
Ultrabond G15 Premium, fast-setting, epoxy flooring adhesive for high-moisture conditions	★	★		★	★						★	★	★		
Ultrabond G17 Conductive epoxy flooring adhesive	●					●									
Ultrabond G19 Professional, two-part urethane flooring adhesive		★		★	★						★	★	★		
Ultrabond G21 Premium, two-part urethane flooring adhesive		★		★	★						★	★	★		
Ultrabond ECO 575 Premium wall-base adhesive														●	
Ultrabond ECO 570 Premium, urethane rubber-sports-flooring adhesive															●
Mapecontact™ MRT Moisture-resistant tape for resilient flooring installation	●	●	●	●	●		●				●	●	●	●	●
Mapecontact SRT Sound-reduction, moisture-resistant tape for resilient and wood flooring installation	●	●	●	●	●		●				●	●	●	●	●

Legend: ○ = Standard ◐ = Professional ● = Premium ★ = Superior



Wood-Flooring Adhesives

	Finger block parquet	Engineered wood	Solid wood	Bamboo	Exotic wood	Cork underlayment
Ultrabond ECO® 960 Professional engineered-wood-flooring adhesive	●	●				●
Ultrabond ECO 962 Premium, pressure-sensitive engineered-wood-flooring adhesive	●	●				●
Ultrabond ECO 975 Standard urethane adhesive for hardwood flooring	○	○	○			○
Ultrabond ECO 977 Fast-set urethane adhesive for hardwood flooring	☹	☹	☹			☹
Ultrabond ECO 980 Premium urethane adhesive for hardwood flooring	●	●	●	●	●	●
Ultrabond ECO 983 Modified-silane, moisture-control wood-flooring adhesive	●	●	●	●	●	●
Ultrabond ECO 995 Premium moisture-control, sound-reduction and wood-flooring adhesive	☐	☐	☐	☐	☐	☐
Ultrabond ECO 985 Hybrid-polymer-based, moisture-control and sound-reducing wood-flooring adhesive	☐	☐	☐	☐	☐	☐
Mapecontact™ SRT Sound-reduction, moisture-resistant tape for resilient and wood flooring installation	☐	☐	☐	☐	☐	☐

Legend:

- = Standard
- = Professional
- = Premium
- ☐ = Moisture control, sound reduction, bonding
- ☹ = Moisture control and bonding



Planiprep™ AR

Adhesive Remover

Planiprep AR adhesive remover is a powerful, water-based adhesive remover designed to remove most water-based adhesives quickly and easily from the surface of concrete subfloors. *Planiprep AR* is the first step in preparing an adhesive-coated concrete subfloor to receive new floor covering. It must be used in conjunction with *Planiprep SA* concrete scouring agent and *Planiprep ET* epoxy concrete subfloor treatment.

	Product Code	Packaging
U.S./Canada	37168	Pail: 5 U.S. gals. (18.9 L)



Planiprep™ SA

Concrete Scouring Agent

Planiprep SA is a powerful, acidic scouring solution designed for preparing nonporous or chemically contaminated concrete surfaces. This product will chemically etch the surface of concrete to create a scoured, porous surface, promoting excellent adhesion for the subsequent application of adhesives or *Planiprep ET*.

	Product Code	Packaging
U.S./Canada	37068	Pail: 5 U.S. gals. (18.9 L)



Planiprep™ ET

Epoxy Concrete Subfloor Treatment

Planiprep ET epoxy concrete subfloor treatment is an ultra low-viscosity, two-component, penetrating, 100%-epoxy treatment designed to prepare concrete slabs treated with *Planiprep SA* concrete scouring agent for subsequent flooring installation. For subsequent flooring installation that have been treated using *Planiprep SA* concrete scouring agent. *Planiprep ET* penetrates deeply into the prepared concrete surface, strengthening it and creating a suitable surface for direct application of all MAPEI adhesives that are approved for use on nonporous substrates. *Planiprep ET* must be used in a system with *Planiprep SA*. Used in this manner, the product system provides subfloor moisture emission control up to 12 lbs. (5.44 kg) and 92% relative humidity (RH) without the need for shotblasting the concrete surface.

	Product Code	Packaging
U.S./Canada	36964	Part A, Pail: 2.2 U.S. gals. (8.33 L)
	36953	Part B, Bottle: 0.8 U.S. gal. (3.03 L)





Planitex™ UNS

Standard, Gypsum-Based Floor-Patching Compound

Planitex UNS is a fast-setting, nonshrinking, polymer-modified, gypsum-based patching compound that is easy to apply. *Planitex UNS* is for repairing holes, voids and depressions in concrete, gypsum-based surfaces or wood underlayments before the installation of floor-covering materials. It also is designed for patching holes in drywall and plaster walls.

	Product Code	Packaging
U.S.	2051026	Bag: 25 lbs. (11.3 kg)



Planipatch®

Fast-Setting, Polymer-Modified, Cement-Based Patching Compound

Planipatch is an ultra fast-drying, self-curing, polymer-modified, cement-based patching compound that rapidly develops high compressive strength. When *Planipatch* is mixed with *Planipatch Plus*®, the *Planipatch Plus* System can be used as an embossing leveler or as a patch to fill voids over properly prepared vinyl sheet goods, vinyl composition tile (VCT) and cement terrazzo before the direct glue-down installation of floor coverings.

	Product Code	Packaging
U.S.	0080045	Bag in pail: 45 lbs. (20.4 kg)
	0080025	Bag: 25 lbs. (11.3 kg)
	0080010	Bag: 10 lbs. (4.54 kg)
Canada	11027000	Bag: 22.7 lbs. (10 kg)
	0080010	Bag: 10 lbs. (4.54 kg)
	11004000	Bag: 4.4 lbs. (2.0 kg)



Planipatch Plus®

High-Performance Additive for Planipatch®

Planipatch Plus is an acrylic latex additive for use specifically with *Planipatch* fast-setting, polymer-modified, cement-based patching compound. Mixing *Planipatch Plus* undiluted with *Planipatch* allows it to be used over a variety of substrates including vinyl composition tile (VCT), felt-backed sheet vinyl, cutback adhesive residue and MAPEI moisture barriers.

	Product Code	Packaging
U.S./Canada	7050005	Pail: 5 U.S. gals. (18.9 L)
	7050001	Jug: 1 U.S. gal. (3.79 L)



Planiprep™ SC

High-Performance, Fiber-Reinforced Skimcoating Compound

Planiprep SC is a high-performance, polymer-modified, fiber-reinforced, cement-based skimcoating and patching compound. Use *Planiprep SC* to skimcoat and smooth minor surface variations and defects on common substrates. *Planiprep SC* creates a strong, durable surface ready for almost any floor application. Its unique formulation mixes easily with water and produces an easy-to-apply patching compound. Rapid-setting *Planiprep SC* allows for fast-track flooring installations in 30 to 60 minutes after application, depending on thickness and environmental conditions.

	Product Code	Packaging
U.S./Canada	37411	Bag: 10 lbs. (4.54 kg)



Planiprep™ MRS

Moisture-Resistant, High-Compressive-Strength Skimcoating Compound

Planiprep MRS is an advanced, hydraulic-cement-based skimcoating compound designed for use under moisture-controlling membranes and adhesive systems. It is especially formulated for skimcoating and patching interior horizontal concrete surfaces with high moisture content or where environmental controls are not operational. *Planiprep MRS* has no moisture vapor emission rate (MVER) limitations and can be installed without testing on properly prepared concrete substrates.

	Product Code	Packaging
U.S./Canada	1204105	Bag: 10 lbs. (4.54 kg)



Mapecem® Quickpatch

High-Performance Concrete Patch

Mapecem Quickpatch is a high-performance, fast-setting, cementitious material used for the patching of concrete surfaces.

	Product Code	Packaging
U.S./Canada	10510000	Bag: 10 lbs. (4.54 kg)
	10525000	Bag: 25 lbs. (11.3 kg)
	10550	Bag: 50 lbs. (22.7 kg)





Planitex™ SL

High-Flow, Gypsum, Self-Leveling Underlayment

Planitex SL is a high-flow, gypsum-based, self-leveling underlayment with an exceptionally smooth, hard surface for use in dry interior residential and commercial areas. *Planitex SL* provides an excellent substrate for a wide variety of floor coverings. *Planitex SL* can also be used to cover radiant or in-floor heating systems.



Planitex™ SLF

Fiber-Reinforced, Gypsum, Self-Leveling Underlayment

Planitex SLF is a fiber-reinforced, gypsum-based, self-leveling underlayment with enhanced flexural strength. It resists cracking and provides an exceptionally smooth, hard surface for use in dry, interior residential and commercial areas. *Planitex SLF* provides an excellent substrate for a wide variety of floor coverings. *Planitex SLF* can also be used to cover radiant or in-floor heating systems.



Novoplan® SP

Standard-Performance, Self-Leveling Underlayment

Novoplan SP is a standard-performance, self-leveling, calcium-aluminate-based underlayment and repair mix for interior concrete and engineer-approved floors.

	Product Code	Packaging
U.S./Canada	117450	Plastic bag: 50 lbs. (22.7 kg)

	Product Code	Packaging
U.S./Canada	1162323	Plastic bag: 50 lbs. (22.7 kg)

	Product Code	Packaging
U.S./Canada	2732123	Bag: 50 lbs. (22.7 kg)



Novoplan® 2 Plus

Professional, Self-Leveling Underlayment

Novoplan 2 Plus is a high-strength, self-leveling cement-based underlayment and repair mix with a quicker curing time, for interior concrete and engineer-approved floors.



Novoplan® Easy Plus

Easy-Preparation, Self-Leveling Underlayment

Novoplan Easy Plus is a high-strength, self-leveling, calcium-aluminate-based underlayment and repair mix for interior concrete and engineer-approved floors. Its unique formulation allows for direct application on substrates that are clean, securely bonded and properly primed.



Novoplan® DPL

Deep-Pour, Self-Leveling Compound

Novoplan DPL is a self-leveling, calcium-aluminate-based underlayment and repair mix for interior concrete and engineer-approved floors and is capable of being placed up to 4" (10 cm) in a single lift.

	Product Code	Packaging
U.S./Canada	1785156	Bag: 50 lbs. (22.7 kg)

	Product Code	Packaging
U.S./Canada	2731923	Bag: 50 lbs. (22.7 kg)

	Product Code	Packaging
U.S./Canada	2732956	Bag: 50 lbs. (22.7 kg)





Ultraplan® M20 Plus

Quick-Setting, High-Compressive-Strength Underlayment

Ultraplan M20 Plus is a calcium-aluminate-based, quick-setting, self-leveling underlayment and topping. It is specially formulated for the resurfacing and construction of interior horizontal surfaces as a high-compressive-strength underlayment with maximum resistance to wheel tracking and indentations. *Ultraplan M20 Plus* is suitable for use as a commercial wear topping in warehouse and alternate industrial applications where an exceptional flat and smooth concrete surface is desired.

	Product Code	Packaging
U.S./Canada	19250000	Bag: 50 lbs. (22.7 kg)



Ultraplan® 1 Plus

High-Performance, Quick-Setting, Self-Leveling Underlayment

Ultraplan 1 Plus is a quick-setting, self-leveling, self-drying underlayment and repair mix for interior concrete and engineer-approved floors. *Ultraplan 1 Plus* has high strength and is abrasion-resistant, able to withstand light foot traffic after 2 to 3 hours and vehicular rubber-wheel traffic after 3 days.

	Product Code	Packaging
U.S./Canada	17350000	Bag: 50 lbs. (22.7 kg)



Ultraplan® Easy

High-Performance, Easy-Preparation, Self-Leveling Underlayment

Ultraplan Easy is a quick-setting, self-leveling underlayment that requires only a clean, soundly bonded, properly prepared and primed substrate before application.

	Product Code	Packaging
U.S./Canada	24350000	Bag: 50 lbs. (22.7 kg)





UltraPlan® LSC

High-Flow, Fast-Setting, Self-Leveling, Liquid Skimcoat

UltraPlan LSC is a super fluid, high-flow, calcium-aluminate-cement-based underlayment designed for thin-coat applications over large surfaces. Unique flow properties allow *UltraPlan LSC* to spread easily and quickly, potentially eliminating the need for hand-applied skimcoats. This product cures to a hard and flat surface that typically requires no further touchup or repair, accelerating floor-covering installation and reducing the need for additional patching or skimcoating materials.

	Product Code	Packaging
U.S./Canada	7492823	Bag: 50 lbs. (22.7 kg)



UltraPlan® Lite

Lightweight, Self-Leveling Underlayment

UltraPlan Lite is a polymer-modified, calcium-aluminate-based, lightweight, self-drying, self-leveling underlayment. It has been specifically designed for use for leveling substrates that are not rated to carry the full weight of a traditional self-leveling underlayment. *UltraPlan Lite* mixes easily and flows out to a suitable finish with a final dry density of about 67 lbs. per cu. ft. (1 073 kg per m³) at 28 days.

	Product Code	Packaging
U.S./Canada	7492911	Bag: 25 lbs. (11.3 kg)



UltraPlan® QuickTraffic

Extremely Fast-Setting, Self-Leveling Underlayment

UltraPlan QuickTraffic is an extremely fast-setting, high-flow, calcium-aluminate-cement-based underlayment designed for rapid subfloor preparation. Easily mixed and poured, *UltraPlan QuickTraffic* is suitable for all types of floor-covering installations in as soon as 1 to 3 hours after placement.

	Product Code	Packaging
U.S./Canada	0350123	Bag: 50 lbs. (22.7 kg)





Polyplan™ RSL

Rapid-Setting, Polymer-Modified, Self-Leveling Underlayment

Polyplan RSL is a fast-setting, two-part, self-leveling and smoothing compound with enhanced bond over nonporous substrates including MAPEI epoxy moisture barriers and razor-scraped adhesive residues. *Polyplan RSL* can be placed directly over burnished, dense concrete substrates that are free of sealers, curing compounds and form-release compounds.

	Product Code	Packaging
U.S./Canada	1946314	Part A, Bag: 30 lbs. (13.6 kg)
	1946404	Part B, Jug: 1 U.S. gal. (3.79 L)



Ultraplan® Extreme 2

Weather-Resistant, High-Compressive-Strength, Self-Leveling Underlayment

Ultraplan Extreme 2 is an advanced hydraulic-cement-based, self-leveling compound designed for fast-track underlayment applications. It is especially formulated for leveling interior horizontal concrete surfaces where environmental controls are not operational or the building is not enclosed. Once installed, *Ultraplan Extreme 2* is not affected by exposure to intermittent rain exposure after 6 hours or to freezing temperatures after 3 days of curing. Its high compressive strength is designed to allow it to be exposed to traffic as a temporary wear layer until the floor is covered with floor covering. *Ultraplan Extreme 2* has no moisture vapor emission limitations and can be installed without testing on properly prepared concrete substrates. It is the self-leveling compound of choice for use under moisture-controlling adhesive systems and epoxy moisture barriers.

	Product Code	Packaging
U.S./Canada	0348823	Bag: 50 lbs. (22.7 kg)



MAPEI Self-Leveling Mixing Kit

MAPEI Self-Leveling Mixing Kit consists of a 15-gallon (56.8 L) double-handled mixing barrel with a lid, 1" (2.5 cm) spike shoes, a 5-quart (4.73 L) measuring pitcher, an oval mixing paddle, a smoother, a gauge rake and a three-part broom handle.

	Product Code	Packaging
U.S./Canada	7966115	Kit in barrel



MAPEI Self-Leveling Mixing Barrel Cart

Barrel Cart for Mixing Self-Levelers

MAPEI Self-Leveling Mixing Barrel Cart is designed to improve efficiency in barrel-mixing MAPEI self-leveling underlayments, toppings and mortars that require jobsite mixing. The cart's barrel band attaches snugly to the MAPEI Self-Leveling Mixing Barrel (sold separately), holding it fast during mixing and keeping it in place during material pouring/placement. MAPEI Self-Leveling Mixing Barrel Cart has been designed to roll easily over textured surfaces and enables easy, precise placement of the mix. The double-handle design allows for the cart to be easily moved and tipped, reducing strain on the cart body and controlling the material placement.

	Product Code	Packaging
U.S./Canada	7966120	Cart



MAPEI Self-Leveling Mixing Barrel

Mixing Barrel for Self-Leveling Products

MAPEI Self-Leveling Mixing Barrel is perfect for the blending of cement and gypsum self-leveling underlayments, toppings and pourable mortars. The barrel easily holds up to three 50-lb. (22.7-kg) bags of material and works perfectly in conjunction with oval-shaped mixers. Two types of handles (grab handles and recessed handles) make this barrel easy to move. Used along with MAPEI Self-Leveling Mixing Barrel Cart, this barrel eases the mixing and transport process of any material that requires mixing and dispensing on commercial or residential jobsites.

	Product Code	Packaging
U.S./Canada	7966121	Barrel



MAPEI Self-Leveling Spike Roller

Spiked Roller for Self-Leveling Products

MAPEI Self-Leveling Spike Roller has been designed specifically for cement- and gypsum-based self-leveling underlayments and toppings. The spikes are 2" (5 cm) in length, making it easy to work with deep pours of material. The shape of the spikes is also designed to cut through the material easily, creating a much smoother, homogenous material. Measuring 20" (51 cm) in width, MAPEI Self-Leveling Spike Roller enables quick work on large surface areas.

	Product Code	Packaging
U.S./Canada	781701	Roller



Primer L™

Advanced-Technology, Acrylic Latex Primer for Concrete

Primer L is a concentrated, solvent-free acrylic primer used before the installation of underlayments. It is green for easy identification. *Primer L* improves the bond between a properly prepared and profiled concrete substrate, and a self-leveling underlayment. *Primer L* can also be used as a primer for gypsum-based underlayments and patches.

	Product Code	Packaging
U.S./	36068000	Pail: 5 U.S. gals. (18.9 L)
Canada	36053000	Pail: 1 U.S. gal. (3.79 L)



Primer T™

All-Purpose Primer for Self-Leveling Underlayments

Primer T is a low-VOC, magenta-colored, water-based acrylic primer that enhances the performance and adhesion of self-leveling underlayments (SLUs) on nonporous and porous substrates. Suitable for a wide variety of substrates, *Primer T* combines excellent versatility with easy, low-odor application.

	Product Code	Packaging
U.S./	36657	Jug: 2 U.S. gals. (7.57 L)
Canada		



Primer X™

Fast-Drying, Textured Primer for Nonporous Substrates

Primer X is a fast-drying, high-performance, low-VOC, water-based, acrylic primer. It is textured to enhance the performance and adhesion of self-leveling underlayments over 100%-solids, epoxy moisture barriers and other nonporous substrates.

	Product Code	Packaging
U.S./	1559508	Jug: 2 U.S. gals. (7.57 L)
Canada		





ECO Prim Grip™

Multipurpose, Bond-Promoting Primer

ECO Prim Grip is a ready-to-use, low-VOC, synthetic resin-based primer with bond-promoting silica aggregates suspended in a dispersion. It enhances the performance and adhesion of mortars to existing ceramics and difficult-to-bond-to substrates. Plus, it improves bonding of self-leveling underlayments (SLUs) and bonds of render coats over cementitious substrates. Suitable for a wide variety of substrates, *ECO Prim Grip* combines excellent versatility with an easy, low-odor application.



Primer WE™

Water-Based, Epoxy Primer

Primer WE is a two-component, polymer-modified, water-based, epoxy primer for enhanced adhesion to nonporous substrates before the application of MAPEI self-leveling materials. It improves adhesion over smooth, nonabsorbent and difficult-to-bond-to substrates such as properly prepared ceramic tile, epoxy moisture barriers, cement-based terrazzo, old cutback adhesive residue and approved plywood subfloors.



Primer E™

High-Performance, 100%-Solids, Epoxy Primer

Primer E is a two-component, 100%-solids, epoxy primer and bonding agent designed for MAPEI self-leveling underlayments when using a sand broadcast method. *Primer E* is the most effective method for bonding to nonporous, dense substrates before installing self-leveling underlayments subject to high stress. *Primer E*'s low viscosity makes installation fast and easy, and provides excellent penetration into the substrate and therefore a tenacious bond.

	Product Code	Packaging
U.S./Canada	36153000	Pail: 1 U.S. gal. (3.79 L) (4 pails per case)
	36163000	Pail: 3.5 U.S. gals. (13.2 L)

	Product Code	Packaging
U.S./Canada	45457000	Kit: 2 U.S. gals. (7.57 L)
	45468000	Part A, Pail: 5 U.S. gals. (18.9 L)
	45568000	Part B, Pail: 5 U.S. gals. (18.9 L)

	Product Code	Packaging
U.S./Canada	36564	Part A, Pail: 2.06 U.S. gals. (7.80 L)
	36553	Part B, Jug: 0.94 U.S. gal. (3.56 L)





Primer CE™

Ultra Low-Viscosity, Consolidating, Epoxy Primer

Primer CE is an ultra low-viscosity, two-component, 100%-solids, surface-consolidating, epoxy primer. *Primer CE* effectively penetrates and consolidates the surface of weak concrete or gypsum substrates. Applied in a single-coat application, *Primer CE* is designed to restore structural integrity to friable substrates such as weak gypsum-based underlayments or lightweight concretes before the application of underlayments, toppings or floor finishes. Once installed, *Primer CE* is compatible with a wide number of primers and adhesives typically used with flooring installations, such as with tile, vinyl composition tile (VCT), carpet, sheet vinyl, wood and other floor-finishing products.

	Product Code	Packaging
U.S./	36864	Part A: 2.2 U.S. gals. (8.33 L)
Canada	36853	Part B: 0.8 U.S. gal. (3.03 L)



Planibond® EBA

High-Modulus, Epoxy Bonding Agent

Planibond EBA is a two-component, multipurpose, high-modulus, epoxy bonding agent. *Planibond EBA* is nonshrink, 100%-solids and moisture-tolerant. *Planibond EBA* is used primarily as a bonding agent for screeds and repair mortars.

	Product Code	Packaging
U.S./	40158000	Kit: 2 U.S. gals. (7.57 L)
Canada	40169000	Part A: 5 U.S. gals. (18.9 L)
	40269000	Part B: 5 U.S. gals. (18.9 L)



Mapelath™

Synthetic Lath

Mapelath is a lightweight, noncorroding, alkali-resistant synthetic lath used as a substitute for traditional metal lath. It is lighter and easier to work with.

	Product Code	Packaging
U.S./	02702000	Roll: 27' x 75' (68.6 cm x 22.9 m)
Canada		



Mapesand™ Coarse

Calibrated, 16/30 Mesh Sand

Mapesand Coarse is a calibrated, washed and oven-dried, 16/30 mesh silica sand for use with resin and epoxy primers to create texture, which is necessary for the primer to bond with self-leveling and topping compounds.

Mapesand™ Fine

Calibrated, 20/40 Mesh Sand

Mapesand Fine is a calibrated, washed and oven-dried, 20/40 mesh silica sand for use as an extender for Planitex™ SL gypsum self-leveling underlayment, and to improve the bond of resin and epoxy primers with self-leveling and topping compounds.

Topcem™ Premix

Accelerated-Cure Screed

Topcem Premix is an accelerated-cure screed mortar suitable for bonded as well as unbonded applications. Topcem Premix can easily be screeded or sloped, and has the workability and working time of conventional screed mortars.

	Product Code	Packaging
U.S./Canada	7861223	Plastic bag: 50 lbs. (22.7 kg)

	Product Code	Packaging
U.S./Canada	7861118	Plastic bag: 40 lbs. (18.1 kg)

	Product Code	Packaging
U.S./Canada	15750	Bag: 50 lbs. (22.7 kg)





Mapecem® Premix

Fast-Setting Screed Mortar

Mapecem Premix is a fast-setting, premixed cement-based mortar for concrete repairs and subfloor preparation work. Mixed exclusively with water, Mapecem Premix provides an easy-to-use, high-compressive-strength, fast-setting mortar that sets completely within 24 hours without shrinkage cracks. When properly used, Mapecem Premix will allow installation of ceramic tile and natural-stone flooring after only 3 to 4 hours and installation of floor covering (such as vinyl, wood, rubber, linoleum and carpet) after 16 to 18 hours.

	Product Code	Packaging
U.S./Canada	2060021	Bag: 50 lbs. (22.7 kg)



MAPEI SM Primer™

Water-Based Primer for MAPEI Peel-and-Stick Membranes

MAPEI SM Primer is a ready-to-use, fast-drying, water-based, latex primer for use under MAPEI's peel-and-stick sheet membranes on residential and commercial indoor or outdoor floors. MAPEI SM Primer greatly increases the bond of MAPEI's peel-and-stick sheet membranes to concrete, plywood and other approved, properly prepared floors. It can be applied with a roller or brush, is white in color and dries clear.

	Product Code	Packaging
U.S./Canada	7071001	Jug: 1 U.S. gal. (3.79 L) – 4 jugs per case
	7071005	Pail: 5 U.S. gals. (18.9 L)



MAPEI SM Primer™ Fast

Fast-Tacking, Water-Based Primer for MAPEI Peel-and-Stick Membranes

MAPEI SM Primer Fast is a ready-to-use, fast-drying, quick-tacking, water-based, pressure-sensitive, nonhydrolyzable latex primer for use under MAPEI's peel-and-stick sheet membranes on residential and commercial indoor or outdoor floors. MAPEI SM Primer Fast greatly increases the bond of MAPEI's peel-and-stick sheet membranes to concrete, plywood and other approved, properly prepared floors. It can be applied with a roller or brush, is white in color and dries clear.

	Product Code	Packaging
U.S.	33354	Jug: 1 U.S. gal. (3.79 L) – 4 jugs per case





Mapeguard® 2

Premium Crack-Isolation and Sound-Reduction Sheet Membrane

Mapeguard 2 is a next-generation, flexible, thin, 40-mil, lightweight, load-bearing, fabric-reinforced “peel-and-stick” crack-isolation membrane. After application, ceramic tile or stone can be installed immediately with any polymer-modified cement-based mortar. Glue-down wood flooring can also be installed with any MAPEI urethane adhesive.

Mapeguard 2 helps to prevent existing or future in-plane floor cracks (with movement up to 3/8” [10 mm] wide) from transmitting through grout, ceramic tile or natural stone. It also reduces the transmission of impact sound (footsteps, dropped objects, etc.) and airborne sound (voice, TV, etc.) through floors when installed under ceramic tile, stone or wood-floor coverings.

	Product Code	Packaging
U.S./Canada	04051	Roll: 39.4" x 68.6' (1 x 20.9 m)



Mapesonic™ 2

Premium Sound-Reduction and Crack-Isolation Sheet Membrane

Mapesonic 2 is a patent-pending, next-generation, flexible, 76-mil thin, lightweight, load-bearing, fabric-reinforced “peel-and-stick” sound-reduction and crack-isolation membrane. Application of Mapesonic 2 can be immediately followed by installation of flooring: ceramic tile or stone with a recommended MAPEI polymer-modified, cement-based mortar; luxury vinyl tile or luxury vinyl plank with an appropriate MAPEI flooring adhesive; or glue-down wood flooring with any MAPEI urethane or hybrid-polymer-based wood adhesive.

	Product Code	Packaging
U.S./Canada	04140000	Roll: 39" x 49.2' (99 cm x 15 m)



Mapesonic™ RM

Premium, Sound-Reduction Rubber Membrane

Mapesonic RM is a high-performance, acoustic underlayment designed to reduce ambient and impact sound transmissions in installations of ceramic and porcelain tile, natural stone, wood flooring, luxury vinyl tile (LVT), luxury vinyl plank (LVP), sheet vinyl and carpet tile. Mapesonic RM is ideal for applications in apartments, condominiums, college dormitories, classrooms and office buildings.

	Product Code	Roll Thickness/ Roll Size
U.S./Canada	2817328	Mapesonic RM 2: 5/64" (2 mm) 4' x 75' (1.22 x 22.9 m)
	2817409	Mapesonic RM 5: 3/16" (5 mm) 4' x 25' (1.22 x 7.62 m)
	2817809	Mapesonic RM 10: 3/8" (10 mm) 4' x 25' (1.22 x 7.62 m)





Ultrabond ECO® 20

Standard Flooring Adhesive

Ultrabond ECO 20 has been designed to provide both value and performance in a standard flooring adhesive. Its unique formulation provides ample working time for installing felt-backed vinyl sheet flooring, smooth-backed carpet and rough-backed carpet.



Ultrabond ECO® 120

Professional Flooring Adhesive

Ultrabond ECO 120 is a latex-based adhesive designed for the installation of most broadloom carpets and felt-backed vinyl sheet flooring. Its formulation has been specifically crafted to provide ample working time for the placement and alignment of flooring.



Ultrabond ECO® 220

Premium Flooring Adhesive

Ultrabond ECO 220 is a high-solids, latex-based adhesive designed specifically for installing carpet and felt-backed vinyl sheet flooring. Its unique formulation is perfectly suited for commercial flooring applications where heavy traffic is expected. *Ultrabond ECO 220* also exhibits an extended working time, making it ideal for the installation of patterned carpets. It may be used in both direct and double glue-down installation methods for carpet.

	Product Code	Packaging
U.S.	92064	Pail: 4 U.S. gals. (15.1 L)
Canada	92064	Pail: 4 U.S. gals. (15.1 L)
	96820000	Pail: 5 U.S. gals. (18.9 L)

	Product Code	Packaging
U.S.	91264	Pail: 4 U.S. gals. (15.1 L)
	95312000	Pail: 1 U.S. gal. (3.79 L)
Canada	91264	Pail: 4 U.S. gals. (15.1 L)
	95312000	Pail: 1 U.S. gal. (3.79 L)
	96812000	Pail: 5 U.S. gals. (18.9 L)

	Product Code	Packaging
U.S./Canada	92264000	Pail: 4 U.S. gals. (15.1 L)





Ultrabond ECO® 85

Standard, Quick-Grab Carpet Adhesive


Ultrabond ECO 85 has been redesigned for the value-conscious carpet installer. *Ultrabond ECO 85* provides quick leg development and good bond strength for most carpet backing types and felt-backed vinyl sheet flooring.



Ultrabond ECO® 185

Professional Carpet Adhesive

Ultrabond ECO 185 is a latex-based adhesive that offers fast grab and quick leg development for the fast-track installation of commercial carpet. It can be used in direct-bond and double-stick carpet applications.

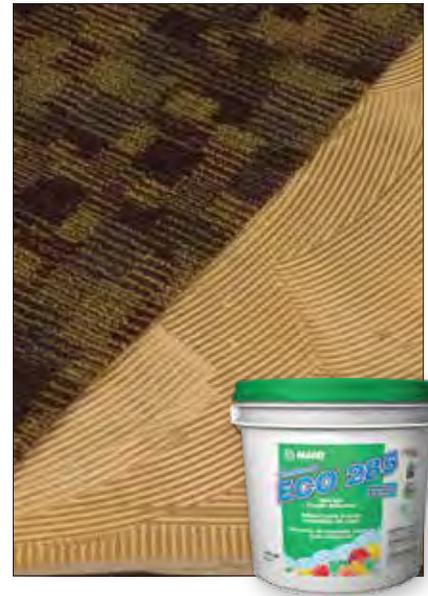

Ultrabond ECO® 285

Premium, Wet-Set Carpet Adhesive

Ultrabond ECO 285 is a high-performance, latex-based adhesive designed specifically for the fast-track installation of broadloom carpet. Its unique high-solids formulation has been developed for use in the wet-lay installation method, so that no flash time is required. Its rapid tack development and superior bond strength make *Ultrabond ECO 285* the adhesive of choice for demanding carpet installations in high-traffic conditions.

	Product Code	Packaging
U.S.	98564	Pail: 4 U.S. gals. (15.1 L)
Canada	98564 98568000	Pail: 4 U.S. gals. (15.1 L) Pail: 5 U.S. gals. (18.9 L)

	Product Code	Packaging
U.S.	96518000	Pail: 4 U.S. gals. (15.1 L)
Canada	96818000	Pail: 5 U.S. gals. (18.9 L)

	Product Code	Packaging
U.S./Canada	92865000	Pail: 4 U.S. gals. (15.1 L)





Ultrabond ECO® 420

Professional, Outdoor Carpet Adhesive

Ultrabond ECO 420 is MAPEI's long-standing favorite for installing most types of outdoor carpet products. Excellent moisture resistance, freeze/thaw stability and superb bond strength make *Ultrabond ECO 420* the perfect choice for residential and light commercial installations of outdoor carpet. *Ultrabond ECO 420* is easy to trowel and has plenty of working time, even in the warmest installation conditions. Nonflammable and CRI Green Label Plus certified, *Ultrabond ECO 420* is MAPEI's best recommendation for outdoor carpet installations over concrete, wood and fiberglass.



Ultrabond ECO® 811

Universal Carpet Tile Adhesive

Ultrabond ECO 811 provides an enhanced, aggressive tack for installing all types of carpet tile. *Ultrabond ECO 811* provides a secure, releasable adhesive base for standard PVC-backed carpet tile as well as for non-PVC-, polyolefin-, felt- and bituminous-backed carpet tile. It can also be used to bond fiberglass-reinforced vinyl sheet flooring.



Ultrabond® Spray CTA

Universal Spray Adhesive for Carpet Tile

Ultrabond Spray CTA is an aerosolized, water-based, high-performance, acrylic adhesive designed for installing all types of carpet tile. Its unique application method provides bond performance equal to traditional trowel-applied adhesives while using considerably less material in much less time.

	Product Code	Packaging
U.S./Canada	1042001	Pail: 4 U.S. gals. (15.1 L)
	1042002	Pail: 1 U.S. gal. (3.79 L)
	94291000	Pail: 1 U.S. qt. (946 mL)

	Product Code	Packaging
U.S./Canada	1949915	Pail: 4 U.S. gals. (15.1 L)

	Product Code	Packaging
U.S./Canada	1950656	Aerosol can: 22 U.S. oz. (624 g)





Ultrabond ECO® 3185

Premium, Latex Carpet Pad Cement

Ultrabond ECO 3185 latex carpet pad adhesive is a water-based adhesive for fastening carpet padding permanently in place over any flooring surface. It has good initial tack and high strength to prevent movement of padding during stretching or subsequent use. *Ultrabond ECO 3185* has no solvent added and is nonflammable, making it suitable for use in enclosed environments in occupied buildings.



Ultrabond ECO® 2285

Premium Universal Seam Sealer for Carpet

Ultrabond ECO 2285 is recommended for seaming/sealing most types of carpet in a direct glue-down installation. *Ultrabond ECO 2285* can also be used in double-stick applications; however, some carpet manufacturers recommend hot-melt taping at the seams rather than seam sealing.



Ultrabond ECO® 290

Professional, Felt-Backed Vinyl Sheet Flooring Adhesive

Ultrabond ECO 290 is based on MAPEI's advanced acrylic polymer technology. This adhesive has excellent open time that allows for the positioning of felt-backed vinyl sheet flooring and is perfectly suited for commercial or residential installations. *Ultrabond ECO 290* is non-staining, easy to trowel, light in color, low in volatile organic content (VOCs) and provides a strong, durable bond for a secure flooring installation in heavy traffic conditions.

	Product Code	Packaging
U.S./Canada	98453	Jug: 1 U.S. gal. (3.79 L)

	Product Code	Packaging
U.S./Canada	97432	Bottle: 1 U.S. qt. (946 mL)

	Product Code	Packaging
U.S.	92964	Pail: 4 U.S. gals. (15.1 L)
Canada	92964	Pail: 4 U.S. gals. (15.1 L)
	1002104	Pail: 1 U.S. gal. (3.79 L)
	1002101	Pail: 1 U.S. qt. (946 mL)





Ultrabond ECO® 390

Premium Linoleum Flooring Adhesive

Ultrabond ECO 390 is a specially formulated adhesive designed for the installation of linoleum flooring. Its high solids content, strong leg development and aggressive tack make it perfect to install linoleum flooring. *Ultrabond ECO 390*'s fast-grab characteristics hold onto the linoleum backing during installation, reducing the need for continual rolling to ensure proper contact and bond. Easy to trowel, *Ultrabond ECO 390* has low volatile organic content (VOCs), is low in odor and is water-based, making it suitable for use in occupied buildings such as hospitals and schools. The high-performance characteristics of *Ultrabond ECO 390* make it perfect for residential and commercial use.

	Product Code	Packaging
U.S./Canada	96539000	Pail: 4 U.S. gals. (15.1 L)



Ultrabond ECO® 300

Professional Adhesive for Solid Vinyl and Rubber Flooring

Ultrabond ECO 300 is a hard-set acrylic adhesive that locks flooring into place while offering excellent indentation resistance. *Ultrabond ECO 300* develops a strong bond to limit flooring movement, offers outstanding compatibility with vinyl and rubber flooring, and will not stain.

	Product Code	Packaging
U.S.	93064	Pail: 4 U.S. gals. (15.1 L)
	93053000	Pail: 1 U.S. gal. (3.79 L)
Canada	93064	Pail: 4 U.S. gals. (15.1 L)
	93053000	Pail: 1 U.S. gal. (3.79 L)
	1003001	Pail: 1 U.S. qt. (946 mL)



Ultrabond ECO® 350

Professional Solid Vinyl Flooring Adhesive

Ultrabond ECO 350 is a proprietary formulation based on a MAPEI acrylic polymer. It offers the unique flexibility of installing floor coverings after a short flash time or once the adhesive exhibits pressure-sensitive characteristics. Easy to apply and low in odor, *Ultrabond ECO 350* is perfectly suited for the installation of flooring in occupied environments.

	Product Code	Packaging
U.S.	93564	Pail: 4 U.S. gals. (15.1 L)
	1006004	Pail: 1 U.S. gal. (3.79 L)
Canada	1006001	Pail: 1 U.S. qt. (946 mL)





Ultrabond ECO® 360

Premium, High-Performance Adhesive for Solid Vinyl Sheet, Tile and Plank

Ultrabond ECO 360 is a proprietary, high-performance, wet-lay and pressure-sensitive adhesive designed specifically for installing homogeneous and heterogeneous solid vinyl flooring. With its strong, durable, moisture-resistant and alkali-resistant bond, it is ideal for commercial and institutional applications. *Ultrabond ECO 360* has an excellent open time, develops strength quickly, performs well under rolling loads and resists indentation. Its low volatile organic content makes it ideal for use in occupied buildings such as hospitals and medical centers.



Ultrabond ECO® 373

Universal, Pressure-Sensitive, Multi-Flooring Adhesive

Ultrabond ECO 373 is a super-aggressive, pressure-sensitive adhesive that is designed for the installation of a wide variety of resilient flooring types. *Ultrabond ECO 373* has been specifically formulated to provide extended working time and can be applied using a trowel or roller, depending on the level of tack that is required for the flooring that is being installed.



Ultrabond® Spray RFA

Universal Spray Adhesive for Resilient Flooring

Ultrabond Spray RFA is an aerosolized, water-based, high-performance, acrylic adhesive designed for the installation of solid sheet vinyl, solid vinyl tile, luxury vinyl tile (LVT) and vinyl composition tile (VCT). Its unique application method provides bond performance equal to traditional trowel-applied adhesives while using considerably less material in much less time.

	Product Code	Packaging
U.S.	93564	Pail: 4 U.S. gals. (15.1 L)
	1006004	Pail: 1 U.S. gal. (3.79 L)

	Product Code	Packaging
U.S./	1942315	Pail: 4 U.S. gals. (15.1 L)
Canada	1942304	Pail: 1 U.S. gal. (3.79 L)

	Product Code	Packaging
U.S./	1950756	Aerosol can: 22 U.S. oz. (624 g)
Canada		





Ultrabond ECO® 560

Premium, Universal Rubber-Flooring Adhesive

Ultrabond ECO 560 is a proprietary acrylic polymer-based adhesive with enhanced bonding characteristics specifically for rubber sheet and tile flooring. It can also be used to bond solid vinyl sheet, plank and tile; vinyl composition tile (VCT); and felt-backed vinyl sheet flooring. *Ultrabond ECO 560* flashes quickly to its tacky phase and is suitable for use over porous and nonporous substrates. Its unique performance characteristics, non-hazardous components and low volatile organic content make it suitable for use when two-component urethane products cannot be recommended.

	Product Code	Packaging
U.S./	95664	Pail: 4 U.S. gals. (15.1 L)
Canada	95653	Pail: 1 U.S. gal. (3.79 L)



Ultrabond ECO® 570

Premium, Urethane Rubber-Sports-Flooring Adhesive

Ultrabond ECO 570 is a moisture-curing, one-component, polyurethane polymer adhesive specifically designed for the direct bonding of high-performance reground-rubber sports flooring in interior or exterior applications. Its unique formulation is perfectly suited for most types of reground-rubber sports flooring and provides an aggressive and durable bond. *Ultrabond ECO 570* utilizes rapidly renewable raw materials as part of the formulation and is free of phthalate plasticizers.

	Product Code	Packaging
U.S./	95568	Pail: 5 U.S. gals. (18.9 L)
Canada		



Ultrabond ECO® 611

Standard, Black, Thin-Spread VCT Adhesive

Ultrabond ECO 611 is a traditional, latex-modified asphalt emulsion adhesive specifically designed for the value-conscious installer of vinyl composition tile (VCT). Quick drying times, superb tack and easy trowelability make *Ultrabond ECO 611* an excellent choice for VCT installations. Use over approved substrates including properly prepared existing cutback adhesive residue and existing VCT. *Ultrabond ECO 611* also can also be used directly over MAPEI's *Planiseal® EMB* moisture-reduction barrier when installing VCT over it, provided that the surface is smooth and flat.

	Product Code	Packaging
U.S./	96168	Pail: 5 U.S. gals. (18.9 L)
Canada	96153	Pail: 1 U.S. gal. (3.79 L)





Ultrabond ECO® 711

Premium, Clear, Thin-Spread VCT Adhesive

Ultrabond ECO 711 has been reformulated to provide even faster drying times, enhanced grab and greater slip resistance. Use to install vinyl composition tile (VCT) on approved substrates as well as over an existing single layer of VCT. Now a FastTrack Ready™ product, *Ultrabond ECO 711* has been formulated for higher moisture resistance, making it suitable for use over fresh concrete slabs with moisture vapor emission rates (MVERs) up to 8 lbs. per 1,000 sq. ft. (3.63 kg per 92.9 m²) per 24 hours.



Ultrabond ECO® 575

Premium Wall-Base Adhesive

Ultrabond ECO 575 is a premium wall-base adhesive specifically designed to provide superior bond and impact resistance for rubber, vinyl and carpet wall base. *Ultrabond ECO 575* also has been recently reformulated to offer even greater grab and wet strength, keeping corners wrapped tight. Its acrylic-based, light-colored formulation won't stain even the whitest wall base. In addition, *Ultrabond ECO 575* can be used to install various types of carpet in vertical/wall applications.



Ultrabond® G15

Premium, Fast-Setting, Epoxy Flooring Adhesive for High-Moisture Conditions

Ultrabond G15 is a fast-setting, two-part, reactive epoxy adhesive with low volatile organic compounds (VOCs), designed for the installation of rubber and vinyl flooring in high-moisture conditions. *Ultrabond G15* provides the ultimate in bond and shear strength, can be used on concrete slabs with high moisture vapor emission rates, and is recommended for high-traffic installations where superior indentation resistance and performance are required.

	Product Code	Packaging
U.S.	97164	Pail: 4 U.S. gals. (15.1 L)
	97154	Pail: 1 U.S. gal. (3.79 L)
Canada	97168	Pail: 5 U.S. gals. (18.9 L)
	97391000	Pail: 1 U.S. qt. (946 mL)

	Product Code	Packaging
U.S./Canada	1005015	Pail: 4 U.S. gals. (15.1 L)
	1005004	Pail: 1 U.S. gal. (3.79 L)
	1005001	Cartridge: 28.7 U.S. oz. (849 mL)
	1005002	Cartridge: 11 U.S. oz. (325 mL)

	Product Code	Packaging
U.S./Canada	92353	Kit: 1 U.S. gal. (3.79 L)





Ultrabond® G17

Conductive, Epoxy Flooring Adhesive

Ultrabond G17 is a two-part, reactive epoxy adhesive with low volatile organic compounds (VOCs), designed for the installation of electrostatic dissipative or conductive flooring.



Ultrabond® G19

Professional, Two-Part, Urethane Flooring Adhesive

Ultrabond G19 is a two-part, reactive adhesive specifically designed for installing floor coverings that demand a high-performance adhesive, such as sports flooring. *Ultrabond G19* is excellent for installing indoor/outdoor floor coverings that demand reliable results in various weather conditions. This adhesive aggressively adheres all types of floor coverings to properly prepared metal, asphalt pavement and many other difficult-to-bond-to substrates.



Ultrabond® G21

Premium, Two-Part, Urethane Flooring Adhesive

Ultrabond G21 is a two-part, reactive adhesive with low volatile organic compounds (VOCs), designed for extreme indoor and outdoor flooring installations. This adhesive aggressively adheres all types of floor coverings to properly prepared metal, asphalt pavement and many other difficult-to-bond-to substrates.

	Product Code	Packaging
U.S./Canada	93753	Kit: 1 U.S. gal. (7.57 L)

	Product Code	Packaging
U.S./Canada	3050006	Pail: 1 U.S. gal. (3.79 L)

	Product Code	Packaging
U.S./Canada	3090007	Pail: 2 U.S. gals. (7.57 L)





Mapecontact™ MRT

Moisture-Resistant Tape for Resilient Flooring Installation

Mapecontact MRT is a double-sided, moisture-resistant tape for the rapid and permanent installation of a wide variety of resilient flooring types. It has been specifically designed to provide instant bond and instant utilization for residential and commercial floor installations. *Mapecontact MRT* is unaffected by high moisture conditions in concrete and can be installed without moisture testing.

Mapecontact™ SRT

Sound-Reduction, Moisture-Resistant Tape for Resilient and Wood Flooring Installation

Mapecontact SRT is a double-sided, foam-core, dry-film tape for rapidly and permanently installing solid vinyl sheet, vinyl tile and vinyl plank flooring, as well as prefinished engineered or solid wood. Providing sound reduction for multifamily living, it has also been specifically designed for instant bonding and instant utilization in residential and commercial floor installations. *Mapecontact SRT* is unaffected by high moisture conditions in concrete and can be installed without moisture testing. Plus, it provides subfloor moisture protection for wood and bamboo flooring.

Ultrabond ECO® 960

Professional Engineered-Wood-Flooring Adhesive

Ultrabond ECO 960 is a professional-grade, high-tack, high-solids wood-flooring adhesive specifically designed for the installation of traditional engineered wood floors. Use it for the installation of engineered wood plank, acrylic impregnated plank and wood parquet.

	Product Code	Packaging
U.S./	0634301	Roll: 3 ft. x 166 ft. (0.91 x 50.6 m)
Canada	0634201	Roll: 1 ft. x 166 ft. (0.30 x 50.6 m)
	0634701	Roll: 6" x 166 ft. (15 cm x 50.6 m)
	0634401	Roll: 3" x 166 ft. (7.5 cm x 50.6 m)

	Product Code	Packaging
U.S./	0634501	Roll: 3 ft. x 166 ft. (0.91 x 50.6 m)
Canada	0634601	Roll: 1 ft. x 166 ft. (0.30 x 50.6 m)
	0634901	Roll: 6" x 166 ft. (15 cm x 50.6 m)
	0634801	Roll: 3" x 166 ft. (7.5 cm x 50.6 m)

	Product Code	Packaging
U.S./	96064	Pail: 4 U.S. gals. (15.1 L)
Canada		





Ultrabond ECO® 962

Premium, Pressure-Sensitive, Engineered-Wood-Flooring Adhesive

Ultrabond ECO 962 is a pressure-sensitive, engineered-wood-flooring adhesive that has been specifically designed to offer a robust, water-based solution for engineered wood flooring. *Ultrabond ECO 962* is also well suited for the installation of luxury vinyl tile, luxury vinyl plank and cork flooring/underlayment.



Ultrabond ECO® 975

Standard, Urethane Adhesive for Hardwood Flooring

Ultrabond ECO 975 is a 100%-solids, one-component, moisture-cured, urethane adhesive specifically designed for the installation of domestic solid and engineered wood flooring.



Ultrabond ECO® 977

Fast-Set Urethane Adhesive for Hardwood Flooring

Ultrabond ECO 977 is a fast-setting, 100%-solids, one-component, moisture-cured urethane adhesive specifically designed for the installation of domestic solid and engineered wood flooring. *Ultrabond ECO 977* can also be used in elevated subfloor moisture conditions of up to 12 lbs. (5.44 kg) MVER and 95% relative humidity when a specific installation method and trowel notch configurations are used.

	Product Code	Packaging
U.S./Canada	1942615	Pail: 4 U.S. gals. (15.1 L)

	Product Code	Packaging
U.S./Canada	96898000	Metal pail: 5 U.S. gals. (18.9 L)

	Product Code	Packaging
U.S./Canada	1947645	Pail: 4 U.S. gals. (15.1 L)






Ultrabond ECO® 980

Premium Urethane Adhesive for Hardwood Flooring

Ultrabond ECO 980 is a 100%-solids, one-component, moisture-cured urethane adhesive specifically designed for the installation of domestic and exotic solid and engineered wood flooring, including bamboo.

	Product Code	Packaging
U.S./	98168	Metal pail: 5 U.S. gals. (18.9 L)
Canada	98163	Metal pail: 3.5 U.S. gals. (13.2 L)

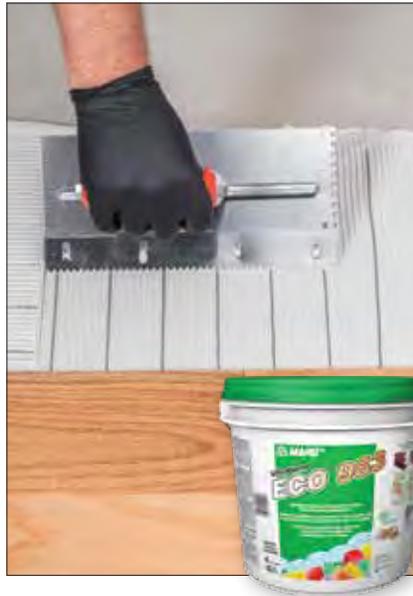

Ultrabond ECO® 983

Modified-Silane, Moisture-Control Wood-Flooring Adhesive

Ultrabond ECO 983 is a single-component, 100%-solids, modified-silane wood-flooring adhesive that is formulated without water, solvents, amines, isocyanates, phthalate plasticizers or epoxy resins. With an extremely low emission level of volatile organic compounds (VOCs), the unique formulation of *Ultrabond ECO 983* provides excellent bond strength and moisture control up to 15 lbs. (6.80 kg) MVER and 90% relative humidity (RH). Special trowel clips are provided to apply the adhesive in a monolithic layer for subfloor moisture control. It can also be used with traditional trowel applied methods where subfloor moisture problems do not exist.

	Product Code	Packaging
U.S./	1942515	Plastic pail: 4 U.S. gals. (15.1 L)
Canada		



Ultrabond ECO® 995

Premium Moisture-Control, Sound-Reduction and Wood-Flooring Adhesive

Ultrabond ECO 995 is MAPEI's premium, 100%-solids, one-component, moisture-curing urethane adhesive for all types of wood flooring and bamboo. *Ultrabond ECO 995* can be used in a single-coat application method that provides a superior bond and moisture vapor emission control on concrete slabs. *Ultrabond ECO 995* also provides sound-reduction properties, making it suitable for use in multi-unit housing projects.

	Product Code	Packaging
U.S./	99568	Metal pail: 5 U.S. gals. (18.9 L)
Canada		






Ultrabond ECO® 985

Hybrid-Polymer-Based, Moisture-Control and Sound-Reducing Wood-Flooring Adhesive

Ultrabond ECO 985 is MAPEI's premium single-component, hybrid-polymer-based wood-flooring adhesive that is formulated without water, solvents, amines, isocyanates, phthalate plasticizers or epoxy resins, and has an extremely low emission level of volatile organic compounds (VOCs). *Ultrabond ECO 985*'s formulation provides excellent sound-reduction properties that are required for multi-unit housing. *Ultrabond ECO 985* is also a moisture-controlling wood-flooring adhesive that protects wood flooring from moisture vapor emitting through concrete slabs in a single application.

	Product Code	Packaging
U.S./Canada	98664	Pail: 4 U.S. gals. (15.1 L)

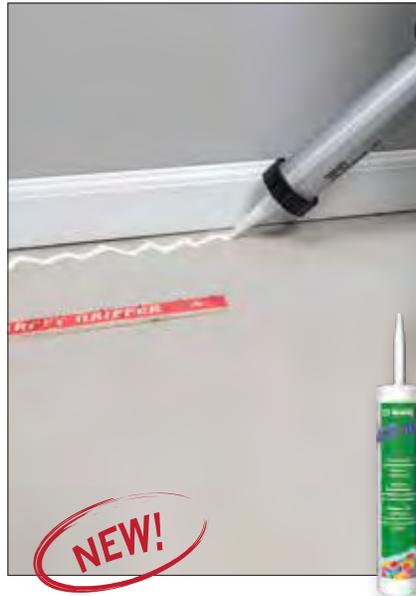

Ultrabond ECO® 907

Fast-Curing, Silane-Modified Polymer Adhesive

Ultrabond ECO 907 is a fast-curing, 100%-solids, moisture-curing, gun-grade adhesive designed for basic wood subfloor construction practices as well as repairing of wood flooring; bonding of wood stair nosings; installation of wood molding and baseboards; and attachment of tackstrips to concrete subfloors. *Ultrabond ECO 907* is also ideal for supplemental bonding of wide plank boards when nailing and gluing are required.

	Product Code	Packaging
U.S./Canada	1947956	Sausage pack: 20 U.S. oz. (591 mL)
	1947958	Plastic cartridge: 29 U.S. oz. (858 mL)



Ultrabond® Urethane Cleaner

Professional Adhesive Remover

Ultrabond Urethane Cleaner is a ready-to-use urethane adhesive cleaner designed to effectively remove wet urethane adhesive residues, such as *Ultrabond ECO® 975*, *Ultrabond ECO 980* and *Ultrabond ECO 995* from the surface of prefinished wood flooring. It is low-odor, nonflammable, pH-neutral and biodegradable. Safe for use on most types of prefinished wood flooring including parquet, engineered, solid and bamboo, *Ultrabond Urethane Cleaner* also removes urethane adhesive from trowels and tools.

	Product Code	Packaging
U.S./Canada	3432000	Jug: 1 U.S. qt. (946 mL)





Planiseal® MSP

Moisture-Control Membrane, Adhesive Isolator, Sealer, pH Blocker and Primer

Planiseal MSP is a two-coat, high-solids, polymer-based adhesive isolator, sealer, moisture-control membrane and self-leveling primer. *Planiseal MSP* protects flooring installations against subfloor moisture and pH in concrete slabs with moisture vapor emission rates (MVERs) up to 15 lbs. (6.80 kg) per ASTM F1896, relative humidity (RH) up to 99% per ASTM F2170 and alkalinity protection up to pH of 12. *Planiseal MSP* eliminates the need for a secondary primer for self-leveling applications.



Planiseal® PMB

One-Component, Polyurethane Moisture Barrier and Bonding Agent

Planiseal PMB is a one-component, moisture-curing, polyurethane compound designed to provide moisture vapor emission protection on damp concrete substrates in a single- or double-coat application method as well as a vapor retarder using a single-coat method over wood substrates. It also serves as a bonding agent and moisture barrier system for self-leveling underlayments when applied in a double-coat method with dry sand.



Planiseal® VS

Alkali-Resistant, Epoxy Moisture-Reduction Barrier


Planiseal VS is an alkali-resistant, two-component, 100%-solids, epoxy coating that effectively stops moisture-related problems with floor coverings. In addition, *Planiseal VS* expedites floor-covering installations by eliminating the traditional wait time required for new concrete slabs to reach moisture levels suitable for installations.

	Product Code	Packaging
U.S./Canada	2436315	Pail: 4 U.S. gals. (15.1 L)

	Product Code	Packaging
U.S./Canada	2438513	Pail: 3.5 U.S. gals. (13.2 L)

	Product Code	Packaging
U.S./Canada	46364	Part A, Pail: 2.20 U.S. gals. (8.33 L)
	46353	Part B, Jug: 0.8 U.S. gal. (3.03 L)



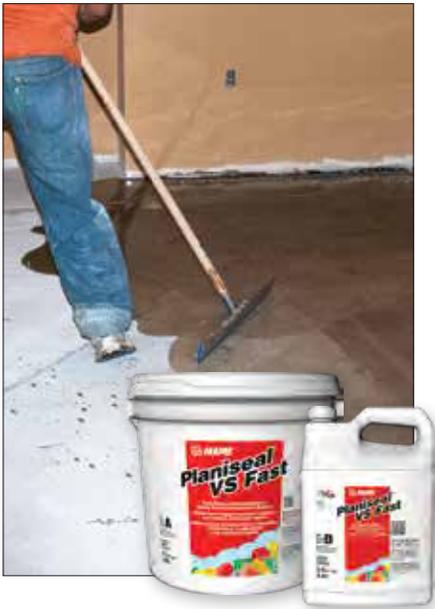

Planiseal® VS Fast

Fast-Track, Alkali-Resistant, Epoxy Moisture-Reduction Barrier

Planiseal VS Fast is a fast-curing, alkali-resistant, two-component, 100%-solids, epoxy coating that effectively stops moisture-related problems over concrete that impact floor coverings. In addition, it significantly expedites floor installations by eliminating the traditional wait time required for new concrete slabs to reach moisture levels suitable for floor-covering installation.

	Product Code	Packaging
U.S./	46964	Part A, 1.97 U.S. gals. (7.46 L)
Canada	46953	Part B, 1 U.S. gal. (3.79 L)




Ultratop®

High-Performance, Self-Leveling Concrete Topping

Ultratop is a self-leveling, self-drying topping that is specially formulated for fast-track resurfacing of horizontal wear surfaces.

	Product Code	Color	Packaging
U.S./	19350000	White	Bag: 50 lbs. (22.7 kg)
Canada	19852000	Natural Gray	Bag: 50 lbs. (22.7 kg)

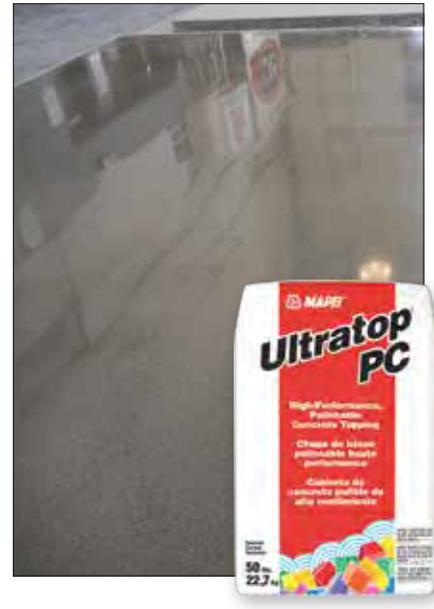

Ultratop® PC

High-Performance, Polishable Concrete Topping

Ultratop PC is a self-leveling, cementitious topping optimized for polishing. *Ultratop PC* is engineered to provide a thin resurfacing material that is extremely dense, hard and durable.

	Product Code	Packaging
U.S./	15950	Bag: 50 lbs. (22.7 kg)
Canada		





Mapecrete™ Protector FF

High-Gloss, Film-Forming Protective Coating for Concrete

Mapecrete Protector FF is a film-forming, high-gloss protective coating designed to increase the stain resistance of interior, polished or hard-troweled concrete floors.

	Product Code	Packaging
U.S./Canada	1797619	Pail: 5 U.S. gals. (18.9 L)



Mapecrete™ Hard LI

Lithium Silicate Densifier and Sealer for Concrete

Mapecrete Hard LI is a water-based, VOC-free, lithium silicate solution used to densify, seal and dustproof horizontal, hard-troweled concrete surfaces. It penetrates the concrete surface, chemically reacts with the free lime and produces a dense, hard matrix within the concrete and a more durable surface on top.

	Product Code	Packaging
U.S./Canada	48668	5 U.S. gals. (18.9 L)
	48677	55 U.S. gals. (208 L)



Mapecrete™ Hard SB

Silicate-Blend, Liquid Densifier, Sealer and Dustproofer for Concrete

Mapecrete Hard SB is a special blend of silicate and silicate polymers specifically designed to penetrate concrete in order to densify, seal, dustproof and harden the surface. It is formulated to chemically react and create an internal bond that increases surface density, durability and abrasion resistance.

	Product Code	Packaging
U.S./Canada	48768	5 U.S. gals. (18.9 L)
	48777	55 U.S. gals. (208 L)



Mapecrete™ Hard SI

Sodium Silicate Densifier for Concrete

Mapecrete Hard SI is a clear, water-based sodium silicate densifier used to harden and dustproof concrete surfaces. It chemically reacts with the free lime and calcium carbonate in concrete, forming a dense surface.

	Product Code	Packaging
U.S./	48868	5 U.S. gals. (18.9 L)
Canada	48877	55 U.S. gals. (208 L)



Planibond® JF

Semi-Rigid, Epoxy Joint Filler

Planibond JF is a two-part, 100%-solids, moisture-tolerant, semi-rigid, epoxy joint filler.

	Product Code	Packaging
U.S./	46057	Kit: 2 U.S. gals. (7.57 L)
Canada	46074	Dual cartridge: 20.2 U.S. oz. (597 mL)



Planiseal® RapidJoint 15

Self-Leveling Polyurea Floor Joint Filler

Planiseal RapidJoint 15 is a 100%-solids, two-component, rapid-curing, polyurea elastomer joint and crack filler. *Planiseal RapidJoint 15* is designed for supporting non-moving joint nosings exposed to forklift and steel-wheeled traffic. *Planiseal RapidJoint 15* features broad temperature capabilities, can address joint movement of 10% to 15%, and cures quickly so that repaired joints can be re-opened to traffic almost immediately after application. Designed with enhanced application characteristics, *Planiseal RapidJoint 15* is formulated for easy shaving of any excess and will typically not leave a stain on surfaces adjacent to joints.

	Product Code	Packaging
U.S./	45274	Dual cartridge: 20.2 U.S. oz. (597 mL)
Canada		



MAPEI USA

MAPEI Headquarters of North America

1144 East Newport Center Drive
Deerfield Beach, Florida 33442
1-888-US-MAPEI (1-888-876-2734) /
(954) 246-8888

Technical Services

1-800-992-6273 (U.S. and Puerto Rico)
1-800-361-9309 (Canada)

Customer Service

1-800-42-MAPEI (1-800-426-2734)

Copyright ©2019 by MAPEI Corporation (“MAPEI”) and all rights are reserved. All intellectual property rights and other information contained in this document are the exclusive property of MAPEI (or its parent or related companies), unless otherwise noted. No part of this document may be reproduced or transmitted in any form without the prior written consent of MAPEI.

All Rights Reserved. Printed in the USA.

