



FAST TRACK SCREEDS

Normal setting, fast drying screeds




MAPEI'S RANGE OF NORMAL SETTING,
FAST DRYING SCREEDS

FAST TRACK SCREEDS

Normal setting, fast drying screeds

Table of Contents	1
■ Screeds	
Mapecem	2
Mapecem Pronto	2
Topcem	3
Topcem Pronto	3
Project References	4

ICONS LEGEND

	NEW CONSTRUCTION		RESTAURANTS AND HOTELS
	OLD CONSTRUCTION		RAPID CURING
	COMMERCIAL ENVIRONMENTS		HIGH MECHANICAL STRENGTH
	INDUSTRIAL BUILDING		PRE-BLENDED
	PUBLIC TRANSPORTATION		EASY TO USE
	LIVING AREA		SITE MIXED

■ Mapecem

DESCRIPTION Special hydraulic binder for fast setting, fast drying (24 hours) and shrinkage controlled screeds.

TECHNICAL DATA

Consistency: powder.
Colour: grey.
Bulk density (kg/m³): 1,300.
Density of the mix (kg/m³): 2,200-2,500.
Open time of mix: 20-30 minutes.
Application temperature range: from +5°C to +35°C.
Cleaning: water.

Storage: 12 months.
Installation: 3 hours for ceramic tiles and stone material 24 hours for resilient coverings and wood.
Application: by hand or pump.
Consumption: 3.5-4.5 kg/m² per cm of thickness.
Packaging: 20 kg.

WHERE TO USE



CERTIFICATION



MAIN FEATURES



■ Mapecem Pronto

DESCRIPTION Pre-blended, ready to use, fast setting and drying (24 hours), shrinkage controlled screed.

TECHNICAL DATA

Consistency: powder.
Colour: grey.
Bulk density (kg/m³): 1800.
Density of the mix (kg/m³): approx. 2200.
Open time of mix: 20-30 minutes.
Application temperature range: from +5°C to +35°C.
Cleaning: water.

Storage: 12 months.
Installation: 3-4 hours for ceramic and natural stone; 24 hours for resilient materials and wood.
Application: by hand or pump.
Consumption: approx. 20kg/m² per cm of thickness.
Packaging: 25 kg.

WHERE TO USE



CERTIFICATION



MAIN FEATURES



■ Topcem

DESCRIPTION Special hydraulic binder for normal setting, fast drying (4 days) and shrinkage controlled screeds.

TECHNICAL DATA

Consistency: powder.
Colour: grey.
Bulk density (kg/m³): 850.
Density of the mix (kg/m³): 2100.
Open time of mix: 60 minutes.
Application temperature range: from +5°C to +35°C.
Cleaning: water.

Storage: 12 months.
Installation: 24 hours for ceramic tiles, 2 days for stone material, 4 days for resilient and wood.
Application: by hand or pump.
Consumption: 2-2.5 kg/m²/cm of thickness.
Packaging: 20 kg.

WHERE TO USE



CERTIFICATION



MAIN FEATURES



■ Topcem Pronto

DESCRIPTION Pre-blended, ready to use, fast drying (4 days) shrinkage controlled screed with high thermal conductivity.

TECHNICAL DATA

Consistency: powder.
Colour: grey.
Bulk density (kg/m³): 1,500.
Density of the mix (kg/m³): 2,100 depending on compaction.
Open time of mix: 60 minutes.
Application temperature range: from +5°C to +35°C.
Cleaning: water.

Storage: 12 months.
Installation: from 1-4 days depending on the type of flooring to be laid.
Application: by hand or pump.
Consumption: 18-20 kg/m² per cm of thickness.
Packaging: 25 kg.

WHERE TO USE



CERTIFICATION



MAIN FEATURES




Project Reference

Aston Martin - Newcastle



Project Reference

Siemens Sustainability Centre - London

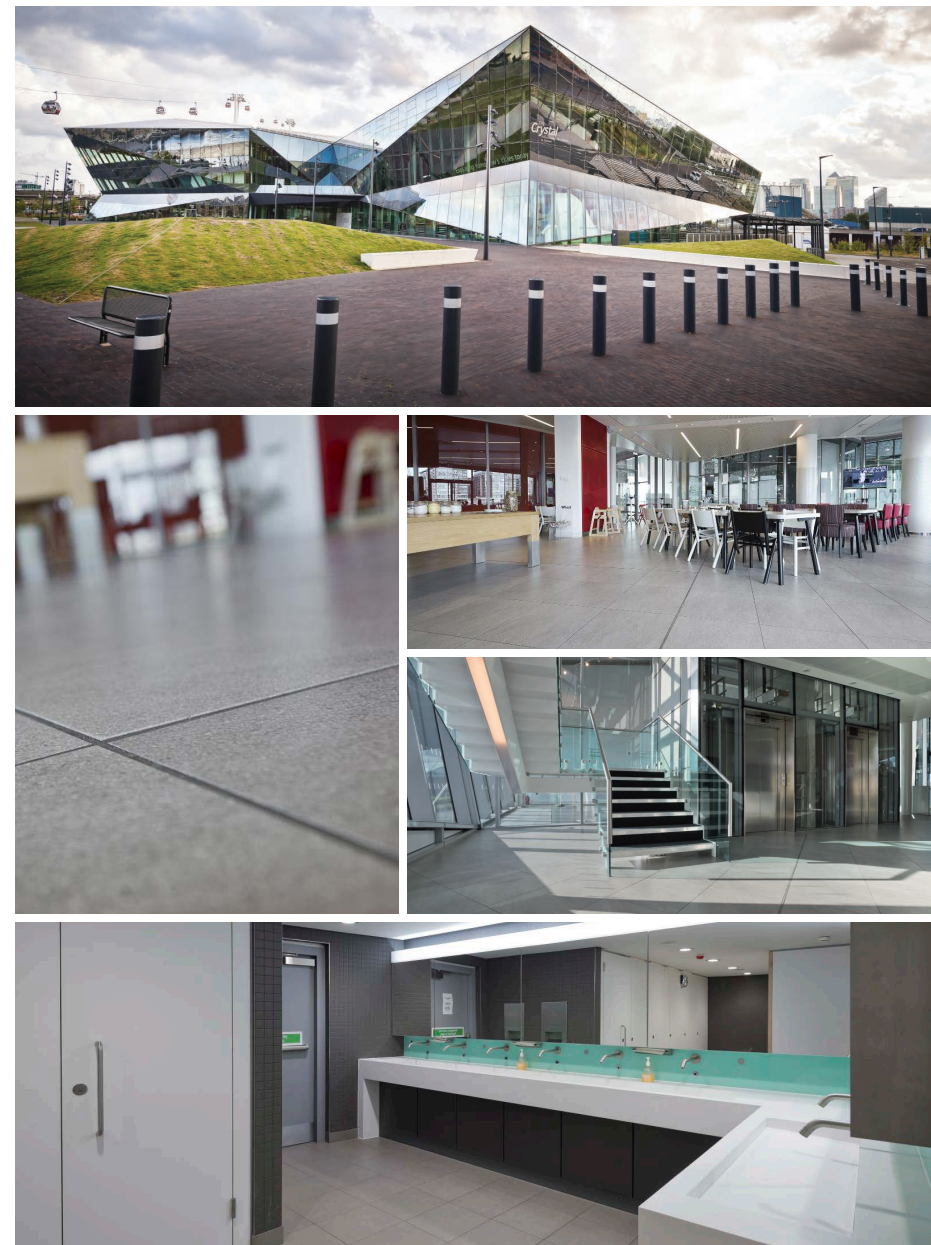

MAPEI WORLD LONDON CITY

6 Great Sutton Street
Clerkenwell
London
EC1V 0BX
020 3302 9610
clerkenwell@mapei.co.uk

MAPEI UK LTD

Mapei House
Steel Park Road
Halesowen
West Midlands. B62 8HD
0121 508 6970
info@mapei.co.uk



0121 508 6970 | mapei.co.uk

