

## Technical data

Pot life of mix:	45 minutes
Set to light foot traffic:	approx. 24 hours
Ready for use:	after 3 days surfaces may be exposed to chemicals
Colours:	21 (see colour chart)
Application:	Mapei rubber trowel
Finishing:	Mapei cellulose sponge
Storage:	24 months
Consumption:	according to the size of the joint
Packaging:	3 kg

## Colour chart

100	WHITE
111	SILVER GREY
113	CEMENT GREY
114	ANTHRACITE
120	BLACK
130	JASMINE
132	BEIGE 2000
146	RICH BROWN
147	CAPPUCCINO
151	MUSTARD YELLOW
160	MAGNOLIA
163	LILAC
165	CHERRY RED
170	CROCUS BLUE
173	OCEAN BLUE
181	JADE GREEN
182	TORMALINE
183	LIME GREEN
282	BARDIGLIO GREY
283	SEA BLU
290	CREAM

wide  
range

Due to the printing processes involved, the colours should be taken as merely indicative of the shades of the actual product. For an accurate colour representation, please refer to "The Mapei Coloured Grouts" sample box. Colours can be affected by the surface (where they are used) and the brightness of the environment.

- PRODUCTS FOR CERAMICS AND STONE MATERIALS
- PRODUCTS FOR RESILIENT AND TEXTILE MATERIALS
- PRODUCTS FOR WOODEN FLOORING
- PRODUCTS FOR CEMENTITIOUS AND RESIN FLOORING
- PRODUCTS FOR ACOUSTIC INSULATION
- PRODUCTS FOR BUILDING
- ADMIXTURES FOR CONCRETE
- PRODUCTS FOR STRUCTURAL STRENGTHENING
- PRODUCTS FOR THE REPAIR OF MASONRY
- PRODUCTS FOR THERMAL INSULATION
- WALL PROTECTIVE AND DECORATIVE COATINGS
- PRODUCTS FOR WATERPROOFING
- PRODUCTS FOR UNDERGROUND CONSTRUCTIONS
- ELASTIC SEALANTS AND ADHESIVES
- GRINDING AIDS FOR CEMENT

## MAPEI UK LTD

Mapei House, Steel Park Road  
Halesowen, West Midlands. B62 8HD  
Tel: 0121 508 6970  
Fax: 0121 508 6960  
E-mail: [info@mapei.co.uk](mailto:info@mapei.co.uk)  
Internet: [www.mapei.co.uk](http://www.mapei.co.uk)



MK740230 06/14



# Kerapoxy CQ

**Two-component, acid-resistant epoxy grout which is particularly easy to apply and clean, ideal for grouting ceramic tiles and mosaics**



## Maximum performance

- Quick, easy mixing
- Easy to apply and spread
- Easy to clean
- Speeds up grouting operations on large surfaces
- High resistance to acids
- Extremely strong
- No shrinkage or cracking
- Non-absorbent
- Maximum hygiene
- Low dirt pick up
- Suitable for surfaces in direct contact with foodstuffs in compliance with the HACCP system – EC REG. 852/04
- Suitable for any size of joint
- No slumping in floor joints, even with wide joints
- Does not run when applied on walls



Applying Kerapoxy CQ with a Mapei trowel

## The top in Eco-sustainability


- Very low emission level of volatile organic compounds (VOC)
- Certified EMICODE EC1 R Plus
- Certified A+ in compliance with guide lines issued by the French Committee "GRENELLE DE L'ENVIRONNEMENT"
- Contains recycled raw materials
- Produced by environment-friendly plant equipment in conformity with ISO 14001 standards
- Helps designers and contractors create innovative LEED projects in compliance with the Green Building Council
- Product certified by the University of Modena (Italy) according to ISO 22196:2007 standards as a grouting mortar protected against the formation and proliferation of micro-organisms



Applying Kerapoxy CQ with a Mapei trowel on walls



Cleaning with water and a disk cleaner fitted with a "Scotch Brite®" type abrasive disk

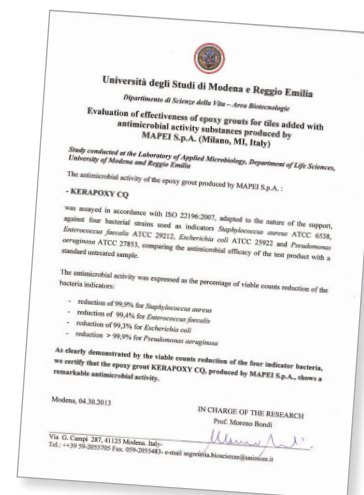

Removing liquid residues with a rubber spreader

## The top in aesthetics

- Wide range of colours
- Fashionable colours in line with the latest trends in contemporary design
- Stable, colour-fast tints
- Ideal for bathrooms, kitchens, swimming pools, hot tubs, the foodstuffs industry, worktops, commercial environments and industrial applications

