

# ***Cementitious adhesives for installing ceramic tiles and natural stone***





# Cementitious adhesives for installing ceramic tiles and natural stone

## Class **C2** ADHESIVES

### Normal setting

- Kerabond Plus
- Adesilex P9
- Adesilex P10
- Keraflex
- Ultralite Flex

### Rapid setting

- Adesilex P4
- Adesilex P9 Express

## Class **S1** ADHESIVES

### Normal setting

- Keraflex Easy S1
- Keraflex Maxi S1 zero
- Keraflex Maxi S1
- Ultralite S1

### Rapid setting

- Granirapid
- Keraquick Maxi S1
- Ultralite S1 Quick

## Class **S2** ADHESIVES

### Normal setting

- Ultralite S2
- Kerabond + Isolastic
- Kerabond Plus + Isolastic

### Rapid setting

- Ultralite S2 Quick
- Elastorapid
- Keraquick Maxi S1 + Latex Plus

*The figures indicated are for reference purposes only. For further information consult the specific Technical Data Sheet for each product, available on our website [www.mapei.com](http://www.mapei.com)*

# Kerabond Plus



NORMAL-SETTING adhesives

## High-performance cementitious adhesive with extended open time for ceramic tiles and natural stone.

- Classified C2E according to EN 12004 and ISO 13007-1 standards.
- Very low emission level of volatile organic compounds, classified EMICODE EC1 R Plus by GEV.
- For bonding all types of ceramic tiles and natural stone not sensitive to moisture.
- Recommended for bonding medium size ceramic and natural stone tiles.
- By mixing **Kerabond Plus** with **Isolastic** instead of water, its characteristics are improved to such a degree that it meets the requirements of class C2ES2 adhesive (high performance, highly deformable cementitious adhesive with extended open time) according to EN 12004 and ISO 13007-1 standards.



# Adesilex P9



## High-performance non-slip cementitious adhesive with extended open time for ceramic tiles and natural stone.


- Classified C2TE according to EN 12004 and ISO 13007-1 standards.
- Very low emission level of volatile organic compounds, classified EMICODE EC1 R Plus by GEV.
- Excellent workability.
- Recommended for overlaying existing flooring and bonding on heated cementitious substrates.

N.B. the white version has very high white balance.

NORMAL-SETTING adhesives



# Adesilex P10

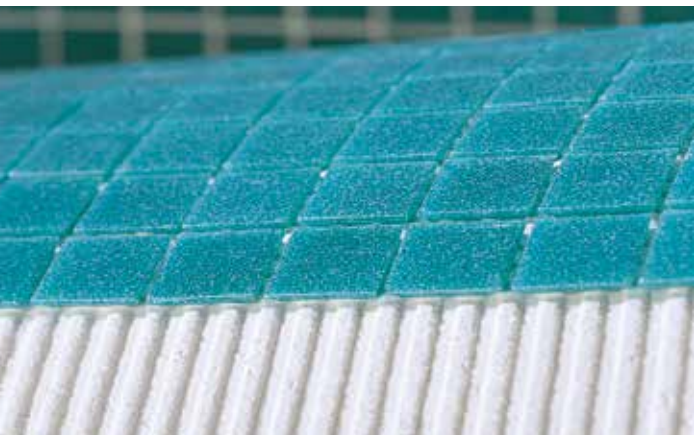

NORMAL-SETTING adhesives

**High-performance, non-slip white cementitious adhesive with extended open time for glass mosaics, ceramic tiles and marble.**

- Classified C2TE according to EN 12004 and ISO 13007-1 standards.
- Very low emission level of volatile organic compounds, classified EMICODE EC1 R Plus by GEV.
- Recommended for bonding glass mosaics.
- With a special white balance that exalts and highlights the tones of coloured glass mosaics.
- By mixing **Adesilex P10** with **Isolastic** instead of water, its characteristics are improved to such a degree that it meets the requirements of class C2ES1 adhesive (high performance, deformable cementitious adhesive with extended open time) according to EN 12004 and ISO 13007-1 standards.



# Keraflex



## High-performance non-slip cementitious adhesive with extended open time for ceramic tiles and natural stone.

- Classified C2TE according to EN 12004 and ISO 13007-1 standards.
- Very low emission level of volatile organic compounds, classified EMICODE EC1 R Plus by GEV.
- Excellent workability.
- Recommended for bonding medium/large size ceramic and natural stone tiles, including by overlaying, on heated substrates, deformable substrates such as plasterboard, cement-fibre panels and waterproofing membranes from the **Mapelastic** and **Mapegum WPS** range.

NORMAL-SETTING adhesives



# Ultralite Flex



NORMAL-SETTING adhesives

**One-component, high-performance, non-slip, lightweight cementitious adhesive with moderate deformability and extended open time for ceramic tiles, natural stone and thin porcelain tiles.**

- Classified C2TE according to EN 12004 and ISO 13007-1 standards.
- Very low emission level of volatile organic compounds, classified EMICODE EC1 R Plus by GEV.
- Thanks to Low Dust technology the formation of dust during mixing is drastically reduced.
- Easier to handle and apply, less tiring for tilers.
- Excellent wetting of the back of tiles.
- Up to 55% higher yield compared with other adhesives with the same classification.
- Contains more than 20% of recycled materials.
- High white balance.
- The adhesive recommended for routine work and for bonding all types of tile.





# Adesilex P4



**High-performance, self-buttering, rapid-setting grey cementitious adhesive for ceramic tiles and natural stone.**

- Classified C2F according to EN 12004 and ISO 13007-1 standards.
- Very low emission level of volatile organic compounds, classified EMICODE EC1 R Plus by GEV.
- May also be used for smoothing and levelling internal and external surfaces.
- Smoothing and levelling in layers from 3 to 20 mm thick.



# Adesilex P9 Express

**New!**



**High performance, rapid-setting cementitious adhesive with extended open time for ceramic tiles.**

- Classified C2FE according to EN 12004 and ISO 13007-1.
- Extended workability.
- The white version has very high white balance.
- Very low emission of volatile organic compounds, classified EMICODE EC1 R Plus.
- Particularly recommended for high performance, rapid-setting cementitious adhesive for bonding ceramic on internal and external floors and walls.

**RAPID-SETTING adhesives**





For tiles with lots of **Class...**  
Don't risk it; use **Class S1**  
and **S2** certified adhesives.

**Mapei** offers a vast range of **Class S1** and **S2** certified adhesives for all your project needs. Amongst the adhesives that meet the requirements for **Class S1** and **S2**, certified according to **EN 12004** standards, **Mapei** suggests **Keraflex Maxi S1 Ultra White**, **Keraflex Maxi S1 zero**, **Ultralite S1**, and **Ultralite S2**. And also: **Ultralite S1 Quick**, **Ultralite S2 Quick**, **Keraquick Maxi S1**, **Granirapid** and **Elastorapid**. Don't risk it; choose the most suitable adhesive for tiles with lots of class.

# Keraflex Easy S1



NORMAL-SETTING adhesives

**Easy-to-apply, high-performance, deformable cementitious adhesive with extended open time and high wetting capacity for ceramic tiles and natural stone.**

- Classified C2ES1 according to EN 12004 and ISO 13007-1 standards.
- Very low emission level of volatile organic compounds, classified EMICODE EC1 R Plus by GEV.
- Specific for large areas and large size tiles, making it particularly suitable for floors in commercial, industrial and civil areas.



# Keraflex Maxi S1 zero



**High-performance, non-slip, highly-deformable, grey cementitious adhesive with extended open time, specific for large size ceramic tiles and natural stone.**

- Classified C2TES1 according to EN 12004 and ISO 13007-1 standards.
- Easy to spread.
- Highly thixotropic.
- May be applied in thick layers, including on heavy tiles, without slipping.
- Thanks to Low Dust technology the formation of dust during mixing is drastically reduced.
- Very low emission level of volatile organic compounds, classified EMICODE EC1 R Plus by GEV.
- The first adhesive with zero climate-change effect: residual greenhouse gas emissions, impossible to eliminate from a technical point of view, have been eliminated through certified offsetting.
- For interior and exterior use in layers up to 15 mm thick.

NORMAL-SETTING adhesives



# Keraflex Maxi S1



NORMAL-SETTING adhesives

**High-performance, non-slip, deformable, white cementitious adhesive with extended open time for ceramic tiles and natural stone.**

- Classified C2TES1 according to EN 12004 and ISO 13007-1 standards.
- High white balance.
- Excellent workability.
- Highly thixotropic.
- May be applied in thick layers, including on heavy tiles, without slipping.
- Thanks to Low Dust technology the formation of dust during mixing is drastically reduced.
- Very low emission level of volatile organic compounds, classified EMICODE EC1 R Plus by GEV.
- For interior and exterior use in layers up to 15 mm thick.



# Ultralite S1



**One-component, high-performance, non-slip, deformable, lightweight cementitious adhesive with extended open time for ceramic tiles, natural stone and slim porcelain tiles.**

- Classified C2TES1 according to EN 12004 and ISO 13007-1 standards.
- Thanks to Low Dust technology the formation of dust during mixing is drastically reduced.
- Very low emission level of volatile organic compounds, classified EMICODE EC1 R Plus by GEV.
- Easier to handle and apply, less tiring for tilers.
- Excellent wetting of the back of tiles.
- Up to 60% higher yield compared with other adhesives with the same classification.
- Contains more than 20% of recycled materials.
- Suitable for bonding glass mosaics in swimming pools.

NORMAL-SETTING adhesives

**Ultra**lite  
Technology



# Granirapid



**Two-component, high-performance, deformable, rapid-setting and hydrating cementitious adhesive for ceramic tiles and natural stone.**

- Classified C2FS1 according to EN 12004 and ISO 13007-1 standards.
- Very low emission level of volatile organic compounds, classified EMICODE EC1 R Plus by GEV.
- Suitable for bonding on internal and external surfaces in areas exposed to heavy traffic.
- Recommended for quick repair work and for areas that need to be ready for use as soon as possible (supermarkets, industry, hospitals, airports, etc.).
- Rapid bonding of large size tiles, including overlaying on existing ceramic floors and heated substrates.
- The ideal solution for natural stone sensitive to moisture and agglomerates.

RAPID-SETTING adhesives





# Keraquick Maxi S1

New!



**High-performance, rapid-setting and hydrating, deformable, non-slip cementitious adhesive for ceramic tiles and particularly suitable for natural stone, including large and thick formats.**

- Classified C2FTS1 according to EN 12004 and ISO 13007-1 standards.
- Very low emission level of volatile organic compounds, classified EMICODE EC1 R Plus by GEV.
- Low viscosity, good trowellability and extended workability.
- Suitable for application in layers up to 15 mm thick: No sinking of large, heavy tiles.
- The white version has a high white balance.
- Suitable for repairing floors in areas exposed to intense traffic or that need to be ready for use quickly.
- Rapid bonding, including by overlaying.
- When **Keraquick Maxi S1** is mixed with **Latex Plus** it forms highly deformable adhesive, class C2FS2 according to EN 12004 and ISO 13007-1.
- Contains 5% of recycled materials.



RAPID-SETTING adhesives



# Ultralite S1 Quick



**One-component, high-performance, rapid-setting and hydrating, non-slip, deformable, lightweight cementitious adhesive for ceramic tiles, natural stone and thin porcelain tiles.**

- Classified C2FTS1 according to EN 12004 and ISO 13007-1 standards.
- Easier to handle and apply, less tiring for tilers.
- Excellent wetting of the back of tiles.
- Up to 60% higher yield compared with other adhesives with the same classification.
- Contains more than 20% of recycled materials.
- Ideal for laying tiles in areas that need to be ready for use quickly or for laying in cold weather.
- Specific for bonding thin porcelain tiles, particularly on non-absorbent substrates.


RAPID-SETTING adhesives

**Ultra**lite  
Technology

**Fast**  
**Track**  
Ready



# Ultralite S2

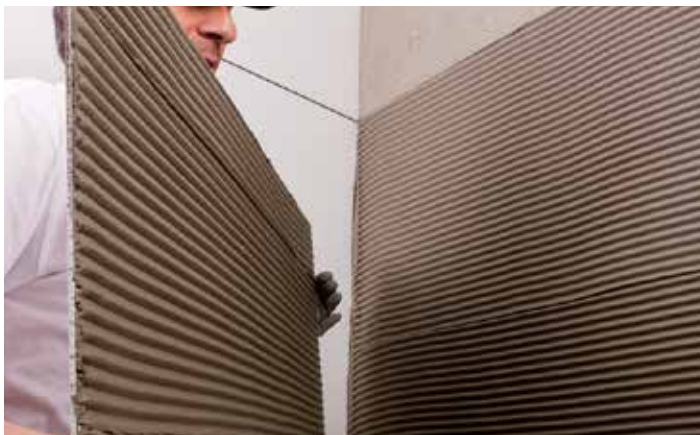

**One-component, high-performance, highly deformable, lightweight cementitious adhesive with extended open time for ceramic tiles, natural stone and thin porcelain tiles.**

- Classified C2ES2 according to EN 12004 and ISO 13007-1 standards.
- Very low emission level of volatile organic compounds, classified EMICODE EC1 R Plus by GEV.
- Easier to handle and apply, less tiring for tilers.
- Excellent wetting of the back of tiles.
- Contains more than 20% of recycled materials.
- 80% higher yield compared with two-component adhesives with the same classification.
- No need to add latex, just mix with water.
- Ideal for the tiled thermal insulation system **Mapetherm Tile System**.

NORMAL-SETTING adhesives

**UltraLite**  
Technology.



# Isolastic



NORMAL-SETTING adhesives

## Latex additive mixed with KERABOND, KERABOND PLUS and ADESILEX P10.

- **Kerabond** and **Kerabond Plus** mixed with **Isolastic** are transformed into high-performance, highly deformable adhesives with extended open time (C2E/S2).
- **Adesilex P10** mixed with **Isolastic** (diluted 1:1 with water) is transformed into a high-performance, highly deformable adhesive with extended open time (C2E/S1).



# Ultralite S2 Quick



**One-component, high-performance, highly-deformable, lightweight, rapid-setting and hydrating cementitious adhesive with extended open time for ceramic tiles and natural stone; ideal for laying thin porcelain tiles.**

- Classified C2FES2 according to EN 12004 and ISO 13007-1 standards.
- Very low emission level of volatile organic compounds, classified EMICODE EC1 R Plus by GEV.
- Easier to handle and apply, less tiring for tilers.
- Excellent wetting of the back of tiles.
- Contains more than 20% of recycled materials.
- 80% higher yield compared with two-component adhesives with the same classification.
- No need to add latex, just mix with water.
- Ideal for the tiled thermal insulation system **Mapetherm Tile System**.
- Recommended for overlaying with large size porcelain tiles.

**Ultra**lite  
Technology

**Fast**  
**Track**  
Ready



# Elastorapid



**Two-component, high-performance, highly-deformable, rapid-setting and hydrating, non-slip cementitious adhesive with extended open time for ceramic tiles and natural stone.**

- Classified C2FTES2 according to EN 12004 and ISO 13007-1 standards.
- Recommended for quick repair work in areas that need to be ready for use as soon as possible (public areas, supermarkets, airports, etc.), including in hot weather.
- Laying ceramic and natural stone, including large sizes, on façades, balconies, terraces and paved roofs exposed to direct sunlight and temperature variations.
- Bonding tiles in areas exposed to high mechanical stress and vibrations (railway underpasses, underground railway platforms, etc.).
- Laying natural stone sensitive to staining.

RAPID-SETTING adhesives



# Latex Plus

---



## Latex admixture mixed with KERAQUICK MAXI S1.

- **Keraquick Maxi S1** mixed with **Latex Plus** is transformed into a high-performance, highly deformable, rapid-setting adhesive (C2F/S2), according to EN 12004 and ISO 13007-1.



RAPID-SETTING adhesives

**HEADQUARTERS**

**MAPEI SpA**

Via Cafiero, 22 - 20158 Milan

Tel. +39-02-37673.1

Fax +39-02-37673.214

Internet: [www.mapei.com](http://www.mapei.com)

E-mail: [mapei@mapei.it](mailto:mapei@mapei.it)

