

Advantages of Ultracoat Oil Wax

- Stain resistant
- Scratch resistant
- Easy maintenance
- Long-lasting

Technical data (typical values)

Product identity	
Consistency:	fluid
Appearance:	oil
Colour:	neutral
Density (g/cm ³):	0.8
Application temperature:	+10°C - +25°C
Application:	roller, brush, pad or trowel
Removal time:	35-45 minutes



• Technical documentation

From the technical area menu you can view the technical documentation divided per product lines and type of document.

HEADQUARTERS
 MAPEI SpA
 Via Cafiero, 22 - 20158 Milan
 Tel. +39-02-37673.1
 Fax +39-02-37673.214
 Internet: www.mapei.com
 E-mail: mapei@mapei.it



/mapeispa

C.P. MK 708030 - (GB) 12/13

Ultracoat Oil Wax

PRODUCTS FOR **PROTECTING WOODEN FLOORS**





Water and oil-repellent oil/wax finish with very little odour used to protect wooden surfaces and give them a delicate, warm colour.

WHERE TO USE


Oil-based water and oil-repellent product used to treat and protect wood.

TECHNICAL CHARACTERISTICS

Ultracoat Oil Wax is an oil/wax product used to treat wooden floors which, thanks to its special characteristics, offers efficient protection against stains so that wood maintains its natural beauty for many years.

PACKAGING

The product is available in 2.5 l metallic drums.

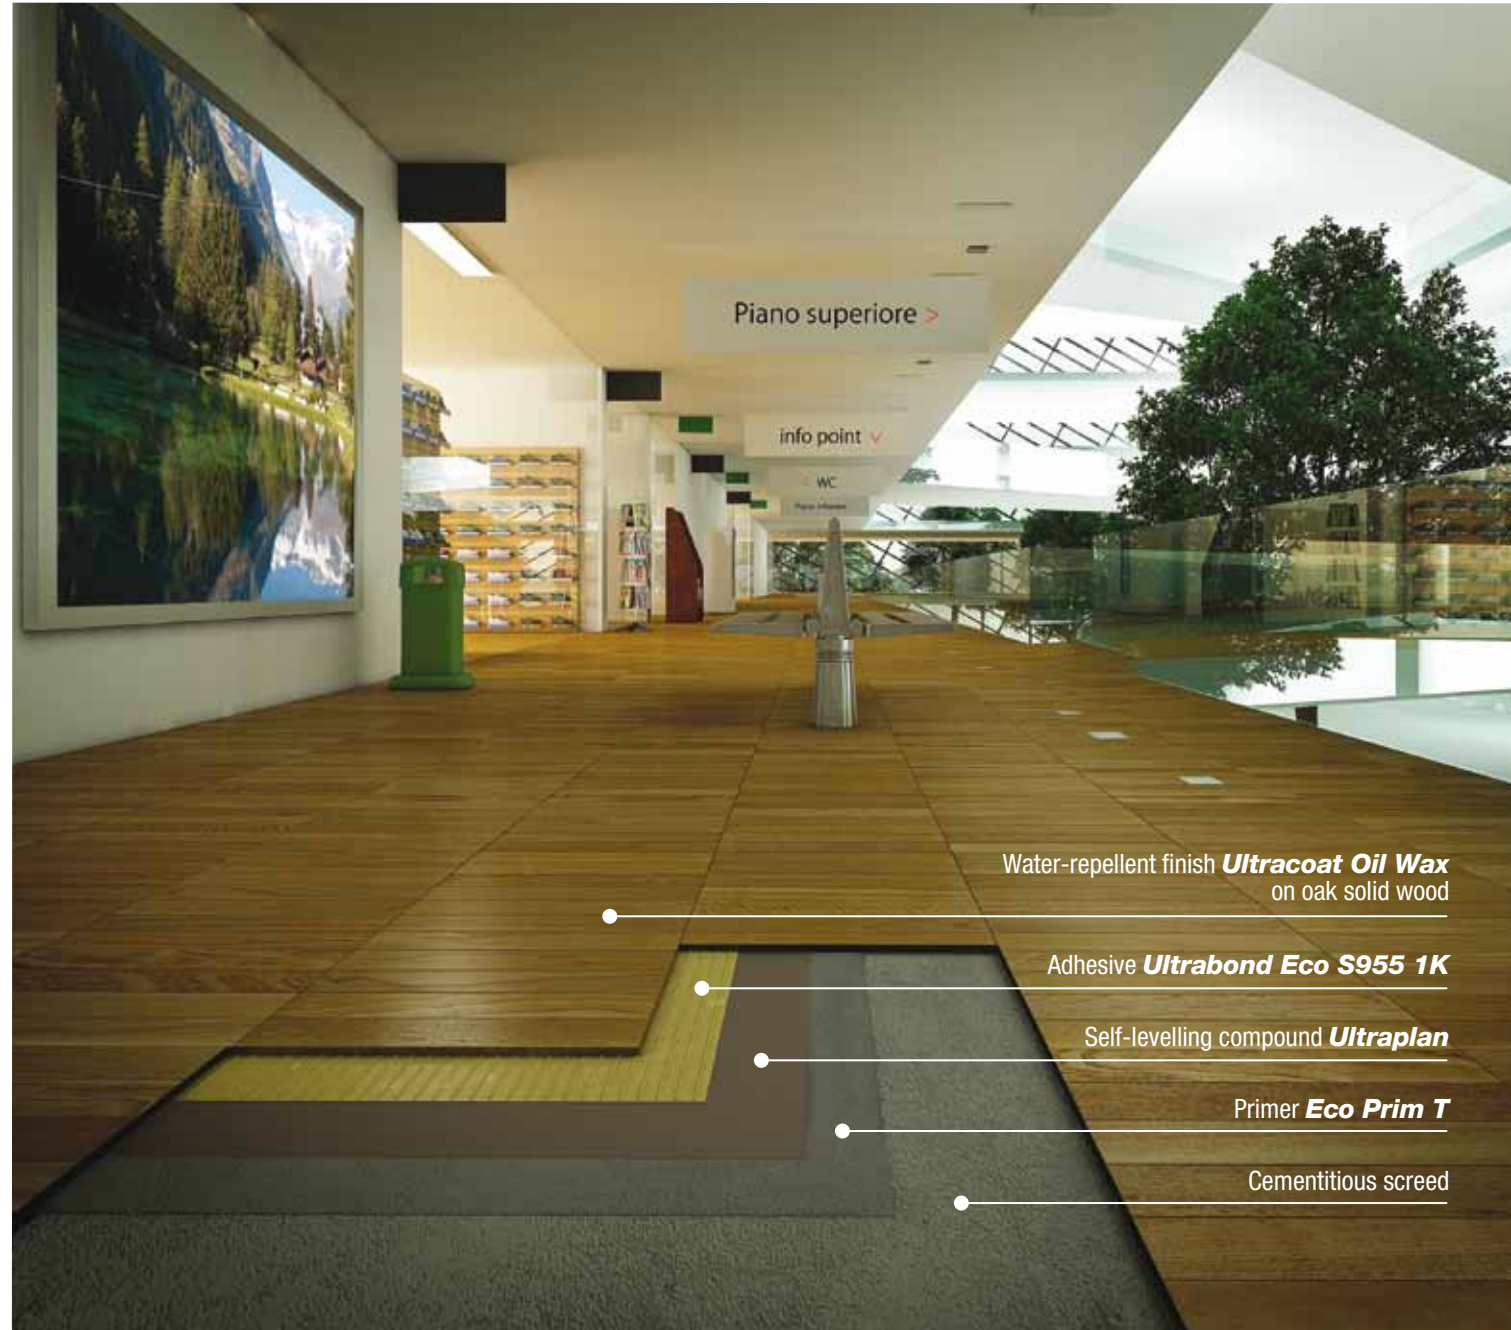

Water-repellent finish **Ultracoat Oil Wax**
on oak solid wood

Adhesive **Ultrabond Eco S955 1K**

Self-levelling compound **Ultraplan**

Primer **Eco Prim T**

Cementitious screed