

ONE-COMPONENT LIGHTWEIGHT CEMENTITIOUS ADHESIVE







Ultralite Flex

Lightweight and tough for all your daily tiling work

What is Ultralite Flex:


One-component, high-performance, fair deformability, lightweight cementitious adhesive with extended open time, with no vertical slip, excellent back-buttering capacities, good trowellability and very high yield.

Classified C2TE according to EN 12004 and ISO 13007-1 standards and EMICODE EC1 R Plus according to GEV.

Characteristics and advantages:


- Easier to apply compared with conventional adhesives.
- Less effort required thanks to its special formulation and the use of lightweight natural aggregates that make trowelling easier.
- Lighter bags (15 kg) with practical hand grips for easier transport and handling.
- Up to 55% higher yield compared with other adhesives with the same classification.
- Excellent back-buttering of the tiles, double-buttering not required.
- Excellent adhesion to all types of substrate normally used in the building industry.
- Lower transport costs each pallet weighs just 750 kg which means more bags of product can be transported with each load.
- Thanks to its Low Dust technology, the formation of dust during mixing is drastically reduced.
- Available in brilliant white and grey.
- Helps earn Leed award points.




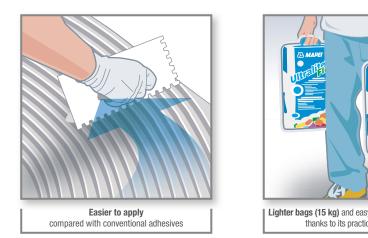





Up to 55% higher yield compared with adhesives with the same classification

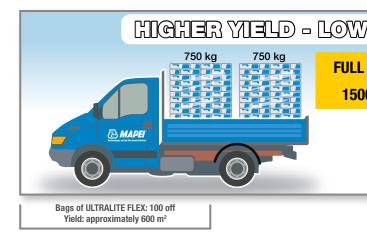





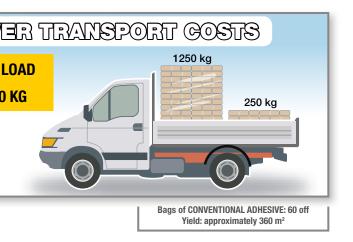



Why use Ultralite Flex:

- Offers **55% higher yield** compared with other adhesive of the same class; one 15 kg bag is enough to install around the same m² of tiles as a 25 kg bag of conventional adhesive.
- Suitable for all types of ceramic, mosaic, thin porcelain tiles (without reinforcement mesh) and dimensionally stable stone on all conventional types of substrate, by overlaying, on heated substrates and on plasterboard.
- Allows you to install on waterproofing membranes from the Mapelastic family and on Mapegum WPS.









Technical documentation

From the technical area menu you can view the technical documentation divided per product lines and type of document.

HEAD OFFICE MAPEI S.p.A. Via Cafiero, 22 - 20158 Milan Tel. +39-02-37673.1 Fax +39-02-37673.214 Internet: www.mapei.com E-mail: mapei@mapei.it



