

Ultrabond Eco P909 2K Plus

PRODUCTS FOR WOODEN FLOORING

More **practical**
and **easier to use**



Ultrabond Eco P909 2K Plus



**MUCH LOWER
CONSUMPTION
RATES***


Two-component, solvent-free polyurethane adhesive with very low emission level of volatile organic compounds (EC1 R Plus) for bonding all types and formats of solid and pre-finished engineered wooden flooring on any type of substrate, including heated floors. Suitable for users allergic to epoxy-polyurethane products.

WHY YOU SHOULD USE IT:

- safeguards the health of man and the environment;
- much less effort for floor layers;
- perfect installation;
- wets more than 60% of the back of wood elements;
- bond up to 10 m² of wood with just one 10 kg drum.

Mapei products for bonding wood are solvent-free and have very low emission level of volatile organic compounds (VOC).

** Much lower consumption rates; just over 1 kg required per square metre (value measured during on-site tests).*

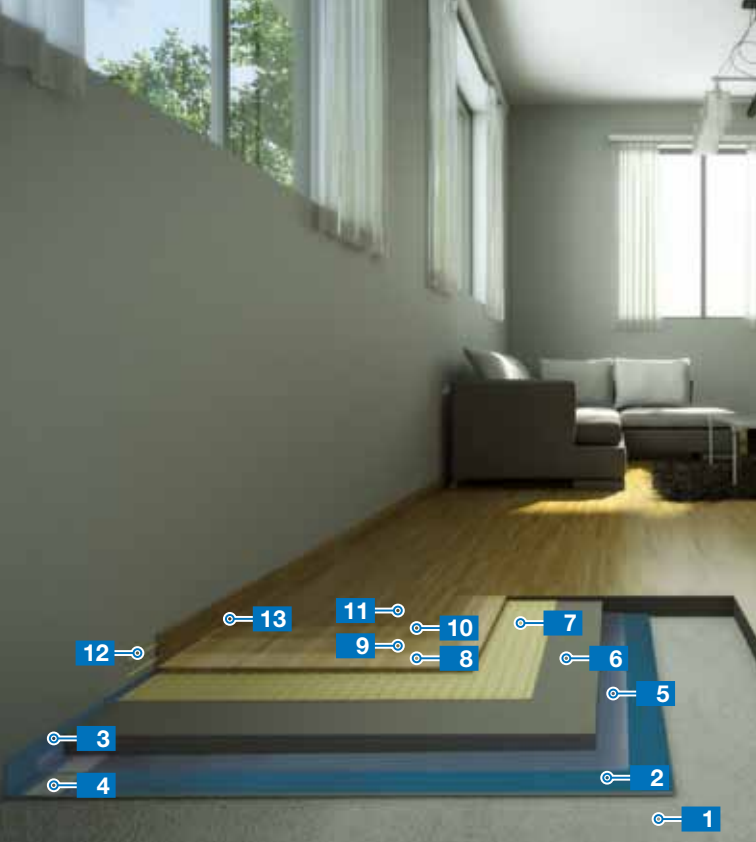

Rapid soundproofing system for installing wood

- | | | | |
|----------|---|-----------|--|
| 1 | Concrete substrate | 8 | Industrial-grade wood |
| 2 | Soundproofing membrane
<i>Mapesilent Comfort</i> | 9 | Water-based binder for grouting
<i>Ultracoat Aqua Plus</i> |
| 3 | Soundproofing strip
<i>Mapesilent Band R</i> | 10 | Two-component water-based undercoat
<i>Ultracoat Premium Base</i> |
| 4 | Soundproofing tape
<i>Mapesilent Tape</i> | 11 | Two-component water-based polyurethane lacquer
<i>Ultracoat High Traffic</i>
(2 coats) |
| 5 | Vapour barrier | 12 | Adhesive
<i>Ultrabond S997 1K</i> |
| 6 | Screed
<i>Mapecem Pronto</i> | 13 | Sealant
<i>Silwood</i> |
| 7 | Adhesive
<i>Ultrabond Eco P909 2K Plus</i> | | |

- 1 > NEW PACKAGING: FOR EASIER HANDLING DURING TRANSPORT AND EASIER ON-SITE STOCK CONTROL
- 2 > SIMPLE TO USE ON SITE
- 3 > INNOVATIVE MAGNETIC INDUCTION SEALING AND SAFETY CAP SYSTEM; THE SPECIAL CAP ALLOWS FOR EASY REMOVAL OF THE SAFETY SEAL
- 4_5 > THE 2 COMPONENTS A AND B ARE EASIER TO MIX TOGETHER THANKS TO THE LOW VISCOSITY OF COMPONENT A
- 6 > NEW FORMULA: EXTENDED POT LIFE OF THE MIX TO MAKE SITE WORK MUCH EASIER
- 7 > EXCEPTIONAL WORKABILITY TO MAKE FLOOR LAYERS' WORK SIMPLER
- 8 > EXCELLENT RIB STABILITY TO GUARANTEE EVEN WETTING ON THE BACK OF THE WOOD







Technical documentation

From the technical area menu you can view the technical documentation divided per product lines and type of document.

HEAD OFFICE
MAPEI S.p.A.
Via Cafiero, 22 - 20158 Milan
Tel. +39-02-37673.1
Fax +39-02-37673.214
Internet: www.mapei.com
E-mail: mapei@mapei.it

