


GENERAL CATALOGUE

November 2023



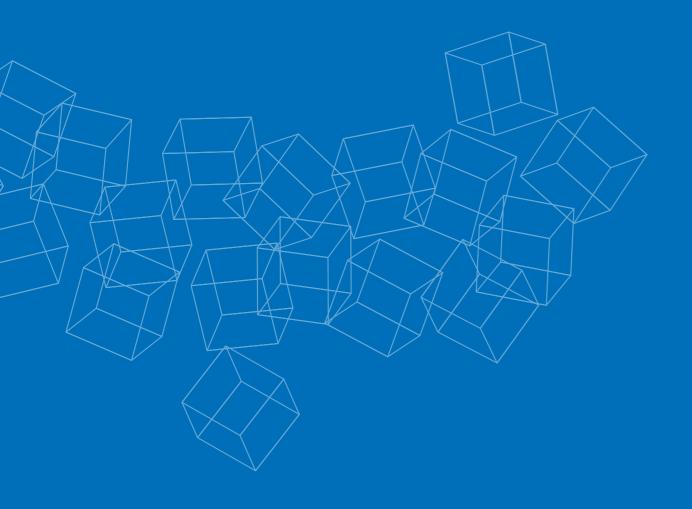

GENERAL CATALOGUE

November 2023

Welcome to the interactive Mapei General Catalogue

With this tool, you will find the products and the insights you need.

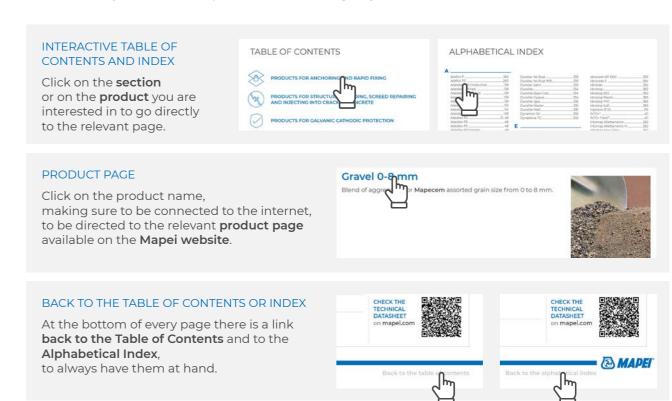


TABLE OF CONTENTS

| | SCREEDS AND SMOOTHING COMPOUNDS | 11 |
|---|--|--------------|
| | 1. Products for screeds | |
| <u> </u> | Products for traditional screeds Products for smoothing | |
| | 4. Products for levelling substrates | |
| | | |
| | PRODUCTS FOR SOUNDPROOFING | 25 |
| | | |
| | PRIMERS, BONDING PROMOTERS CONSOLIDATING | |
| === | AND WATERPROOFING PRODUCTS | 31 |
| | | |
| | ADJUGGIVES FOR SERANJO TILES STONE MATERIAL AND MOSAICS | (17) |
| | ADHESIVES FOR CERAMIC TILES, STONE MATERIAL AND MOSAICS | 47 |
| $\equiv \subseteq \setminus$ | Hydraulic binders-based adhesives Synthetic resin-based adhesives | 48 57 |
| <u> </u> | Reactive adhesives | 57 |
| | | |
| | GROUTS FOR CERAMIC TILES, STONE MATERIAL AND MOSAICS | 61 |
| | 1. Cementitious grouts | |
| XXX | 2. Epoxy grouts | 63 |
| | 3. Ready-to-use paste products | 65 |
| | | |
| | PRODUCTS FOR CLEANING, MAINTAINING | |
| * ************************************* | AND PROTECTING SURFACES | 69 |
| | Cleaning solutions Protectors | |
| | Complementary products | |
| | | |
| | SYSTEMS FOR LAYING AND GROUTING | |
| | ARCHITECTURAL STONE PAVING | 81 |
| | | |
| ~ | ELASTIC SEALANTS AND ADHESIVES | 89 |
| | 1. Acetic silicone sealants | |
| | 2. Polyurethane sealants and adhesives | |
| | Neutral silicone sealants Hybrid sealants and adhesives | |
| | 5. Other sealants | |
| | 6. Adhesives for PVC | |
| | 7. Accessories and primers for sealants | |
| | 9. Accessories for foams | |
| | | |
| $\lambda \backslash \lambda \lambda$ | ADHESIVES AND FINISHING PRODUCTS FOR WOODEN FLOORS | 115 |
| | 1. Adhesives for wooden and laminate floors | |
| X | 2. Paints, fillers, base coats and coloured sealants for parquet | 122 |
| | | |
| | ADHESIVES FOR RESILIENT, LVT AND TEXTILE COVERINGS | 133 |
| <u>=</u> @/ | 1. Adhesives in water dispersion | |
| | Reactive adhesives Polychloroprenic and elastomeric contact adhesives | 144 |
| | Polychloroprenic and elastomeric contact adriesives Powder adhesives | 147 |
| | 5. Cementitous adhesives | 149 |
| | Adhesive strips Adhesives for synthetic grass | |
| | ··· | |

| | COMPLEMENTARY PRODUCTS FOR CERAMIC TILES, STONE MATERIAL, PARQUET, RESILIENT AND TEXTILE COVERINGS | 155 |
|-------|--|---|
| 4 | Complementary products for ceramic tiles and stone material | 165 |
| | PRODUCTS FOR RESIN AND CEMENTITIOUS FLOORS 1. Resin-based products | 202 |
| //i/\ | PRODUCTS FOR REPAIRING ASPHALT AND HIGHWAY MAINTENANCE | 217 |
| | PRODUCTS FOR THE RESTORATION OF MASONRY BUILDINGS 1. Consolidating various types of weak and crumbly substrates" (porous stone, brickwork, tuff, installation mortar, render, etc.) By impregnating | 225 225 227 229 231 232 232 |
| | REPAIRING, CONSOLIDATING AND STRENGTHENING WOODEN STRUCTURES | 239 |
| H H | ADHESIVES AND SMOOTHING COMPOUNDS FOR CELLULAR CONCRETE BLOCKS | 243 |
| # | PRODUCTS FOR THE RESTORATION OF CONCRETE 1. Protection of steel reinforcement rods | |
| | WATER-REPELLENT PRODUCTS FOR THE PROTECTION OF CONCRETE | 261 |
| | RENDERING AND INSTALLATION MORTARS | 265 |
| | SMOOTHING AND PROTECTIVE PRODUCTS FOR CONCRETE AND RENDER SURFACES | 269 |



269

TABLE OF CONTENTS

ALPHABETICAL INDEX

| | PRODUCTS FOR ANCHORING AND RAPID FIXING | 279 |
|----------|--|---------------------------------|
| | PRODUCTS FOR STRUCTURAL BONDING, SCREED REPAIRING AND INJECTING INTO CRACKED CONCRETE | 289 |
| | PRODUCTS FOR GALVANIC CATHODIC PROTECTION | 295 |
| *** | COMPOSITE SYSTEMS FOR STRUCTURAL STRENGTHENING 1. Products for composite systems for structural strengthening | 320 |
| *** | PRODUCTS EXTERNAL INSULATION SYSTEMS 1. Adhesives and smoothing compounds | |
| Property | PRODUCTS FOR TREATING ASBESTOS CEMENT SLABS | 331 |
| | WALL PROTECTIVE AND DECORATIVE COATINGS | 335 |
| 000 | PRODUCTS FOR WATERPROOFING 1. Waterproofing products for underground structures | 371 |
| | ADMIXTURES FOR CONCRETE 1. Admixtures for concrete 2. Admixtures for screeds 3. Form release agents 4. Surface curing compounds 5. Mapei color paving | 409 410 411 |
| | AGGREGATES AND MORTARS FOR THE BUILDING INDUSTRY 1. Mortars for the building industry | 419 420 423 423 425 |
| + + + | THE GREAT WORKS MAPEI | 429 |
| | MAPEI HEAD OFFICES AROUND THE WORLD | 439 |

| Additix P | 777 |
|--------------------------------|---------------------------------|
| Additix PE | |
| Adesilex G19 Conductive | |
| Adesilex G19 Fast | |
| Adesilex G19 FR Fast | |
| Adesilex G20 | |
| Adesilex G20 Fast | |
| Adesilex LC/R | |
| Adesilex LP | |
| Adesilex MT32 | |
| Adesilex P4 | 22, 48 |
| Adesilex P8 | |
| Adesilex P9 | 48 |
| Adesilex P9 Express | 49 |
| Adesilex P10 | 49 |
| Adesilex P22 | 57 |
| Adesilex PG1 | |
| Adesilex PG1 Rapido | |
| Adesilex PG2 | , |
| Adesilex PG4 | , |
| Adesilex PVC | |
| Adesilex PVC HP | |
| Adesilex V6 / F | |
| Adesilex VS45 | |
| Adesilex VZ | |
| Adesivil D3 | |
| Antipluviol | |
| Antipluviol S Antipluviol W | |
| Aquacol T | |
| Aquaflex Primer | |
| Aquaflex Roof | |
| Aguaflex Roof HR | |
| Aquaflex Roof Plus | |
| Aquaflex S 1K | |
| Aquaflex System | |
| | |
| BEtonFLuid* | 420 |
| Biblock | |
| BIOstabilitura* | 416 |
| | |
| Cablejet | 400 |
| CALCESTRUZZO RCK30*. | 420 |
| CALCESTRUZZO RCK40*. | 421 |
| Carbonlata | 301 |
| Carboplate | 301 |
| Carboplate W | |
| Carboplate W Carbotube | |
| Carboplate W | |
| Carboplate W | 169 169 |
| Carboplate W | 169 169 337 |
| Carboplate W | 169 337 337 |
| Carboplate W | 169 169 337 337 412 |
| Carboplate W | |

| 371 | Dursilac Matt338 |
|----------|--------------------------------------|
| 207 | Dursilac No Rust338 |
| e144 | Dursilac No Rust WB339 |
| 144 | Dursilac Satin339 |
| 145 | Dursilite339 |
| 145 | Dursilite Base Coat340 |
| 145 | Dursilite Gypsos340 |
| 116 | Dursilite Igea340 |
| | 9 |
| 147 | Dursilite Level341 |
| 134 | Dursilite Master341 |
| 22, 48 | Dursilite Matt341 |
| 48 | Dynamon SX400 |
| 48 | Dynastone TZ207 |
| 49 | |
| 49 | E |
| 57 | ECO-Dreno*421 |
| 290, 300 | |
| 290, 300 | Eco Prim Grip Plus32 |
| | Eco Prim PU 1K32 |
| 290, 300 | Eco Prim PU 1K Turbo33 |
| 291, 387 | Eco Prim T Easy33 |
| 101 | Eco Prim T Plus33 |
| 102 | Eco Prim T Pro34 |
| 134 | Elastocolor Net342 |
| 134 | Elastocolor Paint342 |
| 148 | |
| 116 | Elastocolor Pittura Plus342 |
| 336 | Elastocolor Primer343 |
| | Elastocolor Rasante343 |
| 336 | Elastocolor Rasante SF343 |
| 336 | Elastocolor Tonachino Plus344 |
| 135 | Elastocolor Waterproof344 |
| 371 | Elastorapid49 |
| 372 | Epojet291, 302 |
| 372 | |
| 372 | Epojet LV |
| 373 | Eporip34, 292 |
| | Eporip SCR34, 292 |
| 332, 373 | Eporip Turbo35, 292 |
| | Epoxy Speed208 |
| | Expancrete Plus400 |
| 420 | Expanfluid401 |
| 32 | EXTRABETON RCK50* |
| 416 | LATRABLION RCROU422 |
| 410 | F |
| | |
| | Fiberplan14 |
| 400 | Fibre HPC320 |
| *420 | FIBROmalta*416 |
| *421 | FIBROstabilitura*416 |
| | Fix & Grout Brick |
| 301 | |
| 301 | Flexcolor65 |
| 301 | Flexcolor 4 LVT165 |
| 169 | FRANTUMATA*425 |
| 169 | Fugolastic62 |
| 337 | |
| 337 | G |
| 412 | |
| | Glicovil Decor148 |
| 412 | Granirapid50, 148 |
| 224 | Grassello di CALCE*417 |
| 224 | Gravel 0-8 mm12, 249 |
| 224 | Gravel 0-15250 |
| 207 | Gravel 3-5250 |
| | Gravel 6-10250 |
| | |
| | Gravel Bardiglio CENE Grey 2-4 mm208 |
| 373 | Gravel Carrara White 2-4 mm208 |
| eral374 | Gravel Ebony Black 2-4 mm209 |
| 421 | |
| 270 | H |
| 337 | HR10 Fibro*417 |
| | |
| 338 | HR15*417 |

| ï | |
|---|--|
| | Idrocrete DM 401 Idrocrete KR 1000 401 Idrocrete S 402 Idrosilex 358 Idrostop 388 Idrostop B25 388 Idrostop Mastic 389 Idrostop Soft 389 Injectors Ø 23 320 INTO+* 419 Intomap Allettamento 266 Intomap Allettamento H 266 Intomap R2 267 Intomap R2 Fibro 267 Isamite 374 Isolastic 50 |
| K | Kerabond |
| | Keracolor FF 62 Keracolor GG 62 Keracolor SF 63 Keracrete 52 Keraflex 52 Keraflex Easy S1 Zero 52 Keraflex Extra S1 Zero 53 |
| | Keraflex Maxi SI Zero 53 Keralastic 57 Keralastic T 58 Kerapoxy 63 Kerapoxy Adhesive 58 Kerapoxy CQ 64 Kerapoxy Easy Design 64 Kerapoxy IEG 64 Keraquick Maxi SI 53 Keraset 54 |
| L | Lampocem 280 Lamposilex 358 Latex Plus 54 Lignobond 116 Livigum 35 |
| М | Malech 35, 344 Malta+ Fibro* 419 MaltaBASTARDA* 418 MaltaVISTA* 402 Mapeair AEI 402 Mapeair LA/P 402 Mape-Antique Allettamento 236 Mape-Antique Colabile 225 Mape-Antique Ecolastic 237 Mape-Antique ECO Rasante Civile 234 Mape-Antique FC Rinzaffo 230 Mape-Antique FC Civile 233 Mape-Antique FC Grosso 233 Mape-Antique FC Ultrafine 234 |



ALPHABETICAL INDEX

| Mape-Antique I | 226 |
|---|--|
| Mape-Antique I-15 Mape-Antique Intonaco NHL | |
| Mape-Antique LC | |
| Mape-Antique MC | |
| Mape-Antique MC Macchina | |
| Mape-Antique NHL ECO Rasante Gross | |
| Mape-Antique NHL | |
| ECO Restaura23 | |
| Mape-Antique NHL ECO Rinzaffo | |
| Mape-Antique NHL ECO Risana Mape-Antique Strutturale NHL23 | |
| Mape-Asphalt Repair 0/8 | |
| Mapeband | |
| Mapeband Easy | |
| Mapeband Flex Roll | |
| Mapeband PE 120 | |
| Mapeband SA | |
| Mapeband TPE Mapecem | |
| Mapecem Pronto | 1Z 12 |
| Mapecoat 4 LVT | 165 |
| Mapecoat ACT Matt | |
| Mapecoat ACT Satin | |
| Mapecoat AF | |
| Mapecoat Decor Easy | |
| Mapecoat Decor Protection | 166 |
| Mapecoat DW 25178 Mapecoat EPN 24178 | 3, 346 |
| Mapecoat Filler | |
| Mapecoat Filler 250 | |
| Mapecoat I 24 | |
| Mapecoat I 62 W | |
| Mapecoat I 600 W3 | |
| Mapecoat I 600 W Lucido3 | |
| Mapecoat I 620 W | 180 |
| Mapecoat I 650 WT Mapecoat PU 20 N | |
| Mapecoat TC | |
| Mapecoat Universal | |
| Mapecoat Wet & Dry R11 | |
| Mapecoal Met & DI y KII | 166 |
| Mapecolor CPU+ | 181 |
| Mapecolor CPU+ Mapecolor Metallic | 181 65 |
| Mapecolor CPU+ Mapecolor Metallic Mapecolor Paste | 181 65 181 |
| Mapecolor CPU+ | 181 65 181 412 |
| Mapecolor CPU+ | 181 65 181 412 209 |
| Mapecolor CPU+ | 181 65 181 412 209 |
| Mapecolor CPU+ | 181 65 181 412 209 149 |
| Mapecolor CPU+ | 181 65 412 209 149 181 403 |
| Mapecolor CPU+ | 181 65 181 412 209 149 181 403 182 |
| Mapecolor CPU+ | 18165181412209149181403182182 |
| Mapecolor CPU+ | 18165181412209149181403182182182183 |
| Mapecolor CPU+ | 18165181209149181403182182183 |
| Mapecolor CPU+ | 18165181412209149181403182182183183 |
| Mapecolor CPU+ | 18165181412209149181403182182183183135 |
| Mapecolor CPU+ | 18165181412209149181403182182183183183135 |
| Mapecolor CPU+ | 18165181412209149181403182182183183183183 |
| Mapecolor CPU+ | 18165181412209149181403182182183183183183183 |
| Mapecolor CPU+ | 181651814122091491814031821821831831831831831831841 1, 403411403 |
| Mapecolor CPU+ | 18165181412209149181403182182183183183183183183183183183 |
| Mapecolor CPU+ | 18165181412209149181403182182183183183183135411 1, 403411 1, 403411403 |
| Mapecolor CPU+ | 18165181412209149181403182182183183183135411403411403411403 |
| Mapecolor CPU+ | 18165181412209149181403182182183183183135411411 1, 403411403411403 |
| Mapecolor CPU+ | 18165181412209149181403182182183183183183183411411 1, 40341140341440424814 |
| Mapecolor CPU+ | 18165181412209149181403182182183183183183183411403411403414404248248 |
| Mapecolor CPU+ | 18165181412209149181403182182183183183183141140341140341140341440440424814209404 |
| Mapecolor CPU+ | 18165181412209149181403182182183183183183141140341140341140341440440424814209404 |

| Mapefibre ST30 | 13, 406 |
|---|---|
| Mapefibre ST42 | |
| Mapefibre ST 50 Twisted | |
| Mapefill F | 280 |
| Mapefill MF 610 | 251 |
| Mapefill R | 280 |
| Mapefill Zero | 281 |
| Mapefinish | 270 |
| Mapefix Combibox VE SF Kit | 282 |
| Mapefix EP 50 | 282 |
| Mapefix EP 100 | |
| Mapefix EP Mixer | 283 |
| Mapefix Metal Sleeve | 281 |
| Mapefix PE + VE Mixer | 283 |
| Mapefix PE SF | |
| Mapefix Plastic Sleeve | 281 |
| Mapefix PolyBond | 284 |
| Mapefix UM-H 420 | |
| Mapefix VE SF | 284 |
| Mapefix VinyBond | 285 |
| Mapefix V LP | 285 |
| Mapeflex AC3 | 98 |
| Mapeflex AC4 | |
| Mapeflex AC-P | 99 |
| Mapeflex Blackfill | |
| Mapeflex E-PU21 SL | |
| Mapeflex E-PU 30 NS | |
| Mapeflex Firestop 1200°C | 100 |
| Mapeflex FR | 100 |
| Mapeflex MS 40 | 97 |
| Mapeflex MS 45 | 97 |
| Mapeflex MS 55 | 98 |
| Mapeflex MS Crystal | 98 |
| Mapeflex PU35 CR | 92 |
| Mapeflex PU 40 | |
| Triaperiex i o io illiminiminimi | . 92, 392 |
| Mapeflex PU 45 FT | 93, 392 |
| Mapeflex PU 45 FT Mapeflex PU50 SL | 93, 392 93, 392 |
| Mapeflex PU 45 FT Mapeflex PU50 SL Mapeflex PU 65 | 93, 392 93, 392 93 |
| Mapeflex PU 45 FT Mapeflex PU50 SL | 93, 392 93, 392 93 |
| Mapeflex PU 45 FT | 93, 392 93, 392 93 94 |
| Mapeflex PU 45 FT | 93, 392 93, 392 93 94 94 |
| Mapeflex PU 45 FT | 93, 392 93, 392 93 94 94 94 |
| Mapeflex PU 45 FT | 93, 392 93, 392 93 94 94 94 |
| Mapeflex PU 45 FT | 93, 392 93, 392 93 94 94 95 184 |
| Mapeflex PU 45 FT | 93, 392 93, 392 93 94 94 94 95 184 |
| Mapeflex PU 45 FT | 93, 392 93, 392 93 94 94 95 184 210 184 |
| Mapeflex PU 45 FT | 93, 392 93, 392 93 94 94 95 184 210 185 185 |
| Mapeflex PU 45 FT | 93, 392 93, 392 93 94 94 95 184 210 185 185 |
| Mapeflex PU 45 FT | 93, 392 93, 392 93 94 94 95 184 210 185 185 185 |
| Mapeflex PU 45 FT | |
| Mapeflex PU 45 FT | |
| Mapeflex PU 45 FT | 93, 392 93, 392 93 94 94 95 184 185 185 186 186 186 186 |
| Mapeflex PU 45 FT | 93, 39293, 39293949495184185185186186186186 |
| Mapeflex PU 45 FT | 93, 39293, 39293949495184185185186186186186 |
| Mapeflex PU 45 FT | 93, 39293, 392949495184185185186186186186187 |
| Mapeflex PU 45 FT | 93, 39293, 392949495184185185186186186186187187 |
| Mapeflex PU 45 FT | 93, 39293, 392949495184185185186186186187 |
| Mapeflex PU 45 FT Mapeflex PU50 SL Mapeflex PU 65 Mapeflex PU 70 NS Mapeflex PU 70 SL Mapeflex PU 70 SL Mapeflex PU 70 SL Mapeflex Xpress 80/400 Mapeflex Xpress Mixers Mapefloor Binder 930 Mapefloor Cleaner ED Mapefloor CPU+/COVE Mapefloor CPU+/HD Mapefloor CPU+/HF Mapefloor CPU+/NZ Mapefloor CPU+/NZ Mapefloor CPU+/RT Mapefloor CPU+/SR Mapefloor CPU+/TC Mapefloor CPU+/UD Mapefloor CPU+/UD Mapefloor CPU/TC Glossy Mapefloor Decor 700 Mapefloor EP19 Mapefloor EP 90 Mapefloor EP 90 Mapefloor Filler | 93, 39293, 39293949495184210185185185186186186187187184187187188 |
| Mapeflex PU 45 FT Mapeflex PU50 SL Mapeflex PU 65 Mapeflex PU 70 NS Mapeflex PU 70 SL Mapeflex PU 70 SL Mapeflex PU 70 SL Mapeflex Xpress 80/400 Mapeflex Xpress Mixers Mapefloor Binder 930 Mapefloor Cleaner ED Mapefloor CPU+/COVE Mapefloor CPU+/HD Mapefloor CPU+/HF Mapefloor CPU+/NZ Mapefloor CPU+/NZ Mapefloor CPU+/RT Mapefloor CPU+/SR Mapefloor CPU+/TC Mapefloor CPU+/TC Mapefloor CPU+/UD Mapefloor CPU+/UD Mapefloor CPU-/TC Glossy Mapefloor EP19 Mapefloor EP19 Mapefloor EP 90 Mapefloor Filler Mapefloor Filler Mapefloor Filler | 93, 39293, 39293949495184210185185186186186187187187188218 |
| Mapeflex PU 45 FT Mapeflex PU50 SL Mapeflex PU 65 Mapeflex PU 70 NS Mapeflex PU 70 NS Mapeflex PU 70 SL Mapeflex PU 70 SL Mapeflex Xpress 80/400 Mapeflex Xpress Mixers Mapefloor Binder 930 Mapefloor Cleaner ED Mapefloor CPU+/COVE Mapefloor CPU+/HD Mapefloor CPU+/HD Mapefloor CPU+/NZ Mapefloor CPU+/NZ Mapefloor CPU+/RT Mapefloor CPU+/SR Mapefloor CPU+/TC Mapefloor CPU+/TC Mapefloor CPU+/UD Mapefloor CPU+/UD Mapefloor CPU-/TC Glossy Mapefloor EP19 Mapefloor EP19 Mapefloor EP30 Mapefloor Filler Mapefloor Finish 50 N Mapefloor Finish 50 N | .93, 392 |
| Mapeflex PU 45 FT | 93, 39293, 39293, 392949495184185185185186186186187187187187188218210188218 |
| Mapeflex PU 45 FT | |
| Mapeflex PU 45 FT | 93, 39293, 39293, 392949495184185185186186186187187188187188188189189 |
| Mapeflex PU 45 FT | 93, 39293, 39293, 392949495184185185185186186186187187184187188188189189189 |
| Mapeflex PU 45 FT | .93, 39293, 39293, 392949495184185185185186186186187187187188218210188189189190 |
| Mapeflex PU 45 FT | .93, 39293, 39293, 392949495184185185185186186186187187187188187188189189190190 |
| Mapeflex PU 45 FT Mapeflex PU50 SL Mapeflex PU 65 Mapeflex PU 70 NS Mapeflex PU 70 NS Mapeflex PU 70 SL Mapeflex Xpress 80/400 Mapeflex Xpress Mixers Mapefloor Binder 930 Mapefloor CPU+/COVE Mapefloor CPU+/HD Mapefloor CPU+/HD Mapefloor CPU+/HZ Mapefloor CPU+/NZ Mapefloor CPU+/RT Mapefloor CPU+/RT Mapefloor CPU+/TC Mapefloor CPU+/TC Mapefloor CPU+/TC Mapefloor CPU+/ID Mapefloor CPU+/ID Mapefloor CPU+/ID Mapefloor CPU+/ID Mapefloor CPU+/ID Mapefloor FIII Mapefloor FIII Mapefloor Finish 50 N Mapefloor Finish 53 W/L Mapefloor Finish 54 W/S Mapefloor Finish 59 W Mapefloor Finish 415 Mapefloor Finish 450 EU | 93, 39293, 39293, 392949495184185185186186187187184187188188188188188189189189190190 |
| Mapeflex PU 45 FT Mapeflex PU50 SL Mapeflex PU 65 Mapeflex PU 70 NS Mapeflex PU 70 NS Mapeflex PU 70 SL Mapeflex Xpress 80/400 Mapeflex Xpress Mixers Mapefloor Binder 930 Mapefloor CPU+/COVE Mapefloor CPU+/HD Mapefloor CPU+/HD Mapefloor CPU+/HZ Mapefloor CPU+/NZ Mapefloor CPU+/RT Mapefloor CPU+/RT Mapefloor CPU+/TC Mapefloor CPU+/TC Mapefloor CPU+/TC Mapefloor CPU+/ID Mapefloor CPU+/ID Mapefloor CPU+/ID Mapefloor CPU+/ID Mapefloor CPU+/ID Mapefloor FIII Mapefloor FIII Mapefloor Finish 50 N Mapefloor Finish 53 W/L Mapefloor Finish 54 W/S Mapefloor Finish 59 W Mapefloor Finish 415 Mapefloor Finish 450 EU Mapefloor Finish 451 | 93, 39293, 39293, 39294949495184185185186186187187184187188188188189189189190190191 |
| Mapeflex PU 45 FT Mapeflex PU50 SL Mapeflex PU 65 Mapeflex PU 70 NS Mapeflex PU 70 NS Mapeflex PU 70 SL Mapeflex Xpress 80/400 Mapeflex Xpress Mixers Mapefloor Binder 930 Mapefloor CPU+/COVE Mapefloor CPU+/HD Mapefloor CPU+/HD Mapefloor CPU+/HZ Mapefloor CPU+/NZ Mapefloor CPU+/RT Mapefloor CPU+/RT Mapefloor CPU+/TC Mapefloor CPU+/TC Mapefloor CPU+/TC Mapefloor CPU+/ID Mapefloor CPU+/ID Mapefloor CPU+/ID Mapefloor CPU+/ID Mapefloor CPU+/ID Mapefloor FIII Mapefloor FIII Mapefloor Finish 50 N Mapefloor Finish 53 W/L Mapefloor Finish 54 W/S Mapefloor Finish 59 W Mapefloor Finish 415 Mapefloor Finish 450 EU | 93, 39293, 39293, 39294949495184185186186186187187188187188218210188189189190190191191 |

| Mapefloor I 300 SL192 |
|---|
| Mapefloor I 300 SL TRP192 |
| Mapefloor I 302 SL |
| |
| Mapefloor I 306 CR193 |
| Mapefloor I 309 CR193 |
| Mapefloor I 320 SL CONCEPT194 |
| Mapefloor I 324194 |
| Mapefloor I 357 ESD194 |
| |
| Mapefloor I 360 AS195 |
| Mapefloor I 370 SL195 |
| Mapefloor I 390 EDF195 |
| Mapefloor I 500 W196 |
| Mapefloor I 900196 |
| Mapefloor I 910196 |
| |
| Mapefloor I 914197 |
| Mapefloor JA197 |
| Mapefloor Maintenance Kit210 |
| Mapefloor Pore Filler197 |
| Mapefloor PU 400 LV198 |
| |
| Mapefloor PU 406198 |
| Mapefloor PU 410198 |
| Mapefloor PU 460199 |
| Mapefloor PU 461199 |
| Mapefloor PU 470199 |
| Mapefloor Wax Remover211 |
| |
| Mapefluid N200406 |
| Mapefluid PZ500407 |
| Mapefluid R104 407 |
| Mapefoam102, 393 |
| Mapeform 1500 Plus410 |
| |
| Mapeform DMA 1000410 |
| Mapeform DMA 2000410 |
| Maria a Clista a v |
| MapeGlitter65 |
| |
| Mapegrid B 250302 |
| Mapegrid B 250302 Mapegrid B 300302 |
| Mapegrid B 250 302 Mapegrid B 300 302 Mapegrid B 400 303 |
| Mapegrid B 250 302 Mapegrid B 300 302 Mapegrid B 400 303 Mapegrid C 170 303 |
| Mapegrid B 250 |
| Mapegrid B 250 |
| Mapegrid B 250 302 Mapegrid B 300 302 Mapegrid B 400 303 Mapegrid C 170 303 Mapegrid C 200 303 Mapegrid G 120 304 |
| Mapegrid B 250 302 Mapegrid B 300 302 Mapegrid B 400 303 Mapegrid C 170 303 Mapegrid C 200 303 Mapegrid G 120 304 Mapegrid G 220 304 |
| Mapegrid B 250 302 Mapegrid B 300 302 Mapegrid B 400 303 Mapegrid C 170 303 Mapegrid C 200 303 Mapegrid G 120 304 Mapegrid G 220 304 Mapegrout 430 Zero 251 |
| Mapegrid B 250 302 Mapegrid B 300 302 Mapegrid B 400 303 Mapegrid C 170 303 Mapegrid C 200 303 Mapegrid G 120 304 Mapegrid G 220 304 Mapegrout 430 Zero 251 Mapegrout Betontech HPC 10 218, 252 |
| Mapegrid B 250 302 Mapegrid B 300 302 Mapegrid B 400 303 Mapegrid C 170 303 Mapegrid C 200 303 Mapegrid G 120 304 Mapegrid G 220 304 Mapegrout 430 Zero 251 Mapegrout Betontech HPC 10 218, 252 Mapegrout BM 252 |
| Mapegrid B 250 |
| Mapegrid B 250 |
| Mapegrid B 250 302 Mapegrid B 300 302 Mapegrid B 400 303 Mapegrid C 170 303 Mapegrid G 200 303 Mapegrid G 120 304 Mapegrid G 220 304 Mapegrout 430 Zero 251 Mapegrout Betontech HPC 10 218, 252 Mapegrout Colabile GF 253 Mapegrout Colabile TI 20 219, 253 |
| Mapegrid B 250 302 Mapegrid B 300 302 Mapegrid B 400 303 Mapegrid C 170 303 Mapegrid G 200 303 Mapegrid G 120 304 Mapegrid G 220 304 Mapegrout 430 Zero 251 Mapegrout Betontech HPC 10 218, 252 Mapegrout Colabile GF 253 Mapegrout Colabile TI 20 219, 253 Mapegrout Easy Repair Zero 255 |
| Mapegrid B 250 302 Mapegrid B 300 302 Mapegrid B 400 303 Mapegrid C 170 303 Mapegrid C 200 303 Mapegrid G 120 304 Mapegrid G 220 304 Mapegrout 430 Zero 251 Mapegrout Betontech HPC 10 218, 252 Mapegrout Colabile GF 253 Mapegrout Colabile TI 20 219, 253 Mapegrout Easy Repair Zero 255 Mapegrout Fast-Set 255 |
| Mapegrid B 250 302 Mapegrid B 300 302 Mapegrid B 400 303 Mapegrid C 170 303 Mapegrid C 200 303 Mapegrid G 120 304 Mapegrid G 220 304 Mapegrout 430 Zero 251 Mapegrout Betontech HPC 10 218, 252 Mapegrout Colabile GF 253 Mapegrout Colabile TI 20 219, 253 Mapegrout Easy Repair Zero 255 Mapegrout Fast-Set 255 Mapegrout FMR-PP 254 |
| Mapegrid B 250 302 Mapegrid B 300 302 Mapegrid B 400 303 Mapegrid C 170 303 Mapegrid C 200 303 Mapegrid G 120 304 Mapegrid G 220 304 Mapegrout 430 Zero 251 Mapegrout Betontech HPC 10 218, 252 Mapegrout Colabile GF 253 Mapegrout Colabile TI 20 219, 253 Mapegrout Easy Repair Zero 255 Mapegrout Fast-Set 255 |
| Mapegrid B 250 302 Mapegrid B 300 302 Mapegrid B 400 303 Mapegrid C 170 303 Mapegrid C 200 303 Mapegrid G 120 304 Mapegrid G 220 304 Mapegrout 430 Zero 251 Mapegrout Betontech HPC 10 218, 252 Mapegrout Colabile GF 253 Mapegrout Colabile TI 20 219, 253 Mapegrout Easy Repair Zero 255 Mapegrout Fast-Set 255 Mapegrout FMR-PP 254 |
| Mapegrid B 250 302 Mapegrid B 300 302 Mapegrid B 400 303 Mapegrid C 170 303 Mapegrid C 200 303 Mapegrid G 120 304 Mapegrout 430 Zero 251 Mapegrout Betontech HPC 10 218, 252 Mapegrout Colabile GF 253 Mapegrout Colabile TI 20 219, 253 Mapegrout Easy Repair Zero 255 Mapegrout Fast-Set 255 Mapegrout F FSt-Set 254 Mapegrout Hi-Flow Zero 252 |
| Mapegrid B 250 302 Mapegrid B 300 302 Mapegrid B 400 303 Mapegrid C 170 303 Mapegrid C 200 303 Mapegrid G 120 304 Mapegrout 430 Zero 251 Mapegrout Betontech HPC 10 218, 252 Mapegrout Colabile GF 253 Mapegrout Colabile TI 20 219, 253 Mapegrout Easy Repair Zero 255 Mapegrout Fast-Set 255 Mapegrout FFR-PP 254 Mapegrout Hi-Flow Zero 252 Mapegrout High-Flow B2 253 |
| Mapegrid B 250 302 Mapegrid B 300 302 Mapegrid B 400 303 Mapegrid C 170 303 Mapegrid C 200 303 Mapegrid G 120 304 Mapegrout 430 Zero 251 Mapegrout Betontech HPC 10 218, 252 Mapegrout Colabile GF 253 Mapegrout Colabile TI 20 219, 253 Mapegrout Easy Repair Zero 255 Mapegrout Fast-Set 255 Mapegrout GF Betoncino BI 254 Mapegrout Hi-Flow Zero 252 Mapegrout High-Flow B2 253 Mapegrout LM2K 254 |
| Mapegrid B 250 302 Mapegrid B 300 302 Mapegrid B 400 303 Mapegrid C 170 303 Mapegrid C 200 304 Mapegrid G 220 304 Mapegrout 430 Zero 251 Mapegrout Betontech HPC 10 218, 252 Mapegrout BM 252 Mapegrout Colabile GF 253 Mapegrout Easy Repair Zero 255 Mapegrout Fast-Set 255 Mapegrout FMR-PP 254 Mapegrout Hi-Flow Zero 252 Mapegrout High-Flow B2 253 Mapegrout LM2K 254 Mapegrout SV 219, 255 |
| Mapegrid B 250 302 Mapegrid B 300 302 Mapegrid B 400 303 Mapegrid C 170 303 Mapegrid C 200 304 Mapegrid G 220 304 Mapegrout 430 Zero 251 Mapegrout Betontech HPC 10 218, 252 Mapegrout BM 252 Mapegrout Colabile GF 253 Mapegrout Easy Repair Zero 255 Mapegrout Fast-Set 255 Mapegrout GF Betoncino B1 254 Mapegrout High-Flow Zero 252 Mapegrout High-Flow B2 253 Mapegrout LM2K 254 Mapegrout SV 219, 255 Mapegrout SV Fiber 219, 256 |
| Mapegrid B 250 302 Mapegrid B 300 302 Mapegrid B 400 303 Mapegrid C 170 303 Mapegrid C 200 304 Mapegrid G 220 304 Mapegrout 430 Zero 251 Mapegrout Betontech HPC 10 218, 252 Mapegrout BM 252 Mapegrout Colabile GF 253 Mapegrout Easy Repair Zero 255 Mapegrout Fast-Set 255 Mapegrout GF Betoncino B1 254 Mapegrout High-Flow Zero 252 Mapegrout High-Flow B2 253 Mapegrout LM2K 254 Mapegrout SV 219, 255 Mapegrout SV Fiber 219, 256 |
| Mapegrid B 250 302 Mapegrid B 300 302 Mapegrid B 400 303 Mapegrid C 170 303 Mapegrid C 200 304 Mapegrid G 220 304 Mapegrout 430 Zero 251 Mapegrout Betontech HPC 10 218, 252 Mapegrout BM 252 Mapegrout Colabile GF 253 Mapegrout Easy Repair Zero 255 Mapegrout Fast-Set 255 Mapegrout FMR-PP 254 Mapegrout Hi-Flow Zero 252 Mapegrout High-Flow B2 253 Mapegrout LM2K 254 Mapegrout SV 219, 255 Mapegrout SV Fiber 219, 256 Mapegrout SV T 220, 256 |
| Mapegrid B 250 302 Mapegrid B 300 302 Mapegrid B 400 303 Mapegrid C 170 303 Mapegrid C 200 303 Mapegrid G 120 304 Mapegrout 430 Zero 251 Mapegrout Betontech HPC 10 218, 252 Mapegrout BM 252 Mapegrout Colabile GF 253 Mapegrout Easy Repair Zero 255 Mapegrout Fast-Set 255 Mapegrout FRR-PP 254 Mapegrout Hi-Flow Zero 252 Mapegrout High-Flow B2 253 Mapegrout LM2K 254 Mapegrout SV 219, 255 Mapegrout SV Fiber 219, 256 Mapegrout T40 256 |
| Mapegrid B 250 302 Mapegrid B 300 302 Mapegrid B 400 303 Mapegrid C 170 303 Mapegrid C 200 304 Mapegrid G 120 304 Mapegrout 430 Zero 251 Mapegrout Betontech HPC 10 218, 252 Mapegrout BM 252 Mapegrout Colabile GF 253 Mapegrout Easy Repair Zero 255 Mapegrout FAR-Set 255 Mapegrout GF Betoncino B1 254 Mapegrout High-Flow Zero 252 Mapegrout High-Flow B2 253 Mapegrout SV 219, 255 Mapegrout SV Fiber 219, 256 Mapegrout T40 256 Mapegrout T60 257 |
| Mapegrid B 250 302 Mapegrid B 300 302 Mapegrid B 400 303 Mapegrid C 170 303 Mapegrid C 200 304 Mapegrid G 120 304 Mapegrout 430 Zero 251 Mapegrout Betontech HPC 10 218, 252 Mapegrout BM 252 Mapegrout Colabile GF 253 Mapegrout Easy Repair Zero 255 Mapegrout FAR-Set 255 Mapegrout GF Betoncino B1 254 Mapegrout High-Flow Zero 252 Mapegrout High-Flow B2 253 Mapegrout SV 219, 255 Mapegrout SV Fiber 219, 256 Mapegrout T40 256 Mapegrout T60 257 Mapegrout Thixotropic Zero 257 |
| Mapegrid B 250 302 Mapegrid B 300 302 Mapegrid B 400 303 Mapegrid C 170 303 Mapegrid C 200 304 Mapegrid G 120 304 Mapegrout 430 Zero 251 Mapegrout Betontech HPC 10 218, 252 Mapegrout BM 252 Mapegrout Colabile GF 253 Mapegrout Easy Repair Zero 255 Mapegrout Fast-Set 255 Mapegrout GF Betoncino B1 254 Mapegrout High-Flow Zero 253 Mapegrout High-Flow B2 253 Mapegrout SV 219, 255 Mapegrout SV Fiber 219, 256 Mapegrout T40 256 Mapegrout Thixotropic Zero 257 Mapegrout Thixotropic Zero 257 Mapegrout Thixotropic Zero 257 Mapegrout Thixotropic Zero 257 |
| Mapegrid B 250 302 Mapegrid B 300 302 Mapegrid B 400 303 Mapegrid C 170 303 Mapegrid C 200 304 Mapegrid G 120 304 Mapegrout 430 Zero 251 Mapegrout Betontech HPC 10 218, 252 Mapegrout BM 252 Mapegrout Colabile GF 253 Mapegrout Easy Repair Zero 255 Mapegrout Fast-Set 255 Mapegrout GF Betoncino B1 254 Mapegrout High-Flow Zero 253 Mapegrout High-Flow B2 253 Mapegrout SV 219, 255 Mapegrout SV 219, 255 Mapegrout SV Fiber 219, 256 Mapegrout T40 256 Mapegrout T60 257 Mapeguard Board 156 Mapeguard DH-L 393 |
| Mapegrid B 250 302 Mapegrid B 300 302 Mapegrid B 400 303 Mapegrid C 170 303 Mapegrid C 200 304 Mapegrid G 120 304 Mapegrout 430 Zero 251 Mapegrout Betontech HPC 10 218, 252 Mapegrout BM 252 Mapegrout Colabile GF 253 Mapegrout Easy Repair Zero 255 Mapegrout Fast-Set 255 Mapegrout GF Betoncino B1 254 Mapegrout High-Flow Zero 253 Mapegrout High-Flow B2 253 Mapegrout SV 219, 255 Mapegrout SV 219, 255 Mapegrout SV Fiber 219, 256 Mapegrout T40 256 Mapegrout T60 257 Mapeguard Board 156 Mapeguard DH-L 393 |
| Mapegrid B 250 302 Mapegrid B 300 302 Mapegrid B 400 303 Mapegrid C 170 303 Mapegrid C 200 304 Mapegrid G 120 304 Mapegrout 430 Zero 251 Mapegrout Betontech HPC 10 218, 252 Mapegrout BM 252 Mapegrout Colabile GF 253 Mapegrout Easy Repair Zero 255 Mapegrout Fast-Set 255 Mapegrout GF Betoncino B1 254 Mapegrout High-Flow Zero 252 Mapegrout High-Flow B2 253 Mapegrout SV 219, 255 Mapegrout SV 219, 255 Mapegrout SV 219, 256 Mapegrout T40 256 Mapegrout T60 257 Mapegrout DH-L 393 Mapeguard DH-R 393 |
| Mapegrid B 250 302 Mapegrid B 300 302 Mapegrid B 400 303 Mapegrid C 170 303 Mapegrid C 200 304 Mapegrid G 120 304 Mapegrout 430 Zero 251 Mapegrout Betontech HPC 10 218, 252 Mapegrout BM 252 Mapegrout Colabile GF 253 Mapegrout Colabile TI 20 219, 253 Mapegrout Easy Repair Zero 255 Mapegrout Fast-Set 255 Mapegrout GF Betoncino B1 254 Mapegrout High-Flow Zero 253 Mapegrout High-Flow B2 253 Mapegrout SV Fiber 219, 255 Mapegrout SV 219, 255 Mapegrout SV T 220, 256 Mapegrout T40 256 Mapegrout Thixotropic Zero 257 Mapeguard Board 156 Mapeguard DH-L 393 Mapeguard DH-R 394 |
| Mapegrid B 250 302 Mapegrid B 300 302 Mapegrid B 400 303 Mapegrid C 170 303 Mapegrid C 200 303 Mapegrid G 120 304 Mapegrout 430 Zero 251 Mapegrout Betontech HPC 10 218, 252 Mapegrout BM 252 Mapegrout Colabile GF 253 Mapegrout Easy Repair Zero 255 Mapegrout Fast-Set 255 Mapegrout FMR-PP 254 Mapegrout GF Betoncino B1 254 Mapegrout High-Flow Zero 253 Mapegrout Wigh-Flow B2 253 Mapegrout J High-Flow B2 253 Mapegrout SV Fiber 219, 255 Mapegrout SV Fiber 219, 255 Mapegrout T40 256 Mapegrout T60 257 Mapegrout DH-L 393 Mapeguard DH-L 393 Mapeguard EC 394 |
| Mapegrid B 250 302 Mapegrid B 300 302 Mapegrid B 400 303 Mapegrid C 170 303 Mapegrid C 200 303 Mapegrid G 120 304 Mapegrout 430 Zero 251 Mapegrout Betontech HPC 10 218, 252 Mapegrout Colabile GF 253 Mapegrout Easy Repair Zero 255 Mapegrout Fast-Set 255 Mapegrout GF Betoncino B1 254 Mapegrout High-Flow Zero 252 Mapegrout High-Flow B2 253 Mapegrout SV Fiber 219, 255 Mapegrout SV Fiber 219, 256 Mapegrout T40 256 Mapegrout Thixotropic Zero 257 Mapeguard Board 156 Mapeguard DH-L 393 Mapeguard DC 394 Mapeguard PC 394 |
| Mapegrid B 250 302 Mapegrid B 300 302 Mapegrid B 400 303 Mapegrid C 170 303 Mapegrid C 200 303 Mapegrid G 120 304 Mapegrout 430 Zero 251 Mapegrout Betontech HPC 10 218, 252 Mapegrout Betontech HPC 10 218, 252 Mapegrout Colabile GF 253 Mapegrout Colabile TI 20 219, 253 Mapegrout Easy Repair Zero 255 Mapegrout Fast-Set 255 Mapegrout GF Betoncino BI 254 Mapegrout Hi-Flow Zero 252 Mapegrout High-Flow B2 253 Mapegrout SV 219, 255 Mapegrout SV 219, 255 Mapegrout T40 256 Mapegrout T60 257 Mapegrout DH-L 393 Mapeguard DH-L 393 Mapeguard DH-R 393 Mapeguard PC 394 Mapeguard Roller 156 |
| Mapegrid B 250 302 Mapegrid B 300 302 Mapegrid B 400 303 Mapegrid C 170 303 Mapegrid C 200 303 Mapegrid G 120 304 Mapegrout 430 Zero 251 Mapegrout Betontech HPC 10 218, 252 Mapegrout Colabile GF 253 Mapegrout Easy Repair Zero 255 Mapegrout Fast-Set 255 Mapegrout GF Betoncino B1 254 Mapegrout High-Flow Zero 252 Mapegrout High-Flow B2 253 Mapegrout SV Fiber 219, 255 Mapegrout SV Fiber 219, 256 Mapegrout T40 256 Mapegrout Thixotropic Zero 257 Mapeguard Board 156 Mapeguard DH-L 393 Mapeguard DC 394 Mapeguard PC 394 |
| Mapegrid B 250 302 Mapegrid B 300 302 Mapegrid B 400 303 Mapegrid C 170 303 Mapegrid C 200 303 Mapegrid G 120 304 Mapegrout 430 Zero 251 Mapegrout Betontech HPC 10 218, 252 Mapegrout Betontech HPC 10 218, 252 Mapegrout Colabile GF 253 Mapegrout Colabile TI 20 219, 253 Mapegrout Easy Repair Zero 255 Mapegrout Fast-Set 255 Mapegrout GF Betoncino B1 254 Mapegrout High-Flow Zero 252 Mapegrout High-Flow B2 253 Mapegrout SV 219, 255 Mapegrout SV Fiber 219, 256 Mapegrout T40 256 Mapegrout T60 257 Mapeguard Board 156 Mapeguard DH-L 393 Mapeguard DH-R 393 Mapeguard PC 394 Mapeguard Roller 156 Mapeguard ST 395 |
| Mapegrid B 250 302 Mapegrid B 300 302 Mapegrid B 400 303 Mapegrid C 170 303 Mapegrid C 200 303 Mapegrid G 120 304 Mapegrout 430 Zero 251 Mapegrout Betontech HPC 10 218, 252 Mapegrout Betontech HPC 10 218, 252 Mapegrout Colabile GF 253 Mapegrout Colabile TI 20 219, 253 Mapegrout Easy Repair Zero 255 Mapegrout Fast-Set 255 Mapegrout GF Betoncino B1 254 Mapegrout Hi-Flow Zero 252 Mapegrout High-Flow B2 253 Mapegrout SV 219, 255 Mapegrout SV Fiber 219, 256 Mapegrout T40 256 Mapegrout T60 257 Mapeguard Board 156 Mapeguard PC 394 Mapeguard PC 394 Mapeguard Roller 156 Mapeguard ST 395 Mapeguard UM 35 156 |
| Mapegrid B 250 302 Mapegrid B 300 302 Mapegrid B 400 303 Mapegrid C 170 303 Mapegrid C 200 303 Mapegrid G 120 304 Mapegrout 430 Zero 251 Mapegrout Betontech HPC 10 218, 252 Mapegrout Betontech HPC 10 218, 252 Mapegrout Colabile GF 253 Mapegrout Colabile TI 20 219, 253 Mapegrout Easy Repair Zero 255 Mapegrout Fast-Set 255 Mapegrout GF Betoncino B1 254 Mapegrout High-Flow Zero 252 Mapegrout High-Flow B2 253 Mapegrout SV 219, 255 Mapegrout SV Fiber 219, 256 Mapegrout T40 256 Mapegrout T60 257 Mapeguard Board 156 Mapeguard DH-L 393 Mapeguard DH-R 393 Mapeguard PC 394 Mapeguard Roller 156 Mapeguard ST 395 |

| Mapegum EPX-T377 |
|---|
| Mapegum WPS377 |
| Mapei Gun 310102 |
| Mapei Gun 310 PRO103 |
| Mapei Gun 420 2K103 |
| Mapei Gun 585 2K103 |
| Mapei Gun 585 Air104 |
| Mapei Gun 585 Electric104 |
| Mapei Gun 600 2K104 |
| Mapei Gun 600 PRO105 |
| Mapei Gun 600 PRO Electric105 |
| Mapei Gun 825 2K105 |
| Mapei Spray Mop170 |
| Mapei Steel Bar 304304 |
| Mapei Steel Bar 316305 |
| Mapei Steel Dry 316305 |
| Mapei Tile Spacer 7-in-1162 |
| Mapei Tile Spacer T162 |
| Mapei Tile Spacer Wedge S162 |
| Mapei Tile Spacer X163 |
| Mapei Tile Spacer Y163 |
| Mapei Waterproofer358 |
| Mapejoint 100/12211 |
| Mapejoint 100/25211 |
| Mapelastic AquaDefense377 |
| Mapelastic Foundation359 |
| Mapelastic Guard Zero270 |
| Mapelastic Smart |
| Mapelastic Turbo |
| Mapelastic Zero |
| Mapelay167 Mapelectric CP1167 |
| MapeLevel Easy Cap158 |
| Maperever Lasy Cap |
| Manel evel FasyClick Can 158 |
| MapeLevel EasyClick Cap158 |
| MapeLevel EasyClick Cap158 MapeLevel Easy Shield159 |
| MapeLevel EasyClick Cap158 MapeLevel Easy Shield159 MapeLevel Easy T159 |
| MapeLevel Easy Click Cap |
| MapeLevel Easy Shield |
| MapeLevel EasyClick Cap |
| MapeLevel EasyClick Cap 158 MapeLevel Easy Shield 159 MapeLevel Easy T 159 MapeLevel Easy Spacer L - I 158 MapeLevel Easy Spacer L - T 159 MapeLevel Easy Spacer L - X 159 MapeLevel EasyWDG 157 MapeLevel EasyWDG Pushing-Pliers 157 MapeLevel EasyWDG Spacer M 157 MapeLevel ProWDG 160 MapeLevel ProWDG Spacer C 160 MapeLevel ProWDG Spacer C-H 161 Mapelux Lucida 212 Mapelux Opaca 212 Mapenet 150 379 |
| MapeLevel EasyClick Cap 158 MapeLevel Easy Shield 159 MapeLevel Easy T 159 MapeLevel Easy Spacer L - I 158 MapeLevel Easy Spacer L - T 159 MapeLevel Easy Spacer L - X 159 MapeLevel EasyWDG 157 MapeLevel EasyWDG Pushing-Pliers 157 MapeLevel EasyWDG Spacer M 157 MapeLevel ProWDG 160 MapeLevel ProWDG Spacer C 160 MapeLevel ProWDG Spacer C-H 161 Mapelux Lucida 212 Mapelux Opaca 212 Mapenet 150 379 Mapenet EM 30 305 |
| MapeLevel EasyClick Cap 158 MapeLevel Easy Shield 159 MapeLevel Easy T 159 MapeLevel Easy Spacer L - I 158 MapeLevel Easy Spacer L - T 159 MapeLevel Easy Spacer L - X 159 MapeLevel EasyWDG 157 MapeLevel EasyWDG Pushing-Pliers 157 MapeLevel FasyWDG Spacer M 157 MapeLevel ProWDG 160 MapeLevel ProWDG Spacer C 160 MapeLevel ProWDG Spacer C-H .161 Mapelux Lucida 212 Mapelux Opaca 212 Mapenet 150 379 Mapenet EM 30 305 Mapenet EM 40 306 |
| MapeLevel EasyClick Cap 158 MapeLevel Easy Shield 159 MapeLevel Easy T 159 MapeLevel Easy Spacer L - I 158 MapeLevel Easy Spacer L - T 159 MapeLevel Easy Spacer L - X 159 MapeLevel EasyWDG 157 MapeLevel EasyWDG Pushing-Pliers 157 MapeLevel EasyWDG Spacer M 157 MapeLevel ProWDG 160 MapeLevel ProWDG Spacer C 160 MapeLevel ProWDG Spacer C-H 161 Mapelux Lucida 212 Mapelux Opaca 212 Mapenet 150 379 Mapenet EM 30 305 Mapenet EM 40 306 Mapenet EM Connector 306 |
| MapeLevel EasyClick Cap 158 MapeLevel Easy Shield 159 MapeLevel Easy T 159 MapeLevel Easy Spacer L - I 158 MapeLevel Easy Spacer L - T 159 MapeLevel Easy Spacer L - X 159 MapeLevel EasyWDG 157 MapeLevel EasyWDG Pushing-Pliers 157 MapeLevel FasyWDG Spacer M 160 MapeLevel ProWDG 160 MapeLevel ProWDG Spacer C 160 MapeLevel ProWDG Spacer C-H 161 Mapelux Lucida 212 Mapenet 150 379 Mapenet EM 30 305 Mapenet EM 40 306 Mapenet EM Connector 306 Mapenet EMR 33 306 |
| MapeLevel EasyClick Cap 158 MapeLevel Easy Shield 159 MapeLevel Easy T 159 MapeLevel Easy Spacer L - I 158 MapeLevel Easy Spacer L - T 159 MapeLevel Easy Spacer L - X 159 MapeLevel EasyWDG 157 MapeLevel EasyWDG Pushing-Pliers 157 MapeLevel EasyWDG Spacer M 157 MapeLevel ProWDG 160 MapeLevel ProWDG Spacer C 160 MapeLevel ProWDG Spacer C-H 161 Mapelux Lucida 212 Mapelux Opaca 212 Mapenet 150 379 Mapenet EM 30 305 Mapenet EM 40 306 Mapenet EM Connector 306 |
| MapeLevel EasyClick Cap 158 MapeLevel Easy Shield 159 MapeLevel Easy T 159 MapeLevel Easy Spacer L - I 158 MapeLevel Easy Spacer L - T 159 MapeLevel Easy WDG 157 MapeLevel EasyWDG Pushing-Pliers 157 MapeLevel EasyWDG Spacer M 157 MapeLevel ProWDG Spacer C 160 MapeLevel ProWDG Spacer C 161 Mapelux Lucida 212 Mapelux Opaca 212 Mapenet 150 379 Mapenet EM 30 305 Mapenet EM Connector 306 Mapenet EMR 33 306 Mapenet EMR 33 306 Mapenet EMR 33 Angolare 307 Mapenet EMR 66 307 Mapenet EMR 66 307 |
| MapeLevel EasyClick Cap 158 MapeLevel Easy Shield 159 MapeLevel Easy T 159 MapeLevel Easy Spacer L - I 158 MapeLevel Easy Spacer L - T 159 MapeLevel Easy Spacer L - X 159 MapeLevel EasyWDG 157 MapeLevel EasyWDG Pushing-Pliers 157 MapeLevel FasyWDG Spacer M 157 MapeLevel ProWDG Spacer C 160 MapeLevel ProWDG Spacer C-H 161 Mapelux Lucida 212 Mapenet 150 379 Mapenet EM 30 305 Mapenet EM Connector 306 Mapenet EMR 33 306 Mapenet EMR 33 Angolare 307 Mapenet EMR 66 307 Mapenet EMR 66 Angolare 307 Mapenet EMR 99 308 |
| MapeLevel EasyClick Cap 158 MapeLevel Easy Shield 159 MapeLevel Easy T 159 MapeLevel Easy Spacer L - I 158 MapeLevel Easy Spacer L - Z 159 MapeLevel Easy Spacer L - X 159 MapeLevel EasyWDG 157 MapeLevel EasyWDG Pushing-Pliers 157 MapeLevel FasyWDG Spacer M 157 MapeLevel ProWDG Spacer C 160 MapeLevel ProWDG Spacer C-H 161 Mapelux Lucida 212 Mapenet 150 379 Mapenet EM 30 305 Mapenet EM 40 306 Mapenet EM Connector 306 Mapenet EMR 33 306 Mapenet EMR 33 Angolare 307 Mapenet EMR 66 307 Mapenet EMR 66 307 Mapenet EMR 99 308 Mapenet EMR 99 Angolare 308 |
| MapeLevel EasyClick Cap |
| MapeLevel EasyClick Cap 158 MapeLevel Easy Shield 159 MapeLevel Easy T 159 MapeLevel Easy Spacer L - I 158 MapeLevel Easy Spacer L - Z 159 MapeLevel Easy Spacer L - X 159 MapeLevel Easy Spacer L - Z 157 MapeLevel Easy WDG Pushing-Pliers 157 MapeLevel Easy WDG Spacer M 157 MapeLevel ProWDG Spacer C 160 MapeLevel ProWDG Spacer C 160 MapeLevel ProWDG Spacer C-H 161 Mapelux Lucida 212 Mapenet 150 379 Mapenet EM 30 305 Mapenet EM 40 306 Mapenet EM Connector 306 Mapenet EMR 33 306 Mapenet EMR 66 307 Mapenet EMR 66 307 Mapenet EMR 99 308 Mapenet EMR 99 Angolare 308 Mapenet EMR Connector 308 Mapenet EMR Connector 308 Mapenet EMR Connector 308 |
| MapeLevel EasyClick Cap |
| MapeLevel EasyClick Cap 158 MapeLevel Easy Shield 159 MapeLevel Easy T 159 MapeLevel Easy Spacer L - I 158 MapeLevel Easy Spacer L - X 159 MapeLevel EasyWDG 157 MapeLevel EasyWDG Pushing-Pliers 157 MapeLevel EasyWDG Spacer M 157 MapeLevel ProWDG 160 MapeLevel ProWDG Spacer C 160 MapeLevel ProWDG Spacer C-H 161 Mapelux Lucida 212 Mapenet 150 379 Mapenet EM 30 305 Mapenet EM 40 306 Mapenet EM Connector 306 Mapenet EMR 33 306 Mapenet EMR 66 307 Mapenet EMR 66 Angolare 307 Mapenet EMR 99 308 Mapenet EMR 99 Angolare 308 Mapenet FM 15 Mapenet FS 15 Mapenet FS 15 Mapenet PZ300 407 |
| MapeLevel EasyClick Cap 158 MapeLevel Easy Shield 159 MapeLevel Easy T 159 MapeLevel Easy Spacer L - I 158 MapeLevel Easy Spacer L - T 159 MapeLevel Easy Spacer L - X 159 MapeLevel EasyWDG 157 MapeLevel EasyWDG Pushing-Pliers 157 MapeLevel EasyWDG Spacer M 157 MapeLevel ProWDG 160 MapeLevel ProWDG Spacer C 160 MapeLevel ProWDG Spacer C-H 161 Mapelux Lucida 212 Mapenet 150 379 Mapenet EM 30 305 Mapenet EM 40 306 Mapenet EM Connector 306 Mapenet EMR 33 306 Mapenet EMR 66 307 Mapenet EMR 66 Angolare 307 Mapenet EMR 99 308 Mapenet EMR 99 Angolare 308 Mapenet FM 15 Mapenet FS 15 Mapenet FS 15 Mapenet SF 408 |
| MapeLevel EasyClick Cap 158 MapeLevel Easy Shield 159 MapeLevel Easy T 159 MapeLevel Easy Spacer L - I 158 MapeLevel Easy Spacer L - T 159 MapeLevel Easy Spacer L - X 159 MapeLevel EasyWDG 157 MapeLevel EasyWDG Pushing-Pliers 157 MapeLevel EasyWDG Spacer M 157 MapeLevel ProWDG 160 MapeLevel ProWDG Spacer C 160 MapeLevel ProWDG Spacer C-H 161 Mapelux Lucida 212 Mapenet 150 379 Mapenet EM 30 305 Mapenet EM 40 306 Mapenet EM Connector 306 Mapenet EMR 33 306 Mapenet EMR 66 307 Mapenet EMR 66 307 Mapenet EMR 99 308 Mapenet EMR Connector 308 Mapenet EMR Connector 308 Mapenet EMR 59 308 Mapenet FM 15 Mapenet FM 15 Mapenet FS 15 |
| MapeLevel EasyClick Cap 158 MapeLevel Easy Shield 159 MapeLevel Easy T 159 MapeLevel Easy Spacer L - I 158 MapeLevel Easy Spacer L - T 159 MapeLevel Easy Spacer L - X 159 MapeLevel EasyWDG 157 MapeLevel EasyWDG Pushing-Pliers 157 MapeLevel EasyWDG Spacer M 157 MapeLevel ProWDG 160 MapeLevel ProWDG Spacer C 160 MapeLevel ProWDG Spacer C-H 161 Mapelux Ucida 212 Mapelux Opaca 212 Mapenet EM 30 305 Mapenet EM 40 306 Mapenet EM Connector 306 Mapenet EMR 33 306 Mapenet EMR 66 307 Mapenet EMR 66 Angolare 307 Mapenet EMR 99 308 Mapenet EMR Connector 308 Mapenet EMR Connector 308 Mapenet EMR Connector 308 Mapenet EMR Onnector 308 Mapenet EMR Connector 308 |
| MapeLevel EasyClick Cap 158 MapeLevel Easy Shield 159 MapeLevel Easy T 159 MapeLevel Easy Spacer L - I 158 MapeLevel Easy Spacer L - T 159 MapeLevel Easy Spacer L - X 159 MapeLevel EasyWDG 157 MapeLevel EasyWDG Pushing-Pliers 157 MapeLevel EasyWDG Spacer M 157 MapeLevel ProWDG Spacer M MapeLevel ProWDG Spacer C 160 MapeLevel ProWDG Spacer C-H 161 Mapelux Lucida 212 Mapelux Opaca 212 Mapenet EM 30 305 Mapenet EM 40 306 Mapenet EM Connector 306 Mapenet EMR 33 306 Mapenet EMR 66 307 Mapenet EMR 66 Angolare 307 Mapenet EMR 99 308 Mapenet EMR Connector 308 Mapenet EMR Connector 308 Mapenet EMR Connector 308 Mapenet EMR 79 308 Mapenet EMR 64 307 < |
| MapeLevel EasyClick Cap 158 MapeLevel Easy Shield 159 MapeLevel Easy T 159 MapeLevel Easy Spacer L - I 158 MapeLevel Easy Spacer L - T 159 MapeLevel Easy Spacer L - X 159 MapeLevel EasyWDG 157 MapeLevel EasyWDG Pushing-Pliers 157 MapeLevel EasyWDG Spacer M 157 MapeLevel ProWDG 160 MapeLevel ProWDG Spacer C 160 MapeLevel ProWDG Spacer C-H 161 Mapelux Ucida 212 Mapelux Opaca 212 Mapenet EM 30 305 Mapenet EM 40 306 Mapenet EM Connector 306 Mapenet EMR 33 306 Mapenet EMR 66 307 Mapenet EMR 66 Angolare 307 Mapenet EMR 99 308 Mapenet EMR Connector 308 Mapenet EMR Connector 308 Mapenet EMR Connector 308 Mapenet EMR Onnector 308 Mapenet EMR Connector 308 |
| MapeLevel EasyClick Cap 158 MapeLevel Easy Shield 159 MapeLevel Easy T 159 MapeLevel Easy Spacer L - I 158 MapeLevel Easy Spacer L - T 159 MapeLevel Easy Spacer L - X 159 MapeLevel EasyWDG 157 MapeLevel EasyWDG Pushing-Pliers 157 MapeLevel EasyWDG Spacer M 157 MapeLevel ProWDG 160 MapeLevel ProWDG Spacer C 160 MapeLevel ProWDG Spacer C-H 161 Mapelux Ucida 212 Mapenet 150 379 Mapenet EM 30 305 Mapenet EM 40 306 Mapenet EM Connector 306 Mapenet EMR 33 306 Mapenet EMR 66 307 Mapenet EMR 99 308 Mapenet EMR Connector 308 Mapenet EMR Connector 308 Mapenet EMR Connector 308 Mapenet EMR Connector 308 Mapenet EMR 15 Mapenater FM 15 Mapenater FS </td |
| MapeLevel EasyClick Cap 158 MapeLevel Easy Shield 159 MapeLevel Easy T 159 MapeLevel Easy Spacer L - I 158 MapeLevel Easy Spacer L - T 159 MapeLevel Easy Spacer L - X 159 MapeLevel EasyWDG 157 MapeLevel EasyWDG Pushing-Pliers 157 MapeLevel EasyWDG Spacer M 157 MapeLevel ProWDG 160 MapeLevel ProWDG Spacer C 160 MapeLevel ProWDG Spacer C-H 161 MapeLevel ProWDG Spacer C-H 161 Mapelux Opaca 212 Mapenet ISO 379 Mapenet EM 30 305 Mapenet EM 40 306 Mapenet EM Connector 306 Mapenet EMR 66 307 Mapenet EMR 66 Angolare 307 Mapenet EMR 99 308 Mapenet EMR Connector 308 Mapenet EMR Connector 308 Mapenet EMR Connector 308 Mapenet EMR Connector 308 Mapenet FM 15 |

| Mapeproof FBT | |
|--|--|
| Mapeproof FBT Tape 600 | |
| Mapeproof Fix Tape | 362 |
| Mapeproof Liquid Membrane | 362 |
| Mapeproof Mastic | |
| Mapeproof Primer | |
| Mapeproof SA | 767 |
| | |
| Mapeproof SA Primer | |
| Mapeproof SA Tape | |
| Mapeproof Seal | |
| Mapeproof SW | 364 |
| Mapeproof Swell | 365 |
| MapePUR All in One Foam | |
| MapePUR Cleaner | |
| MapePUR Easy Spray | |
| | |
| MapePUR Fire Foam M | |
| MapePUR Gun Special | |
| MapePUR Gun Standard | |
| MapePUR Multi Adhesive Foam G | 108 |
| MapePUR Roof Foam G | 109 |
| MapePUR Roof Foam M | 109 |
| MapePUR Thermo Fill G | |
| MapePUR Thermo Fill M | |
| | |
| MapePUR Thermo Stick G | 110 |
| MapePUR Thermo Stick M | |
| MapePUR Universal Foam G | |
| MapePUR Universal Foam M | |
| MapePUR Dispenser M | 111 |
| Maperod C | 309 |
| Maperod G | |
| Mapescreed Advance HR | |
| Mapescreed Advance MR | |
| | |
| Mapesept Gel | |
| Mapesept Liquid | |
| Mapeshield Corrosion Control 249 | |
| Mapeshield E 25248 | 3. 296 |
| | |
| Mapeshield I249 | |
| Mapeshield I249 | 9, 296 |
| Mapesil AC90 |), 296), 395 |
| Mapesil AC90 Mapesil AC ECO90 | 9, 296), 395 90 |
| Mapesil AC90 Mapesil AC ECO Mapesil BM | 9, 296 9, 395 90 95 |
| Mapesil AC | 9, 296 9, 395 90 95 27 |
| Mapesil AC | 9, 296 9, 395 90 95 95 |
| Mapesil AC | 9, 296 9, 395 90 95 27 95 96 |
| Mapesil AC | 9, 296), 395 90 95 27 95 96 |
| Mapesil AC | 9, 296), 395 90 95 27 95 96 |
| Mapesil AC | 9, 296), 395 90 95 95 96 96 |
| Mapesil AC | 9, 296 9, 395 90 95 95 96 96 96 |
| Mapesil AC | 9, 296 9, 395 90 95 95 96 96 96 96 |
| Mapesil AC | 9, 296 9, 395 90 95 95 96 96 96 97 90 |
| Mapesil AC | 9, 296 9, 395 90 95 95 96 96 96 97 90 91 |
| Mapesil AC | 9, 296 9, 39590959596969697999191 |
| Mapesil AC | 9, 296 9, 395 90 90 95 96 96 96 97 99 99 99 99 99 99 99 99 99 |
| Mapesil AC | 9, 296 9, 39590959596969697919191912626 |
| Mapesil AC | 9, 296 9, 39590959596969697919191912626 |
| Mapesil AC | 9, 296 9, 395 90 95 95 96 96 97 99 90 91 91 26 26 27 379 |
| Mapesil AC | 9, 296 9, 395 90 95 95 96 96 97 99 90 91 91 26 26 27 379 |
| Mapesil AC | 9, 296 9, 395 90 95 95 96 96 97 99 90 91 91 92 92 93 94 95 96 97 99 90 91 92 93 94 95 96 97 99 99 99 99 99 99 99 99 99 |
| Mapesil AC | 9, 296 9, 395 90 95 95 96 96 96 97 90 91 26 26 27 379 27 28 |
| Mapesil AC | 9, 296 9, 395 90 95 95 96 96 96 97 90 91 91 26 26 27 379 27 28 82 |
| Mapesil AC | 9, 296 9, 395 90 95 95 96 96 96 97 90 91 91 26 26 27 379 27 28 82 |
| Mapesil AC | 9, 296 9, 395 90 90 95 96 96 96 97 99 97 99 98 99 99 99 99 99 99 99 99 99 99 99 |
| Mapesil AC | 9, 296 9, 395 90 90 95 96 96 96 97 99 97 99 98 99 99 99 99 99 99 99 99 99 99 99 |
| Mapesil AC | 9, 296 9, 395 90 90 95 96 96 96 97 99 97 99 98 99 99 99 99 99 99 99 99 99 99 99 |
| Mapesil AC | 9, 296 9, 395 90 90 95 96 96 96 97 99 97 99 90 97 90 90 90 90 90 90 90 90 90 90 90 90 90 |
| Mapesil AC | 9, 296 9, 395 90 90 95 96 96 96 97 99 97 99 90 99 90 90 90 90 90 90 90 90 90 90 |
| Mapesil AC | 9, 296 9, 395 90 90 95 96 96 96 97 99 97 99 99 99 99 99 99 99 99 99 99 |
| Mapesil AC | 9, 296 9, 395 90 90 95 96 96 96 97 99 99 99 99 99 99 99 99 99 99 99 99 |
| Mapesil AC | 9, 296 9, 395 90 90 95 96 96 96 97 99 97 99 90 97 90 91 91 91 91 91 92 91 92 92 93 93 94 95 96 96 97 98 99 99 99 99 99 99 99 99 99 99 99 99 |
| Mapesil AC | 9, 296 9, 395 90 90 95 96 96 96 97 99 97 99 90 97 90 91 91 91 91 91 92 91 92 92 93 94 95 96 96 97 98 99 98 99 99 99 99 99 99 99 99 99 99 |
| Mapesil AC | 9, 296 9, 395 90 90 95 96 96 96 97 99 97 99 99 99 99 99 99 99 99 99 99 |
| Mapesil AC | 9, 296 9, 395 90 90 95 96 96 96 97 99 97 99 91 91 91 92 91 92 91 92 92 92 93 93 94 95 96 96 97 98 99 99 99 99 99 99 99 99 99 99 99 99 |
| Mapesil AC | 9, 296 9, 395 90 90 95 96 96 96 97 99 97 99 91 91 91 92 91 91 92 91 92 91 92 92 92 93 93 94 95 96 96 97 98 99 99 99 99 99 99 99 99 99 99 99 99 |

| Mapestop | |
|---|--|
| Mapestop Cream | 227 |
| Mapestop Cream Tool 280 | 227 |
| Mapestop Cream Tool 600 | |
| | |
| Mapestop Injectors | |
| Mapestop Kit Diffusion | 228 |
| Mapetape | 395 |
| Mapetard | 408 |
| Mapetard ES | |
| | |
| Mapetex 50 | |
| Mapetex FG | 380 |
| Mapetex Sel N | 380 |
| Mapetex System | |
| | |
| Mapethene HT | |
| Mapethene HT AP | |
| Mapethene LT | 366 |
| Mapethene LT AP | 366 |
| Mapethene Primer | |
| Mapethene Primer W | 700 |
| | |
| Mapetherm AR1 | |
| Mapetherm AR1 GG | 324 |
| Mapetherm AR1 Light | 324 |
| Mapetherm AR1 Maxi | |
| | |
| Mapetherm EPS 100 CAM | |
| Mapetherm EPS G 100 CAM | |
| Mapetherm EPS G CAM | 326 |
| Mapetherm - Etics Fixing Plugs | |
| | |
| Mapetherm Fixing Elements | |
| Mapetherm Flex RP | |
| Mapetherm Net | 325 |
| Mapetherm PF CAM | |
| Mapetherm Profiles | 720 |
| | |
| Mapetherm Tile-EJOT SBV-P 8/90 K | 164 |
| Mapetherm Tile-EJOT SDF-S | |
| PLUS Ø 8 UB | .164 |
| Mapetiles Removable System | |
| | 161 |
| | |
| Mapetop N AR6 | .201 |
| Mapetop N AR6 Mapetop N AR9 | .201 202 |
| Mapetop N AR6 | .201 202 |
| Mapetop N AR6 Mapetop N AR9 Mapetop S AR3 | .201 202 202 |
| Mapetop N AR6 Mapetop N AR9 Mapetop S AR3 Mapetop S AR6 | .201 202 202 203 |
| Mapetop N AR6 Mapetop N AR9 Mapetop S AR3 Mapetop S AR6 MapeWall Inject & Consolidate | .201 202 202 203 226 |
| Mapetop N AR6 | .201 202 202 203 226 232 |
| Mapetop N AR6 Mapetop N AR9 Mapetop S AR3 Mapetop S AR6 MapeWall Inject & Consolidate | .201 202 202 203 226 232 |
| Mapetop N AR6 | .201 202 202 203 226 232 237 |
| Mapetop N AR6 | .201 202 202 203 226 232 237 |
| Mapetop N AR6 | .201 202 202 203 226 232 237 |
| Mapetop N AR6 | .201 202 202 203 226 232 237 236 .413 |
| Mapetop N AR6 | .201 202 202 203 226 232 237 236 .413 |
| Mapetop N AR6 | .201 202 202 203 226 232 237 236 .413 |
| Mapetop N AR6 | .201 202 202 203 226 232 237 236 .413 .413 240 |
| Mapetop N AR6 | .201 202 202 203 226 232 237 236 .413 .413 240 240 |
| Mapetop N AR6 | .201 202 202 203 226 232 237 236 .413 .413 240 240 240 |
| Mapetop N AR6 | .201 202 202 203 226 232 237 236 .413 240 240 309 |
| Mapetop N AR6 | .201 202 202 203 226 232 237 236 .413 .413 240 240 309 .310 |
| Mapetop N AR6 | .201 202 202 203 226 232 237 236 .413 .413 240 240 309 .310 |
| Mapetop N AR6 | .201 202 202 203 226 232 237 236 .413 .413 240 240 240 309 .310 |
| Mapetop N AR6 | .201 202 202 203 226 232 237 236 .413 .413 240 240 309 .310 .310 |
| Mapetop N AR6 | .201 202 203 226 232 237 236 .413 .413 240 240 309 .310 .310 |
| Mapetop N AR6 | .201 202 203 226 232 237 236 .413 .413 240 240 309 .310 .310 .311 .311 |
| Mapetop N AR6 | .201 202 203 226 232 237 236 .413 .413 240 240 309 .310 .310 .311 .311 |
| Mapetop N AR6 | .201 202 202 203 226 232 237 236 .413 .413 240 240 309 .310 .310 311 311 |
| Mapetop N AR6 | .201 202 202 203 226 232 237 236 .413 .413 240 240 309 .310 .310 .311 .311 .311 |
| Mapetop N AR6 | .201 202 202 203 226 232 237 236 .413 .413 240 240 .310 .310 .311 .311 .311 .312 |
| Mapetop N AR6 | .201 202 202 203 226 237 236 .413 .413 240 240 330 .310 .310 311 311 312 312 |
| Mapetop N AR6 | .201 202 202 203 226 237 236 .413 .413 240 240 309 .310 .311 .311 .311 .312 .312 .312 |
| Mapetop N AR6 | .201 202 202 203 226 237 236 .413 .413 240 240 309 .310 .311 .311 .311 .312 .312 .312 |
| Mapetop N AR6 | .201 202 202 203 226 237 236 .413 .413 240 240 309 .310 .311 .311 .311 .312 .312 .313 .313 |
| Mapetop N AR6 | .201 202 202 203 226 237 236 .413 .413 240 240 .310 .310 .311 .311 .312 .312 .313 .313 .313 |
| Mapetop N AR6 | .201 202 202 203 226 237 236 .413 .413 240 240 .310 .310 .311 .311 .312 .312 .313 .313 .313 |
| Mapetop N AR6 | .201 202 202 203 226 237 236 .413 .413 240 240 309 .310 .311 .311 .311 .312 .312 .313 .313 .314 .314 |
| Mapetop N AR6 | .201 202 202 203 226 237 236 .413 .413 240 240 309 .310 .311 .311 .311 .312 .312 .313 .313 .314 .314 |
| Mapetop N AR6 | .201 202 202 203 226 237 236 .413 .413 240 240 .310 .310 .311 .311 .312 .312 .313 .313 .314 .314 |
| Mapetop N AR6 | .201 202 202 203 226 237 236 .413 .413 240 240 309 .310 .311 .311 .312 .312 .313 .313 .314 .314 .315 |
| Mapetop N AR6 | .201 202 202 203 226 237 236 .413 .413 240 240 309 .310 .311 .311 .312 .312 .313 .313 .314 .314 .315 .315 |
| Mapetop N AR6 | .201 202 202 203 226 232 237 236 .413 .413 240 240 240 .310 311 311 312 312 312 313 313 313 313 313 314 315 315 315 |



* VAGA products

* VAGA products

ALPHABETICAL INDEX

| | MapeWrap SG FIOCCOMB1 Pavicalce* | | |
|---|--|-------|---|
| | MISTA* | .425 | |
| | Monofinish | | |
| | Monolastic | | |
| Ν | | | |
| | NERO+* | .424 | |
| | Nivoplan22 | | |
| | Nivorapid | 15 | |
| | Novoplan Maxi | 16 | |
| P | | | |
| | Pianocem M | 16 | |
| | Pianodur R | 16 | |
| | Planex HR | | |
| | Planex HR Maxi | | |
| | Planibond BA 100 | | |
| | Planicrete37, | | |
| | Planigrout 300 | | |
| | Planigrout 750 | | |
| | Planigrout 350 Planipatch | | |
| | Planipatch Xtra | | |
| | Planiprep 4 LVT18 | | |
| | Planiprep Contract | | |
| | Planiprep Fast Track | | |
| | Planiprep Remove 4 LVT19 | | |
| | Planiseal 88 (former Idrosilex Pronto) | 367 | |
| | Planiseal 288 | | |
| | Planiseal WR 40 | | |
| | Planiseal WR 85 Gel | | |
| | Planiseal WR 100 | | |
| | Planitop 100 | | |
| | Planitop 200 | | |
| | Planitop 207 Planitop 210 | | |
| | Planitop 217 | | |
| | Planitop 510 | | |
| | Planitop 517 | | |
| | Planitop 525 | | |
| | Planitop 530 | | |
| | Planitop 540 | .274 | |
| | Planitop 560 | . 275 | |
| | Planitop 565 | | |
| | Planitop 600 RasaGesso | | |
| | Planitop 610 RasaGesso M | | |
| | Planitop Fast 33023, | 276 | |
| | Planitop Fine Finish | | |
| | Planitop HDM Maxi | | |
| | Planitop HDM Restauro Planitop HPC | | |
| | Planitop HPC Floor | | |
| | Planitop HPC Floor 46 | | |
| | Planitop HPC Floor 46 T | | |
| | Planitop HPC Floor T | | Q |
| | Planitop HPC LV | | |
| | Planitop HPC Tixo | | |
| | Planitop Intonaco Armato | | |
| | Planitop Raso Max | | |
| | Planitop Smooth & Repair R4 Zero. | .258 | |
| | Planitop Smooth & Repair Zero | | |
| | Planitop Superfine | .277 | |
| | Planitop U-HPC Floor | | |
| | Planopur | | |
| | Plastimul | | |
| | Plastimul 1K Super Plus | | |
| | Plastimul 2K Plus | ShX | |

| Plastimul 2K Reactive369 |
|------------------------------|
| Plastimul 2K Super369 |
| Plastimul C369 |
| Plastimul High Flex Plus370 |
| Plastimul Primer370 |
| Plastimul Primer SB370 |
| Porocol244 |
| Porocol FF244 |
| PoroMap Deumidificante231 |
| PoroMap Finitura Civile235 |
| PoroMap Finitura Granello235 |
| PoroMap Rinzaffo Plus231 |
| Primer 329637, 225 |
| Primer A |
| Primer BI |
| Primer EP38, 106 |
| Primer EP4 Fast381 |
| Primer EP 100W381 |
| Primer EP Rustop38, 200 |
| Primer FD106 |
| Primer FT382 |
| Primer G |
| Primer G Conductive39, 168 |
| Primer Grip White200 |
| Primer KL |
| Primer LT200 |
| Primer M |
| Primer MF40 |
| Primer MF EC Plus40 |
| Primer P |
| Primer P1 |
| Primer P241, 382 |
| Primer P341 |
| Primer PU6042, 383 |
| Primer PU Fast383 |
| Primer S42 |
| Primer SN |
| Primer SN Rasante201 |
| Primer W-AS N201 |
| Prosfas |
| PU Catalyst212 |
| Pulicol 2000168 |
| Purtop 200383 |
| Purtop 400 M384 |
| Purtop 500 N384 |
| Purtop 1000384 |
| Purtop 1000 N |
| Purtop ADY385 |
| Purtop Easy385 |
| Purtop Easy DW386 |
| Purtop Easy T386 |
| Purtop Easy T Primer386 |
| |
| Purtop FR |
| Purtop Primer Black387 |
| |
| |
| Quartz 0.5213 |
| Quartz 0.9213 |

| PITTIEL LP4 Fast | | Silancolor Paint Plus |
|----------------------------|---------|--|
| Primer EP 100W | | Silancolor Pittura |
| Primer EP Rustop | 38, 200 | Silancolor Primer |
| Primer FD | 106 | Silancolor Primer Plus |
| Primer FT | 382 | Silancolor Tonachino |
| Primer G | 38 | |
| Primer G Conductive | 39, 168 | Silancolor Tonachino Plus |
| Primer Grip White | 200 | Silexcolor Base Coat |
| Primer KL | | Silexcolor Marmorino |
| Primer LT | | Silexcolor Paint |
| Primer M | | Silexcolor Primer |
| Primer MF | | Silexcolor Tonachino |
| Primer MF EC Plus | | Silwood |
| Primer P | | Spacers 4 LVT |
| Primer P1 | | Spindle for Mapei Steel Dry |
| Primer P2 | , | Stabilcem |
| | , | |
| Primer P3 | | Г |
| Primer PU60 | 42, 303 | |
| Primer PU Fast | | Thinner for Adhesives |
| Primer S | | Thinner PU |
| Primer SN | * | TICINO * |
| Primer SN Rasante | | Tixobond White |
| Primer W-AS N | 201 | Topcem |
| Prosfas | 43 | Topcem Pronto |
| PU Catalyst | 212 | Triblock Finish |
| Pulicol 2000 | 168 | Triblock P |
| Purtop 200 | 383 | Triblock WTS |
| Purtop 400 M | 384 | TurboMASS* |
| Purtop 500 N | | |
| Purtop 1000 | | U |
| Purtop 1000 N | • | |
| Purtop ADY | | Ultrabond 333 |
| Purtop Easy | | Ultrabond Eco 4 LVT |
| Purtop Easy DW | | Ultrabond Eco 375 |
| Purtop Easy T | | Ultrabond Eco 380 |
| Purtop Easy T Primer | | Ultrabond Eco 388 |
| Purtop FR | | Ultrabond Eco 520 |
| Purtop Primer Black | | Ultrabond Eco 530 |
| Purtop Primer Black | | Ultrabond Eco 571 2K |
| | | Ultrabond Eco 575 |
| | | Ultrabond Eco Contact |
| Quartz 0.5 | 213 | Ultrabond Eco Decor Dry |
| Quartz 0.9 | | Ultrabond Eco Decor Wet |
| Quartz 0.25 | | Ultrabond Eco Fast Track |
| Quartz 1.2 | | Ultrabond Eco Fix |
| Quartz 1.9 | | Ultrabond Eco MS1 |
| Quarzolite Base Coat | | Ultrabond Eco MS 4LVT Walls |
| Quarzolite HF Plus | | Ultrabond Eco MS Easy |
| Quarzolite Paint | | Ultrabond Eco MS EasyUltrabond Eco P909 2K |
| Quarzolite Tonachino | | |
| Quarzolite Tonachino Plus | | Ultrabond Eco P909 2K Fast . |
| | | Ultrabond Eco P909 2K Plus |
| Quarzolite Tonachino Pro | | Ultrabond Eco P948 1K |
| Quarzolite Tonachino Pro S | 548 | Ultrabond Eco PU 2K |

R

S

| RASA+*420 | |
|---|---|
| Resfoam 1K-M371 | |
| Rete 320214 | |
| Rollcoll | |
| 133 | |
| | |
| | - |
| SabbiaCEMENTO *423 | |
| SABBIASAL*424 | |
| SAETTA*422 | |
| Silancolor AC Paint348 | |
| Silancolor AC Paint Plus349 | |
| Silancolor AC Tonachino349 | |
| Silancolor AC Tonachino Plus349 | |
| Silancolor Base Coat350 | |
| Silancolor Base Coat Plus350 | |
| Silancolor Cleaner Plus350 | |
| Silancolor Paint Plus | |
| Silancolor Pittura351 | |
| Silancolor Primer | |
| Silancolor Primer Plus352 | |
| Silancolor Tonachino352 | |
| Silancolor Tonachino Plus352 | |
| Silexcolor Base Coat | |
| Silexcolor Marmorino | |
| Silexcolor Paint | |
| Silexcolor Primer354 | |
| Silexcolor Tonachino354 | |
| Silwood122 | |
| | |
| Spacers 4 LVT | |
| Spindle for Mapei Steel Dry321 | |
| Stabilcem258 | |
| | |
| | |
| | _ |
| Thinner for Adhesives | - |
| Thinner for Adhesives43 Thinner PU44 | - |
| Thinner PU44 | - |
| Thinner PU | _ |
| Thinner PU | _ |
| Thinner PU 44 TICINO * 425 Tixobond White 54 Topcem 13 | _ |
| Thinner PU 44 TICINO * 425 Tixobond White 54 Topcem 13 Topcem Pronto 13 | _ |
| Thinner PU 44 TICINO * 425 Tixobond White 54 Topcem 13 Topcem Pronto 13 Triblock Finish 277 | _ |
| Thinner PU 44 TICINO* 425 Tixobond White 54 Topcem 13 Topcem Pronto 13 Triblock Finish 277 Triblock P 44 | _ |
| Thinner PU 44 TICINO* 425 Tixobond White 54 Topcem 13 Topcem Pronto 13 Triblock Finish 277 Triblock P 44 Triblock WTS 214 | _ |
| Thinner PU 44 TICINO* 425 Tixobond White 54 Topcem 13 Topcem Pronto 13 Triblock Finish 277 Triblock P 44 | _ |
| Thinner PU 44 TICINO* 425 Tixobond White 54 Topcem 13 Topcem Pronto 13 Triblock Finish 277 Triblock P 44 Triblock WTS 214 | _ |
| Thinner PU 44 TICINO * 425 Tixobond White 54 Topcem 13 Topcem Pronto 13 Triblock Finish 277 Triblock P 44 Triblock WTS 214 TurboMASS* 423 | _ |
| Thinner PU 44 TICINO * 425 Tixobond White 54 Topcem 13 Topcem Pronto 13 Triblock Finish 277 Triblock P 44 Triblock WTS 214 TurboMASS* 423 Ultrabond 333 136 | _ |
| Thinner PU 44 TICINO * 425 Tixobond White 54 Topcem 13 Topcem Pronto 13 Triblock Finish 277 Triblock P 44 Triblock WTS 214 TurboMASS* 423 Ultrabond 333 136 Ultrabond Eco 4 LVT 136 | _ |
| Thinner PU 44 TICINO * 425 Tixobond White 54 Topcem 13 Topcem Pronto 13 Triblock Finish 277 Triblock P 44 Triblock WTS 214 TurboMASS* 423 Ultrabond 333 136 Ultrabond Eco 4 LVT 136 Ultrabond Eco 375 136 | _ |
| Thinner PU 44 TICINO * 425 Tixobond White 54 Topcem 13 Topcem Pronto 13 Triblock Finish 277 Triblock P 44 Triblock WTS 214 TurboMASS* 423 Ultrabond 333 136 Ultrabond Eco 4 LVT 136 Ultrabond Eco 375 136 Ultrabond Eco 380 137 | _ |
| Thinner PU 44 TICINO * 425 Tixobond White 54 Topcem 13 Topcem Pronto 13 Triblock Finish 277 Triblock P 44 Triblock WTS 214 TurboMASS* 423 Ultrabond 333 136 Ultrabond Eco 4 LVT 136 Ultrabond Eco 375 136 Ultrabond Eco 380 137 Ultrabond Eco 388 137 | _ |
| Thinner PU 44 TICINO * 425 Tixobond White 54 Topcem 13 Topcem Pronto 13 Triblock Finish 277 Triblock P 44 Triblock WTS 214 TurboMASS* 423 Ultrabond 333 136 Ultrabond Eco 4 LVT 136 Ultrabond Eco 375 136 Ultrabond Eco 380 137 Ultrabond Eco 388 137 Ultrabond Eco 520 137 | |
| Thinner PU 44 TICINO * 425 Tixobond White 54 Topcem 13 Topcem Pronto 13 Triblock Finish 277 Triblock P 44 Triblock WTS 214 TurboMASS* 423 Ultrabond 333 136 Ultrabond Eco 4 LVT 136 Ultrabond Eco 375 136 Ultrabond Eco 380 137 Ultrabond Eco 388 137 Ultrabond Eco 520 137 Ultrabond Eco 530 138 | |
| Thinner PU 44 TICINO * 425 Tixobond White 54 Topcem 13 Topcem Pronto 13 Triblock Finish 277 Triblock P 44 Triblock WTS 214 TurboMASS* 423 Ultrabond Eco 4 LVT 136 Ultrabond Eco 375 136 Ultrabond Eco 380 137 Ultrabond Eco 388 137 Ultrabond Eco 520 137 Ultrabond Eco 530 138 Ultrabond Eco 571 2K 146 | _ |
| Thinner PU | _ |
| Thinner PU 44 TICINO * 425 Tixobond White 54 Topcem 13 Topcem Pronto 13 Triblock Finish 277 Triblock P 44 Triblock WTS 214 TurboMASS* 423 Ultrabond Eco 4 LVT 136 Ultrabond Eco 375 136 Ultrabond Eco 380 137 Ultrabond Eco 388 137 Ultrabond Eco 520 137 Ultrabond Eco 530 138 Ultrabond Eco 571 2K 146 | _ |
| Thinner PU | |
| Thinner PU | _ |
| Thinner PU | |
| Thinner PU | |
| Thinner PU 44 TICINO * 425 Tixobond White 54 Topcem 13 Topcem Pronto 13 Triblock Finish 277 Triblock P 44 Triblock WTS 214 TurboMASS* 423 Ultrabond Eco 4 LVT 136 Ultrabond Eco 375 136 Ultrabond Eco 380 137 Ultrabond Eco 520 137 Ultrabond Eco 530 138 Ultrabond Eco 571 2K 146 Ultrabond Eco Contact 148 Ultrabond Eco Decor Dry 138 Ultrabond Eco Decor Wet 146 Ultrabond Eco Fast Track 139 | |

.. 117

.118

Ultrabond Eco PU 2K.

| Ultrabond Eco S940 1K118 Ultrabond Eco S955 1K19 Ultrabond Eco S958 1K119 |
|---|
| Ultrabond Eco S968 1K119 |
| Ultrabond Eco S Lite120 |
| Ultrabond Eco S Plus120 |
| Ultrabond Eco Tack139 |
| Ultrabond Eco Tack 4 LVT140 |
| Ultrabond Eco Tack TX+140 |
| Ultrabond Eco TX1140 |
| Ultrabond Eco TX2141 |
| Ultrabond Eco TX3141 |
| Ultrabond Eco V4 Evolution141 |
| Ultrabond Eco V4SP142 |
| Ultrabond Eco V4 SP Conductive142 |
| Ultrabond Eco V4 SP Fiber142 |
| Ultrabond Eco VS60143 |
| Ultrabond Eco VS90 Plus143 |
| Ultrabond EP 2K59 |
| Ultrabond MS Rapid100, 396 |
| Ultrabond P902 2K120 |
| Ultrabond P913 2K Plus121 |
| Ultrabond P980 1K121 |
| Ultrabond P990 1K121 |
| Ultrabond P-R9170 |
| Ultrabond PU Strong101 |
| Ultrabond S965 1K122 |
| Ultrabond S997 1K122 |
| Ultrabond Super Grip101, 287 |
| Ultrabond Turf 2 Stars149 |
| Ultrabond Turf 2 Stars Pro150 |
| Ultrabond Turf 2 Stars W150 |
| Ultrabond Turf Catalyst150 |
| Ultrabond Turf LS151 |
| Ultrabond Turf PU 1K151 |
| Ultrabond Turf PU 1K LC |
| Ultrabond Turf PU 2K152 |
| Ultrabond Turf Repair152 |
| Ultrabond Turf Tape 100152 |
| Ultrabond Turf Tape 300153 |
| Ultrabond Turf Tape LS153 Ultrabond Turf Tape Pro153 |
| Ultrabond TX57143 |
| UltraCare Acid Cleaner70 |
| UltraCare Acid Cleaner70 UltraCare Anti-Mould Protector74 |
| UltraCare Epoxy Off Gel70 |
| |
| UltraCare Grout Cleaner70 |
| UltraCare Grout Poloaco |
| UltraCare Grout Release75 UltraCare HD Cleaner71 |
| UltraCare Intensifier S75 |
| UltraCare Intensifier W75 |
| Jacob Control of VV |
| |

| UltraCare Keranet | |
|----------------------------------|------|
| UltraCare Keranet Crystals | 7 |
| UltraCare Keranet Easy | 72 |
| UltraCare Kerapoxy Cleaner | 72 |
| UltraCare Mould Remover | 72 |
| UltraCare Multicleaner | 73 |
| UltraCare Multicleaner Spray | 73 |
| UltraCare Rain Protector S | 76 |
| UltraCare Rain Protector W | 76 |
| UltraCare Rust Remover | |
| UltraCare Smooth Silicone | |
| UltraCare Stain Protector S | |
| UltraCare Stain Protector W | 77 |
| UltraCare Stain Protector W Plus | 77 |
| UltraCare Stain Remover | |
| Ultracoat Aqua Plus | 123 |
| Ultracoat Base One | 123 |
| Ultracoat Binder | 123 |
| Ultracoat Cleaner | 170 |
| Ultracoat Easy | 124 |
| Ultracoat Easy Plus | 124 |
| Ultracoat EL | |
| Ultracoat Hard Oil Fast | |
| Ultracoat Hard Oil Hardener | 125 |
| Ultracoat Hard Oil Wax Plus | 125 |
| Ultracoat HT 2K | |
| Ultracoat HT Sport | |
| Ultracoat MT 2K | |
| Ultracoat Oil Care Plus | |
| Ultracoat Oil Care Silver Plus | |
| Ultracoat Oil Pad | |
| Ultracoat Pad | .17 |
| Ultracoat Pad Special Stripper | .17 |
| Ultracoat Polish Anti-Slip | 172 |
| Ultracoat Polish Matt | 172 |
| Ultracoat Premium Base | |
| Ultracoat Remover Plus | |
| Ultracoat Renew FL | |
| Ultracoat Roller Base Sport | 173 |
| Ultracoat Roller Finish Sport | 17.3 |
| Ultracoat Roller MT8 | 17.3 |
| Ultracoat Roller MT Sport | 174 |
| Ultracoat Roller T3 | 174 |
| Ultracoat Roller T5 | |
| Ultracoat Roller T10 | |
| Ultracoat Soft Touch Base | |
| Ultracoat Soft Touch Finish | |
| Ultracoat Sport Color | |
| Ultracoat Sport Color Hardener | 120 |
| Ultracoat SR | |
| Ultracoat Steel Spatula | 175 |
| Ultracoat Toning Base | 170 |
| CILIGOUGE TOTTILING DUDE | 14- |

| Ultracoat Top Deck Cleaner | 130 |
|----------------------------|-----|
| Ultracoat Top Deck Oil | |
| Ultracoat Universal Base | |
| Ultracolor Plus | |
| Ultraflex S1 2K | |
| Ultralite Flex | 55 |
| Ultralite S1 Flex Ouick | |
| Ultralite S1 Flex Zero | |
| Ultralite S2 Flex | |
| Ultralite S2 Flex Quick | |
| Ultramastic III | |
| Ultraplan | |
| Ultraplan Contract | 20 |
| Ultraplan Eco | |
| Ultraplan Maxi | 21 |
| Ultraplan Renovation | |
| Ultraplan Trade | 21 |
| Ultraplan Xtra | 22 |
| Ultratop | 203 |
| Ultratop Base Coat | |
| Ultratop Easycolor | 204 |
| Ultratop Industrial | |
| Ultratop Living | |
| Ultratop Loft F | 205 |
| Ultratop Loft W | 205 |
| Ultratop Outdoor | |
| Ultratop Screed | 206 |
| Ultratop Stucco | 206 |
| | |
| | |
| VAGAlighTher* | 418 |
| VAGAQUARZ* | |
| VAGASAL* | |
| VAGLIATA* | |
| VAGLIATA Super* | 426 |
| VG03S* | 426 |
| \/C1F* | |

VG16SS* VG17FS*.

| WallGard | Graffiti | Barrier | | 35 |
|----------|----------|---------|-----|-----|
| WallGard | Graffiti | Remover | Gel | .35 |

Vinavil 03V Special Asbestos...

..427

CO₂ FULLY OFFSET PRODUCTS




Keraflex Maxi S1 Zero is part of the CO2 Fully Offset in the Entire Life Cycle line of products. CO₂ emissions measured throughout the life cycle of products from the Zero line in 2023 using Life Cycle Assessment (LCA) methodology, verified and certified with EPDs, have been offset through the acquisition of certified carbon credits in support of renewable energy and forestry protection projects. A commitment to the planet, to people and to biodiversity. For more details on how emissions are calculated and on climate mitigation projects financed through certified carbon credits, visit the webpage zero.mapei.com.



* VAGA products



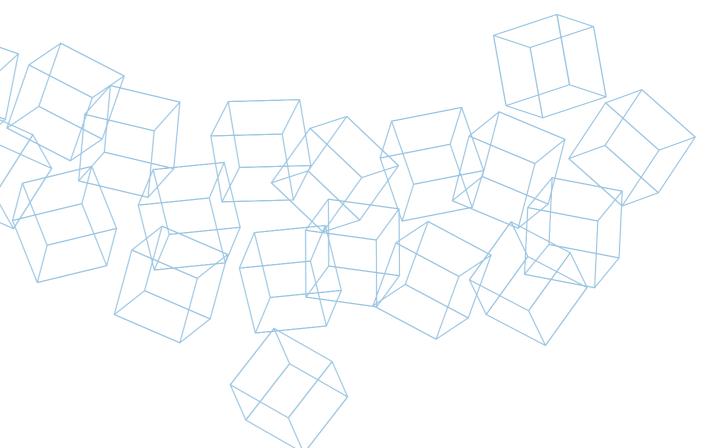



SCREEDS AND SMOOTHING COMPOUNDS

Gravel 0-8 mm

Blend of aggregates for Mapecem assorted grain size from 0 to 8 mm.



CHECK THE TECHNICAL DATASHEET on mapei.com



1.6 kg/m² per mm of thickness CONSUMPTION

PACKAGING 20 kg bags

CERTIFICATIONS **AND MARKINGS**



Mapecem

Special quick-setting and drying (24 hours), controlled-shrinkage hydraulic binder for screeds.


APPLICATION tapping and flattening with a straight edge CONSUMPTION 3.5-4.5 kg/m² per cm of thickness

PACKAGING 20 kg bags

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.com



Mapecem Pronto

Pre-blended, ready-to-use, quick-setting and drying (24 hours), controlled-shrinkage mortar for screeds

APPLICATION tapping and flattening with a straight edge

CONSUMPTION 20 kg/m² per cm of thickness

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS











CHECK THE TECHNICAL DATASHEET on mapei.com



Topcem

Special normal-setting, quick-drying (4 days), controlled-shrinkage hydraulic binder for screeds.

APPLICATION tapping and flattening with a straight edge

CONSUMPTION 2-2.5 kg/m² per cm of thickness

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS









TECHNICAL DATASHEET on mapei.con



Topcem Pronto

Ready-to-use, normal-setting, controlled-shrinkage mortar with high thermal conductivity for quick-drying screeds (4 days).

APPLICATION tapping and flattening with a straight edge

CONSUMPTION 18-20 kg/m² per cm of thickness according to the compaction degree.

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS

DOSAGE

PACKAGING







from 1 to 6 kg per cubic metre of mix

6 kg plastic bags and in boxes containing








CHECK THE **TECHNICAL** DATASHEET on mapei.con



2. PRODUCTS FOR TRADITIONAL SCREEDS

Mapefibre ST30

Structural polymer macro-fibres for concrete.



TECHNICAL DATASHEET on mapei.com





Back to the table of contents Back to the alphabetical index

fifteen 1 kg plastic bags

12

Mapefibre ST42

Structural polymer macro-fibres for concrete.



CHECK THE TECHNICAL DATASHEET on mapei.com



DOSAGE from 1 to 5 kg per cubic metre of mix

PACKAGING 5 kg, 6 kg and 1.8 kg plastic bags,

with water-soluble pucks

3. PRODUCTS FOR SMOOTHING

Fiberplan

Self-levelling, fibre-reinforced, ultra-rapid hardening smoothing compound for thicknesses from 3 to 10 mm. Particularly recommended for wooden substrates.

| APPLICATION | trowel or rake |
|-------------|----------------|
| | |

COLOUR pinkish grey

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS

CONSUMPTION





1.6 kg/m² per mm of thickness





CHECK THE TECHNICAL DATASHEET on mapei.com



Mapefibre 6 mm

6 mm fibres for strengthening self-levelling smoothing compounds.



PACKAGING 250 g bags

Mapenet FM

Glass-fibre mesh for reinforcing self-levelling smoothing compounds with min. thickness 5 mm applied over new or existing uneven substrates, subject to movements or vibration, or in general for substrates to be repaired.



TECHNICAL
DATASHEET
on mapei.com



PACKAGING 0.9 m x 100 m rolls

Mapenet FS

Glass fibre mesh for reinforcing joints, cracks, and adjacent substrates made of different materials, and, in general, for repairing new or existing uneven substrates, subject to movements or vibrations.



CHECK THE TECHNICAL DATASHEET on mapei.com



PACKAGING 0.8 m x 45 m rolls

Nivorapid

Quick-drying, thixotropic, cementitious smoothing compound for thicknesses from 1 to 20 mm, including on vertical surfaces. Ideal for localised repair works.

| APPLICATION | metal trowel |
|-------------|-------------------------------|
| CONSUMPTION | 1.6 kg/m² per mm of thickness |
| COLOUR | grey |

CERTIFICATIONS AND MARKINGS

PACKAGING



25 kg bags







CHECK THE TECHNICAL DATASHEET on mapei.com





Novoplan Maxi

Rapid-hardening, fibre-reinforced, free-flowing cementitious levelling mortar with high thermal efficiency applied in layers from 3 to 40 mm thick, specifically designed for underfloor heating/cooling systems.

APPLICATION trowel, rake, levelling bar or pump

CONSUMPTION 1.8 kg/m² per mm of thickness

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS









CHECK THE TECHNICAL DATASHEET on mapei.com



Pianocem M

Quick-drying, thixotropic, cementitious smoothing compound for thicknesses from 1 to 5 mm, including on vertical surfaces.

1.4 kg/m² per mm of thickness

APPLICATION trowel

COLOUR white

PACKAGING

CONSUMPTION

25 kg bags

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.com



Pianodur R

Fine-grained, ultra quick-setting self-levelling smoothing compound for thicknesses up to 3 mm per coat, suitable for floors subject to intense traffic.

| APPLICATION | trowel or rake |
|-------------|-------------------------------|
| CONSUMPTION | 1.5 kg/m² per mm of thickness |
| COLOUR | grey |
| PACKAGING | 22 kg bags |
| | |

CERTIFICATIONS AND MARKINGS

16





CHECK THE TECHNICAL DATASHEET on mapei.com



Planex HR

Rapid-drying, moisture-resistant, self-levelling, smoothing compound, for thicknesses from 1 to 10 mm. Also suitable for smoothing off internal surfaces; smoothing off substrates before bonding non-welded resilient floor tiles with reactive adhesives in areas that need to be washed or rinsed frequently; smoothing over concrete substrates with rising damp before placing PVC uncoupling sheets (such as Mapelay).

| APPLICATION | trowel, rake, or pump |
|-------------|-------------------------------|
| CONSUMPTION | 1.7 kg/m² per mm of thickness |
| COLOUR | grey |

CERTIFICATIONS
AND MARKINGS

PACKAGING



25 kg bags







TECHNICAL
DATASHEET
on mapei.com



Planex HR Maxi

Rapid-drying, moisture-resistant, self-levelling, smoothing compound, for thicknesses from 2 to 20 mm. Also suitable for smoothing off internal surfaces; smoothing off substrates before bonding non-welded resilient floor tiles with reactive adhesives in areas that need to be washed or rinsed frequently; smoothing over concrete substrates with rising damp before placing PVC uncoupling sheets (such as **Mapelay**).

| APPLICATION | trowel, rake, or pump |
|-------------|-------------------------------|
| CONSUMPTION | 1.7 kg/m² per mm of thickness |
| COLOUR | grey |

CERTIFICATIONS AND MARKINGS

PACKAGING



25 kg bags







CHECK THE TECHNICAL DATASHEET on mapei.con



Planipatch

Fine-grained, ultra quick-drying, thixotropic cementitious smoothing compound for thicknesses from 0 to 10 mm, including on vertical surfaces.

| APPLICATION | trowel |
|-------------|-------------------------------|
| CONSUMPTION | 1.5 kg/m² per mm of thickness |
| COLOUR | grey |
| PACKAGING | 25 kg bags |

CERTIFICATIONS AND MARKINGS











CHECK THE TECHNICAL DATASHEET on mapei.com





Planipatch Xtra

Fine-grained, ultra-fast drying thixotropic cementitious patching compound for local repairing. Installation of resilient flooring after 45-60 minutes.

APPLICATION trowel

CONSUMPTION 1.4 kg/m² per mm of thickness

COLOUR grey

CERTIFICATIONS AND MARKINGS

PACKAGING



5 and 23 kg bags









CHECK THE TECHNICAL DATASHEET on mapei.com



Planiprep 4 LVT

Ready-to-use grout smoother before installing LVT floors. For smoothing over (down to a feather edge up to up to 2 mm thick) existing interior ceramic and stone surfaces. It fills the joints between the tiles and forms a fine-textured, smooth finish suitable for the very quick (2 hours) installation of loose-lay LVT, or bonded LVT with reactive adhesives, such as **Ultrabond Eco MS 4 LVT Wall&Floor**.

| APPLICATION | trowel |
|-------------|---------------------------------|
| CONSUMPTION | approx. 80-100 g/m ² |
| COLOUR | grey |
| PACKAGING | 10 kg drums |
| | |

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.com



Planiprep Contract

Fine textured cementitious skimming compound, suitable for levelling and skimming, also in more than one coat, new and existing internal substrates (also ceramic) to make them suitable for bonding all types of floors covering, from 1 to 3 mm of thickness.

| APPLICATION | trowel |
|-------------|--------------------------------|
| CONSUMPTION | 1.25 kg/m² per mm of thickness |
| COLOUR | grey or white |
| PACKAGING | 22 kg bags |
| | |

CERTIFICATIONS AND MARKINGS

18









CHECK THE
TECHNICAL
DATASHEET
on mapei.com



Planiprep Fast Track

Ultra rapid-drying fine textured thixotropic cementitious skimming compound, suitable for and skimming (from a feather-edge up to 3 mm) new and existing internal substrates to make them suitable for bonding all types of floor covering very quickly (2 hours), including resilient and textile flooring.

| APPLICATION | trowel |
|-------------|---|
| CONSUMPTION | approx. 1.0 kg/m² per mm of thickness |
| COLOUR | grey |
| PACKAGING | 6 kg boxes containing four 4 kg plastic sachets |

CERTIFICATIONS AND MARKINGS







TECHNICAL
DATASHEET
on mapei.com



Planiprep Remove 4 LVT

Ready-to-use grout smoother for existing substrates before the application of looselay LVT. Easy to remove without leaving any residual. For levelling off and smooth over (also down to a feather edge or in layers up to 2 mm thick) existing interior ceramic and stone surfaces. It fills joints and gaps between tiles and forms a fine, smooth finish suitable for loose-lay LVT tiles and planks.

| APPLICATION | trowel |
|-------------|-------------------------------------|
| CONCLIMENTO | 1 approx 0.0 10 leg/gs? |
| CONSUMPTION | N approx. 0.8-1.0 kg/m ² |
| COLOUR | white |
| PACKAGING | 10 kg drums |
| | |

CERTIFICATIONS AND MARKINGS





CHECK THE TECHNICAL DATASHEET on mapei.com



Planopur

Two-component, self-levelling, flexible, polyurethane levelling compound for all types of substrate, especially the deformable type.

| APPLICATION | rake or flat metal trowel |
|-------------|---------------------------------------|
| CONSUMPTION | approx. 1.5 kg/m² per mm of thickness |
| COLOUR | comp. A: beige, comp. B: brown |
| PACKAGING | 14 kg units |



CHECK THE TECHNICAL DATASHEET on mapei.com





Ultraplan

Self-levelling, ultra quick-hardening smoothing compound for thicknesses from 1 to 10 mm.

APPLICATION trowel, rake, or pump

CONSUMPTION 1.6 kg/m² per mm of thickness

COLOUR pinkish grey

PACKAGING 23 kg bags

CERTIFICATIONS AND MARKINGS









CHECK THE TECHNICAL DATASHEET on mapei.com



Ultraplan Contract

Self-levelling, ultra quick-hardening smoothing compound ideal for large sites and retails for thicknesses from 1 to 10 mm.

APPLICATION trowel, rake, or pump

CONSUMPTION 1.6 kg/m² per mm of thickness

COLOUR grey

PACKAGING 24 kg bags

CERTIFICATIONS AND MARKINGS









CHECK THE TECHNICAL DATASHEET on mapei.com



Ultraplan Eco

Self-levelling, ultra quick-hardening smoothing compound for thicknesses from 1 to 10 mm.

APPLICATION trowel, rake, or pump

CONSUMPTION 1.6 kg/m² per mm of thickness

COLOUR grey

PACKAGING 23 kg bags

CERTIFICATIONS AND MARKINGS













CHECK THE TECHNICAL DATASHEET on mapei.com



Ultraplan Maxi

Self-levelling, ultra rapid-hardening smoothing compound for thicknesses from 3 to 40 mm.

APPLICATION trowel or pump

CONSUMPTION 1.7 kg/m² per mm of thickness

COLOUR grey

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS









TECHNICAL

DATASHEET

on mapei.com



Ultraplan Renovation

Self-levelling, fibre-reinforced, ultra rapid drying smoothing compound for thicknesses from 3 to 40 mm. Particularly suitable for levelling off existing substrates, even wooden substrates.

APPLICATION trowel or pump

CONSUMPTION 1.8 kg/m² per mm of thickness

COLOUR grey

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS









TECHNICAL

DATASHEET

on mapei.com



Ultraplan Trade

Fast hardening, self-levelling compound for thicknesses from 3 to 40 mm.

APPLICATION trowel or pump

CONSUMPTION 1.7 kg/m² per mm of thickness

COLOUR grey

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS











TECHNICAL

DATASHEET

on mapei.com





Back to the table of contents

Back to the alphabetical index

20

Ultraplan Xtra

Self-levelling, ultra quick-drying smoothing compound for thicknesses from 1 to 20 mm. Ideal for installing wooden, textile, ceramic, and natural stone coverings already after 6 hours at +23°C in thicknesses up to 5 mm.

APPLICATION trowel or rake

CONSUMPTION 1.6 kg/m² per mm of thickness

COLOUR pinkish grey

PACKAGING 23 kg bags

CERTIFICATIONS AND MARKINGS











CHECK THE TECHNICAL DATASHEET on mapei.com



4. PRODUCTS FOR LEVELLING SUBSTRATES

Adesilex P4

Quick-hardening cementitious levelling compound for internal and external surfaces.

APPLICATION no. 6 or 10 rounded notched trowel

CONSUMPTION 4-10 kg/m²

COLOUR grey

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS













CHECK THE TECHNICAL DATASHEET on mapei.com



Nivoplan

Smoothing mortar for walls and ceilings in interior and exterior for thicknesses from 2 to 20 mm.

APPLICATION trowel

 ${\color{red}{\sf CONSUMPTION}} \qquad 1.4 \text{ kg/m}^2 \text{ per mm of thickness}$

COLOUR grey or white

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.com



Planitop Fast 330

Quick-setting, fibre-reinforced cementitious levelling mortar for internal and external floors and walls, applied in layers from 3 to 30 mm to even out irregularities.

APPLICATION straight trowel

CONSUMPTION 1.45 kg/m² per mm of thickness

COLOUR grey

PACKAGING 25 kg vacuum-packed polyethylene bags

CERTIFICATIONS AND MARKINGS














CHECK THE TECHNICAL DATASHEET on mapei.com



MAPE



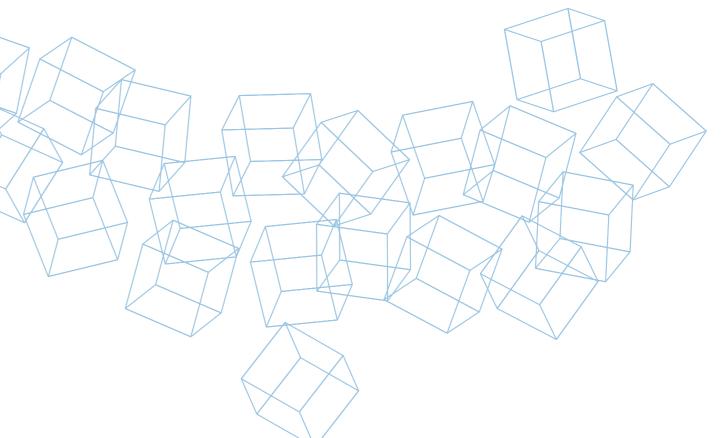



PRODUCTS FOR SOUNDPROOFING

Mapesilent Band R

Closed-cell, expanded polyethylene adhesive band applied to perimeter walls and around the edges of elements which pass through screeds to avoid the formation of acoustic bridges, designed to be easily applied in a L-shape. The product can be used in combination with all the products from the **Mapesilent** range. Available in two different heights depending on the total thickness of floating screeds.

| FORMAT | light blue roll |
|-----------|-----------------|
| THICKNESS | 5 mm |
| LENGTH | 50 m |
| HEIGHT | 100 - 160 mm |
| PACKAGING | 4 50 m rolls |



CHECK THE TECHNICAL DATASHEET on mapei.com



Mapesilent Comfort

Dry soundproofing system for floating screeds made from high density, closed-cell foam polyethylene sandwiched to a special protective film.

| FORMAT | 1.2 x 42 m (50 m²) rolls |
|-----------|--------------------------|
| THICKNESS | 6 mm |
| PACKAGING | 50 m² rolls |





CHECK THE TECHNICAL DATASHEET on mapei.com



Mapesilent Panel

Tiles with a bitumen and special polymer-based elasto-plastomeric membrane with polyester reinforcement, sandwiched to a resilient layer of polyester fibre.

| FORMAT | 1 m x 1 m tiles |
|-----------|-----------------|
| THICKNESS | 13 mm |
| WEIGHT | 5 kg/m² |
| PACKAGING | 75 tiles |
| | |

CERTIFICATIONS AND MARKINGS



CHECK THE TECHNICAL DATASHEET on mapei.com



Mapesilent Roll

Sheets with a bitumen and special polymer-based elasto-plastomeric membrane with polyester reinforcement sandwiched to a layer of resilient polyester fibre coated with blue, non-woven polypropylene fabric with a 5 cm wide self-adhesive border along the sides.

| FORMAT | 10 x 1 m rolls with a 5 cm border along the sides |
|----------------|---|
| THICKNESS | 8 mm |
| WEIGHT | 1.8 kg/m² |
| PACKAGING | 1.05 x 10 m rolls |
| CERTIFICATIONS | (JEMICO) |



CHECK THE TECHNICAL DATASHEET on mapei.com



Mapesilent Tape

AND MARKINGS

Adhesive sealing tape made in closed-cell expanded polyethylene, ideal for sealing rolls and panels from the **Mapesilent** range. It prevents the formation of acoustic bridges ensuring the seamlessness of the soundproofing system.

| FORMAT | white roll |
|-----------|----------------|
| THICKNESS | 3 mm |
| WIDTH | 100 mm |
| LENGTH | 25 m |
| PACKAGING | 12 rolls boxes |



CHECK THE TECHNICAL DATASHEET on mapei.com



Mapesonic CR

Soundproofing mat in sheets of rubber and cork applied on substrates before installing ceramic, stone, resilient and multi-layered wooden floors.

| FORMAT | 20 x 1 m (2 mm) rolls; 10 x 1 m (4 mm) rolls |
|-----------|---|
| THICKNESS | 2 mm, 4 mm |
| PACKAGING | • 20 x 1 m (2 mm) rolls; • 10 x 1 m (4 mm) rolls |

CERTIFICATIONS
AND MARKINGS



CHECK THE TECHNICAL DATASHEET on mapei.com





Back to the table of contents

Mapesonic Strip

Adhesive strip made of closed-cell expanded polyethylene to be applied around the edge of flooring and any pillars passing through the flooring to prevent the formation of acoustic bridges along the perimeter of the walls. Specific for use with **Mapesonic CR** to ensure the seamlessness of the soundproofing system.

| FORMAT | grey roll |
|-----------|---------------|
| THICKNESS | 3 mm |
| WIDTH | 50 mm |
| LENGTH | 11 m |
| PACKAGING | 4 rolls boxes |



CHECK THE TECHNICAL DATASHEET on mapei.com





Biblock

Two-component, epoxy curing product in water dispersion for concrete with consolidating and anti-dust properties.

Suitable for not absorbent substrates before the application of Triblock P.



| CHECK THE |
|--------------|
| TECHNICAL |
| DATASHEET |
| on mapei.com |



APPLICATION roller, brush or spray CONSUMPTION 0.10-0.15 kg/m² COLOUR comp. A: straw yellow; comp. B: amber PACKAGING 2.5 + 2.5 kg drums

Eco Prim Grip Plus

Multi-purpose, ready-to-use, low odour, bonding promoter primer with a very low emission of volatile organic compounds (VOC) for render, smoothing and levelling compounds and cementitious adhesives, for internal and external application.

| APPLICATION | roller, brush |
|-------------|---------------------------|
| CONSUMPTION | 0.2-0.3 kg/m ² |
| COLOUR | grey |
| PACKAGING | 1, 5 and 10 kg drums |



32







Eco Prim PU 1K

One-component, solvent-free, moisture curing polyurethane primer with a very low emission level of volatile organic compounds (VOC) for consolidating and waterproofing cementitious screeds.

| APPLICATION | roller, brush |
|----------------|---------------------------|
| CONSUMPTION | 0.2-0.4 kg/m ² |
| COLOUR | brown |
| PACKAGING | 10 kg drums |
| CERTIFICATIONS | (Signature) |





CHECK THE TECHNICAL DATASHEET on mapei.com



Eco Prim PU 1K Turbo

One-component, solvent-free, moisture curing, rapid-drying polyurethane primer with a very low emission level of volatile organic compounds (VOC) for consolidating and waterproofing cementitious screeds.

| APPLICATION | roller, brush |
|-------------|------------------------|
| CONSUMPTION | 0.2-0.4 kg/m² per coat |
| COLOUR | brown |
| PACKAGING | 10 kg drums |

CERTIFICATIONS AND MARKINGS







TECHNICAL DATASHEET on mapei.com



Eco Prim T Easy

Ready to use acrylic primer for absorbent substrates.

| APPLICATION | roller, brush |
|-------------|----------------------------|
| CONSUMPTION | 0.1-0.15 kg/m ² |
| COLOUR | light blue |
| PACKAGING | 10 kg drums |

CERTIFICATIONS AND MARKINGS





CHECK THE TECHNICAL DATASHEET on mapei.com



Eco Prim T Plus

Universal acrylic primer for all absorbent and non-absorbent substrates.

| APPLICATION | roller, brush |
|-------------|-----------------------------|
| CONSUMPTION | 0.03-0.15 kg/m ² |
| COLOUR | light blue |
| PACKAGING | 20, 10 and 5 kg drums |

CERTIFICATIONS AND MARKINGS







TECHNICAL DATASHEET on mapei.com





Eco Prim T Pro

Multi-purpose acrylic primer for absorbent substrates and ceramic.

APPLICATION roller, brush CONSUMPTION 0.05-0.15 kg/m² COLOUR light blue PACKAGING 10 and 1 kg drums **CERTIFICATIONS** EC 1 AND MARKINGS







Eporip

Two component solvent-free epoxy adhesive for construction joints and for monolithic sealing of cracks in screeds.

APPLICATION brush, trowel, or pouring CONSUMPTION 1.35 kg/dm³ for bonding

COLOUR comp. A: grey; comp. B: white

PACKAGING • 10 ka kit:

(component A 7.5 kg + component B 2.5 kg) • 2 kg kit: (component A 1.5 kg + component B 0.5 kg)

CERTIFICATIONS AND MARKINGS







CHECK THE **TECHNICAL** DATASHEET on mapei.com



Eporip SCR

Rapid-hardening, silicate-urethane resin for sealing cracks and joints in screeds and carrying out small repairs.

APPLICATION roller, brush

PACKAGING boxes containing 6 (A+B) kits

(comp. A: 300 ml; comp. B: 300 ml)

CERTIFICATIONS AND MARKINGS

CONSUMPTION





Approx. 1.7 kg/dm³ of cavity to be filled



CHECK THE TECHNICAL DATASHEET on mapei.com



Eporip Turbo

Two-component, quick-hardening polyester resin for monolithic sealing of cracked screeds.

| APPLICATION | pouring |
|----------------|--|
| CONSUMPTION | 1.7 kg/dm³ of cavity to be filled |
| COLOUR | comp. A: grey; comp. B: white |
| PACKAGING | 508 g metal can (comp. A = 500 g; component B 8 g). |
| CERTIFICATIONS | Facal (1) |



TECHNICAL DATASHEET on mapei.com



Livigum

AND MARKINGS

Synthetic resin-based admixture in water dispersion to be added to cementitious mortar and smoothing compounds to improve mechanical performances and adhesions.

60-90 g/m² per mm of skim coat;

1.5-2 kg per bag of Pianocem M



TECHNICAL DATASHEET on mapei.com





Malech

PACKAGING

CONSUMPTION

Water-based acrylic undercoat and bonding promoter with a smooth finish.

25 kg tanks



| APPLICATION | roller, brush or spray |
|-------------|-----------------------------|
| CONSUMPTION | 0.10-0.15 kg/m ² |
| COLOUR | transparent |
| PACKAGING | 2 and 10 kg |







Mapecoat I 600 W

Two-component, transparent epoxy primer in water dispersion.

| APPLICATION | roller, spray or airless spray |
|-------------|--|
| CONSUMPTION | 300-500 g/m², depending on the absorbency rate of diluted primer |
| COLOUR | opalescent mix |
| PACKAGING | 5.9 kg and 11.8 kg kits (A+B) |



CHECK THE TECHNICAL DATASHEET on mapei.com



Mapecoat I 600 W Lucido

Two-component transparent epoxy primer in water dispersion.

| APPLICATION | roller, spray or airless spray |
|-------------|--|
| CONSUMPTION | 300-500 g/m², depending on the absorbency rate of diluted primer |
| COLOUR | opalescent mix |
| PACKAGING | 5.9 kg kit (A+B) |



CHECK THE TECHNICAL DATASHEET on mapei.com



Mapeproof Primer

PVDC based primer in water dispersion for suppressing residual moisture up to 4,5% (95% R.H.) in cementitious screeds.

| APPLICATION | roller, brush |
|-------------|--|
| CONSUMPTION | approx. 250 g/m² as a two coats application (coverage 4 m²/kg) |
| PACKAGING | 10 kg tanks |
| | |

CERTIFICATIONS AND MARKINGS





CHECK THE TECHNICAL DATASHEET on mapei.com



Planicrete

Synthetic rubber latex to improve adhesion and performance of cement mixes and prepare bonding slurries for screeds.



TECHNICAL
DATASHEET
on mapei.com



Primer 3296

CONSUMPTION


PACKAGING

Acrylic primer in water dispersion with high penetration, consolidating and anti-dust properties for screeds.

• to prepare bonding slurries: 100-150 g/m²;

5-10-25 kg tanks and 12 x 1 kg packages

• to prepare screeds and renders: 50-80 kg/m³.

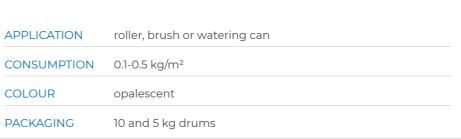



CHECK THE TECHNICAL DATASHEET on mapei.com



Primer BI

Synthetic resin primer in solvent, specific for improving adhesion of polyurethane coating products (from the **Purtop** range) on existing bituminous membranes.



| CONSUMPTION | 0.20 kg/m² per coat, depending on the characteristics of the substrate |
|-------------|---|
| COLOUR | transparent |
| PACKAGING | 10 kg |







Primer EP

APPLICATION

CONSUMPTION

COLOUR

PACKAGING

Two-component epoxy primer in solvents for consolidating and waterproofing cementitious screeds and industrial floors.

roller, brush or watering can



| CHECK THE |
|--------------|
| TECHNICAL |
| DATASHEET |
| on manei com |



Primer EP Rustop

Two-component epoxy primer for metal surfaces.

 $0.5-0.7 \text{ kg/m}^2$

transparent

5 +5 kg drums



| APPLICATION | roller, brush or airless spray |
|-------------|--------------------------------|
| CONSUMPTION | 0.2 kg/m ² |
| COLOUR | white mix |
| PACKAGING | 5 kg kit (A+B) |
| | |





Primer G

Synthetic resin primer in water dispersion

| APPLICATION | roller, brush |
|----------------|------------------------------------|
| CONSUMPTION | 0.1-0.2 kg/m² depending on the use |
| COLOUR | light blue |
| PACKAGING | 25, 10 and 5 drums and 12x1 kg |
| CERTIFICATIONS | TEMICA 490N Q JON 000Up |

AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.com



Primer G Conductive

brush

black

0.1-0.15 kg/m²

10 kg drums

Dark-coloured, solvent-free conductive synthetic resin primer in water dispersion.



CHECK THE TECHNICAL DATASHEET on mapei.com



Primer KL

APPLICATION

COLOUR

PACKAGING

CONSUMPTION

Adhesion promoter in solvent for two-component epoxy, epoxy-polyurethane and polyurethane adhesives and thinner for **Primer MF**.

| APPLICATION | soaked cotton rag |
|-------------|---|
| CONSUMPTION | 0.3-0.4 kg/m ² |
| COLOUR | pinkish grey |
| PACKAGING | boxes of 12x0.8 litre bottles and 8 kg metal drums |



TECHNICAL DATASHEET on mapei.com

Back to the alphabetical index



Primer M

APPLICATION

brush

One-component, solvent-free primer for polyurethane sealants, for use absorbent and compact surfaces.



| CONSUMPTION | 5-10 g/m (for a 1 cm deep joint) | CHECK THE TECHNICAL |
|-------------|----------------------------------|------------------------|
| COLOUR | brown | DATASHEET on mapei.com |
| PACKAGING | 250 g bottles, 2 kg metal drums | |







Primer MF

Two-component, solvent-free epoxy primer for consolidating and waterproofing cementitious substrates.



| CHECK THE |
|--------------|
| TECHNICAL |
| DATASHEET |
| on mapei.com |



| APPLICATION | roller, brush |
|-------------|---------------------------------|
| CONSUMPTION | 0.20-0.40 kg/m ² |
| COLOUR | yellow transparent |
| PACKAGING | 1 kg (A+B) and 6 kg (A+B) units |

Primer MF EC Plus

Two-component, solvent-free, low-viscosity, epoxy primer with very low emission of volatile organic compounds for consolidating and waterproofing cementitious substrates.

| APPLICATION | roller, brush or metal straight trowel |
|-------------|--|
| CONSUMPTION | 0.2-0.3 kg/m² per coat |
| COLOUR | yellow transparent |
| PACKAGING | 5 kg units (A+B) |

CERTIFICATIONS AND MARKINGS









CHECK THE TECHNICAL DATASHEET on mapei.com



Primer P

One-component primer for sealants applied on plastic materials.



APPLICATION brush 5-10 g/m (for a 1 cm deep joint) CONSUMPTION COLOUR transparent PACKAGING 150 g bottles



Primer P1

One-component solvent-based primer for polyurea coatings (from the Purtop line) on plastic surfaces such as PVC.



CHECK THE TECHNICAL DATASHEET on mapei.com



Primer P2

COLOUR

PACKAGING

CONSUMPTION 0.1-0.2 kg/m²

yellowish

50 kg tanks

One-component solvent-based primer for polyurea coatings (from the Purtop line) on plastic surfaces such as TPO.



CHECK THE **TECHNICAL** DATASHEET on mapei.com



CONSUMPTION 0.1-0.2 kg/m² COLOUR yellowish PACKAGING 50 kg tanks

Primer P3

Two-component solvent-based polyurethane primer for products from the **Purtop** line.



| CONSUMPTION | approx. 50-100 g/m² as adhesion promoter for polyurethane finishes; 150-200 g/m² as primer for bitumen membranes. |
|-------------|---|
| COLOUR | comp. A: yellow-transparent; comp. B: dark brown |
| PACKAGING | 5 +1.20 kg and 1.24 kg kits (A+B) |

CHECK THE TECHNICAL DATASHEET on mapei.com





Primer PU60

Moisture curing polyurethane resin for consolidating and waterproofing damp screeds.

roller, brush or watering can



| CHECK THE |
|--------------|
| TECHNICAL |
| DATASHEET |
| on manei com |



Primer S

PACKAGING

APPLICATION

COLOUR

CONSUMPTION

Waterproofing primer in water dispersion.

0.4-1.2 kg/m²

10 kg drums

brown



| CHECK THE |
|--------------|
| TECHNICAL |
| DATASHEET |
| on mapei.com |
| - |



APPLICATION roller, brush CONSUMPTION 0.1 kg/m² per coat COLOUR pink PACKAGING 5 kg bottles

Two-component epoxy primer with fillers. May be coloured with **Mapecolor Paste.**

| APPLICATION | straight metal trowel or straight rake |
|-------------|--|
| CONSUMPTION | 0.3-0.7 kg/m² per coat, depending on the absorbency and the characteristics of the substrate |
| COLOUR | neutral |
| PACKAGING | 20 kg and 5 kg kits (A+B) |
| | |

CERTIFICATIONS AND MARKINGS

Primer SN





CHECK THE TECHNICAL DATASHEET on mapei.com



Prosfas

APPLICATION

COLOUR

PACKAGING

CONSUMPTION

Water-based, solvent-free consolidator with high penetration properties for cementitious substrates.

roller, scrubber or brush

0.5-0.7 kg/m²

transparent

25 kg tanks



TECHNICAL
DATASHEET
on mapei.com



Quartz 1.2

Selected graded silica sand to improve the bond on resin or epoxy primers.



CHECK THE TECHNICAL DATASHEET on mapei.com



COLOUR beige - grey

PACKAGING 25 kg bags

Thinner for Adhesives

Note: Packaging approved according to ADR as specified in Italian Ministerial Decree 22/2/1990.



CHECK THE TECHNICAL DATASHEET on mapei.com





Thinner PU

Thinners for **Primer PU 60**.



| CONSUMPTION | 0.25-1 litre per litre of Primer PU 60 according to dilution rate considered. | |
|-------------|--|--|
| COLOUR | transparent | |
| PACKAGING | 9 kg drums | |
| | | |





Triblock P

Three-component epoxy-cementitious primer for waterproofing non-absorbent damp substrates.



| APPLICATION | roller, brush |
|-------------|---|
| CONSUMPTION | 0.5 kg/m ² |
| COLOUR | comp. A white; comp. B white; comp. C white |
| PACKAGING | 5 kg drums (A+B+C) |
| | |





45



1. HYDRAULIC BINDERS-BASED ADHESIVES

Adesilex P4

High-performance, self-buttering, quick-setting grey cementitious adhesive for ceramic tiles and stone material.

Note: May also be used for smoothing internal and external surfaces.

APPLICATION notched trowel to be selected depending on the format

of the tiles

CONSUMPTION $4-10 \text{ kg/m}^2$

COLOUR grey

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS











CHECK THE TECHNICAL DATASHEET on mapei.com



Adesilex P8

Improved adhesion cementitious adhesive with no vertical slip and extended open time, for ceramic tiles and stone materials.

APPLICATION notched trowel to be selected depending on the format

of the tiles

CONSUMPTION 2-5 kg/m²

COLOUR white and grey

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS









CHECK THE TECHNICAL DATASHEET on mapei.com



Adesilex P9

High-performance cementitious adhesive with no vertical slip and extended open time for ceramic tiles and stone material. Note: The white version has excellent whiteness and workability.

APPLICATION notched trowel to be selected depending on the format of the tiles

CONSUMPTION 2-5 kg/m²

COLOUR grey or white

PACKAGING 25 kg bags and 4x5 kg Alupack boxes

CERTIFICATIONS AND MARKINGS

48









CHECK THE TECHNICAL DATASHEET on mapei.com



Adesilex P9 Express

High-performance rapid-setting cementitious adhesive with extended open time for bonding ceramic tiles.

APPLICATION notched trowel to be selected depending on the format of the tiles

CONSUMPTION 2.5-5 kg/m²

COLOUR grey or white

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS













TECHNICAL DATASHEET on mapei.com



Adesilex P10

High-performance cementitious adhesive with no vertical slip and extended open time for glass mosaic, ceramic and marble coverings.

APPLICATION notched trowel to be selected depending on the format of the tiles

CONSUMPTION 2-5 kg/m²

COLOUR white

CERTIFICATIONS AND MARKINGS

PACKAGING



25 kg bags







TECHNICAL DATASHEET on mapei.com



Elastorapid

Two-component, high-performance, highly-deformable, quick-setting and drying cementitious adhesive with no vertical slip and extended open time for ceramic tiles and stone material.

APPLICATION notched trowel to be selected depending on the format of the tiles

CONSUMPTION 3-8 kg/m²

COLOUR grey or white

PACKAGING Elastorapid white: 31.25 kg kit, Elastorapid grey: 31.25 kg kit. Comp. A: 25 kg / comp. B: 6.25 kg

CERTIFICATIONS AND MARKINGS









TECHNICAL DATASHEET on mapei.com





Granirapid

Two-component, high-performance, deformable, quick-setting and hydrating cementitious adhesive for ceramic tiles and stone material.

APPLICATION notched trowel to be selected depending on the format

of the tiles

CONSUMPTION 3-8 kg/m²

COLOUR grey or white

PACKAGING Granirapid white: 28 kg kit, Granirapid grey: 30.5 kg kit. Comp. A: 25 kg / comp. B: 5.5 kg

CERTIFICATIONS AND MARKINGS









CHECK THE TECHNICAL DATASHEET on mapei.com



Isolastic

Elasticising latex mixed with **Kerabond**, **Kerabond Easy**, **Kerabond T**, **Kerabond Plus** and **Adesilex P10**. **Kerabond**, **Kerabond Plus** and **Kerabond T** mixed with **Isolastic** become high performance, highly deformable adhesives with extended open time (C2E/S2). When **Adesilex P10** is mixed with **Isolastic** (dilution rate 1:1 with water), becomes a high-performance, deformable adhesive with extended open time (C2E/S1).

APPLICATION notched trowel to be selected depending on the format of the tiles

CONSUMPTION 1-2 kg/m²

PACKAGING 25 and 5 kg tanks

CERTIFICATIONS AND MARKINGS





TECHNICAL
DATASHEET
on mapei.com



Kerabond

Cementitious adhesive for ceramic tiles.

APPLICATION notched trowel to be selected depending on the format

of the tiles

CONSUMPTION 2-5 kg/m²

COLOUR grey or white

PACKAGING 25 kg bags and 4x5 kg Alupack boxes

CERTIFICATIONS AND MARKINGS

50









CHECK THE TECHNICAL DATASHEET on mapei.com



Kerabond Easy

Cementitious adhesive for ceramic tiles.

APPLICATION notched trowel to be selected depending on the format of the tiles

TOTTIAL OF LIFE LIFES

CONSUMPTION 2-5 kg/m²

COLOUR grey or white

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS









CHECK THE TECHNICAL DATASHEET on mapei.com



Kerabond Plus

Improved adhesion cementitious adhesive with extended open time for ceramic tiles.

APPLICATION notched trowel to be selected depending on the format of the tiles

CONSUMPTION 2-5 kg/m²

CERTIFICATIONS AND MARKINGS

COLOUR

PACKAGING



grey or white

25 kg bags







CHECK THE TECHNICAL DATASHEET on mapei.com



Kerabond T

Cementitious adhesive with no vertical slip for ceramic tiles.

APPLICATION notched trowel to be selected depending on the format of the tiles

CONSUMPTION 2-5 kg/m²

COLOUR grey or white

PACKAGING 25 kg bags

CERTIFICATIONS
AND MARKINGS









CHECK THE TECHNICAL DATASHEET on mapei.com





Keracrete

Synthetic latex rubber mixed with sand and cement.

APPLICATION notched trowel to be selected depending on the format of the tiles

CONSUMPTION 0.5-1 kg/m²

PACKAGING 25 kg tanks

CERTIFICATIONS AND MARKINGS





TECHNICAL DATASHEET on mapei.com



Keraflex

High-performance cementitious adhesive with no vertical slip and extended open time for ceramic and stone tiles.

APPLICATION notched trowel to be selected depending on the format

of the tiles

CONSUMPTION 2-5 kg/m²

COLOUR grey or white

PACKAGING 25 kg bags and 4x5 kg Alupack boxes

CERTIFICATIONS AND MARKINGS









CHECK THE TECHNICAL DATASHEET on mapei.com



Keraflex Easy S1 Zero

High-performance, easy to apply, deformable cementitious adhesive with extended open time, with high wetting capacity, very low emission of volatile organic compounds and fully offset Greenhouse Gas emissions, for ceramic tiles and stone material. It is particularly recommended for bonding large-sized tiles over large areas of flooring. Suitable for application in layers up to 10 mm thick.

APPLICATION notched trowel to be selected depending on the format of the tiles

CONSUMPTION 2-5 kg/m²

COLOUR grey or white

PACKAGING 25 kg bags

CERTIFICATIONS **AND MARKINGS**











Keraflex Extra S1 Zero

High-performance, deformable cementitious adhesive with variable rheology, with no vertical slip or with high wetting capacity, extended open time, with very low emission of volatile organic compounds and fully offset Greenhouse Gas emissions, for ceramic tiles and stone material including in large format.

APPLICATION notched trowel to be selected depending on the format of the tiles

CONSUMPTION 1,2 kg/m² per mm of thickness

COLOUR grey or white

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS















Keraflex Maxi S1 Zero

High-performance cementitious adhesive with no vertical slip, with Low Dust technology, extended open time and deformable with excellent workability. Suitable for laying large-format ceramic tiles and stone material, with very low emission of volatile organic compounds and fully offset greenhouse gas emissions. Suitable for high thickness adhesives up to 15 mm.

APPLICATION notched trowel to be selected depending on the format of the tiles

CONSUMPTION 1.2 kg/m² per mm of thickness

COLOUR grey or white **PACKAGING** 25 kg bags

CERTIFICATIONS **AND MARKINGS**

















Keraquick Maxi S1

High-performance, deformable, rapid-setting and hydrating, non-slip cementitious adhesive with very low emission of volatile organic compounds for ceramic tiles and in particular for stone, including large formats. Suitable for high thickness adhesives up to 15 mm.

APPLICATION notched trowel to be selected depending on the format of the tiles

CONSUMPTION 1.2 kg/m² per mm of thickness

COLOUR grey or white

PACKAGING 25 kg and 23 kg bags and 4x5 kg Alupack

CERTIFICATIONS AND MARKINGS















TECHNICAL DATASHEET on mapei.com





Keraset

Cementitious adhesive for ceramic tiles.

APPLICATION notched trowel to be selected depending on the format of the tiles

CONSUMPTION 2-5 kg/m²

COLOUR grey or white

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.com



Latex Plus

Elasticising latex mixed with Keraquick Maxi S1. When Keraquick Maxi S1 is mixed with Latex Plus it forms a high-performance, quick-setting, highly-deformable adhesive (C2F/S2).

APPLICATION notched trowel to be selected depending on the format of the tiles

CONSUMPTION to be calculated according to the amount of Keraquick Maxi S1 and to the mixing ratio

PACKAGING 10 kg tanks

CERTIFICATIONS AND MARKINGS





CHECK THE TECHNICAL DATASHEET on mapei.com



Tixobond White

High-performance, ultra-white cementitious adhesive with no vertical slip and extended open time for ceramic tiles.

APPLICATION notched trowel to be selected depending on the format of the tiles

CONSUMPTION 1.2 kg/m² per mm of thickness

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS









CHECK THE TECHNICAL DATASHEET on mapei.com



Back to the table of contents

Ultraflex S1 2K

Two-component, high-performance, deformable cementitious adhesive with extended open time, resistant to vertical slip, for laying ceramic tiles and stone material, particularly suitable for outdoor installation.

APPLICATION notched trowel to be selected depending on the format

CONSUMPTION 1.2 kg/m² per mm of thickness

COLOUR

PACKAGING 32.5 kg kit: comp. A 25 kg bag, comp. B 7.5 kg drum

CERTIFICATIONS AND MARKINGS







TECHNICAL DATASHEET on mapei.com



Ultralite Flex

One-component, high-performance, moderately deformable, lightweight, cementitious adhesive with no vertical slip and extended open time, Low Dust technology and extremely high yield. Easy to apply by trowel with excellent back-buttering capacities, for ceramic and stone tiles and mosaics.

APPLICATION notched trowel to be selected depending on the format of the tiles

CONSUMPTION 0.8 kg/m² per mm of thickness

PACKAGING 15 kg bags

CERTIFICATIONS AND MARKINGS















Ultralite S1 Flex Quick

One-component, high-performance, highly deformable, lightweight, cementitious adhesive with rapid setting and hydration and extended open time, Low Dust technology and extremely high yield. Easy to apply by trowel with excellent back-buttering capacities, for ceramic, mosaic and stone tiles. Ideal for large-format tiles.

APPLICATION notched trowel to be selected depending on the format of the tiles

CONSUMPTION 0.8 kg/m² per mm of thickness

COLOUR white and grey

PACKAGING 15 kg bags

CERTIFICATIONS AND MARKINGS





















Ultralite S1 Flex Zero

One-component, high-performance, deformable, lightweight, cementitious, adhesive with no vertical slip and extended open time, Low Dust technology and extremely high yield. Easy to apply by trowel with excellent back-buttering capacities, very low emission of volatile organic compounds and fully offset Greenhouse Gas emissionss. For ceramic and stone tiles, ideal for large-format tiles.

APPLICATION notched trowel to be selected depending on the format

of the tiles

CONSUMPTION 0,8 kg/m² per mm of thickness

COLOUR grey or white

PACKAGING 15 kg bags

CERTIFICATIONS AND MARKINGS















CHECK THE

TECHNICAL

DATASHEET



Ultralite S2 Flex

One-component, high-performance, highly deformable, lightweight, cementitious adhesive with extended open time, Low Dust technology and extremely high yield. Easy to apply by trowel with excellent back-buttering capacities, for ceramic, mosaic and stone tiles. Particularly suitable for laying large format-tiles.

APPLICATION notched trowel to be selected depending on the format

of the tiles

CONSUMPTION 0.8 kg/m² per mm of thickness

COLOUR white and grey

PACKAGING 15 kg bags

CERTIFICATIONS **AND MARKINGS**

















on mapei.com



Ultralite S2 Flex Quick

One-component, high-performance, highly deformable, lightweight, cementitious adhesive with rapid setting and hydration and extended open time, Low Dust technology and extremely high yield. Easy to apply by trowel with excellent back-buttering capacities, for ceramic, mosaic and stone tiles. Ideal for large-format tiles.

APPLICATION notched trowel to be selected depending on the format of the tiles

CONSUMPTION 0.8 kg/m² per mm of thickness

COLOURS white and grey

PACKAGING 15 kg bags

CERTIFICATIONS **AND MARKINGS**

56















CHECK THE TECHNICAL DATASHEET on mapei.com



2. SYNTHETIC RESIN-BASED ADHESIVES

Adesilex P22

Ready-to-use adhesive paste with no vertical slip and long open time for ceramic tiles.

APPLICATION notched trowel to be selected depending on the format of the tiles

CONSUMPTION 1.5-2.5 kg/m²


COLOUR white

PACKAGING 5 - 10 and 25 kg drums and 1x12 packs

CERTIFICATIONS AND MARKINGS







TECHNICAL DATASHEET on mapei.com



Ultramastic III

Ready-to-use, high-performance adhesive paste with no vertical slip and long open time, for laying ceramic tiles on walls and floors.

APPLICATION notched trowel to be selected depending on the format of the tiles

PACKAGING 1.5-2.5 kg/m² on walls, 3-4 kg/m² on floors

COLOUR white

PACKAGING 16 - 10 - 5 and 1 kg drums

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.con



3. REACTIVE ADHESIVES

Keralastic

Two-component, high-performance polyurethane adhesive for ceramic tiles and stone material.

APPLICATION notched trowel to be selected depending on the format of the tiles CONSUMPTION 2.5-5 kg/m²

COLOUR grey or white

PACKAGING 5 and 10 kg units (A:B = 94:6 parts by weight)

CERTIFICATIONS AND MARKINGS







TECHNICAL DATASHEET on mapei.com





Keralastic T

Two-component, high-performance polyurethane adhesive with no vertical stone material.

| APPLICATION | notched trowel to be selected depending on the format of the tiles |
|-------------|--|
| CONSUMPTION | 2-5 kg/m² |

COLOUR grey or white

PACKAGING 5 and 10 kg units (A:B = 94:6 parts by weight)

CERTIFICATIONS AND MARKINGS









Kerapoxy Adhesive

Two-component epoxy adhesive with no vertical slip for ceramic tiles and stone material.

| APPLICATION | notched trowel to be selected depending on the format |
|-------------|---|
| | of the tiles |

CONSUMPTION 1.5 kg/m² per mm of thickness

grey or white

COLOUR

PACKAGING 10 kg units

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.com



Ultrabond Eco PU 2K

Two-component, solvent-free, high-performance, non-slip polyurethane adhesive with very low emission level of volatile organic compounds (VOC) for ceramic and stone tiles.

APPLICATION notched trowel to be selected depending on the format of the tiles

CONSUMPTION 2.5-5 kg/m²

COLOUR grey or white

PACKAGING 10 kg units (A:B = 88:12 parts by weight)

CERTIFICATIONS AND MARKINGS

58







Ultrabond EP 2K

Two-component high-performance reactive adhesive with improved workability for bonding ceramic tiles, mosaics and stone to all types of substrate.

APPLICATION notched trowel to be selected depending on the format of the tiles

CONSUMPTION 2.5-5 kg/m²

COLOUR white

PACKAGING 10 kg kit: component A: 9 kg drum,

comp. B: 1 kg can

CERTIFICATIONS AND MARKINGS







TECHNICAL DATASHEET on mapei.con






Back to the table of contents Back to the alphabetical index

59



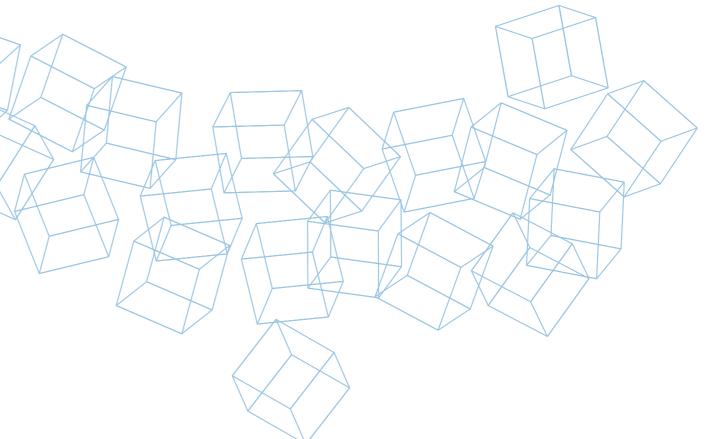

GROUTS FOR
CERAMIC TILES,
STONE MATERIAL
AND MOSAICS

GROUTING CERAMIC TILES, STONE MATERIAL AND MOSAICS

1. CEMENTITIOUS GROUTS

Fugolastic

Polymer liquid admix for Keracolor FF, Keracolor GG and Keracolor SF.



| CHECK THE |
|---------------------|
| TECHNICAL |
| DATASHEET |
| on mapei.com |



APPLICATION rubber trowel according to the size of the joints and tiles CONSUMPTION PACKAGING 10 and 5 kg tanks and 10x1 kg packages

Keracolor FF

Pre-blended, high-performance, polymer-modified cementitious mortar with water-repellent **DropEffect®** technology for grouting joints up to 6 mm wide.

| ' | |
|-------------|---|
| APPLICATION | rubber trowel |
| CONSUMPTION | according to the size of the joints and tiles |
| COLOUR | 20 |
| PACKAGING | 25 kg bags and 4x5 kg Alupack boxes depending on the colour |





CHECK THE TECHNICAL DATASHEET on mapei.com



Keracolor GG

Pre-blended, high-performance polymer-modified cementitious mortar for grouting joints between ceramic and stone tiles. For joints from 4 to 15 mm.

| APPLICATION | rubber trowel |
|-------------|---|
| CONSUMPTION | according to the size of the joints and tiles |
| COLOUR | 20 |
| PACKAGING | 25 kg bags and 4x5 kg Alupack boxes depending on the colour |

CERTIFICATIONS AND MARKINGS





CHECK THE TECHNICAL DATASHEET on mapei.com



Keracolor SF

High-performance, super-fine, white cementitious mortar for grouting joints between ceramic and stone tiles and mosaics. For joints up to 4 mm.

| APPLICATION | rubber trowel |
|-------------|---|
| CONSUMPTION | according to the size of the joints and tiles |
| COLOUR | white |
| PACKAGING | 22 kg bags and 4x5 kg Alupack boxes |

CERTIFICATIONS AND MARKINGS







TECHNICAL DATASHEET on mapei.com



Ultracolor Plus

High-performance, anti-efflorescence, quick-setting and drying polymer-modified mortar free from Portland cement with water-repellent **DropEffect®** and mould-resistant **BioBlock®** technology, with very low emission of volatile organic compounds and fully offset Greenhouse Gas Emissions, for grouting joints ceramic, stone and mosaic tiles.

| For Joints t | For Joints up to 20 mm wide. | | |
|--------------|------------------------------|---|--|
| APPLICATION | ON rubber | trowel | |
| CONSUMP | TION accordi | according to the size of the joints and tiles | |
| COLOUR | 40 | | |
| PACKAGIN | G 22 kg b | ags, 4x5 kg or 8x2 kg Alupack boxes depending | |

CERTIFICATIONS AND MARKINGS















CHECK THE **TECHNICAL** DATASHEET on mapei.con



2. EPOXY GROUTS

Kerapoxy

Two-component, anti-acid epoxy mortar for grouting ceramic tiles and stone material. For joints of at least 1 mm. Can also be used as an adhesive.

| APPLICATION | rubber trowel |
|-------------|--|
| CONSUMPTION | used as grout: according to the size of the joints and tiles; used as adhesive: 2-4 kg/m² |
| COLOUR | 17 |
| PACKAGING | 10-15 kg units and 12x2 kg boxes |

CERTIFICATIONS AND MARKINGS













CHECK THE DATASHEET on mapei.com





Kerapoxy CQ

AND MARKINGS

Two-component anti-acid epoxy grout, easy to apply and to clean, with bacteriostatic agent (BioBlock® technology), ideal for grouting ceramic and stone tiles and mosaics. For joints of at least 1 mm. Can also be used as an adhesive.

Product certified according to ISO 22196:2011 standards as a grouting mortar protected against the formation and proliferation of micro-organisms.

| APPLICATION | rubber trowel |
|----------------|--|
| CONSUMPTION | used as grout: according to the size of the joints and tiles; used as adhesive: 2-4 kg/m² |
| COLOUR | 17 |
| PACKAGING | 3 kg or 10 kg containers for the coloured versions 113 cement grey, 114 anthracite, 132 beige 2000, 282 bardiglio grey and 100 white |
| CERTIFICATIONS | |





Kerapoxy Easy Design

Two-component, epoxy grout with a bacteriostatic agent and BioBlock® technology, easy to apply and clean. Versatile, decorative, acid-resistant, ideal for grouting ceramic tiles, glass mosaic and stone material. To be used also in combination with MapeGlitter and Mapecolor Metallic. For grouting joints from 1 to 15 mm wide. Can also be used as an adhesive.

Certified according to ISO 22196:2011 standards as a grouting mortar protected against the formation and proliferation of micro-organisms.

| ciro romination ana p | or emercial error er er garmerne. |
|-----------------------|--|
| APPLICATION | rubber trowel |
| CONSUMPTION | used as grout: according to the size of the joints and tiles; used as adhesive: 2-4 kg/m² |
| COLOUR | 41 |
| PACKAGING | 3 kg units |









Kerapoxy IEG

Two-component epoxy mortar with extremely high chemical resistance for grouting ceramic and stone tiles. For joints of at least 3 mm.

| | APPLICATION | rubber trowel |
|--|-------------|---|
| | CONSUMPTION | according to the size of the joints and tiles |
| | COLOUR | 113 and 130 |
| | PACKAGING | 10 kg units |
| | | |

CERTIFICATIONS AND MARKINGS









CHECK THE TECHNICAL DATASHEET on mapei.com



Mapecolor Metallic

Powder pigment based on very high-quality pearlescent mica, to be mixed with **Kerapoxy Easy Design** to create a metallic effect.



TECHNICAL DATASHEET on mapei.com



COLOURS Moonlight (similar to platinum), Sahara (similar to gold), Shining (similar to silver), Red Clay (similar to copper), Stardust (similar to dark silver)

PACKAGING boxes with 10x90 g sachets

MapeGlitter

Polyester, aluminium and epoxy resin metal-effect coloured glitter used for mixing with Kerapoxy Easy Design.



TECHNICAL



DATASHEET on mapei.com



3. READY-TO-USE PASTE PRODUCTS

silver and gold

boxes with 10x100 g sachets

Flexcolor


COLOURS

PACKAGING

Ready-to-use, polymer filler paste with water-repellent DropEffect® and mould-resistant BioBlock® technology for grouting joints in ceramic tiles and mosaic from 2 to 10 mm wide.

| | APPLICATION | rubber trowel |
|--|-------------|--|
| | CONSUMPTION | according to the size of the joints and tiles |
| | COLORI | 100 white, 110 manhattan 2000, 111 silver grey, 112 medium grey, 132 beige 2000 |
| | PACKAGING | 5 kg drums |
| | | |

CERTIFICATIONS AND MARKINGS




DATASHEET on mapei.com





MAPEI GROUT COLOUR CHART

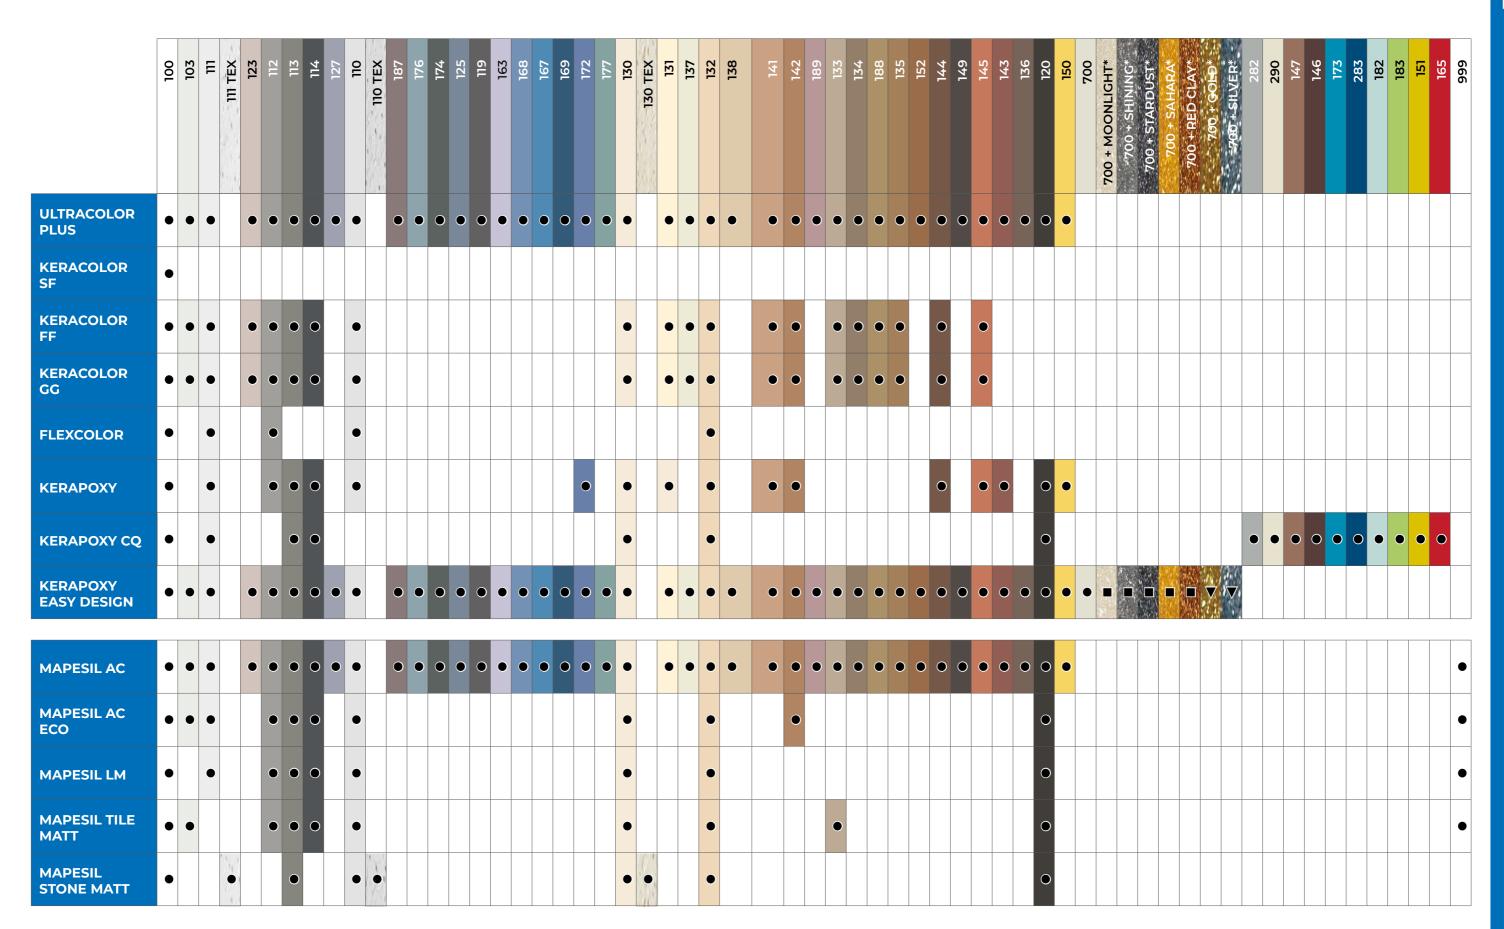

Due to the printing process involved, the colours shown are merely indicative.

66

[►] Kerapoxy Easy Design may be mixed with MapeGlitter





^{*} For the correct use of MapeGlitter and Mapecolor Metallic,

[■] Kerapoxy Easy Design may be mixed with Mapecolor Metallic



CLEANING SOLUTIONS

UltraCare Acid Cleaner

Concentrated acid-based cleaner in liquid form to remove stubborn cementitious grout residues from glass mosaic, ceramic and acid-resistant natural stone. Ideal for cleaning after installation and to remove salt and limescale efflorescence. With fully offset greenhouse gas emissions.

| APPLICATION | rotary-head cleaner or abrasive pad |
|-------------|---|
| CONSUMPTION | depending on dilution, the degree of dirt and the surface to be treated |
| | |

PACKAGING 1 and 5 litres tanks

CERTIFICATIONS AND MARKINGS





CHECK THE TECHNICAL DATASHEET on mapei.com



UltraCare Epoxy Off Gel

Special high-viscosity cleaner to remove epoxy residues.



| CHECK THE |
|--------------|
| TECHNICAL |
| DATASHEET |
| on mapei.com |



Thanks to its viscosity, it is ideal for application on walls.



PACKAGING 1 I tanks

APPLICATION

CONSUMPTION

UltraCare Grout Cleaner

to be treated

Ready to use concentrated cleaner, specific for both epoxy and cementitious grouts. With fully offset greenhouse gas emissions.

| APPLICATION | abrasive pad, suitable brush |
|-------------|--|
| CONSUMPTION | depending on the type of surface, the level of dirt and the size of the grouts to be cleaned |
| PACKAGING | 750 ml bottle with spray |

CERTIFICATIONS AND MARKINGS

70





CHECK THE TECHNICAL DATASHEET on mapei.com



UltraCare HD Cleaner

Concentrated high performing professional detergent to remove organic dirt and to undertake a deep clean of surfaces.

It is also effective as wax remover for water-based and metal-flake waxes. With fully offset greenhouse gas emissions.

APPLICATION rotary-head cleaner or abrasive pad

depending on dilution, the degree of dirt and the surface CONSUMPTION

to be treated

PACKAGING 1 and 5 litres tanks

CERTIFICATIONS AND MARKINGS





CHECK THE **TECHNICAL** DATASHEET on mapei.com



UltraCare Keranet

Acid-based concentrated cleaning product in liquid form to remove cementitious residues from porcelain, ceramic and all acid-resistant materials. Ideal for cleaning operations after completing laying work, for removing salt and limescale efflorescence and rust stains. With fully offset greenhouse gas emissions.

APPLICATION rotary-head cleaner or abrasive pad

CONSUMPTION depending on dilution, the degree of dirt and the surface to be treated

1 - 5 and 20 litres tanks PACKAGING

CERTIFICATIONS AND MARKINGS

PACKAGING





CHECK THE TECHNICAL DATASHEET on mapei.con



UltraCare Keranet Crystals

Concentrated powder acid cleaner to remove cementitious residues. Ideal for cleaning after installation and to remove salt and limescale efflorescence.

APPLICATION rotary-head cleaner or abrasive pad depending on the degree of dirt/residues and the surface CONSUMPTION to be treated



CHECK THE TECHNICAL DATASHEET on mapei.com





Back to the table of contents Back to the alphabetical index

1 and 5 litres tanks

UltraCare Keranet Easy

Ready to use acid spray cleaning product that also removes cementitious residues immediately after grouting.

Removes surface residues of cement, lime and efflorescence. Suitable for cleaning the back side of porcelain tiles.



| APPLICATION | damp cellulose sponge |
|-------------|--|
| CONSUMPTION | depending on the degree of dirt/residues and the surface to be treated |
| PACKAGING | 750 ml bottle with spray |





UltraCare Kerapoxy Cleaner

Ready to use special cleaning product to remove epoxy residues. With fully offset greenhouse gas emissions.

| APPLICATION | abrasive pad |
|-------------|---|
| CONSUMPTION | depending on dilution, the degree of dirt and the surface to be treated |

750 ml bottle with spray and 5 litres tanks

CERTIFICATIONS AND MARKINGS

PACKAGING





CHECK THE TECHNICAL DATASHEET on mapei.com



UltraCare Mould Remover

High penetration detergent with immediate effect to remove mould.



| APPLICATION | cloth |
|-------------|---|
| CONSUMPTION | depending on the absorbency and the surface finish of the substrate to be treated |
| PACKAGING | 750 ml bottle with spray |



Back to the table of contents

UltraCare Multicleaner

Concentrated cleaner with a very high yield for everyday cleaning and maintenance of surfaces. With fully offset greenhouse gas emissions.

| APPLICATION | noor clearier |
|-------------|---|
| CONSUMPTION | depending on dilution, the degree of dirt and the surface to be treated |

CERTIFICATIONS AND MARKINGS

PACKAGING



1 and 5 litres tanks



TECHNICAL DATASHEET on mapei.com



UltraCare Multicleaner Spray

Ready-to-use professional cleaner.



APPLICATION dry cloth depending on the degree of dirt/residues and the surface CONSUMPTION to be treated

PACKAGING 750 ml bottle with spray



on mapei.com

UltraCare Rust Remover

Fast-acting, acid-free, thick consistency cleaner in aqueous solution, with slightly alkaline pH, for the removal of rust stains.



| APPLICATION | brush |
|-------------|--|
| CONSUMPTION | depending on the degree of dirt/residues and the surface to be treated |
| PACKAGING | 125 ml bottles |

CHECK THE **TECHNICAL** DATASHEET on mapei.com





Back to the alphabetical index

UltraCare Stain Remover

High performance professional cleaner in water solution with thick consistency and high extracting properties, for removing organic stains from Terracotta, natural and engineered stone and cementitious surfaces.



| APPLICATION | trowel |
|-------------|--|
| CONSUMPTION | depending on the degree of dirt/residues and the surface to be treated |
| PACKAGING | 0,5 l bucket |

CHECK THE TECHNICAL DATASHEET on mapei.com

2. PROTECTORS

APPLICATION

CONSUMPTION

PACKAGING

UltraCare Anti-Mould Protector

High performance, mould resistant water-based protective solution.




| CIOCIT | — CHECK |
|---|-------------------------|
| depending on the absorbency and the surface finish of the substrate to be treated | TECHN DATAS on ma |
| 750 ml bottle with spray | |





UltraCare Grout Protector

Water dispersion for protecting cementitious grouts and porcelain tiles.

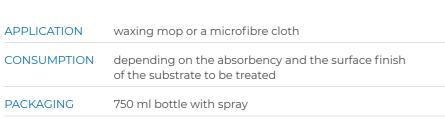

CERTIFICATIONS EC 1 AND MARKINGS



CHECK THE TECHNICAL DATASHEET on mapei.com



Back to the table of contents

UltraCare Grout Release

Product in water dispersion for protecting pre-grouting on pervious materials.

APPLICATION waxing mop or a microfibre cloth

CONSUMPTION depending on the absorbency and the surface finish of the substrate to be treated

PACKAGING 11 tanks

CERTIFICATIONS AND MARKINGS





CHECK THE TECHNICAL DATASHEET on mapei.com



UltraCare Intensifier S

Solvent-based blend of polymers with high penetration capacity, for a colour enhancing and protective effect.



APPLICATION brush, cloth or waxing mop

CONSUMPTION depending on the absorbency and the surface finish of the substrate to be treated

PACKAGING 1 I tanks





UltraCare Intensifier W

Water-based polymeric microemulsion with high penetration capacity and protecting and enhancing effect.

APPLICATION brush, cloth or waxing mop

CONSUMPTION depending on the absorbency and the surface finish of the substrate to be treated

1 I tanks

PACKAGING

CERTIFICATIONS AND MARKINGS EC 1



CHECK THE TECHNICAL DATASHEET on mapei.com





Back to the alphabetical index

UltraCare Rain Protector S

Solvent-based, protective and consolidating water-repellent treatment with very high contact angle, for temporary protection of flooring on terraces, balconies, horizontal surfaces exposed to the weather.



| APPLICATION | waxing mop |
|-------------|---|
| CONSUMPTION | depending on the absorbency and the surface finish of the substrate to be treated |
| PACKAGING | 1 I tanks |



UltraCare Rain Protector W

Consolidating and protective water-repellent treatment with high contact angle, solvent-free, for temporary protection of exterior flooring in contact with rainwater.



| PACKAGING | 11 tanks |
|-------------|---|
| CONSUMPTION | depending on the absorbency and the surface finish of the substrate to be treated |
| APPLICATION | waxing mop |





UltraCare Stain Protector S

76

Solvent-based, natural effect blend of polymers with protective and stain-resistant properties.



| APPLICATION | brush, cloth or waxing mop |
|-------------|---|
| CONSUMPTION | depending on the absorbency and the surface finish of the substrate to be treated |
| PACKAGING | lltanks |



UltraCare Stain Protector W

Water-based, natural effect polymer emulsion with protective and stain-resistant properties for matt surfaces.

| APPLICATION | brush, cloth or waxing mop |
|-------------|---|
| CONSUMPTION | depending on the absorbency and the surface finish of the substrate to be treated |

CERTIFICATIONS AND MARKINGS

PACKAGING



11 tanks



CHECK THE TECHNICAL DATASHEET on mapei.com



UltraCare Stain Protector W Plus

Water-based, natural effect polymer emulsion with protective and stain-resistant properties.

| APPLICATION brush, cloth or waxing m | юр |
|--------------------------------------|----|
|--------------------------------------|----|

CONSUMPTION depending on the absorbency and the surface finish of the substrate to be treated

PACKAGING 1 I tanks

CERTIFICATIONS AND MARKINGS





CHECK THE **TECHNICAL** DATASHEET on mapei.com



3. COMPLEMENTARY PRODUCTS

UltraCare Fuga Fresca

Polymeric paint to refresh the colour of the cementitious grout joints between tiles.

| APPLICATION | brush or from the bottle |
|-------------|---|
| CONSUMPTION | according to the size of the joints and tiles |
| COLOURS | 40 |
| PACKAGING | 1 kg drums and 160 g bottle |



| | | 回回的是中华 |
|--|--|--------|
| | | |



UltraCare Smooth Silicone

Smoothing product for finishing sealants during application. With fully offset greenhouse gas emissions.

| APPLICATION | suitable tools |
|-------------|--|
| CONSUMO | the type of sealant and the size of the joints |
| PACKAGING | 750 ml bottle with spray |

CERTIFICATIONS AND MARKINGS






CHECK THE TECHNICAL DATASHEET on mapei.com



79



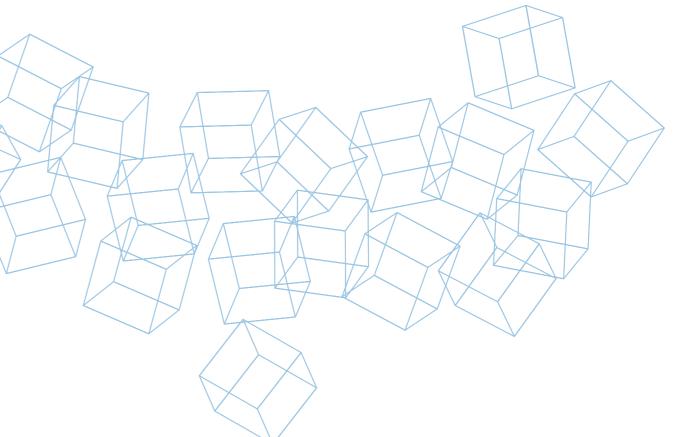



SYSTEMS FOR LAYING AND GROUTING ARCHITECTURAL STONE PAVING

Mapestone GR-ECO

Premixed mortar made of natural fibres and specific aggregates, for grouting stone architectural paving subject to foot and light vehicular traffic.




| CHECK THE |
|---------------------|
| TECHNICAL |
| DATASHEET |
| on manei com |

| 原作的发展 |
|--------------|
| |
| |
| |

CONSUMPTION depending on the width of joints and the size of stone elements COLOUR neutral PACKAGING 23 kg bags

Mapestone GR-ECO Fill

Pre-blended grouting mortar made from natural fibres, special aggregates and inorganic materials with a pozzolanic reaction, specifically designed for grouting decorative pavings made from butted blocks, bricks, porcelain tiles or natural stone, subject to light pedestrian and traffic loads.



| CHECK THE TECHNICAL |
|---------------------|
| DATASHEET |
| on mapei.com |



CONSUMPTION depending on the width of joints and the size of stone elements COLOUR neutral PACKAGING 23 kg bags

Mapestone GR7

Pre-blended grouting mortar made from natural fibres, special aggregates and inorganic materials with a pozzolanic reaction, for grouting joints in decorative stone paving subject to light pedestrian and traffic loads.



CHECK THE TECHNICAL

DATASHEET

| CONSUMPTION | depending on the width of joints and the size of stone elements |
|-------------|---|
| COLOUR | neutral |
| PACKAGING | 23 kg bags |



Back to the table of contents

Mapestone Joint

One-component, solvent-free, non-flammable polyurethane binder with a characteristic odour for creating elastic and pervious architectural road surfaces.

In compliance with UNI 11714-1:2018 standard

APPLICATION

- sealing grout lines between blocks, setts and pebbles used to create architectural road; surfaces for vehicle use installing and sealing paving for pedestrian and light vehicle use;
- installing and sealing paving slabs for pedestrian and light vehicle use.

| CONSUMPTION | with 1 kg of Mapestone Joint it is possible to seal 1 m ² |
|-------------|---|
| | of approx. 8-10 cm blocks |

PACKAGING 25 kg tanks, 200 l drums and 1000 kg IBC



TECHNICAL DATASHEET on mapei.com



Mapestone Joint Cleaner

Specific odourless cleaner for residues of Mapestone Joint and application tools. It can be used on any type of stone.



| CONSUMPTION | depending on the amount of residues to remove |
|-------------|---|
| COLOUR | transparent |
| PACKAGING | 5 and 25 litres tanks |





Mapestone PFS 2

Pre-blended mortar for grouting joints in architectonic stone flooring, with exceptional physical-chemical characteristics suitable for areas exposed to dry/damp cycles specified by exposure class XF4, with high compressive strength and good resistance to de-icing salts, freeze-thaw cycles and seawater.

In compliance with UNI 11714-1:2018 standard

| APPLICATION | Mapei rubber trowel or rake |
|-------------|---|
| CONSUMPTION | depending on the width of joints and the size of stone elements |
| COLOURS | neutral and Dark Grey |
| PACKAGING | 25 kg bags |



TECHNICAL DATASHEET on mapei.con





Back to the alphabetical index

Mapestone PFS2 Flex

Pre-blended, low-elastic modulus (25 GPa) mortar for grouting decorative stone paving subjected to heavy traffic in compliance with UNI 11714-1:2018. It meets the requirements of exposure classes XF4 and XS3 according to EN 206-1 for its high mechanical properties and resistance to de-icing salts, freeze-thaw cycles and sea spray.



| CHECK THE | |
|--------------|--|
| TECHNICAL | |
| DATASHEET | |
| on mapei.com | |

| 14%。 |
|------|

| CONSUMPTION | depending on the width of joints and the size of stone elements |
|-------------|---|
| COLOUR | neutral |
| PACKAGING | 25 kg bags |

Mapestone PFS 2 Visco

Pre-blended, low-viscosity mortar for grouting architectural slab and block-paved road surfaces, with exceptional physical-chemical characteristics suitable for areas exposed to dry/damp cycles specified by exposure class XF4, with high compressive strength and good resistance to de-icing salts, freeze-thaw cycles and seawater.

In compliance with UNI 11714-1:2018 standard

| APPLICATION | pour directly in joints using suitable containers |
|-------------|--|
| CONSUMPTION | depending on the thickness of the stone elements and the width and depth of the joints |
| COLOURS | neutral and Dark Grey |
| PACKAGING | 25 kg bags |
| | |



CHECK THE TECHNICAL DATASHEET on mapei.com



Mapestone PFS Calcix

Pre-blended, lime-based, cement-free mortar specific for grouting architectural stone paving subject to foot and light vehicle traffic, included those of historical interest, in class P4, P5, P6 and P7 according to UNI 11714-1:2018 standard. It features good mechanical strength and resistance to freezing conditions.



CHECK THE TECHNICAL

DATASHEET

on mapei.con

| CONSUMPTION | depending on the width of joints |
|-------------|--|
| COLOURS | light (Mapestone PFS Calcix) and dark grey (Mapestone PFS Tenebris) |
| PACKAGING | 25 kg bags |



Mapestone PFS PCC 2

Pre-blended, polymerer-modified mortar for grouting architectural stone paving with low modulus of elasticity, with exceptional physical-chemical characteristics suitable for areas exposed to dry/damp cycles specified by exposure class XF4, with high compressive strength and good resistance to de-icing salts, freeze-thaw cycles and seawater.

In compliance with UNI 11714-1:2018 standard

| CONSUMPTION | depending on the width of joints and the size of stone elements |
|-------------|---|
| COLOUR | neutral |
| PACKAGING | 25 kg bags |



TECHNICAL

DATASHEET

on mapei.com



Mapestone Scraper

Acid-based cleaner for architectural stone paving.

| APPLICATION | leave it to react for around 5-10 minutes and then scrape off the encrusted material with a spreader or abrasive sponge (medium-grain Scotch-Brite® pad) until there are no marks or stains. |
|-------------|--|
| CONSUMPTION | depending on the need |
| PACKAGING | 5 kg, 25 kg tanks and 12 x 1 kg boxes |
| | |



CHECK THE TECHNICAL DATASHEET on mapei.com



Mapestone TFB 60

Pre-blended mortar for installation screeds of architectural stone paving with exceptional physical-chemical characteristics suitable for areas exposed to dry/damp cycles specified by exposure class XF4, with high compressive strength and good resistance to de-icing salts, freeze-thaw cycles and seawater.

20 kg/m² per cm of thickness

In compliance with UNI 11714-1:2018 standard

CONSUMPTION

PACKAGING



CHECK THE TECHNICAL DATASHEET on mapei.com





Back to the table of contents

Back to the alphabetical index

25 kg bags

Mapestone TFB Calcix

Pre-blended, lime-based, cement-free bedding mortar specific for architectural stone paving subject to foot and light vehicle traffic, included those of historical interest, in class P4, P5, P6 and P7 according to UNI 11714-1:2018 standard. It features good mechanical strength and resistance to freezing conditions.



CHECK THE TECHNICAL DATASHEET on mapei.com



CONSUMPTION 20 kg/m² per cm

PACKAGING 25 kg bags

Mapestone TFB Cube

Pre-blended mortar for installation screeds of architectural stone paving in exposure class XF4 and XS3 with high compressive strength and resistance to de-icing salts, freeze-thaw cycles and seawater.

In compliance with UNI 11714-1:2018 standard



CHECK THE TECHNICAL DATASHEET on mapei.com




CONSUMPTION 20 kg/m² per cm of thickness

PACKAGING 25 kg bags

MAPE



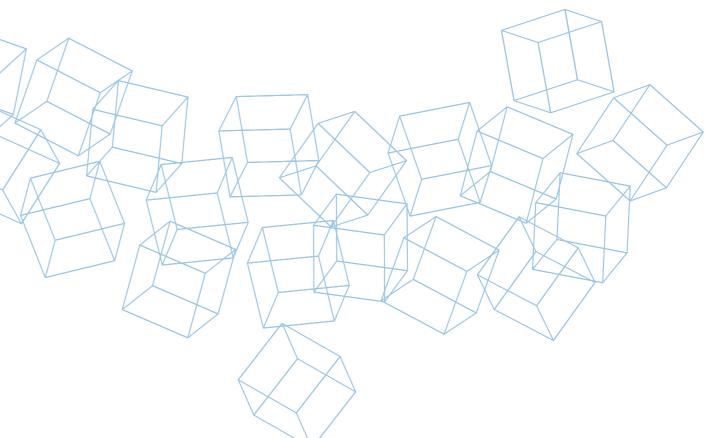



ELASTIC SEALANTS AND ADHESIVES

1. ACETIC SILICONE SEALANTS

Mapesil 300°C

Acetic silicone sealant for high temperatures.

APPLICATION extrusion gun (Mapei Gun 310, Mapei Gun 310 PRO) CONSUMPTION 3.0 meters per 300 ml cartridge (10x10 mm section) COLOUR black

PACKAGING 300 ml cartridges

CERTIFICATIONS AND MARKINGS





TECHNICAL DATASHEET on mapei.com



Mapesil AC

Pure, mould-resistant, acetic silicone sealant with **BioBlock®** technology for movements up to 25%.

extrusion gun (Mapei Gun 310, Mapei Gun 310 PRO) **APPLICATION**

COLOURS 40 colours + transparent

PACKAGING 310 ml cartridges

CERTIFICATIONS AND MARKINGS

CONSUMPTION









3.1 meters per 310 ml cartridge (10x10 mm section)



CHECK THE TECHNICAL DATASHEET on mapei.com



Mapesil AC ECO

Pure acetic, mould-resistant, silicone sealant for movements up to 25%. Produced without the use of fossil resources, with recycled plastic cartridge.

APPLICATION extrusion gun (Mapei Gun 310, Mapei Gun 310 PRO) CONSUMPTION 3.1 meters per 310 ml cartridge (10x10 mm section) COLOURS 11 colours + transparent PACKAGING 310 ml cartridges

CERTIFICATIONS

AND MARKINGS

90









CHECK THE TECHNICAL DATASHEET on mapei.com



Mapesil U

Universal mould-resistant acetic silicone sealant for movements up to 20%

APPLICATION extrusion gun (Mapei Gun 310, Mapei Gun 310 PRO) CONSUMPTION 2.8 meters per 280 ml cartridge (10x10 mm section) COLOURS transparent, white PACKAGING 280 ml cartridges

CERTIFICATIONS AND MARKINGS





CHECK THE TECHNICAL DATASHEET on mapei.com



Mapesil Z Plus

Universal mould-resistant acetic silicone sealant for sinks and sanitary ware. For movements up to 20%.

| APPLICATION | extrusion gun (Mapei Gun 310, Mapei Gun 310 PRO) |
|-------------|--|
| CONSUMPTION | 2.8 meters per 280 ml cartridge (10x10 mm section) |
| COLOURS | transparent, white, grey 113 |
| PACKAGING | 280 ml cartridges |
| | |

CERTIFICATIONS AND MARKINGS







TECHNICAL DATASHEET on mapei.cor



2. POLYURETHANE SEALANTS AND ADHESIVES

Mapeflex E-PU21 SL

Two-component, castable epoxy-polyurethane sealant with high modulus of elasticity and high mechanical and chemical resistance.

| APPLICATION | pouring |
|-------------|----------------------------------|
| CONSUMPTION | 0.14 kg/meter (10x10 mm section) |
| COLOURS | grey 113, neutral and colourless |
| PACKAGING | 5 kg (A+B) |



CHECK THE TECHNICAL DATASHEET on mapei.com





Mapeflex E-PU 30 NS

Two-component, thixotropic epoxy-polyurethane sealant with high modulus of elasticity and high mechanical and chemical resistance.



| CHECK THE | | |
|--------------|--|--|
| TECHNICAL | | |
| DATASHEET | | |
| on manei.com | | |



| APPLICATION | trowel |
|-------------|----------------------------------|
| CONSUMPTION | 0.14 kg/meter (10x10 mm section) |
| COLOURS | grey 113, neutral and colourless |
| PACKAGING | 5 kg (A+B) |

Mapeflex PU35 CR

Polyurethane sealant with high modulus of elasticity, resistant to chemicals, suitable for clean rooms and in environments with food and beverages. Also suitable for drinking water.

| APPLICATION | extrusion gun (Mapei Gun 600 PRO, |
|-------------|-----------------------------------|
| | Mapei Gun 600 PRO Electric) |

CONSUMPTION 6.0 meters per 600 ml sausage

COLOUR grey 113

PACKAGING 600 ml sausage

CERTIFICATIONS AND MARKINGS













TECHNICAL DATASHEET on mapei.com



Mapeflex PU 40

Paintable polyurethane sealant with low modulus of elasticity, for movements up to 25%.

APPLICATION extrusion gun (Mapei Gun 310, Mapei Gun 310 PRO, Mapei Gun 600 PRO, Mapei Gun 600 PRO Electric)

CONSUMPTION • 3.0 meters per 300 ml cartridge

• 6 meters per 600 ml sausage (10x10 mm section)

COLOURS white, grey 111, grey 112

PACKAGING 300 ml cartridge, 600 ml sausage

CERTIFICATIONS AND MARKINGS

92





TECHNICAL DATASHEET on mapei.com



Mapeflex PU 45 FT

Rapid-hardening paintable polyurethane sealant and adhesive with a high modulus of elasticity for movements up to 20%.

extrusion gun (Mapei Gun 310, Mapei Gun 310 PRO, APPLICATION Mapei Gun 600 PRO, Mapei Gun 600 PRO Electric) CONSUMPTION 3.0 metres per 300 ml cartridge; 6.0 metres per 600 ml

COLOURS white, 111 grey, 113 grey, brown, beige, black

sausage (10x10 mm section)

PACKAGING 300 ml cartridge, 600 ml sausage

CERTIFICATIONS AND MARKINGS







TECHNICAL DATASHEET on mapei.com



Mapeflex PU50 SL

Paintable, castable polyurethane sealant with low modulus of elasticity, for movements up to 25%.

| APPLICATION | pouring, peristaltic pump (Mapeflex SPP) |
|-------------|--|
| CONSUMPTION | 6.0 meters per 600 ml sausage (10x10 mm section) |
| COLOUR | grey 111 |
| PACKAGING | 600 ml sausage and 12 kg drums |

CERTIFICATIONS AND MARKINGS



TECHNICAL DATASHEET on mapei.con



Mapeflex PU 65

Two-component, castable polyurethane sealant for sealing joints in roads up to surface level, mixed with **Quartz 0.5** sand at a ratio of up to 1:1 by weight. Setting and hardening may be accelerated by adding a specific liquid accelerator Mapeflex PU 65 Catalyst.



| APPLICATION | pouring |
|-------------|-----------------------------------|
| CONSUMPTION | 0.12 kg/meter (10x10 mm section). |
| COLOUR | black |
| PACKAGING | 10 kg drums (A+B) |







Mapeflex PU 70 NS

Two-component, thixotropic polyurethane sealant with low modulus of elasticity, resistant to hydrocarbons, for movements up to 25%.



CHECK THE TECHNICAL DATASHEET on mapei.com



| APPLICATION | spreader |
|-------------|----------------------------------|
| CONSUMPTION | 0.15 kg/meter (10x10 mm section) |
| COLOUR | black |
| PACKAGING | 5 kg drums (A+B) |

Mapeflex PU 70 SL

Two-component castable polyurethane sealant with low modulus of elasticity, resistant to hydrocarbons, for movements up to 25%.

| APPLICATION | pouring, peristaltic pump (Mapeflex SPP) |
|--------------------------------|--|
| CONSUMPTION | 0.15 kg/meter (10x10 mm section) |
| COLOUR | grey, black |
| PACKAGING | 10 kg drums (A+B) |
| CERTIFICATIONS AND MARKINGS | BS 5212 Fed. Spec. SS-S-200-E |



CHECK THE TECHNICAL DATASHEET on mapei.com



Mapeflex Xpress 80/400

Two-component, cold-applied, ultra-rapid setting polyurea sealant for horizontal joints with a limited amount of movement and subject to intense mechanical stresses.

Sandable after 30 minutes, passable after 3 hours.



| APPLICATION | extrusion gun (Mapei Gun 600 2K) |
|-------------|---|
| COLOUR | grey, black |
| PACKAGING | 600 ml cartridge, 20 litres bucket (comp. A), 20 litres bucket (comp. B) |



Mapeflex Xpress Mixers

Additional mixers for 600 ml bi-axial cartridges of **Mapeflex Xpress 80/400**. The mixer is fitted with a ring for tightening it to the top of the cartridge.



CHECK THE TECHNICAL DATASHEET on mapei.com



and Mapeflex Asphalt Crack Repair

USABLE WITH

PACKAGING

sachet with 12 mixers + 3 tightening rings

600 ml cartridge of Mapeflex Xpress 80/400

3. NEUTRAL SILICONE SEALANTS

Mapesil BM

Neutral silicone sealant for metal-work for movements up to 25%.

| APPLICATION | extrusion gun (Mapei Gun 310, Mapei Gun 310 PRO) |
|-------------|--|
| CONSUMPTION | 3.1 meters per 310 ml cartridge (10x10 mm section) |
| COLOURS | transparent, grey, copper and dark brown |
| PACKAGING | 310 ml cartridges |
| | |





CHECK THE TECHNICAL DATASHEET on mapei.com



Mapesil FR

CERTIFICATIONS

AND MARKINGS

Neutral silicone sealant for fire-resistant joints for movements up to 25%.

| APPLICATION | extrusion gun (Mapei Gun 600 PRO , Mapei Gun 600 PRO Electric) |
|-------------|---|
| CONSUMPTION | 6 meters per 600 ml cartridge (10x10 mm section) |
| COLOURS | grey |
| PACKAGING | 600 ml cartridges |
| | |

CERTIFICATIONS AND MARKINGS



CHECK THE TECHNICAL DATASHEET on mapei.com





Back to the alphabetical index

Mapesil GP

Neutral mould-resistant silicone sealant for building work for movements up to 20%.

| APPLICATION | extrusion gun (Mapei Gun 310, Mapei Gun 310 PRO) |
|-------------|---|
| CONSUMPTION | 2.8 meters per 280 ml cartridge (10x10 mm section) |
| COLOURS | transparent, white, grey-white, grey, copper and dark brown |
| PACKAGING | 280 ml cartridges |

CERTIFICATIONS AND MARKINGS





CHECK THE TECHNICAL DATASHEET on mapei.com



Mapesil LM

Neutral silicone mould-resistant sealant for stone material with **BioBlock**® technology for movements up to 25%.

| APPLICATION | extrusion gun (Mapei Gun 310, Mapei Gun 310 PRO) |
|-------------|--|
| CONSUMPTION | 3.1 meters per 310 ml cartridge (10x10 mm section) |

COLOURS 9 colours + transparent

PACKAGING 310 ml cartridges

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.com



Mapesil Stone Matt

Neutral, silicone, mould-resistant, matt sealant for stone material with for movements up to 25%.

| APPLICATION extrusion gun (Mapei Gun 310, Mapei Gun 310 PRO) | |
|--|--|
| CONSUMPTION 3 meters per 300 ml cartridge (10x10 mm section) | |
| COLOURS 8 colours | |
| PACKAGING 300 ml cartridges | |

CERTIFICATIONS AND MARKINGS

96





CHECK THE TECHNICAL DATASHEET on mapei.com



Mapesil Tile Matt

Neutral, silicone, mould-resistant, matt sealant for ceramics with for movements up to 25%.

APPLICATION extrusion gun (Mapei Gun 310, Mapei Gun 310 PRO)

3 meters per 300 ml cartridge (10x10 mm section)


COLOURS 10 colours + transparent

PACKAGING 300 ml cartridges

CERTIFICATIONS AND MARKINGS

CONSUMPTION





TECHNICAL DATASHEET on mapei.com



4. HYBRID SEALANTS AND ADHESIVES

Mapeflex MS 40

Paintable hybrid sealant with low modulus of elasticity also for wet substrates, for movements up to 25%.

APPLICATION extrusion gun (Mapei Gun 600 PRO, Mapei Gun 600 PRO Electric)

CONSUMPTION 6 meters per 600 ml sausage (10x10 mm section)

COLOURS white, grey 113

PACKAGING 600 ml sausage

CERTIFICATIONS AND MARKINGS







TECHNICAL DATASHEET on mapei.com



Mapeflex MS 45

Paintable hybrid sealant and adhesive with high modulus of elasticity also for wet substrates, for movements up to 20%.

APPLICATION extrusion gun (Mapei Gun 310, Mapei Gun 310 PRO, Mapei Gun 600 PRO, Mapei Gun 600 PRO Electric)

CONSUMPTION 3.0 meters per 300 ml cartridge (10x10 mm section)

COLOURS white, 113 grey, 111 grey, brown, black

PACKAGING 300 ml cartridge, 600 ml sausage

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.com





Mapeflex MS 55

Hybrid sealant and adhesive with high modulus of elasticity also for wet substrates, for movements up to 20%. Also suitable for drinking water. Paintable after polymerization.

APPLICATION extrusion gun (Mapei Gun 310, Mapei Gun 310 PRO)

CONSUMPTION 2,9 meters per 290 ml cartridge (10x10 mm section)

COLOURS white, 113 grey

PACKAGING 290 ml cartridge

CERTIFICATIONS AND MARKINGS









CHECK THE TECHNICAL DATASHEET on mapei.com



Mapeflex MS Crystal

Crystal clear, flexible, hybrid sealant and adhesive with high modulus of elasticity, also for wet substrates.

APPLICATION extrusion gun (Mapei Gun 310, Mapei Gun 310 PRO)

CONSUMPTION 3.0 meters per 300 ml cartridge (10x10 mm section)


COLOUR crystal clear

PACKAGING 300 ml cartridges.

CERTIFICATIONS AND MARKINGS







TECHNICAL

DATASHEET
on mapei.com



5. OTHER SEALANTS

Mapeflex AC3

Paintable acrylic sealant with a smooth finish for movements up to 7,5%.

| APPLICATION | extrusion gun (Mapei Gun 310, Mapei Gun 310 PRO) |
|-------------|--|
| CONSUMPTION | 3.1 meters per 310 ml cartridge (10x10 mm section) |
| COLOURS | white and grey |
| PACKAGING | 310 ml cartridges |
| | |

CERTIFICATIONS AND MARKINGS

98







CHECK THE TECHNICAL DATASHEET on mapei.com



Mapeflex AC4

Paintable acrylic sealant with a smooth finish for movements up to 12,5%.

APPLICATION extrusion gun (Mapei Gun 310, Mapei Gun 310 PRO, Mapei Gun 600 PRO, Mapei Gun 600 PRO Electric)

CONSUMPTION 3.1 meters per 310 ml cartridge (10x10 mm section)

COLOURS white and grey

PACKAGING 310 ml cartridge and 550 ml sausage and 25 kg drum

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.com



Mapeflex AC-P

Paintable acrylic sealant with a render finish for movements up to 12,5%.

APPLICATION extrusion gun (Mapei Gun 310, Mapei Gun 310 PRO),

CONSUMPTION 3.1 meters per 310 ml cartridge (10x10 mm section)

COLOUR white

PACKAGING 310 ml cartridges

CERTIFICATIONS AND MARKINGS







TECHNICAL
DATASHEET
on mapei.con



Mapeflex Blackfill

Bitumen sealant for sealing bituminous membrane.

APPLICATION extrusion gun (Mapei Gun 310, Mapei Gun 310 PRO), spreader

CONSUMPTION 3.0 meters per 300 ml cartridge (10x10 mm section)

COLOUR black

PACKAGING 300 ml cartridges




CHECK THE TECHNICAL DATASHEET on mapei.com





Mapeflex Firestop 1200°C

Refractory grout for sealing for rigid seals in ovens and barbeques in direct contact with fire.

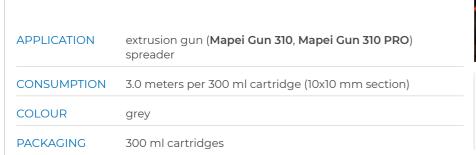







Mapeflex FR

Paintable, elasto-plastic acrylic sealant for fire-break joints, for movements up to 12.5% of the width of the joint. Reaction to fire certified up to El 240.

| APPLICATION | extrusion gun (Mapei Gun 600 PRO , Mapei Gun 600 Electric) |
|-------------|---|
| COLOUR | grey |
| PACKAGING | 550 ml cartridges |











CHECK THE TECHNICAL DATASHEET on mapei.com



Ultrabond MS Rapid

Rapid-setting, deformable, hybrid assembly adhesive for interior and exterior use, with a high initial sucker effect.

| APPLICATION | extrusion gun (Mapei Gun 310, Mapei Gun 310 PRO) |
|-------------|--|
| CONSUMPTION | 5 meters of kerb, triangular section |
| COLOUR | white |
| PACKAGING | 290 ml cartridges |
| | |

CERTIFICATIONS AND MARKINGS

100







CHECK THE TECHNICAL DATASHEET on mapei.com



Ultrabond PU Strong

Ultra-rapid assembly polyurethane adhesive for structural bonds of construction details for interior and exterior use.

| CONSUMPTION 15 meters of bead, triangular section COLOUR beige | | |
|---|-------------|--|
| CONSUMPTION 15 meters of bead, triangular section | PACKAGING | 300 ml cartridges |
| APPLICATION extrusion gun (Mapei Gun 310, Mapei Gun 310 PRO) CONSUMPTION 15 meters of bead, triangular section | COLOUR | beige |
| APPLICATION extrusion gun (Mapei Gun 310, Mapei Gun 310 PRO) | CONSUMPTION | 15 meters of bead, triangular section |
| | APPLICATION | extrusion gun (Mapei Gun 310, Mapei Gun 310 PRO) |

CERTIFICATIONS AND MARKINGS



TECHNICAL

DATASHEET

on mapei.com



Ultrabond Super Grip

Deformable, acrylic assembly adhesive for interior and exterior use, with a high initial sucker effect.

| APPLICATION | extrusion gun (Mapei Gun 310, Mapei Gun 310 PRO) |
|--------------------------------|--|
| CONSUMPTION | 15 meters of bead, triangular section |
| COLOUR | white |
| PACKAGING | 310 ml cartridges |
| CERTIFICATIONS AND MARKINGS | ECT' |





6. ADHESIVES FOR PVC

Adesilex PVC

Adhesive for bonding PVC pipes carrying fluids at low pressure.

| APPLICATION | brush |
|----------------|-----------------------|
| CONSUMPTION | depending on the need |
| COLOUR | transparent |
| PACKAGING | 125 g tube |
| CERTIFICATIONS | |

AND MARKINGS





CHECK THE TECHNICAL DATASHEET on mapei.com





Adesilex PVC HP

Adhesive for bonding PVC pipes carrying fluids at low and high pressure.

| APPLICATION | brush |
|--------------------------------|-----------------------|
| CONSUMPTION | depending on the need |
| COLOUR | red |
| PACKAGING | 125 g tube |
| CERTIFICATIONS AND MARKINGS | (EN 14814) (EN 14680) |



CHECK THE TECHNICAL DATASHEET on mapei.com



7. ACCESSORIES AND PRIMERS FOR SEALANTS

Mapefoam

Closed-cell, extruded polyethylene foam cord used to gauge the correct size of joints to be sealed with **Mapei** sealants.

Supplied in rolls in various lengths according to the diameter of the foam.





CHECK THE TECHNICAL DATASHEET on mapei.com



Mapei Gun 310

Pro-grade manual extrusion gun for 280, 300 and 310 ml cartridges of sealants and chemical anchors.

Ø 40 mm boxes 270 m

| SIZE | cartridges with max Ø 51 mm, length 218 mm |
|----------------|--|
| USABLE WITH | Mapesil (all), Mapeflex (one-component), Ultrabond (one-component), Mapefix (all formats with 300 ml cartridges) |
| WEIGHT | 920 g |
| EXTRUSION RATE | 18:1 |
| PUSHER TRAVEL | 4.5 mm each pull of trigger. |



Mapei Gun 310 PRO

Pro-grade manual tube extrusion gun for 280, 300 and 310 ml cartridges of sealants and chemical anchors.

| SIZE | cartridges with max Ø 51 mm, length 218 mm |
|----------------|--|
| USABLE WITH | Mapesil (all), Mapeflex (one-component), Ultrabond (one-component), Mapefix (all formats with 300 ml cartridges) |
| WEIGHT | 830 g |
| EXTRUSION RATE | 18:1 |
| PUSHER TRAVEL | 4.5 mm each pull of trigger |



Mapei Gun 420 2K

Pro-grade manual extrusion gun for co-axial cartridges up to 420 ml of chemical anchor.





Mapei Gun 585 2K

Pro-grade manual extrusion gun for 385, and 585 ml bi-axial **Mapefix** cartridges.

| SIZE | bi-axial cartridges with max Ø 54 +30 mm, length 247 mm |
|----------------|--|
| USABLE WITH | Mapefix EP 100, Mapefix EP 50 |
| WEIGHT | 1350 g |
| EXTRUSION RATE | 24:1 |
| PUSHER TRAVEL | 3 mm each pull of trigger |
| | |



MAPE

Mapei Gun 585 Air

Pro-grade pneumatic extrusion gun for bi-axial 385 and 585 ml Mapefix cartridges with 3:1 mixing ratio.



| USABLE WITH | Mapefix EP 100, Mapefix EP 50 |
|----------------|-------------------------------|
| WEIGHT | 3000 g |
| MAXIMUM THRUST | 4.0 kN |
| EQUIPMENT | spare battery 18V, 2Ah |

Mapei Gun 585 Electric

Pro-grade power extrusion gun for bi-axial 385 and 585 ml Mapefix cartridges with 3:1 mixing ratio.




| USABLE WITH | Mapefix EP 100, Mapefix EP 50 |
|----------------|---|
| WEIGHT | 3300 g |
| MAXIMUM THRUST | 2.8 kN |
| BATTERY | 18V, 2Ah, fully recharged in 60 minutes |
| EQUIPMENT | spare battery 18V, 2Ah |

Mapei Gun 600 2K

Pro-grade manual extrusion gun for bi-axial 600 ml cartridges with mixing ratio 1:1 by volume.





Mapei Gun 600 PRO

Pro-grade manual tube extrusion gun for 550 and 600 ml sausages.

| SIZE | cartridges with max Ø 51 mm, length 335 mm |
|----------------|--|
| USABLE WITH | Mapeflex and Mapesil (all formats with max. 600 ml sausages) |
| WEIGHT | 1170 g |
| EXTRUSION RATE | 18:1 |
| PUSHER TRAVEL | 4.5 mm each pull of trigger |



Mapei Gun 600 PRO Electric

Pro-grade power extrusion gun for max. 600 ml Mapefix and **Mapesil** sausages.



| BATTERY | 110.8V, 5Ah, fully recharged in 30 minutes |
|----------------|--|
| USABLE WITH | sausages up to 600 ml |
| WEIGHT | 1900 g |
| MAXIMUM THRUST | 2.5 kN |
| EQUIPMENT | spare battery 10.8V, 1.5Ah |

Mapei Gun 825 2K

Pro-grade power extrusion gun for max. 600 ml Mapefix and **Mapesil** sausages.



| SIZE | bi-axial cartridges with max Ø 78 +28 mm, length 216 mm |
|----------------|--|
| USABLE WITH | Mapefix VE SF 825 |
| WEIGHT | 1400 g |
| EXTRUSION RATE | 24:1 |
| PUSHER TRAVEL | 3 mm each pull of trigger |



Back to the alphabetical index

Back to the table of contents 104

Primer A

Polyurethane solvent-free primer for absorbent substrate to promote adhesion of **Mapeflex** one-component polyurethane sealants on all types of porous absorbent building substrates such as concrete, mortar, wood and brick.



Primer EP

APPLICATION

CONSUMPTION

PACKAGING

Two-component epoxy primer in solvent for epoxy-polyurethane sealants.

5-10 g/m (for a 1 cm deep joints)

250 g and 2 kg bottle



CHECK THE TECHNICAL DATASHEET on mapei.com



Primer FD

APPLICATION

CONSUMPTION

COLOUR

106

PACKAGING

One-component primer for silicone and hybrid sealants.

roller, brush

transparent

10 kg can (A+B)

5-10 g/m (for a 1 cm deep joint)



| APPLICATION | brush |
|-------------|----------------------------------|
| CONSUMPTION | 5÷10 g/m (for a 1 cm deep joint) |
| COLOURS | transparent and straw |
| PACKAGING | 200 g and 900 g bottle |
| | |



Primer M

APPLICATION

COLOUR

PACKAGING

CONSUMPTION

brush

brown

One-component, solvent-free primer for polyurethane sealants, for use absorbent and compact surfaces.



CHECK THE TECHNICAL DATASHEET on mapei.com



Primer P

APPLICATION

CONSUMPTION

COLOUR

YELD

COLOUR

PACKAGING

PACKAGING

One-component primer for sealants applied on plastic materials.

5÷10 g/m (for a 1 cm deep joint)

5÷10 g/m (for a 1 cm deep joint)

200 g bottles, 2 kg metal can



| on mapei.com | TECHNICAL DATASHEET | CHECK THE | | TECHNICAL DATASHEET |
|--------------|----------------------|-----------|---------------------|---------------------|
| | on mapei.co r | DATASHEET | TECHNICAL DATASHEET | |



8. POLYURETHANE FOAMS

MapePUR All in One Foam

yellow

750 ml spray can

brush

transparent

150 g bottles

Multi-functional and multi-purpose, self-expanding polyurethane foam for filling, insulating and soundproofing.

Thanks to the special spray nozzle, it is available for manual use or for use with the specific gun MapePUR Gun Standard or MapePUR Gun special.

70 meter (kerb with diameter of 30 mm),

10-12 m² insulating panels



| CHECK THE |
|--------------|
| TECHNICAL |
| DATASHEET |
| on mapei.com |






MapePUR Cleaner

Solvent-based cleaning solution for removing traces of wet polyurethane foam from clothes and tools.

Spray on the surface to be cleaned or screw to a polyurethane foam gun.



TECHNICAL DATASHEET on mapei.com



COLOUR transparent

PACKAGING 500 ml spray can

MapePUR Fire Foam M

Expanding polyurethane foam adhesive for filling, insulating and soundproofing. Certified fire resistant up to El 240. Available for manual application.



CHECK THE **TECHNICAL** DATASHEET on mapei.com



COLOUR pink

PACKAGING 750 ml spray can

MapePUR Multi Adhesive Foam G

Multi-purpose, low-expanding polyurethane foam adhesive for bonding construction elements, also made of different materials, for both interiors and exteriors.

Available in gun version for use with the specific gun MapePUR Gun Standard o MapePUR Gun Special.



| YELD | 70 meter (kerb with diameter of 30 mm), |
|------|---|
| | 10-12 m² insulating panels |
| | |

COLOUR yellow

108

PACKAGING 750 ml spray can



CHECK THE TECHNICAL DATASHEET on mapei.com



MapePUR Roof Foam G

Expanding polyurethane foam adhesive for bonding, filling, soundproofing and insulating. Available in gun version MapePUR Gun Standard o MapePUR Gun Special.



TECHNICAL DATASHEET on mapei.con



COLOUR

PACKAGING

MapePUR Roof Foam M

Expanding polyurethane foam adhesive for bonding, filling, soundproofing and insulating. For manual application.

750 ml spray can



DATASHEET on mapei.com



COLOUR grey

YELD

COLOUR

PACKAGING

PACKAGING 750 ml spray can

MapePUR Thermo Fill G

Polyurethane foams for filling. For gun application.



CHECK THE DATASHEET on mapei.com







Back to the table of contents Back to the alphabetical index

up to 40 l

750 ml spray can

beige

MapePUR Thermo Fill M

Polyurethane foams for filling. For manual application.



| CHECK THE |
|---------------------|
| DATASHEET |
| on mapei.com |
| |

| CHECK THE TECHNICAL DATASHEET on mapei.com |
|---|
| |

YELD up to 40 l COLOUR

MapePUR Thermo Stick G

PACKAGING

Polyurethane foams for bonding. For gun application.

750 ml spray can



| YELD | up to 40 l |
|-----------|------------------|
| COLOUR | grey |
| PACKAGING | 750 ml spray can |
| | |





MapePUR Thermo Stick M

Polyurethane foams for bonding. For manual application.



CHECK THE

TECHNICAL

DATASHEET

on mapei.com

| YELD | up to 40 l |
|-----------|------------------|
| COLOUR | grey |
| PACKAGING | 750 ml spray can |



Back to the table of contents

MapePUR Universal Foam G

Expanding multi-purpose polyurethane foam for filling, insulating and soundproofing. For gun application using the special tool MapePUR Gun Standard or MapePUR Gun Special.



TECHNICAL DATASHEET on mapei.com



COLOUR yellow

PACKAGING 750 ml spray can

MapePUR Universal Foam M

Expanding multi-purpose polyurethane foam for filling, insulating and soundproofing. For manual application.



CHECK THE **TECHNICAL** DATASHEET on mapei.con



COLOUR yellow

PACKAGING 750 ml spray can

9. ACCESSORIES FOR FOAMS

MapePUR Dispenser M

Spare nozzle for **MapePUR** type "M".



USABLE WITH MapePUR Fire Foam M,

MapePUR Roof Foam M, MapePUR Thermo Fill M, MapePUR Thermo Stick M, MapePUR Universal Foam M

PACKAGING 12 pcs sachet

Back to the alphabetical index

110

111

MapePUR Easy Spray

Ergonomic grip for polyurethane foam cans (manual application type).



| | USABLE WITH | MapePUR Fire Foam M, MapePUR Roof Foam M, MapePUR Thermo Fill M, MapePUR Thermo Stick M, MapePUR Universal Foam M |
|--|-------------|---|
| | WEIGHT | 100 g |
| | | |

MapePUR Gun Special

PACKAGING

Professional Teflon-coated extrusion gun for **MapePUR** type "G" (spray can be used with guns).

5 pcs boxes



| USABLE WITH | MapePUR "G" version |
|----------------|------------------------|
| WEIGHT | 655 g |
| NOZZLE | Ø 2 mm |
| LENGTH OF TUBE | 200 mm |
| PACKAGING | box containing 1 piece |


MapePUR Gun Standard


Gun for **MapePUR** "G" version (spray can be used with guns).



| USABLE WITH | MapePUR "G" version |
|----------------|------------------------|
| WEIGHT | 440 g |
| NOZZLE | Ø 2 mm |
| LENGTH OF TUBE | 145 mm |
| PACKAGING | box containing 1 piece |
| | |



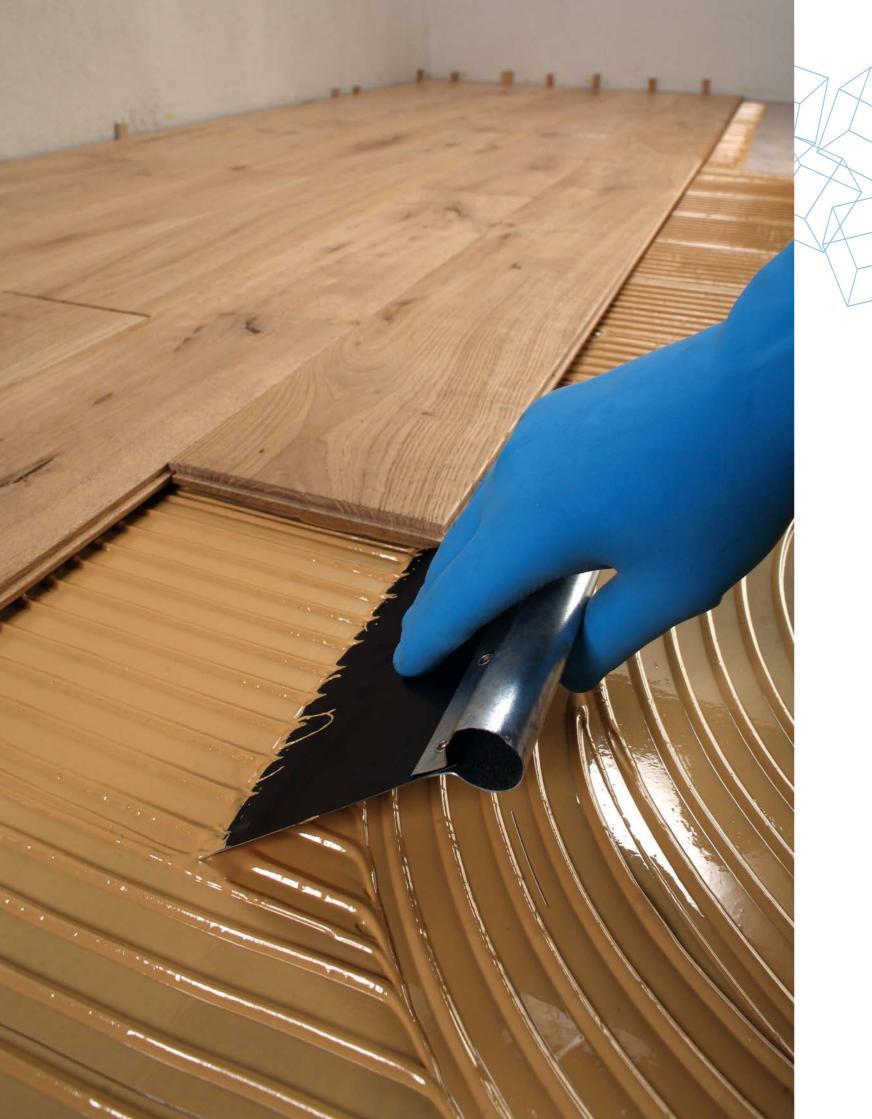

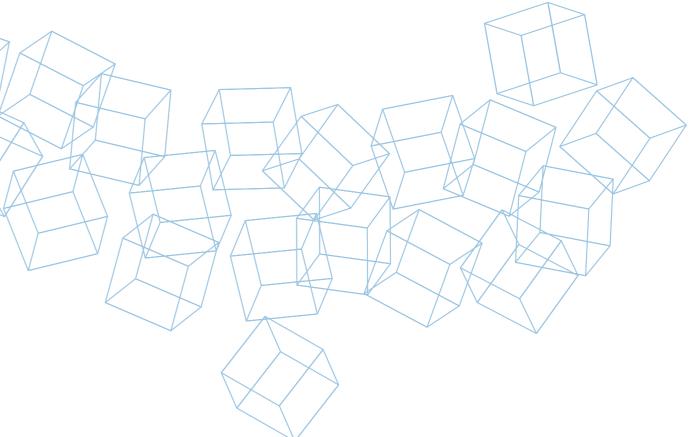



ADHESIVES
AND FINISHING
PRODUCTS FOR
WOODEN FLOORS

1. ADHESIVES FOR WOODEN AND LAMINATE FLOORS

Adesilex LC/R

Quick-setting, solvent-free adhesive in water dispersion for bonding wooden floors. Adesilex LC/R is suitable for bonding on cementitious screeds made from Mapecem, Mapecem Pronto, Topcem or **Topcem Pronto**, wooden substrates, chipboard, masonite panels and heated floors.

| | APPLICATION | n. 2 or 4 notched trowel for wood |
|--|-------------|-----------------------------------|
| | CONSUMPTION | 0.8-1.0 kg/m ² |
| | COLOUR | beige |

PACKAGING 15 kg drums

CERTIFICATIONS AND MARKINGS



TECHNICAL DATASHEET on mapei.com



Adesivil D3

Solvent-free, water-resistant vinyl adhesive for floating floors in pre-finishes wood or rigid, melamine and laminated amino-plastic.



CHECK THE **TECHNICAL** DATASHEET on mapei.com



APPLICATION by extrusion from the nozzle on the bottle 0.025 kg/m; 0.1-0.2 kg/m² CONSUMPTION COLOUR white

0.5 kg bottles

Lignobond

PACKAGING

116

Two-component epoxy-polyurethane adhesive for installing wood flooring Suitable for laying any size and type of wood on all substrates. Also suitable for heating screeds.



| APPLICATION | n. 2 or 4 notched trowel for wood |
|-------------|---|
| CONSUMPTION | 800-1000 g/m ² |
| COLOUR | comp. A: brown or beige; comp. B: whitish |
| PACKAGING | 10 and 5 kg drums (A+B) |



Ultrabond Eco 575

Solvent-free adhesive based on synthetic polymers in water dispersion with strong, with very low emission of volatile organic compounds (VOC) for bonding skirtings.

| APPLICATION | extrusion gun |
|-------------|-------------------|
| CONSUMPTION | 325 ml every 12 m |
| COLOUR | beige |
| PACKAGING | 310 ml cartridges |

CERTIFICATIONS AND MARKINGS

AND MARKINGS





TECHNICAL DATASHEET on mapei.com



Ultrabond Eco P909 2K

Two-component, solvent-free, polyurethane quick adhesive with very low emission level of volatile organic compounds, class EC1 Plus, for all types of parquet.

| APPLICATION | notched trowel |
|----------------|-------------------------------------|
| CONSUMPTION | 800-1000 g/m ² |
| COLOUR | comp. A: ochre; comp. B: dark brown |
| PACKAGING | 9 + 1 kg kit |
| CERTIFICATIONS | (SEMICO) |







Ultrabond Eco P909 2K Fast Two-component, solvent-free, polyurethane adhesive with very low

emission level of volatile organic compounds (VOC) for all types of parquet.

| APPLICATION | notched trowel |
|-------------|-------------------------------------|
| CONSUMPTION | 800-1000 g/m ² |
| COLOUR | comp. A: ochre; comp. B: dark brown |
| PACKAGING | 10 kg units (8.8 kg + 1.2 kg) |
| | |

CERTIFICATIONS AND MARKINGS





TECHNICAL DATASHEET on mapei.com





Ultrabond Eco P909 2K Plus

Two-component, solvent-free, polyurethane adhesive with very low emission level of volatile organic compounds (VOC) for all types of parquet.

| | APPLICATION | spreader for wood |
|--|-------------|-------------------------------------|
| | CONSUMPTION | 800-1000 g/m ² |
| | COLOUR | comp. A: ochre; comp. B: dark brown |
| | PACKAGING | 10 kg units (9 kg+1 kg) |
| | | |

CERTIFICATIONS AND MARKINGS





CHECK THE TECHNICAL DATASHEET on mapei.com



Ultrabond Eco P948 1K

One-component, solvent-free, silylated polymer-based adhesive with very low emission level of volatile organic compounds (VOC).

| APPLICATION | Mapei spreader for wood |
|-------------|-------------------------------|
| CONSUMPTION | 800-1200 g/m ² |
| COLOUR | light beige |
| PACKAGING | 15 kg and 7 kg drums (2x7 kg) |

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.com



Ultrabond Eco S940 1K

One-component, solvent-free, silylated polymer-based adhesive with very low emission level of volatile organic compounds.

| | APPLICATION | notched spreader for wood |
|--|----------------|---------------------------|
| | CONSUMPTION | 800-1200 g/m ² |
| | COLOUR | light beige |
| | PACKAGING | 15 kg in plastic drums. |
| | CEDTIFICATIONS | NEMICON. |

CERTIFICATIONS
AND MARKINGS

118



CHECK THE TECHNICAL DATASHEET on mapei.com



Ultrabond Eco S955 1K

One-component, solvent-free, silylated polymer-based adhesive for all types of parquet with very low emission level of volatile organic compounds.

| APPLICATION | n. 2 or 4 notched trowel for wood |
|-------------|-----------------------------------|
| CONSUMPTION | 800-1200 g/m ² |
| COLOUR | beige |
| | |

CERTIFICATIONS AND MARKINGS

PACKAGING





15 kg drums and 600 ml sausage



TECHNICAL

DATASHEET

on mapei.com



Ultrabond Eco S958 1K

One-component, totally solvent-free, silylated polymer-based adhesive with very low emission level of volatile organic compounds.

| APPLICATION | n. 2 or 4 notched trowel for wood |
|-------------|-----------------------------------|
| CONSUMPTION | 800-1200 g/m ² |
| COLOUR | beige |
| PACKAGING | 15 kg drums and 600 ml sausage |

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.com



Ultrabond Eco S968 1K

One-component, totally solvent-free, silylated polymer-based adhesive with very low emission level of volatile organic compounds.

| APPLICATION | Mapei spreader for wood |
|-------------|---------------------------|
| CONSUMPTION | 800-1200 g/m ² |
| COLOUR | beige |
| PACKAGING | 15 kg drums |

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.com





Ultrabond Eco S Lite

One-component, lightweight solvent-free, silylated polymer-based adhesive with very low emission level of volatile organic compounds. Suitable for the installation of all types of pre-finished or pre-polished multi-layered flooring and solid wood, medium format flooring.

| APPLICATION | Mapei spreader for wood |
|----------------|--|
| CONSUMPTION | 600-800 g/m ² |
| COLOUR | light grey |
| PACKAGING | 11 kg plastic drums |
| CERTIFICATIONS | STEMPER TO THE PROPERTY OF THE |





CHECK THE TECHNICAL DATASHEET on mapei.com



Ultrabond Eco S Plus

One-component, silylated polymer-based adhesive of new generation and technology with very low emission of volatile organic compounds, zero methanol emissions, ideal for the installation of any type of species and format of pre-finished solid wood on all kinds of substrate, including heating screeds.

| | APPLICATION | Mapei spreader for wood |
|--|-------------|---------------------------|
| | CONSUMPTION | 600-1200 g/m ² |
| | COLOUR | light beige |
| | PACKAGING | 15 kg plastic drums |
| | | |





CHECK THE TECHNICAL DATASHEET on mapei.con



Ultrabond P902 2K

Two-component, epoxy-polyurethane adhesive for bonding all types and sizes of parquet on screeds made from Mapecem, Mapecem Pronto, Topcem and Topcem Pronto, cementitious screeds, old wooden, ceramic, marble, and terrazzo etc.

Also suitable for heated substrates.

120



APPLICATION n. 2 or 4 notched trowel for wood CONSUMPTION 1.0-1.5 kg/m² COLOUR comp. A: beige or brown; comp. B: whitish PACKAGING 10 kg drums (A+B)



Ultrabond P913 2K Plus

Two-component epoxy-polyurethane adhesive for installing any format and type of wood flooring.

Mapei spreader for wood

1000-1200 g/m²

10 kg (A+B)



TECHNICAL DATASHEET on mapei.com



Ultrabond P980 1K

APPLICATION

COLOUR

PACKAGING

CONSUMPTION

One-component, solvent-free, silylated polymer-based adhesive for all types of parquet with very low emission level of volatile organic compounds.

comp. A: beige or dark brown; comp. B: whitish

| APPLICATION | notched trowel |
|-------------|---|
| CONSUMPTION | 0.8-1 kg/m ² |
| COLOUR | beige |
| PACKAGING | 15 kg aluminium bags contained in plastic drums |





CHECK THE TECHNICAL DATASHEET on mapei.con



Ultrabond P990 1K

One-component, ready-to-use, solvent-free, flexible polyurethane adhesive for all types of parquet on screeds made from Mapecem, Mapecem Pronto, Topcem and Topcem Pronto, cementitious screeds, old wooden, ceramic, marble and terrazzo floors, etc. Also suitable for heated substrates.

| APPLICATION | n. 2 or 4 notched trowel for wood |
|-------------|--|
| CONSUMPTION | 0.8-1 kg/m ² |
| COLOURS | beige or brown |
| PACKAGING | 15 and 7 kg aluminium bags contained in plastic drums. Boxes containing 20x600 cc sausages. |

CERTIFICATIONS AND MARKINGS





TECHNICAL DATASHEET on mapei.com





Ultrabond S965 1K

One-component, solvent-free, silylated polymer-based adhesive for all types of wood-block flooring, parquet with very low emission level of volatile organic compounds.

| APPLICATION | n. 2 or 4 notched trowel for wood |
|-------------|-----------------------------------|
| CONSUMPTION | 800-1200 g/m ² |
| COLOUR | beige |
| PACKAGING | 15 kg in plastic drums. |

CERTIFICATIONS AND MARKINGS



CHECK THE TECHNICAL DATASHEET on mapei.com



Ultrabond S997 1K

One-component, solvent-free, ready-to-use, flexible, silylated polymer-based thixotropic adhesive for laying wooden steps and parquet mosaic.

| ' | |
|-------------|--|
| APPLICATION | extrusion |
| CONSUMPTION | laying wooden steps: 2 m² per sausage (diagonal kerbs every 5-10 cm); laying three-layered pre-finished parquet: yield approx. 4/6 m² per sausage (diagonal kerbs every 10-15 cm); laying wooden baseboards: yield approx.15 ml of kerbs per sausage; laying parquet mosaic on walls 0,5 kg/m² |

COLOUR ochre

PACKAGING boxes containing 20x600 cc aluminium sausages.







CHECK THE
TECHNICAL
DATASHEET
on mapei.com



2. PAINTS, FILLERS, BASE COATS AND COLOURED SEALANTS FOR PARQUET

Silwood

Acrylic sealant in water dispersion for wooden floors.

| | APPLICATION | extrusion gun for sausages |
|--|-------------|--|
| | CONSUMPTION | depending on the size of the joint to be filled calculating that its density is equal to 1.75 g/cm³. |
| | | white, 112 grey, oak, iroko, doussié, wengé, teak, walnut, cherry, faded beech, birch maple |
| | PACKAGING | 310 ml cartridges |
| | COLOURS | calculating that its density is equal to 1.75 g/cm ³ . white, 112 grey, oak, iroko, doussié, wengé, teak, walnut, cherry, faded beech, birch maple |

CERTIFICATIONS AND MARKINGS

122





CHECK THE TECHNICAL DATASHEET on mapei.com



Ultracoat Aqua Plus

Solvent and NMP-free, odourless, water-based binder, mixed with wood flour filler, for grouting wooden floors. Suitable for **Ultracoat** water-based varnishing cycles and **Ultracoat Hard Oil Fast**.

COLOUR Whitish

PACKAGING 5 | tanks, boxes 2 x 5 |

CERTIFICATIONS AND MARKINGS





TECHNICAL
DATASHEET
on mapei.com



Ultracoat Base One

One-component quick-drying water-based toning basecoat with low emission level of volatile organic compounds and no NMP.

CONSUMPTION 100 ml/m²

COLOUR translucent straw-yellow

PACKAGING 51 tanks, boxes 2 x 5 l

CERTIFICATIONS AND MARKINGS





CHECK THE TECHNICAL DATASHEET on mapei.com



Ultracoat Binder

Solvent and NMP-free, water-based binder, mixed with wood flour filler from any type of wood, including Merbau, for grouting wooden floors. Suitable for **Ultracoat** water-based varnishing cycles and **Ultracoat** Hard **Oil Fast**.

CONSUMPTION 100-120 g/m² per coat

COLOUR transparent

CERTIFICATIONS AND MARKINGS

PACKAGING



5 I tanks



TECHNICAL

DATASHEET

on mapei.com





Ultracoat Easy

One-component, water-based acrylic polyurethane varnish for wooden floors with good resistance to wear and abrasion.
Suitable for floors subjected to normal pedestrian use.



| CHECK THE |
|--------------|
| TECHNICAL |
| DATASHEET |
| on manoi com |



CONSUMPTION 80-100 ml/m² for the first coat 50-70 ml/m² for the subsequent coats

milky white

PACKAGING 5 | tanks, boxes 2x5 |

COLOUR

Ultracoat Easy Plus

One-component, water-based 100% polyurethane varnish with low emission level of volatile organic compounds (VOC), highly resistant to wear and abrasion, for wooden floors.

Suitable for floors subject to frequent pedestrian use.

| CONSUMPTION | 80-100 ml/m² for the first coat |
|-------------|--|
| | 50-70 ml/m ² for the subsequent coats |

COLOUR transparent

PACKAGING 5 | tanks, boxes 2x5 |

CERTIFICATIONS AND MARKINGS





CHECK THE TECHNICAL DATASHEET on mapei.com



Ultracoat EL

CONSUMPTION

PACKAGING

Slow-evaporating mixture to increase the open time of varnish for parquet.

depending on the dilution rate, from 5 to 10%

of varnish consumption

11 tanks, boxes 6 x 11



CHECK THE TECHNICAL DATASHEET on mapei.com



Ultracoat Hard Oil Fast

Wood staining oil for finishing of the surface of wooden floors; available in neutral and various colours.

| APPLICATION | roller, brush |
|-------------|--|
| CONSUMPTION | 1 l pro 20-25 m² depending on the absorption of the wooden floor |
| COLOURS | neutral and colour chart |
| PACKAGING | 1 and 3 l bottles |



CHECK THE TECHNICAL DATASHEET on mapei.com



Ultracoat Hard Oil Hardener

Admixture specific to promote hardening of Ultracoat Hard Oil Fast.



CHECK THE TECHNICAL DATASHEET on mapei.com



| COLOUR | transparent |
|-----------|--|
| PACKAGING | 600 ml bottles and boxes containing 6100 ml bottles |

Ultracoat Hard Oil Wax Plus

Water and oil resistant, low odour oil/wax finish to protect and gently tone wood surfaces giving them a warm hue.

| APPLICATION | roller or trowel |
|-------------|--|
| CONSUMPTION | 1 I pro 20-25 m² depending on the absorption of the wooden floor |
| COLOUR | neutral |
| PACKAGING | 11 hottles |



CHECK THE TECHNICAL DATASHEET on mapei.com





125

Ultracoat HT 2K

Two-component, 100% polyurethane water-based lacquer for wooden floor with very low emission of volatile organic compounds (EMICODE EC1 Plus), with very high resistance to wear and abrasion. Suitable for finishing wooden floors subject to extremely high pedestrian use.

CONSUMPTION 80-100 ml/m² for the first coat 50-70 ml/m² for the subsequent coats

COLORE comp. A: whitish; comp. B: transparent

PACKAGING (A+B) 5.5 I + 0.5 I units

CERTIFICATIONS AND MARKINGS







TECHNICAL DATASHEET on mapei.com



Ultracoat HT Sport

Two-component, water-based polyurethane varnish for wooden playing surfaces. Ultracoat HT Sport complies with European standards for indoor playing surfaces and multi-purpose playing surfaces (EN 14904:2006). Its surface hardness combined with its strength and resistance to chemicals make Ultracoat HT Sport a highly reliable product.



CHECK THE TECHNICAL DATASHEET on mapei.com



COLOUR comp. A: milky white; comp. B: transparent

PACKAGING

CERTIFICATIONS AND MARKINGS



Ultracoat MT 2K

Two-component water-based acrylic-polyurethane lacquer for wooden floors with very low emission of volatile organic compounds (EMICODE EC1 Plus) with high resistance to wear and abrasion. Suitable for floors subject to frequent pedestrian use.

CONSUMPTION 80-100 ml/m² for the first coat

50-70 ml/m² for the subsequent coats

COLORE comp. A: whitish; comp. B: transparent

PACKAGING (A+B) 4.5 l x 0.25 l units

CERTIFICATIONS AND MARKINGS

126





CHECK THE TECHNICAL DATASHEET on mapei.com



Ultracoat Oil Care Plus

APPLICATION

PACKAGING

APPLICATION

CONSUMPTION

Water-based microemulsion based on waxy resin, modified oils and natural waxes for maintaining wooden floors finished with Ultracoat Hard Oil Fast.



TECHNICAL DATASHEET on mapei.com



Ultracoat Oil Care Silver Plus

waxing mop

11 bottles

25/35 m²/l per coat

Wax oil in water emulsion with nanometre particles of colloidal silver for maintaining wooden floors.



waxing mop 25/35 m²/l per application CONSUMPTION

PACKAGING 11 bottles CHECK THE **TECHNICAL** DATASHEET on mapei.con



Ultracoat Premium Base

Two-component, NMP-free, water-based undercoat with low emission of volatile organic compounds (VOC) and high insulating capacity, for preparing solid and pre-sanded wooden floors and wooden floors under repair for water-based finishing cycles.

CONSUMPTION 80-100 g/m² per coat

COLOUR comp. A: milky white; comp. B: transparent

(A+B) 6 l, 2 6 l units **PACKAGING**

CERTIFICATIONS AND MARKINGS





TECHNICAL DATASHEET on mapei.con





Ultracoat Renew FL

Two-component, adhesion promoter primer for two-component, water-based **Ultracoat** lacquers.



| CHECK THE |
|--------------|
| TECHNICAL |
| DATASHEET |
| on mapei.com |



APPLICATION CONSUMPTION $20/35 \text{ m}^2$ COLOUR transparent PACKAGING 1.18 (A+B) units (2x 3,19 l box)

Ultracoat Soft Touch Base

One-component, rapid drying, water-based primer for preparing wooden floors before applying **Ultracoat Soft Touch Finish**. Product with very low emission of volatile organic compounds.

| CONSUMPTION | 80-100 g/m ² |
|-------------|-------------------------|
| COLOUR | milky white |
| PACKAGING | 5 units (2x5 box) |









CHECK THE **TECHNICAL** DATASHEET on mapei.com



Ultracoat Soft Touch Finish

Two-component, water-based, 100% polyurethane varnish with low emission of volatile organic compounds. Natural, soft finish for protecting wooden floors in residential and commercial environments.

| CONSUMPTION | 50-70 ml/m² per coat |
|-------------|---------------------------------------|
| COLOUR | comp. A: whitish; comp. B: colourless |
| PACKAGING | 5.5 units (A+B) (2x5, 5 box) |
| | |

CERTIFICATIONS AND MARKINGS

128





CHECK THE TECHNICAL DATASHEET on mapei.com



Ultracoat Sport Color

One-component water-based coloured acrylic paint for marking out playing areas on wooden sports surfaces.



TECHNICAL DATASHEET on mapei.com



Ultracoat Sport Color Hardener

 $1.120 \pm 0.005 \, \text{kg/l}$

transparent

various colours

Admixture for Ultracoat Sport Color.

CONSUMPTION 80-100 ml/m² per coat

5 I

COLOUR

DENSITY

COLOUR

PACKAGING

PACKAGING

PACKAGING



CHECK THE **TECHNICAL** DATASHEET on mapei.com



Ultracoat Toning Base

Two-component, NMP-free, water-based toning undercoat with low emission of volatile organic compounds (VOC) and high insulating capacity, for preparing solid and pre-sanded wooden floors and wooden floors under repair for **Ultracoat** water-based finishing cycles.

boxes containing 611 bottles



| CONSUMPTION | 80-100 g/m² per coat | CHECK THE TECHNICAL |
|-------------|--|--------------------------|
| COLOUR | comp. A: milky white; comp. B: transparent | DATASHEET on mapei.co |







Back to the table of contents Back to the alphabetical index

6 I units (A+B)

Ultracoat Top Deck Cleaner

Ready-to-use alkaline solution used for maintaining outdoor wooden flooring treated with **Ultracoat Top Deck Oil**.



CHECK THE TECHNICAL DATASHEET on mapei.com



| CONSUMPTION | depending on the floor |
|-------------|------------------------|
| | |

PACKAGING 4 litres

APPLICATION

CONSUMPTION

COLOURS

PACKAGING

Ultracoat Top Deck Oil

Oil finishing product for treating outdoor wooden floors.



| roller, brush | |
|--------------------|--|
| 1 every 12-15 m² | |
| teak and neutral | |
| 5 | |
| | |





Ultracoat Universal Base

One-component, NMP-free, water-based rapid undercoat, with low emission of volatile organic compounds (VOC) for wooden floors.

| CONSUMPTION | 80-100 ml/m² per coat |
|-------------|-----------------------|
| COLOUR | transparent |
| PACKAGING | 5 I units |

CERTIFICATIONS AND MARKINGS






CHECK THE TECHNICAL DATASHEET on mapei.com







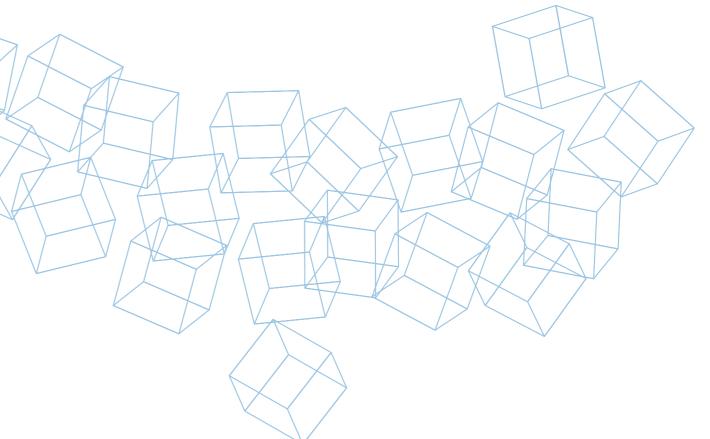



ADHESIVES
FOR RESILIENT,
LVT AND TEXTILE
COVERINGS

1. ADHESIVES IN WATER DISPERSION

Adesilex MT32

Adhesive for laying all types of wall coverings, wallpaper, glass-fibre fabrics and non-woven fabrics.

| APPLICATION | n. 1 Mapei trowel, TKB A1 trowel or roller |
|----------------|---|
| CONSUMPTION | 150-250 g/m ² |
| COLOUR | white |
| PACKAGING | 20, 10 5 and 1 kg drums |
| CERTIFICATIONS | (Semicon) |






AND MARKINGS

Adesilex V4

Multi-purpose adhesive for bonding vinyl and textile flooring.

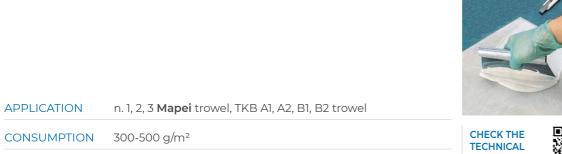





DATASHEET COLOUR white on mapei.com PACKAGING 16 and 5 kg drums

Adesilex VS45

High and fast initial tack adhesive for laying resilient wall coverings.

| APPLICATION | n. 1 Mapei trowel, TKB A1, A2 trowel |
|--------------------------------|---|
| CONSUMPTION | 200-300 g/m ² |
| COLOUR | white |
| PACKAGING | 14 and 5 kg drums |
| CERTIFICATIONS AND MARKINGS | ECT |



CHECK THE **TECHNICAL** DATASHEET on mapei.com



Aquacol T

Hard-set adhesive with long open time for textile and linoleum flooring.

| APPLICATION | n. 2, 3 Mapei trowel, TKB A2, B1, B2 trowel |
|-------------|--|
| CONSUMPTION | 300-450 g/m ² |
| COLOUR | light beige |
| PACKAGING | 25, 16 and 5 kg drums |





TECHNICAL DATASHEET on mapei.con



Mapecryl Eco

Multi-purpose adhesive for vinyl, textile and linoleum wall and floor coverings.

| APPLICATION | n. 1, 2, 3 Mapei notched trowel, TKB A1, A2, B1, B2 trowel |
|-------------|---|
| CONSUMPTION | 250-450 g/m ² |
| COLOUR | light beige |
| PACKAGING | 25, 16 and 5 kg drums |

CERTIFICATIONS AND MARKINGS



CHECK THE **TECHNICAL** DATASHEET on mapei.con



Rollcoll

Multi-purpose adhesive for laying vinyl and textile wall and floor coverings.



| APPLICATION | n. 1, 2, 3 Mapei trowel, TKB A1, A2, B1, B2 trowel or roller | |
|-------------|---|---|
| CONSUMPTION | by trowel: 300-500 g/m ² ; by roller: 200-300 g/m ² | |
| COLOUR | light beige | 1 |
| PACKAGING | 16, 5 and 1 kg drums | |







135

Ultrabond 333

Multi-purpose adhesive with long open time for vinyl textile and linoleum wall and floor coverings.



| CHECK THE |
|---------------------|
| TECHNICAL |
| DATASHEET |
| on manei com |



APPLICATION n. 1, 2, 3 Mapei notched trowel, TKB A1, A2, B1, B2 trowel

CONSUMPTION 300-500 g/m²

COLOUR light beige

PACKAGING 25 and 16 kg drums

Ultrabond Eco 4 LVT

Fibre-reinforced adhesive. Specifically developed for the installation of LVT, SPC and rigid LVT coverings, it guarantees the highest performances in terms of adhesion and dimensional stability.

| APPLICATION | n. 1 Mapei notched trowel, TKB A1, A2 trowel |
|-------------|---|
| CONSUMPTION | 200-300 g/m ² |

COLOUR light beige

PACKAGING 14 and 5 kg drums

CERTIFICATIONS AND MARKINGS













CHECK THE TECHNICAL DATASHEET on mapei.com



Ultrabond Eco 375

Adhesive with long open time for vinyl floor and wall coverings.

| APPLICATION | n. 1 Mapei trowel, TKB A1, A2 trowel |
|-------------|---|
| CONSUMPTION | 200-300 g/m ² |
| COLOUR | light beige |

CERTIFICATIONS AND MARKINGS

PACKAGING



14 kg drums










CHECK THE **TECHNICAL** DATASHEET on mapei.com



Ultrabond Eco 380

"Pressure sensitive" adhesive with strong and fast initial tack, very long open time, for vinyl floor and wall coverings.

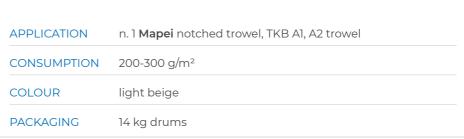



TECHNICAL DATASHEET on mapei.con



Ultrabond Eco 388

Pressure sensitive adhesive for PVC and LVT with excellent wet grab, early build-up of strength and extended open time.

| APPLICATION | n. 1 Mapei notched trowel, TKB A1, A2 trowel |
|----------------|---|
| CONSUMPTION | 200-300 g/m ² |
| COLOUR | light beige |
| PACKAGING | 16 kg drums |
| CERTIFICATIONS | (Second |



Ultrabond Eco 520

AND MARKINGS

AND MARKINGS

Adhesive with high initial tack for linoleum floors and resilient wall coverings.

| APPLICATION | n. 2, 3 Mapei trowel, TKB B1, B2 trowel |
|----------------|--|
| CONSUMPTION | 300-450 g/m ² |
| COLOUR | light beige |
| PACKAGING | 16 kg drums |
| CERTIFICATIONS | (SEMICA) |



CHECK THE **TECHNICAL** DATASHEET on mapei.con





137

Ultrabond Eco 530

Adhesive with high and fast initial bond. For the wet-bed installation of linoleum and resilient wall coverings.

| APPLICATION | n. 2, 3 Mapei trowel, TKB B1, B2 trowel |
|-------------|--|
| CONSUMPTION | 300-450 g/m ² |
| COLOUR | light beige |

PACKAGING 16 kg drums

CERTIFICATIONS AND MARKINGS









CHECK THE TECHNICAL DATASHEET on mapei.com



Ultrabond Eco 575

Synthetic polymer adhesive in water dispersion for installing skirtings.

| | APPLICATION | extrusion |
|--|-------------|-------------------|
| | CONSUMPTION | 325 ml every 12 m |
| | COLOUR | beige |
| | PACKAGING | 310 ml cartridges |

CERTIFICATIONS
AND MARKINGS



CHECK THE TECHNICAL DATASHEET on mapei.com



Ultrabond Eco Decor Dry

Ready to use adhesive for decorative fibre glass and wallpaper in dry area.

| APPLICATION | n. 1 Mapei trowel, TKB A1, roller |
|-------------|--|
| CONSUMPTION | 150-250 g/m ² |
| COLOUR | white |
| PACKAGING | 3 kg drums |
| | (SMICA) |

CERTIFICATIONS AND MARKINGS

138





CHECK THE TECHNICAL DATASHEET on mapei.com



Ultrabond Eco Fast Track

Fast set, universal adhesive for quick renovation of resilient and textile floor coverings. Suitable also and for installing, coves and stairs.

APPLICATION n. 1, 2, 3 Mapei trowel, TKB A1, A2, B1 and B2 trowel

CONSUMPTION 200-400 g/m²

COLOUR beige

PACKAGING 5 kg drums

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.com



Ultrabond Eco Fix

Adhesive and fixative with high residual tack for loose-lay flooring.

APPLICATION n. 1 Mapei trowel, TKB A1, A4 trowel and roller

CONSUMPTION 80-150 g/m²

COLOUR light beige

PACKAGING 10 and 5 kg drums

CERTIFICATIONS AND MARKINGS











TECHNICAL

DATASHEET

on mapei.com



Ultrabond Eco Tack

Adhesive and slip-resistant fixative with high residual tack for loose-lay carpet tiles.

APPLICATION roller

CONSUMPTION 100-200 g/m²

COLOUR light beige

PACKAGING 15 kg drums

CERTIFICATIONS AND MARKINGS





TECHNICAL
DATASHEET
on mapei.com





Ultrabond Eco Tack 4 LVT

Slip-resistant fixative for loose-lay LVT, SPC and rigid LVT.

APPLICATION roller 90-130 g/m² CONSUMPTION COLOUR white PACKAGING 15 kg rectangular drums

CERTIFICATIONS **AND MARKINGS**







CHECK THE TECHNICAL DATASHEET on mapei.com



Ultrabond Eco Tack TX+

Slip-resistant fixative for loose-lay carpet tiles.

APPLICATION roller 50-100 g/m² CONSUMPTION COLOUR transparent/white

5 and 10 kg tanks and 15 kg drums

CERTIFICATIONS AND MARKINGS

PACKAGING













CHECK THE TECHNICAL DATASHEET on mapei.com



Ultrabond Eco TX1

Hard set "standard" adhesive for textile and linoleum flooring.

APPLICATION n. 2, 3 Mapei notched trowel, TKB A2, B1, B2 CONSUMPTION 350-500 g/m²

COLOUR light beige

PACKAGING **CERTIFICATIONS**

AND MARKINGS

140



16 kg drums











CHECK THE TECHNICAL DATASHEET on mapei.com



Ultrabond Eco TX2

"Pro-grade" adhesive with high initial tack and long open time, for textile flooring.

APPLICATION n. 2, 3 Mapei notched trowel, TKB A2, B1, B2

300-450 g/m² CONSUMPTION

COLOUR light beige

16 and 5 kg drums PACKAGING

CERTIFICATIONS AND MARKINGS









CHECK THE TECHNICAL DATASHEET on mapei.com



Ultrabond Eco TX3

"Premium" adhesive with excellent wet grab and early build-up of strength for textile and linoleum flooring.

n. 2, 3 Mapei notched trowel, TKB B1, B2 APPLICATION

CONSUMPTION 350-500 g/m²

light beige

CERTIFICATIONS AND MARKINGS

COLOUR

PACKAGING















CHECK THE **TECHNICAL** DATASHEET on mapei.com



Ultrabond Eco V4 Evolution

16 kg drums

"All in one" universal adhesive with strong, rapid initial tack and long open time for resilient and textile floor and wall-coverings.

APPLICATION n. 1, 2, 3 Mapei notched trowel, TKB A1, A2, B1, B2, roller

CONSUMPTION 200-450 g/m²

COLOUR light beige

PACKAGING 14, 5 and 1 kg drums

CERTIFICATIONS AND MARKINGS















CHECK THE TECHNICAL DATASHEET on mapei.com





Ultrabond Eco V4SP

Universal, high-performance adhesive for laying resilient and textile flooring and covering.

APPLICATION n. 1, 2, 3 Mapei notched trowel, TKB A1, A2, B1, B2

CONSUMPTION 200-450 g/m²

COLOUR light beige

PACKAGING 14 and 5 kg drums

CERTIFICATIONS **AND MARKINGS**











CHECK THE TECHNICAL DATASHEET on mapei.com



Ultrabond Eco V4 SP Conductive

Light-coloured adhesive in water dispersion for installing conductive floors with very low emission of volatile organic compounds (VOC).

APPLICATION Mapei notched trowel

CONSUMPTION 300-400 g/m²

PACKAGING 16 kg drums

CERTIFICATIONS **AND MARKINGS**

COLOUR



light grey





CHECK THE TECHNICAL DATASHEET on mapei.com



Ultrabond Eco V4 SP Fiber

Universal, fibre-reinforced, high-performance adhesive for laying resilient and textile flooring.

APPLICATION n. 1, 2, 3 Mapei notched trowel, TKB A1, A2, B1, B2 CONSUMPTION 200-450 g/m²

COLOUR light beige

PACKAGING 14 kg drums

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.com



Ultrabond Eco VS60

Multi-purpose adhesive with strong tack for vinyl, textile, linoleum and LVT floor and wall coverings.

APPLICATION n. 1, 2, 3 Mapei notched trowel, TKB A1, A2, B1, B2, roller

200-450 g/m² CONSUMPTION

COLOUR light beige

16 kg drums **PACKAGING**

CERTIFICATIONS AND MARKINGS







Ultrabond Eco VS90 Plus

Universal adhesive with strong tack for laying resilient and textile flooring.

APPLICATION n. 1, 2, 3 Mapei trowel, TKB A1, A2, Bland B2

14 and 5 kg drums

CONSUMPTION 200-450 g/m²

COLOUR beige

CERTIFICATIONS AND MARKINGS

PACKAGING

PACKAGING



16 kg drums











CHECK THE TECHNICAL DATASHEET on mapei.com



Ultrabond TX57

High and fast initial tack adhesive for laying textile and linoleum flooring.

n. 2, 3 Mapei notched trowel, TKB A2, B1, B2 **APPLICATION** 300-550 g/m² CONSUMPTION COLOUR light beige



CHECK THE TECHNICAL DATASHEET on mapei.com





143

Back to the table of contents

142

2. REACTIVE ADHESIVES

Adesilex G19

APPLICATION

Two-component epoxy-polyurethane adhesive for installing indoor or outdoor resilient and textile flooring onto both absorbent and non-absorbent substrates.

Specifically developed for the installation of rubber athletic tracks.

CHECK THE **TECHNICAL** DATASHEET on mapei.com



CONSUMPTION 350-1000 g/m² COLOUR comp. A: beige, red, green, black; comp. B: transparent PACKAGING 2, 5 and 10 kg drums

1, 2, 3, 4 Mapei notched trowel, TKB A1, A2, B1, B2, C1

Adesilex G19 Conductive

wo-component epoxy-polyurethane adhesive for installing conductive resilient flooring onto both absorbent and non-absorbent substrates.



CHECK THE TECHNICAL DATASHEET on mapei.com



APPLICATION n. 1, 2 Mapei notched trowel, TKB A2, B1, B2, B3 CONSUMPTION $300-450 \text{ g/m}^2$ COLOUR comp. A:black; comp. B: straw yellow **PACKAGING** 10 kg drums

Adesilex G19 Fast

Fast setting, two-component epoxy-polyurethane adhesive for installing indoor or outdoor resilient and textile flooring onto both absorbent and non-absorbent substrates.

Specifically developed for the installation of rubber athletic tracks.

| APPLICATION | 1, 2, 3, 4 Mapei notched trowel, TKB A1, A2, B1, B2, C1 |
|-------------|--|
| CONSUMPTION | 0.35-1.0 kg/m ² |
| COLOUR | comp. A: beige, red, green, black; comp. B: transparent |
| PACKAGING | 10 kg kit |
| | |

CERTIFICATIONS AND MARKINGS

144



CHECK THE TECHNICAL DATASHEET on mapei.com



Adesilex G19 FR Fast

Solvent free, two component, fast setting, epoxy-polyurethane adhesive for resilient and textile flooring in transportation equipment industry. Complies with the requirements of EN 45545-2:2013 for the Hazard Levels HL1-HL2, requirements set R10. Also meets the requirements of smoke-gas toxicity specified in the Chinese Standards TB/T3237:2010 and TB/T3139:2006. It is suitable for marine equipment in compliance with the Marine Equipment Directive (MED) 96/98/EC and subsequent amendments.

| APPLICATION | 1, 2, 3 Mapei notched trowel, TKB A1, A2, B1, B2, C1 |
|-------------|--|
| CONSUMPTION | 400-800 g/m ² |
| COLOUR | comp. A: beige; comp. B: transparent |
| PACKAGING | 10 kg kit |
| | _ |





TECHNICAL DATASHEET on mapei.com



Adesilex G20

Low-viscosity, two-component epoxy-polyurethane adhesive for installing indoor or outdoor resilient and textile flooring onto both absorbent and non-absorbent substrates. Particularly suitable for installing thin flooring, also onto waterproofing glass-fibre reinforced underlays such as Mapelay, in order to avoid the ribs of adhesive may show through.

| APPLICATION | 1, 2, 3 Mapei notched trowel, TKB A1, A2, B1, B2 |
|-------------|---|
| CONSUMPTION | 350-600 g/m ² |
| COLOUR | comp. A: beige; comp. B: transparent |
| PACKAGING | 5 and 10 kg kit |

CERTIFICATIONS AND MARKINGS





CHECK THE TECHNICAL DATASHEET on mapei.com



Adesilex G20 Fast

Fast setting, low-viscosity, two-component epoxy-polyurethane adhesive for installing indoor or outdoor resilient and textile flooring onto both absorbent and non-absorbent substrates. Particularly suitable for installing thin flooring, also onto waterproofing glass-fibre reinforced underlays such as Mapelay, in order to avoid the ribs of adhesive may show through.

| APPLICATION | 1, 2, 3 Mapei notched trowel, TKB A1, A2, B1, B2 |
|--------------------------------|--|
| CONSUMPTION | 350-600 g/m ² |
| COLOUR | comp. A: beige; comp. B: transparent |
| PACKAGING | 10 kg kit |
| CERTIFICATIONS AND MARKINGS | Factor Control of the |



CHECK THE TECHNICAL DATASHEET on mapei.con





Ultrabond Eco 571 2K

Two-component, low-viscosity polyurethane adhesive with no water or solvents for bonding indoor and outdoor PVC and rubber flooring.

APPLICATION n. 1, 2, 3 Mapei notched trowel, TKB A1, A2, B1, B2

CONSUMPTION 300-600 g/m²

COLOUR comp. A: grey; comp. B: brown

PACKAGING 5 and 10 kg drums

CERTIFICATIONS AND MARKINGS





CHECK THE TECHNICAL DATASHEET on mapei.com



Ultrabond Eco Decor Wet

One-component, silylated polymer-based adhesive for decorative fibreglass and wallpaper in wet areas.

APPLICATION straight or notched trowel (such as **Mapei** n. 1, TKB A1, A4)

CONSUMPTION 200 g/m²

COLOUR transparent

PACKAGING 3 kg drums

CERTIFICATIONS AND MARKINGS





CHECK THE TECHNICAL DATASHEET on mapei.com



Ultrabond Eco MS1

One-component, universal silylated polymer-based adhesive for resilient and textile flooring.

APPLICATION n. 1, 2, 3 **Mapei** trowel TKB A1, A2, B1, B2

CONSUMPTION 350-400 g/m²

COLOUR ivory

PACKAGING 15 kg drums

CERTIFICATIONS AND MARKINGS

146













Ultrabond Eco MS 4LVT Wall&Floor

One-component, silylated polymer-based adhesive for laying LVT, SPC and rigid LVT on walls. Also suitable for floors. Particularly recommended for installation in wet areas and on non-absorbent substrates.

APPLICATION n. 1 Mapei notched trowel or TKB A1, A2

CONSUMPTION 250-350 g/m²

COLOUR ivory

PACKAGING 7 kg drums

CERTIFICATIONS AND MARKINGS













Ultrabond Eco MS Easy

One-component, thixotropic, sylilated polymer-based adhesive for laying PVC, SPC and rigid LVT panels on walls.

| APPLICATION | cartridge |
|-------------|--|
| YELD | 5 linerar meters of bead for cartridge |
| COLOUR | ivory |
| PACKAGING | 300 ml cartridges |
| | ALEMICO A |

CERTIFICATIONS AND MARKINGS






CHECK THE TECHNICAL DATASHEET on mapei.com



3. POLYCHLOROPRENIC AND ELASTOMERIC CONTACT ADHESIVES

Adesilex LP

Polychloroprenic contact adhesive in solvent for laying profiles, covings and resilient floors and wall coverings where immediate setting is required.

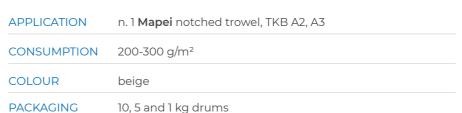



CHECK THE TECHNICAL DATASHEET on mapei.com





Adesilex VZ

Polychloroprenic adhesive in solvent for back-buttering for laying profiles, covings and resilient floors and coverings where immediate setting is required.



| CHECK THE |
|--------------|
| TECHNICAL |
| DATASHEET |
| on mapei.com |



APPLICATION n. 1 Mapei notched trowel, TKB A2, A3 CONSUMPTION 200-300 g/m² COLOUR beige PACKAGING 10, 5 and 1 kg drums

Ultrabond Eco Contact

Solvent-free contact adhesive for laying resilient and textile flooring and covering. Particularly recommended for installing covings, steps, skirtings and corners.

| CONSUMPTION | 150-200 g/m² per coat on every surface type |
|-------------|---|
| COLOUR | white |
| PACKAGING | 2.5 and 5 kg drums |





CHECK THE **TECHNICAL** DATASHEET on mapei.com



4. POWDER ADHESIVES

Glicovil Decor

148

Universal powder adhesive for laying wallpapers with all kinds of backing.



CHECK THE TECHNICAL

DATASHEET

| APPLICATION | roller, brush |
|-------------|-------------------------|
| CONSUMPTION | 80-100 g/m ² |
| COLOUR | white |
| PACKAGING | 250 g boxes |



5. CEMENTITOUS ADHESIVES

Granirapid

Two-component, high-performance, deformable, quick-setting and hydrating cementitious adhesive for rubber tiles bonded to cement.

| APPLICATION | n. 10 Mapei notched trowel |
|-------------|-----------------------------------|
| CONSUMPTION | 8 kg/m² |
| COLOURS | grey or white |
| PACKAGING | • Granirapid white: 28 kg kit |

comp. A: 22.5 kg bag comp. B: 5.5 kg drum
• Granirapid grey: 30.5 kg kit comp. A: 25 kg bag, comp. B: 5.5 kg drum.

CERTIFICATIONS AND MARKINGS







DATASHEET on mapei.con



6. ADHESIVE STRIPS

Mapecontact Plus

Double sided reinforced adhesive strip for laying profiles, skirtings, covings and resilient and textile coverings on steps.

| COLOUR | transparent adhesive and orange reinforcement |
|--------|---|

PACKAGING

- 25 mm: boxes with 12 rolls of 50 m;
- 40 mm: boxes with 7 rolls of 50 m;
- 85 mm: boxes with 3 rolls of 50 m; • 95 mm: boxes with 3 rolls of 50 m;
- 145 mm: boxes with 2 rolls of 50 m;
- 240 mm: boxes with 1 rolls of 50 m.

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.con



7. ADHESIVES FOR SYNTHETIC GRASS

Ultrabond Turf 2 Stars

Two-component, solvent-free polyurethane adhesive for the installation of synthetic turf.

| | APPLICATION | n. 3, 4 Mapei notched trowel |
|--|-------------|--|
| | CONSUMPTION | 0.3-0.4 kg per metre of 30 cm wide jointing strip (10 kg of adhesive for 25-33 metres) |
| | COLOUR | comp. A: green; comp. B: brown |
| | PACKAGING | 5 and 15 kg drums |
| | | |

CERTIFICATIONS AND MARKINGS





TECHNICAL DATASHEET on mapei.com





Ultrabond Turf 2 Stars Pro

Two-component, solvent-free polyurethane adhesive for the installation of synthetic turf of the latest generation.

| APPLICATION | n. 3, 4 Mapei notched trowel |
|--------------------------------|---|
| CONSUMPTION | 0.3-0.4 kg per metre of 30 cm wide jointing strip (10 kg of adhesive for 25-33 metres) |
| COLOURS | comp A: green/white/Swiss red /yellow /Sidney blue comp B: dark amber |
| PACKAGING | 5 and 15 kg drums |
| CERTIFICATIONS AND MARKINGS | EC I) |







Ultrabond Turf 2 Stars W

Two-component, solvent-free polyurethane adhesive for the installation of synthetic turf at low temperatures.

| APPLICATION | n. 3, 4 Mapei notched trowel |
|-------------|--|
| CONSUMPTION | 0.3-0.4 kg per metre of 30 cm wide jointing strip (10 kg of adhesive for 25-33 metres) |
| COLOUR | comp. A: green; comp. B: dark amber |
| PACKAGING | 15 kg drums |
| | |



CHECK THE TECHNICAL DATASHEET on mapei.com



CERTIFICATIONS AND MARKINGS

150

Ultrabond Turf Catalyst

Hardening accelerator for two-component polyurethane adhesives from the **Ultrabond Turf** range.




| CONSUMPTION | approx. 0.1-0.2% (approx. 1 or 2 lids) by the total weight of the adhesive |
|-------------|---|
| COLOUR | colourless, slightly straw yellow |
| PACKAGING | 0.9 kg bottles |



Ultrabond Turf LS

One-component, ready-to-use silylated polymer-based adhesive for bonding decorative synthetic turf.

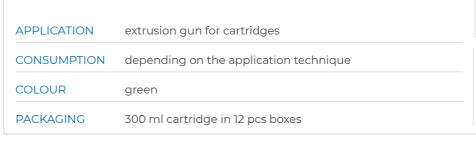



CHECK THE TECHNICAL DATASHEET on mapei.com



Ultrabond Turf PU 1K

One-component, ready-to-use, polyurethane adhesive for bonding synthetic turf.

| APPLICATION | n. 3, 4 Mapei notched trowel |
|-------------|---|
| CONSUMPTION | 0.23-0.26 kg per metre of 30 cm wide jointing strip (10 kg of adhesive for 43.5-38.5 metres) |
| COLOUR | green |
| PACKAGING | 15 and 7 kg drums and 600 ml aluminium sausages in 20 pcs boxes |



CHECK THE TECHNICAL DATASHEET on mapei.com



Ultrabond Turf PU 1K LC

One-component, ready-to-use, polyurethane adhesive for bonding jointing strips between rolls of synthetic turf.

| APPLICATION | n. 3, 4 Mapei notched trowel |
|-------------|---|
| CONSUMPTION | 0.23-0.26 kg per metre of 30 cm wide jointing strip (10 kg of adhesive for 43.5-38.5 metres) |
| COLOUR | green |
| PACKAGING | 15 and 7 kg drums |



MAPE

Ultrabond Turf PU 2K

Two-component polyurethane adhesive for bonding synthetic turf, with very low emission level of volatile organic compounds (VOC).

| APPLICATION | n. 3, 4 Mapei notched trowel |
|-----------------|---|
| CONSUMPTION | 0.4-0.5 kg per metre of 40 cm wide jointing strip (10 kg of adhesive for 20-25 metres) |
| COLOUR | green |
| PACKAGING | 15 kg drums |
| CEDITIEICATIONS | CEMICS 1 |





CERTIFICATIONS AND MARKINGS

APPLICATION

COLOUR

152

PACKAGING

CONSUMPTION

Ultrabond Turf Repair

One component, polyurethane ready-to-use adhesive with modified viscosity for repairing artificial turf surfaces.



| n. 3, 4 Mapei notched trowel | THE RESIDENCE |
|--|--------------------------|
| depending on the strip used for the repairing work | CHECK THE |
| green | DATASHEET on mapei.co |
| 300 ml cartridge in 12 pcs boxes. | |





Ultrabond Turf Tape 100

Jointing strip for fixing synthetic turf.



CHECK THE

TECHNICAL DATASHEET

on mapei.con

| THICKNESS | 0.10 mm |
|-----------|-------------|
| HEIGHT | roll 400 mm |
| LENGTH | roll 300 m |



Ultrabond Turf Tape 300

Jointing strip for fixing synthetic turf rolls and lines for various sporting



| CHECK THE |
|--------------|
| TECHNICAL |
| DATASHEET |
| on mapei.com |
| |



Ultrabond Turf Tape LS

0.50 mm

300 mm roll

300 m roll

THICKNESS

HEIGHT

LENGTH

THICKNESS

HEIGHT


LENGTH

THICKNESS

HEIGHT

LENGTH

Jointing butyl self-adhesive strip for decorative turf.



CHECK THE TECHNICAL DATASHEET on mapei.com



Ultrabond Turf Tape Pro

1 mm

140 mm

10 m roll

Jointing strip for fixing synthetic turf.




| 0.36 mm | CHECK THE TECHNICAL |
|-------------|----------------------|
| 300 mm roll | DATASHEET on mapei.c |
| 300 m roll | |









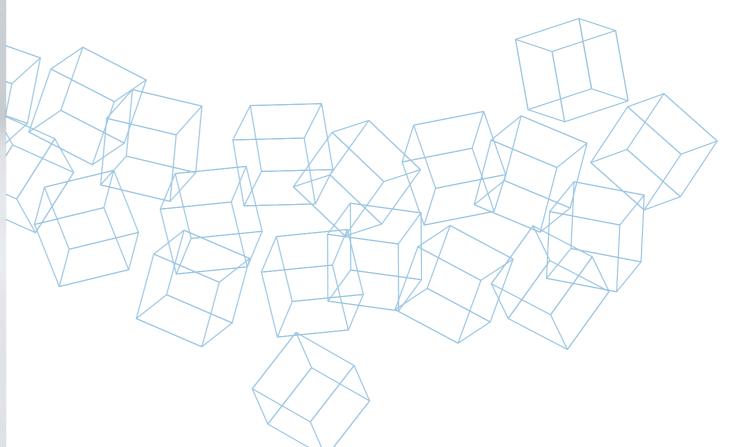



COMPLEMENTARY
PRODUCTS
FOR CERAMIC TILES,
STONE MATERIAL,
PARQUET, RESILIENT
AND TEXTILE
COVERINGS

1. COMPLEMENTARY PRODUCTS FOR CERAMIC TILES AND STONE MATERIAL

Mapeguard Board

Multi-purpose, lightweight waterproof panel used to create room partitions, a background substrate for furnishing features and to line walls internally for the installation of all types of ceramic and natural stone finishes.

| APPLICATION | See TDS |
|-------------|---|
| SIZE | 60x130 cm, thickness from 7 to 10 mm, 60x260 cm, thickness 10, 20, 30 or 48 mm |
| PACKAGING | standard pallet: 16 60x130 cm panels thickness 7 mm 16 60x130 cm panels thickness 10 mm 8 60x260 cm panels thickness 10 mm 8 60x260 cm panels thickness 20 mm 6 60x260 cm panels thickness 30 mm 2 60x260 cm panels thickness 48 mm |



CHECK THE TECHNICAL DATASHEET on mapei.com



Mapeguard Roller

Roller with handle and bag support to maintain even and correct pressure when applying Mapeguard UM Membranes.



CHECK THE TECHNICAL DATASHEET on mapei.con



PACKAGING 1 pc box

Mapeguard UM 35

Waterproofing, uncoupling and anti-fracture membrane for cracked and damp substrates and substrates that are not fully cured before installing ceramic and stone tiles for internal and external surfaces without having to copy the layout of distribution joints in the substrate.

| APPLICATION | See TDS |
|-------------|------------|
| WIDTH | 1 m |
| LENGTH | 30 m |
| THICKNESS | 35 mm |
| PACKAGING | 30 m rolls |



CHECK THE TECHNICAL DATASHEET on mapei.com



MapeLevel EasyWDG

CONSUMPTION

PACKAGING

Levelling wedges for MapeLevel EasyWDG System wedge tile levelling system for ceramic tiles and stone slabs on floors and on walls with thickness from 3 to 12 mm.



TECHNICAL DATASHEET on mapei.com



MapeLevel EasyWDG Spacer M

make reference to the TDS

boxes with 12 bags x 100 pcs.

Spacer clips for MapeLevel EasyWDG System tile levelling system for ceramic tiles and stone slabs on floors and on walls with thickness from 3 to 12 mm.

depending on the installation layout and tile flatness



| SIZE | 30x42 mm, hight 41 mm, available in 7 thicknesses |
|------|---|
| | (0.5, 1, 1.5, 2, 3, 4 and 5 mm) |

CONSUMPTION depending on the installation layout and tile flatness make reference to the TDS

PACKAGING boxes 14 bags x 250 pcs.





MapeLevel EasyWDG Pushing-Pliers

Plier to insert the MapeLevel ProWDG wedges into the MapeLevel ProWDG Spacer C or MapeLevel ProWDG Spacer C-H spacer clips and, if necessary, for inserting mechanically the MapeLevel EasyWDG wedges into the MapeLevel EasyWDG Spacer M spacers.



TECHNICAL DATASHEET on mapei.com

Back to the alphabetical index



PACKAGING 15 pc box

MapeLevel Easy Cap

Spinning cap for MapeLevel Easy System, quick-thread screw tile levelling system for ceramic tiles and stone slabs on floors and on walls with thickness from 3 to 21 mm.



| CHECK THE |
|--------------|
| TECHNICAL |
| DATASHEET |
| on mapei.com |

depending on the installation layout and tile flatness CONSUMPTION make reference to the TDS

PACKAGING boxes with 16 bags x 50 pcs

MapeLevel EasyClick Cap

Spinning cap with special click system for MapeLevel EasyClick System, quick insertion-ejection screw tile levelling system for ceramic tiles and stone slabs on floors and on walls with thickness from 3 to 21 mm.



TECHNICAL DATASHEET on mapei.com



CONSUMPTION depending on the installation layout and tile flatness make reference to the TDS

PACKAGING boxes with 10 bags x 50 pcs.

MapeLevel Easy Spacer L - I

Linear spacers (for linear grout joints) for screw tile levelling system MapeLevel Easy System and MapeLevel EasyClick System for ceramic tiles and stone slabs on floors and on walls with thickness from 3 to 21 mm.



CHECK THE TECHNICAL

DATASHEET

on mapei.com

| SIZE | available in 5 thicknesses (1, 1.5, 2, 3, 5 mm) |
|-------------|---|
| CONSUMPTION | depending on the installat |

depending on the installation layout and tile flatness make reference to the TDS

PACKAGING boxes with 25 bags x 100 pcs.

158



MapeLevel Easy Spacer L - T

T-shaped spacers (for T-shaped grout joints) for screw tile levelling system MapeLevel Easy System and MapeLevel EasyClick System for ceramic tiles and stone slabs on floors and on walls with thickness from 3 to 21 mm.



available in 5 thicknesses (1, 1.5, 2, 3, 5 mm) **TECHNICAL** depending on the installation layout and tile flatness DATASHEET on mapei.com



MapeLevel Easy Spacer L - X

CONSUMPTION

PACKAGING

X-shaped spacers (for cross joints grout joints) for screw tile levelling system MapeLevel Easy System and MapeLevel EasyClick System for ceramic tiles and stone slabs on floors and on walls with thickness from 3 to 21 mm.

make reference to the TDS

boxes with 25 bags x 100 pcs



SIZE available in 5 thicknesses (1, 1.5, 2, 3, 5 mm)

CONSUMPTION depending on the installation layout and tile flatness make reference to the TDS

PACKAGING boxes 25 bags x 100 pcs



MapeLevel Easy Shield

Anti-scratch disk to be applied on the cap MapeLevel Easy Cap to prevent scratches when levelling tiles or removing the spacers and o protect the surface of the tile.



TECHNICAL DATASHEET on mapei.com



PACKAGING boxes with 35 bags x 50 pcs

Back to the table of contents Back to the alphabetical index

159

MapeLevel Easy T

Self-levelling, reusable system for ceramic tiles and stone slabs on floors and on walls with thickness up to 17 mm. Suitable for small adjustments during the tile application operations.

| SIZE | for joints from 1.5 to 6 mm wide, when used in combination |
|------|--|
| | with conventional leveling systems (when used as a single |

leveling system, only for joints 1.5 mm wide)

CONSUMPTION depending on the installation layout and use (if used in

combination with conventional leveling systems or as a single leveling system)

PACKAGING boxes with 10 bags x 50 pcs



CHECK THE TECHNICAL DATASHEET on mapei.com



MapeLevel ProWDG

Levelling wedges for MapeLevel ProWDG System wedge tile levelling system to be inserted with pliers for ceramic tiles and stone slabs on floors and on walls with thickness from 3 to 20 mm (with 2 disposable elements).



CHECK THE TECHNICAL DATASHEET on mapei.com



depending on the installation layout and tile flatness, CONSUMPTION

make reference to the TDS

PACKAGING boxes with 14 bags with 100 pcs

MapeLevel ProWDG Spacer C

Spacers clips for MapeLevel ProWDG System wedge tile levelling system to be inserted with pliers for ceramic tiles and stone slabs on floors and on walls with thickness from 3 to 12 mm.



| SIZE | available in 7 thicknesses |
|------|------------------------------------|
| | (0.5 - 1 - 1.5 - 2 - 3 - 4 - 5 mm) |

CONSUMPTION depending on the installation layout and tile flatness,

make reference to the TDS

PACKAGING boxes with 12 bags with 250 pcs

160



CHECK THE TECHNICAL DATASHEET on mapei.con



MapeLevel ProWDG Spacer C-H

Spacers clips for MapeLevel ProWDG System wedge tile levelling system to be inserted with pliers for ceramic tiles and stone slabs on floors and on walls with thickness from 12 to 20 mm.



available in 4 thicknesses (1 - 2 - 3 - 5 mm) depending on the installation layout and tile flatness,

make reference to the TDS

PACKAGING boxes with 40 bags with 50 pcs



Mapetex System

SIZE

CONSUMPTION

Anti-fracture system for laying ceramic and stone flooring. It can be used together with Mapetex Strip, for the creation of removable ceramic tiles flooring.



APPLICATION See TDS

WIDTH Mapetex: 200 cm, 100 cm Mapetex Strip: 50 mm


PACKAGING Mapetex: 2 m x 50 m and 1 m x 50 m rolls Mapetex Strip: 50 mm x 25 m rolls





Mapetiles Removable System


Removable soundproofing and uncoupling system for installing ceramic flooring.





Mapei Tile Spacer 7-in-1

7 spacers in 1 single element. For ceramic tiles and stone slabs on floors and on walls.



| 1 | S | in | gle | 9 | spa | icei | r wit | th | 7 | different thickness | es |
|---|---|----|-----|---|-----|------|-------|----|---|---------------------|----|
| | _ | _ | _ | _ | _ | _ | _ | - | _ | | |

(0.5 - 1 - 1.5 - 2 - 3 - 4 - 5 mm)

CONSUMPTION depending on the installation layout and the operational requirements

PACKAGING boxes with 12 bags x 200 pcs





Mapei Tile Spacer T

SIZE

T-shaped spacers for the running/staggered patterns of ceramic and stone tiles.

SIZE available in the following sizes

1 - 1.5 - 2 - 2.5 - 3 - 4 - 5 - 6 - 7 - 10 mm

CONSUMPTION according to tiling layout/pattern

and specific operational requirements

PACKAGING 1mm: boxes 30 bags x 200 pcs.

1.5 mm: boxes 30 bags x 200 pcs. 2 mm: boxes 30 bags x 200 pcs.

2.5 mm: boxes 30 bags x 200 pcs. 3 mm: boxes 25 bags x 200 pcs. CE .

TECHNICAL
DATASHEET
on mapei.com

4 mm: boxes 20 bags x 200 pcs.

5 mm: boxes 20 bags x 200 pcs.

6 mm: boxes 20 bags x 200 pcs.

7 mm: boxes 12 bags x 200 pcs.

10 mm: boxes 10 bags x 200 pcs.



Mapei Tile Spacer Wedge S

Wedge spacers to rectify and level-off small lippage when installing ceramic and stone tiles.



SIZE available in sizes from 0 to 5 mm

CONSUMPTION according to tiling layout/pattern

and specific operational requirements

PACKAGING boxes with 40 bags x 200 pcs

162



Mapei Tile Spacer X

X-shaped spacers for the traditional installation of ceramic and stone tiles.

SIZE available in the following sizes 1 - 1.5 - 2 - 2.5 - 3 - 4 - 5 - 6 - 7 - 10 mm

CONSUMPTION according to tiling layout/pattern and

specific operational requirements

PACKAGING 1mm: boxes 45 bags x 200 pcs. 1.5 mm: boxes 45 bags x 200 pcs.

2 mm: boxes 35 bags x 200 pcs. 2.5 mm: boxes 35 bags x 200 pcs. 3 mm: boxes 30 bags x 200 pcs.

4 mm: boxes 30 bags x 200 pcs. 5 mm: boxes 25 bags x 200 pcs. 6 mm: boxes 25 bags x 200 pcs. 7 mm: boxes 20 bags x 200 pcs. 10 mm: boxes 15 bags x 200 pcs. CHECK THE TECHNICAL DATASHEET on mapei.com





Mapei Tile Spacer Y

Y-shaped spacers for hexagonal tiles.



| 5 | Z | Ε | ava | ila | ıbl | е | in | sizes | 2 | and | 3 | mm | |
|---|---|---|-----|-----|-----|---|----|-------|---|-----|---|----|--|
| | | | | | | | | | | | | | |

CONSUMPTION according to tiling layout/pattern

and specific operational requirements

PACKAGING boxes with 35 bags x 200 pcs



on mapei.com



Mapesept Gel

Detergent and hand sanitizer gel.



CHECK THE TECHNICAL DATASHEET on mapei.com



PACKAGING 6 1000

6 1000 ml bottles and 6 dispensers



Mapesept Liquid

Cleaning and hygienizing liquid for hands and small areas of surfaces for domestic and professional use.



CHECK THE TECHNICAL DATASHEET on mapei.com



PACKAGING 5 I tanks

Mapetherm Tile-EJOT SBV-P 8/90 K

Additional washer to be used together with the anchor Mapetherm Tile-EJOT SDF-S PLUS Ø 8 UB.



CHECK THE TECHNICAL DATASHEET on mapei.com



DIAMETER washer: 90 mm

PACKAGING 100 pcs boxes

Mapetherm Tile-EJOT SDF-S PLUS Ø 8 UB

High performance screw anchor to be used together with the washer Mapetherm Tile-EJOT SBV-P 8/90 K.

DIAMETER head: 12 mm; hole 8 mm

DEPTH of the anchorage: 70 mm; hole: 80 mm

LENGTH available in the following sizes

100 - 120 - 140 - 160 - 180 - 200 - 220 - 240 - 260, 280, 300 mm

PACKAGING 100 pcs boxes

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.com



2. COMPLEMENTARY PRODUCTS FOR LAYING RESILIENT, LVT AND TEXTILE COVERINGS

Fix & Grout Brick

Ready to use, high-performance adhesive paste with BioBlock® mould-resistant technology for bonding brick slips and light weight cementitious and synthetic resin conglomerate decorative elements on internal and external surfaces.



TECHNICAL DATASHEET on mapei.com



APPLICATION

notched trowel or brush

CERTIFICATIONS AND MARKINGS





Flexcolor 4 LVT

Ready to use grout for Luxury Vinyl Tiles.

APPLICATION rubber trowel

CONSUMPTION depending on the width of the joint

5 and 1 kg drums

COLOUR 103 moon white, 112 medium grey, 114 anthracite, 120 black, 130 jasmine, 134 silk, 146 rich brown

CERTIFICATIONS AND MARKINGS

PACKAGING









CHECK THE TECHNICAL DATASHEET on mapei.com



Mapecoat 4 LVT

Two-component aliphatic, anti-slip polyurethane finish in water dispersion for LVT.

APPLICATION short pile roller

1.2 kg kit A + B PACKAGING

CERTIFICATIONS AND MARKINGS

CONSUMPTION



80-100 g/m²















Mapecoat Decor Easy

APPLICATION

CONSUMPTION

PACKAGING

One component aliphatic, polyurethane finish in water dispersion for decorative fibre-glass and wall paper in dry areas.



| | CHECK THE TECHNICAL DATASHEE on mapei.c |
|--|--|
|--|--|

| short pile roller (such as T3 or T5) | CHE |
|--------------------------------------|-----------------|
| 80-100 g/m ² | DA ¹ |
| 1 bottles | |

Mapecoat Decor Protection

Two component aliphatic, finish in water dispersion for decorative fibre-glass and wall paper in wet areas.



| short pile roller (such as T3 or T5) | CHECK THE TECHNICAL |
|--------------------------------------|-------------------------------------|
| 80-100 g/m ² | DATASHEET on mapei.co |
| 10 kg kit A + D | |



CONSUMPTION 80-100 g/m²

APPLICATION

PACKAGING 1.2 kg kit A + B

Mapecoat Wet & Dry R11

Two component aliphatic, anti-slip polyurethane finish in water dispersion for resilient floor-coverings.

| IIXING RATIO 5/ |
|-----------------|
|-----------------|

OVERLAYING

min. 2 h- max. 48 h (after more than 48 hours, the surface will need to be adequately prepared with a red or green **Ultracoat Pad**)

SET TO FOOT TRAFFIC

166

16 h

CERTIFICATIONS AND MARKINGS











CHECK THE TECHNICAL DATASHEET on mapei.com



Mapelay

THICKNESS

LENGTH

WIDTH

PACKAGING


CONSUMPTION

WEIGHT

COLOUR

PACKAGING

PVC waterproofing and uncoupling sheet, reinforced with glass fibres, for laying internal resilient and fabric floors on substrates which have cracks, which are particularly dirty or damp or which are subject to capillary-action rising damp.



TECHNICAL DATASHEET on mapei.com



Mapelectric CP1

1.2 mm

25 m

2 m

25 m rolls

see TDS

black

2.5 kg tanks

Solvent-free, conductive additive added to primers, smoothing compounds, adhesives and grouting mortars for laying ceramic floors.



| CHECK THE |
|-------------------|
| TECHNICAL |
| DATASHEET |
| on mapei.c |
| |



Planiprep 4 LVT

Ready-to-use grout smoother before installing LVT floors.

density 1.05 kg/dm³

For smoothing over (down to a feather edge up to up to 2 mm thick) existing interior ceramic and stone surfaces. It fills the joints between the tiles and forms a fine-textured, smooth finish suitable for the very quick (2 hours) installation of loose-lay LVT SPC and rigid LVT, or bonded LVT with reactive adhesives, such as Ultrabond ECO MS 4 LVT Wall &Floor.

| APPLICATION | trowel |
|----------------|---------------------------------|
| CONSUMPTION | approx. 80-100 g/m ² |
| COLOUR | white |
| PACKAGING | 10 kg drums |
| CERTIFICATIONS | 7.50 |





CHECK THE TECHNICAL DATASHEET on mapei.com





Planiprep Remove 4 LVT

Ready-to-use grout smoother for existing substrates before the application of looselay LVT. Easy to remove without leaving any residual. For levelling off and smooth over (also down to a feather edge or in layers up to 2 mm thick) existing interior ceramic and stone surfaces. It fills joints and gaps between tiles and forms a fine, smooth finish suitable for loose-lay LVT tiles and planks.

| APPLICATION | trowel |
|----------------|---------------------------------|
| CONSUMPTION | approx. 80-100 g/m ² |
| COLOUR | white |
| PACKAGING | 10 kg drums |
| CEDTIFICATIONS | (FMICA) |







Primer G Conductive

Dark-coloured, solvent-free conductive synthetic resin primer in water dispersion.



CHECK THE TECHNICAL DATASHEET on mapei.com



Pulicol 2000

APPLICATION

CONSUMPTION

COLOUR

PACKAGING

Solvent gel for removing adhesive and paint.

brush

black

0.1-0.15 kg/m²

10 kg drums.



| APPLICATION | trowel |
|-------------|-----------------------|
| CONSUMPTION | 0.3 kg/m ² |
| COLOUR | transparent |
| PACKAGING | 2.5 kg drums. |



Back to the table of contents

Spacers 4 LVT

Spacers for calibrating grout lines in LVT, SPC and rigid LVT. For 2 mm, 3 mm and 4 mm grouts.



PACKAGING

200 pcs sachet

3. ACCESSORIES, ABRASIVE DISKS AND PRODUCTS FOR THE MAINTENANCE OF PARQUET

Cleaner H

Damp wipes for cleaning hands.



CHECK THE TECHNICAL DATASHEET on mapei.com



PACKAGING

plastic bottles with 80 damp wipes (20x30 cm).

Cleaner L

Cleaning solution for pre-finished parquet.



| PACKAGING | 1 I bottle (0.85 kg) boxes with 12 bottles. |
|-------------|---|
| COLOUR | transparent |
| CONSUMPTION | 5-20 g/m ² |
| APPLICATION | cotton rag |







169

Back to the alphabetical index

Mapei Spray Mop

Compact and light with an innovative design, specifically developed for cleaning domestic areas quickly and efficiently. May be used for daily cleaning operations on wooden floors using specific detergent, as well as for extra maintenance work to remove old wax and apply new wax.



PACKAGING

6 pc box


Ultrabond P-R9

One-component, moisture curing, expansive polyurethane adhesive used by injection, for fastening and repairing parquet elements which are not perfectly bonded to the substrate.



| HECK THE |] |
|--------------------|---|
| ECHNICAL | 1 |
| ATASHEET | , |
| n mapei.com | : |



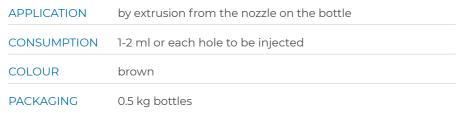

Ultracoat Cleaner

Hygienising detergent for wooden floors. Used neat it removes the most stubborn dirt. When diluted with water, it is the ideal detergent for daily cleaning operations in rooms where maximum hygiene is required. Gets rid of dirt from parquet without removing the finishing treatments. Leaves floors clean and hygienised with a pleasant fragrance.



CHECK THE TECHNICAL DATASHEET on mapei.com



Ultracoat Oil Pad

Special fabric pad for applying **Ultracoat Hard Oil Fast**, **Ultracoat Oil Plus**, **Ultracoat Oil Color**. Specific for removing the products.



Ultracoat Pad

Pads used for polishing and cleaning parquet floors.



CHECK THE TECHNICAL DATASHEET on mapei.com



PACKAGING

6 pcs boxes

Ultracoat Pad Special Stripper

Pads used for polishing and sanding of Ultracoat base coats and paints.



PACKAGING

10 pcs boxes



Ultracoat Polish Anti-Slip

Natural anti-slip protection for wooden floors. Ready-to-use natural wax made from Carnauba extract and water developed specifically for the maintenance of wooden floors using natural products. Also makes surfaces non-slip.



TECHNICAL DATASHEET on mapei.com



Ultracoat Polish Matt

Protective wear and stain-resistant polish for wooden floors. Ready-to-use product for all types of varnished wooden floor. Provides effective protection against the penetration of stains and reduces absorption of oil, grease, coffee, wine and paint. Also protects against wear from footsteps and abrasion and prevents surface scratches.

Brightens up varnished floors to restore them to their original condition and makes the surface of floors less slippery.



TECHNICAL DATASHEET on mapei.com



Ultracoat Remover Plus

Detergent to remove old wax and stubborn dirt; brings out the natural veining of wood. Reacts with old wax by breaking it down to make removal easier.



CHECK THE TECHNICAL DATASHEET on mapei.con



Ultracoat Roller Base Sport

Roller for premium base application of the first coat of **Ultracoat HT Sport** on playing surfaces.



Ultracoat Roller Finish Sport

Roller for applying Ultracoat HT Sport and Ultracoat Sport Color.



Ultracoat Roller MT8

Handle for Ultracoat Roller T3, Ultracoat Roller T5 and Ultracoat Roller T10 rollers.





Back to the alphabetical index

Ultracoat Roller MT Sport

Handle for **Ultracoat Roller Base Sport** and **Ultracoat Roller Finish Sport**



Ultracoat Roller T3

Roller for applying Ultracoat Hard Oil Fast, Ultracoat Oil Plus, Ultracoat Oil Wax and Ultracoat Oil Color.



Ultracoat Roller T5

5 mm fabric roller for applying the second coat of all **Ultracoat** finishing cycles on low porosity wood; after checking its suitability it may also be used for applying the first coat directly on wood.




Ultracoat Roller T10

Roller for applying all base coats and undercoats from the **Ultracoat** line or the first coat of all finishes from the **Ultracoat** line; particularly recommended for absorbent wood and for treating old floors.



Ultracoat SR

Abrasive mesh disks in silica carbide for sanding parquet floors.



Ultracoat Steel Spatula


Special spatula recommended for spreading Ultracoat Aqua Plus and **Ultracoat Oil Wax**. Made entirely from stainless steel, when used to apply **Ultracoat Aqua Plus**. It avoids staining the floor due to discolouring of the high quantity of tannin in certain types of wood. Adjustable flexibility to make grouting operations easier and to guarantee correct filling of even larger joints. Its special shape with rounded corners helps to avoid the formation of streaks of material on the surface of the floor, which makes it particularly recommended for spreading on Ultracoat Oil Wax and Ultracoat Premium Base.





Back to the alphabetical index



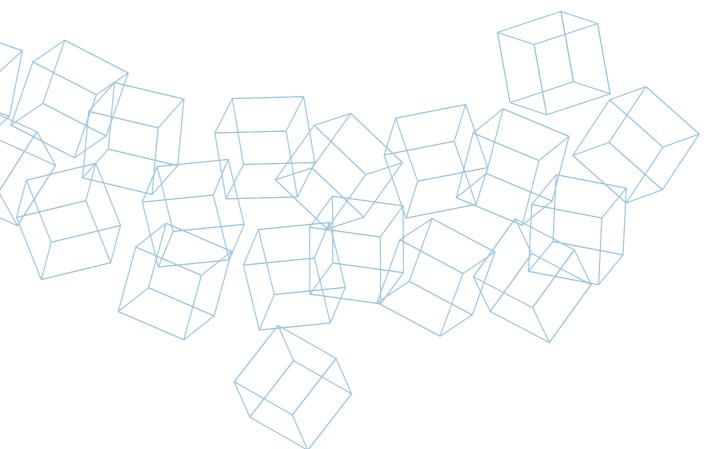



PRODUCTS
FOR RESIN AND
CEMENTITIOUS
FLOORS

1. RESIN-BASED PRODUCTS

Mapecoat DW 25

Two-component epoxy paint for coating concrete surfaces, suitable for contact with drinking water and foodstuff.

| APPLICATION | roller, brush or spray |
|-------------|--------------------------|
| CONSUMPTION | 0.2-0.3 kg/m² (per coat) |

COLOUR white

PACKAGING 5 kg kit (A+B)

CERTIFICATIONS AND MARKINGS









CHECK THE TECHNICAL DATASHEET on mapei.com



Mapecoat EPN 24

Coloured two-component, epoxy-novolac resin-based coating product with high resistance to chemicals and high solids content.

| APPLICATION | medium pile roller, steel straight trow |
|-------------|---|
| CONSUMPTIO | When used to form a thick coating r |

When used to form a thick coating resistant to chemicals: 0.2-0.3 kg/m² per coat
When used as a final coat on multi-layered coatings:

 When used as a final coat on multi-layered coating 0.3-0.4 kg/m²

COLOURS RAL colours - For the complete colour range please contact the Head Office.


CERTIFICATIONS AND MARKINGS

PACKAGING



5 kg kit (A+B)





CHECK THE TECHNICAL DATASHEET on mapei.com



Mapecoat I 24

Two-component epoxy paint for anti-acid coating concrete surfaces.

APPLICATION roller, brush or airless spray

CONSUMPTION 0.4-0.6 kg/m² per coat

COLOURS RAL colours e neutral to be coloured with Mapecolor Paste

PACKAGING 5 kg and 15 kg kits (A+B)

CERTIFICATIONS AND MARKINGS

178







CHECK THE TECHNICAL DATASHEET on mapei.com



Mapecoat I 62 W

Two-component epoxy coating in water dispersion with a gloss finish to form smooth films of resin coating. Specifically developed for coating the surface of walls and ceilings in clean rooms.

APPLICATION short pile roller in two coats or by airless spray system.

CONSUMPTION film coating approx. 0.2-0.25 kg/m² per coat

COLOURS RAL colours. For the complete colour range please

contact the Head Office

PACKAGING 11 kg kit (A + B)

CERTIFICATIONS AND MARKINGS















e De Bull

Mapecoat I 600 W

Two-component, transparent epoxy primer in water dispersion.

APPLICATION roller, spray or airless spray

CONSUMPTION 0.15-0.25 kg/m²,
depending on the absorption of the substrate

COLOUR opalescent

PACKAGING 5.9 kg and 11.8 kg kits (A+B)



CHECK THE TECHNICAL DATASHEET on mapei.com



Mapecoat I 600 W Lucido

Two-component transparent glossy epoxy primer in water dispersion.

| APPLICATION | roller, spray or airless spray |
|-------------|--|
| CONSUMPTION | 0.15-0.25 kg/m², depending on the absorption of the substrate |
| COLOUR | opalescent |
| PACKAGING | 5.9 kg kit (A+B) |



CHECK THE TECHNICAL DATASHEET on mapei.com





179

Mapecoat I 620 W

Two-component, shiny epoxy finish in water dispersion for anti-dust and anti-grease treatments on concrete floors, cementitious substrates and as a finishing coat on epoxy systems.

APPLICATION short or medium pile roller, or airless spray

CONSUMPTION 0.10-0.25 kg/m² per coat, depending on the absorbency

of the substrate

COLOUR opalescent

PACKAGING 15 kg kit (A+B)

CERTIFICATIONS **AND MARKINGS**







CHECK THE TECHNICAL DATASHEET on mapei.com



Mapecoat I 650 WT

Two-component epoxy paint in water dispersion with a ceramic-effect finish and low dirt-retaining surface for finishing support walls in tunnels.

APPLICATION roller, brush or airless spray

CONSUMPTION


approx. 0.25 kg/m² per coat. The consumption depends on the characteristics of the substrate and the application method used. It may increase if the surface on which it is applied is uneven

PACKAGING 15 kg kit (A+B)

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.com



Mapecoat Universal

Two-component transparent epoxy binder for internal decorative coatings from the Mapefloor Compact System range.

- APPLICATION
- used as primer: by roller, steel straight trowel;
 used for Mapefloor Compact System MF: straight steel trowel, straight rake;
 used for Mapefloor Compact System HD:
- screed-box, straight edge with shims
- CONSUMPTION
- used as primer: 0.2-0.4 kg/m²;
- per Mapefloor Compact System MF 3 mm thickness: 1.4-1.6 kg/m²
- per Mapefloor Compact System HD 7 mm thickness: 2.0-2.5 kg/m²

COLOURS

transparent and straw

PACKAGING

15 kg kit (A+B)

CERTIFICATIONS AND MARKINGS

180







CHECK THE TECHNICAL DATASHEET on mapei.com



Mapecolor CPU+

Pigment in paste for colouring the products from the Mapefloor CPU+ range.



TECHNICAL DATASHEET on mapei.com



Mapecolor Paste

APPLICATION

COLOURS

PACKAGING

Pigment in paste for colouring the Mapefloor system.

0.23 kg sachet

| APPLICATION | mix with resin-based formulates during the preparation |
|-------------|---|
| CONSUMPTION | depending on the resin-based formulate |
| COLOURS | 19 colours - other RAL colours upon request for a minimum quantity of 25 kg |
| PACKAGING | 0.7 kg can |

mix with polyurethane/cement-based formulates

grey, beige, ochre, red, green, blue



TECHNICAL DATASHEET on mapei.com



Mapecrete Creme Protection

Solvent-free, silane-based, thixotropic water repellent in water dispersion, ideal for hydrophobic treatments on concrete.

| APPLICATION | squeegee, airless spray, brush or roller |
|-------------|--|
| CONSUMPTION | 0.1-0.4 kg/m² depending on the level of absorption of the concrete |
| COLOUR | yellowish white |

CERTIFICATIONS AND MARKINGS

PACKAGING



25 kg drums





TECHNICAL DATASHEET on mapei.com





Mapecrete LI Hardener

Surface treatment based on lithium silicate in liquid form with a consolidating effect for new or old concrete floors and concrete surfaces with a dry-shake hardener finishing.

spray or low-pressure pump

of the concrete

25 kg tanks



| CHECK THE |
|---------------------|
| TECHNICAL |
| DATASHEET |
| on mapei.com |

Mapecrete Lithium +

APPLICATION


CONSUMPTION

PACKAGING

182

Water-repellent and protective surface treatment in liquid form with a consolidating effect for new or old concrete floors and concrete surfaces with a dry-shake hardener finishing.

0.2-0.4 kg/m² depending on the level of porosity



| CHECK THE | |
|---------------------|--|
| TECHNICAL | |
| DATASHEET | |
| on mapei.com | |
| | |



APPLICATION spray or low-pressure pump CONSUMPTION 0.05-0.3 kg/m² depending on the type of substrate, its absorbency and on the environmental conditions PACKAGING 25 kg tanks

Mapecrete Lithium Cure

Water-repellent and protective surface treatment in liquid form with anti-evaporation function and a consolidating effect for new concrete floors and concrete surfaces with a dry-shake hardener finishing.



| APPLICATION | spray or low-pressure pump |
|-------------|--|
| CONSUMPTION | 1-4 kg/m² depending on the type of substrate, its absorbency and on the environmental conditions |
| PACKAGING | 25 kg tanks |





Mapecrete Lithium Protector

Water-repellent and protective surface treatment in liquid form with a consolidating effect for natural concrete floors and concrete surfaces with a dry-shake hardener finishing. It is used for the protection of coloured concrete or with exposed aggregates concrete such as Mapei Color Paving®.

spray or low-pressure pump

0.05-0.4 kg/m² depending on the type of substrate,

its absorbency and on the environmental conditions.



TECHNICAL DATASHEET on mapei.com



Mapecrete Stain Protection

25 kg tanks

APPLICATION

PACKAGING

PACKAGING

CONSUMPTION

Hydro-oil repellent and anti-stain treatment for concrete, natural stone and cementitious and stone surfaces made from modified organic polymers in water solution.



| CHECK THE |
|---------------------|
| TECHNICAL |
| DATASHEET |
| on mapei.com |
| |



| APPLICATION | airless spray or brush |
|-------------|--|
| CONSUMPTION | 0.1-0.3 kg/m² depending on the level of porosity of the concrete fix |
| | |

Mapecrete U-Protector

25 kg tanks

Water-repellent and protective surface treatment in liquid form for new or old concrete floors. It is used for the protection of concrete with a natural, polished or sanded finish and on **Ultratop** systems.



| APPLICATION | spray or low-pressure pump |
|-------------|--|
| CONSUMPTION | 0.05-0.4 kg/m² depending on the type of substrate, its absorbency and on the environmental conditions. |
| PACKAGING | 25 kg tanks |







Mapefloor Binder 930

One-component aliphatic polyurethane binder for decorative made with natural open-pore aggregates.

| APPLICATION | rake, straight-edge, straight metal trowel, vibrating plate compactor |
|-------------|---|
| COLOUR | transparent |
| CONSUMPTION | 0.8-1.0 kg/m² per cm of thickness |
| PACKAGING | 5 kg drums |



CHECK THE TECHNICAL DATASHEET on mapei.com



Mapefloor CPU/TC Glossy

Three-component polyurethane/cement-based coloured glossy formulate for coating walls and as a finishing coat on polyurethane/cementitious systems for industrial floors.

| APPLICATION | short or medium pile roller, metal or rubber trowel |
|-------------|---|
| COLOUR | red, beige, greed, grey, ochre |
| PACKAGING | 6.3 kg kit (A+B+C) |

CERTIFICATIONS AND MARKINGS









CHECK THE TECHNICAL DATASHEET on mapei.com



Mapefloor CPU+/COVE

Three-component, antimicrobial polyurethane/cement-based mortar for making covings and details.

| APPLICATION | suitable plastic or metal tools |
|-------------|--|
| CONSUMPTION | depending on the shape and volume of the detail approx. 2 kg/l |
| COLOUR | to be coloured with Mapecolor CPU+ |
| PACKAGING | 29.16 kg kit (A+B+C) |

CERTIFICATIONS

184













CHECK THE **TECHNICAL** DATASHEET on mapei.com



Mapefloor CPU+/HD

Three-component, antimicrobial high-strength polyurethane-cement mortar with high resistance to chemicals for industrial floors, applied in thicknesses from 6 to 12 mm.

Complies with standards applied in the foodstuffs sector.

APPLICATION straight metal trowel CONSUMPTION 2 kg/m² per mm of thickness COLOUR to be coloured with Mapecolor CPU+ **PACKAGING** 24.66 kg kit (A+B+C)

CERTIFICATIONS AND MARKINGS













TECHNICAL DATASHEET on mapei.com



Mapefloor CPU+/MF

Three-component, antimicrobial, self-levelling polyurethane-cement mortar with high resistance to chemicals for industrial floors, applied in thicknesses from 3 to 6 mm. Complies with standards applied in the foodstuffs sector

| iii tile loodstalls | s sector. | |
|---------------------|--|--|
| APPLICATION | straight metal trowel or rake with spacers | |
| | | |

1.7 kg/m² per mm of thickness

COLOUR to be coloured with Mapecolor CPU+

PACKAGING 14.16 kg kit (A+B+C)

CERTIFICATIONS AND MARKINGS

CONSUMPTION















Mapefloor CPU+/NZ

Three-component, easy-to-apply, antimicrobial high-strength polyurethane-cement mortar with high resistance to chemicals for industrial floors, applied in thicknesses from 4 to 6 mm. Complies with standards applied in the foodstuffs sector.

CONSUMPTION 1.9 kg/m² per mm of thickness

COLOUR to be coloured with Mapecolor CPU+

PACKAGING 21.16 kg kit (A+B+C)

CERTIFICATIONS AND MARKINGS





















Mapefloor CPU+ Primer

Polyurethane-cement primer for Mapefloor CPU+ systems.



0.3-0.4 kg/m² CONSUMPTION

PACKAGING 6.66 kg kit (A+B+C)

CERTIFICATIONS AND MARKINGS









Mapefloor CPU+/RT

Three-component, antimicrobial, high-strength, polyurethane-cement mortar with high resistance to chemicals for coating industrial floors applied in thicknesses from 6 to 9 mm.

Complies with standards applied in the foodstuffs sector.

CONSUMPTION 1.9 kg/m² per mm of thickness

COLOUR to be coloured with Mapecolor CPU+

PACKAGING 22.66 kg kit (A+B+C)

CERTIFICATIONS AND MARKINGS



















TECHNICAL DATASHEET on mapei.com



Mapefloor CPU+/SR

Three-component, antimicrobial, polyurethane/cement-based mortar for industrial floors with high anti-slip level, applied in thicknesses from 6 to 12 mm. Complies with standards applied in the foodstuffs sector.

| APPLICATION | straight metal trowel |
|-------------|---|
| CONSUMPTION | 2 kg/m² per mm of thickness |
| COLOUR | to be coloured with Mapecolor CPU+ |

CERTIFICATIONS AND MARKINGS

PACKAGING

186





23.16 kg kit (A+B+C)











CHECK THE **TECHNICAL** DATASHEET on mapei.com



Mapefloor CPU+/TC

Three-component, antimicrobial, polyurethane/cement-based formulate for coating walls and as a finishing coat on polyurethane/cementitious systems for industrial floors.

APPLICATION metal or rubber trowel or short or medium pile roller

CONSUMPTION • 0.2-0.25 mm as finishing coat: 0.3-0.35 kg/m²;

• finishing coat: on Mapefloor CPU+/MF broadcast with quartz sand: 0.3-0.6 kg/m²

COLOUR to be coloured with Mapecolor CPU+

PACKAGING 6.66 kg kit (A+B+C)

CERTIFICATIONS AND MARKINGS















Mapefloor CPU+/UD

Three-component, antimicrobial, high-strength, polyurethane/cement-based mortar for industrial floors with high resistance for industrial floors in thicknesses from 6 to 12 mm. Complies with standards applied in the foodstuffs sector.

APPLICATION straight metal trowel

CONSUMPTION 2 kg/m² per mm of thickness

COLOUR to be coloured with Mapecolor CPU+

PACKAGING 23.16 kg kit (A+B+C)

CERTIFICATIONS AND MARKINGS













TECHNICAL DATASHEET on mapei.com



Mapefloor Decor 700

Two-component, epoxy paste in water dispersion to create highly attractive resin systems with a trowel-effect or mottled finish with 1.5 to 3 m thickness.

APPLICATION straight steel trowel

CONSUMPTION from 1 to 1.5 kg/m² per layer, depending on the characteristics of the substrate and the type of decorative effect desired

COLOUR to be coloured with Mapecolor Paste

PACKAGING 10 kg kit (A+B+C)

CERTIFICATIONS AND MARKINGS







TECHNICAL DATASHEET on mapei.com





Mapefloor EP19

Three-component acid and wear-resistant epoxy mortar for floors.

CERTIFICATIONS AND MARKINGS





CHECK THE TECHNICAL DATASHEET on mapei.com



Mapefloor Finish 50 N

Semi-gloss, aliphatic, transparent polyurethane finish.

| APPLICATION | mohair roller or airless spray |
|-------------|--|
| CONSUMPTION | 0.08-0.30 kg/m 2 per coat, depending on the absorbency of the substrate |
| COLOUR | transparent |
| PACKAGING | 10 kg kit (A+B) |



CHECK THE **TECHNICAL** DATASHEET on mapei.com



Mapefloor Finish 52 W

Two-component, polyurethane finishing product in water dispersion with low yellowing properties, for anti-dust and anti-oil treatments.

| APPLICATION | mohair roller or airless spray |
|----------------|---|
| CONSUMPTION | 0.05-0.15 kg/m² per coat depending on the absorbency of the substrate |
| COLOUR | opalescent |
| PACKAGING | 5.4 kg kit (A+B) |
| CERTIFICATIONS | RADITATINATION (IN 1984-21G) |

AND MARKINGS





CHECK THE TECHNICAL DATASHEET on mapei.com



Mapefloor Finish 53 W/L

Two-component, NMP-free, aliphatic, transparent, glossy polyurethane finish in water dispersion with no NMP for protecting resin and cementitious flooring.

| APPLICATION | mohair roller or airless spray |
|-------------|--|
| CONSUMPTION | 0.1-0.2 kg/m² according to the grade of finish required to the coating |
| COLOUR | transparent |
| PACKAGING | 2 kg unit: 5 + 0.5 l (A+B). |
| | |



TECHNICAL DATASHEET on mapei.com



Mapefloor Finish 54 W/S

Two-component, NMP-free, aliphatic, transparent, satin polyurethane finish in water dispersion with no NMP for protecting resin and cementitious flooring.

| APPLICATION | mohair roller or airless spray |
|-------------|--|
| CONSUMPTION | 0.1-0.2 kg/m² according to the grade of finish required to the coating |
| COLOUR | transparent |
| PACKAGING | 2 kg unit: 5 + 0.5 l (A+B). |



CHECK THE TECHNICAL DATASHEET on mapei.com



Mapefloor Finish 58 W

Two-component, aliphatic, water-based, transparent, matt polyurethane finish.

| APPLICATION | mohair roller or airless spray |
|----------------|--|
| CONSUMPTION | 0.1-0.2 kg/m² depending on the level of roughness and porosity of the substrate |
| COLOUR | transparent |
| PACKAGING | 5.5 kg kit (A+B) |
| CERTIFICATIONS | INCOMMENTAL WITH COMMENTAL WITH COMM |





CHECK THE TECHNICAL DATASHEET on mapei.com





Mapefloor Finish 59 W

Two-component, aliphatic, water-based, coloured, matt polyurethane finish, suitable for flexible systems.

| APPLICATION | mohair roller or airless spray |
|-------------|--|
| CONSUMPTION | 0.1-0.2 kg/m² per coat depending on the level of roughness and porosity of the substrate |
| COLOURS | RAL colours - for the complete colour range please contact the Head Office. |

PACKAGING 5.5 kg kit (A+B)

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.com



Mapefloor Finish 59 W TRP

Two-component, aliphatic, water-based, transparent, matt polyurethane finish, suitable for flexible systems.

| APPLICATION | mohair roller or airless spray |
|-------------|--|
| CONSUMPTION | 0.1-0.2 kg/m² per coat depending on the level of roughness and porosity of the substrate |
| COLOUR | transparent |
| PACKAGING | 5.5 kg kit (A+B) |

CERTIFICATIONS AND MARKINGS









TECHNICAL DATASHEET on mapei.com



Mapefloor Finish 415

Two-component, aromatic, flexible, wear-resistant coloured polyurethane finish.

| APPLICATION | roller, steel straight trowel or rubber trowel |
|-------------|---|
| CONSUMPTION | theoretical 0.5-0.8 kg/m² |
| COLOURS | RAL colours - for the complete colour range please contact the Head Office. |
| PACKAGING | 12.5 kg kit (A+B) |

CERTIFICATIONS AND MARKINGS

190





CHECK THE TECHNICAL DATASHEET on mapei.con



Mapefloor Finish 450 EU

Two-component, aliphatic, flexible, wear and UV resistant, elastic, coloured, polyurethane finish.

APPLICATION roller, steel straight trowel or rubber trowel CONSUMPTION theoretical 0.6-0.8 kg/m² depending on the roughness of the substrate, temperature and the tools used for application.

COLOURS RAL colours - for the complete colour range please contact the Head Office.

PACKAGING 20 kg kit (A+B)

CERTIFICATIONS AND MARKINGS











TECHNICAL DATASHEET on mapei.com



Mapefloor Finish 451

Two-component, aliphatic, flexible, wear and UV resistant, elastic, coloured, polyaspartic finish.

APPLICATION roller, steel straight trowel or rubber trowel theoretical 0.6-0.8 kg/m² CONSUMPTION

RAL colours - for the complete colour range **COLOURS** please contact the Head Office.

PACKAGING 20 kg kit (A+B)

CERTIFICATIONS AND MARKINGS









CHECK THE TECHNICAL DATASHEET on mapei.com



Mapefloor Finish 630

Two-component, protective acrylic filming agent in water dispersion for concrete, **Ultratop** and **Ultratop Living** floors.

| APPLICATION | waxing mop, mohair roller or airless spray |
|-------------|---|
| CONSUMPTION | 0.15-0.2 kg/m² depending on the level of porosity and absorption of the substrate |
| COLOURS | transparent milky white |
| PACKAGING | 2 kits unit (A+B): 10 + 0.150 kg |



TECHNICAL DATASHEET on mapei.con





Mapefloor Finish HTR

Two-component, aliphatic, glossy and transparent elastic finish, with high resistance to chemicals and tyre plasticisers.

| APPLICATION | mohair roller or airless spray |
|-------------|---|
| CONSUMPTION | 0.05- 0.15 kg/m² per coat, depending on the type of substrate to be covered |
| COLOUR | transparent |
| PACKAGING | 10 kg kit (A+B) |







Mapefloor I 300 SL

Two-component, multi-purpose, epoxy formulate for industrial floor coatings up to 4 mm thick. Complies with standards applied in the foodstuffs sector and to the radon gas tightness.

|--|

CONSUMPTION • 2.0 kg/m² as self-levelling coating with 2 mm thickness*

• 0.9 kg/m² as intermediate layer in anti-slip coating with 3 mm thickness*

• 0.6 kg/m² as finishing layer of the anti-slip coating both with 1 mm, or 3 mm thickness*

* over a substrate primed with **Primer SN**

to be coloured with **Mapecolor Paste** (if the neutral version is used) COLORE

PACKAGING 20 kg kit (A+B)

CERTIFICATIONS AND MARKINGS

192













CHECK THE TECHNICAL DATASHEET on mapei.com



Mapefloor I 300 SL TRP

Two-component, transparent, low-yellowing epoxy coatings applied at a thickness of 1 mm for finishing coats on epoxy resin systems.



CHECK THE

TECHNICAL

DATASHEET

| APPLICATION | n. 7 notched trowel |
|-------------|---|
| CONSUMPTION | approx. 1.1 kg/m² for a 1 mm thick coat |
| COLOUR | transparent |
| PACKAGING | 18 kg kit (A+B) |



Mapefloor I 302 SL

Two-component multipurpose epoxy formulate for industrial floors in compliance with standards applied to the drinks and foodstuffs industry and clean rooms and to the radon gas tightness.

APPLICATION roller, straight and notched trowel

2.0 kg/m² as self-levelling coating with 2 mm thickness*
0.9 kg/m² as an intermediate coat in anti-slip coating with CONSUMPTION

3 mm thickness*

0.6 kg/m² as finishing layer of the anti-slip coating both with 1 mm, or 3 mm thickness*
 * over a substrate primed with Primer SN

RAL colours - for the complete colour range please contact the Head Office

PACKAGING 20 kg kit (A+B)

CERTIFICATIONS AND MARKINGS

COLOURS















TECHNICAL DATASHEET on mapei.com



Mapefloor I 306 CR

Two-component, low emission epoxy formulate for self-levelling floor coatings in clean rooms.

APPLICATION straight or notched trowel (with V-notches)

CONSUMPTION smooth self-levelling coating

average thickness 2 mm: 2.3 kg/m²

COLOURS RAL colours - for the complete colour range

please contact the Head Office

PACKAGING 20 kg kit (A + B)

CERTIFICATIONS AND MARKINGS













TECHNICAL DATASHEET on mapei.com



Mapefloor I 309 CR

Two-component, very low emission epoxy formulate for self-levelling floor coatings in clean rooms.

APPLICATION straight or notched trowel (with V-notches)

CONSUMPTION smooth self-levelling coating average thickness 2 mm: 2.3 kg/m²

COLOURS RAL colours - for the complete colour range

please contact the Head Office

PACKAGING 19.5 kg kit (A + B)

CERTIFICATIONS AND MARKINGS















TECHNICAL DATASHEET on mapei.com





Mapefloor I 320 SL CONCEPT

Self-levelling epoxy coating with a coloured granular finish for decorative floors.

| APPLICATION | straight trowel |
|----------------|---|
| CONSUMPTION | 2.7-3 kg/m ² |
| COLOURS | light grey, dark grey, light azure, dark azure, red |
| PACKAGING | 16.8 kg kit (A+B) |
| CERTIFICATIONS | C C SE |







Mapefloor I 324

AND MARKINGS

Two-component, coloured formulate, based on epoxy-novolac resin for self-levelling resin systems to be used in industrial floors with very high resistance to chemicals.

| APPLICATION | notched trowel (with V-notches) |
|-------------|--|
| CONSUMPTION | 2.3-2.5 kg/m ² |
| COLOURS | RAL colours - For the complete colour range please contact the Head Office |
| PACKAGING | 20 kg kit (A+B) |







AND MARKINGS

CERTIFICATIONS





Mapefloor I 357 ESD

Two-component, self-levelling epoxy formulate for conductive and dissipative coatings in compliance with ESD standard.

| APPLICATION | notched trowel (with V-notches) |
|----------------|---|
| CONSUMPTION | 1.8-2.0 kg/m² per 1.5 mm of self-levelling layer. The maximum consumption is 2.5 kg/m² |
| COLOURS | RAL colours - For the complete colour range please contact the Head Office |
| PACKAGING | 20 kg kit (A+B) |
| CEDTIFICATIONS | |



CHECK THE TECHNICAL DATASHEET on mapei.com



Mapefloor I 360 AS

Two-component, self-levelling epoxy formulate used to form strong, anti-static, conductive coatings.

| APPLICATION | rake or notched trowel (with V-notches) |
|-------------|--|
| CONSUMPTION | max. 2.4 kg/m² |
| COLOURS | RAL colours - For the complete colour range please contact the Head Office |
| PACKAGING | 20 kg kit (A+B) |



CHECK THE TECHNICAL DATASHEET



CERTIFICATIONS AND MARKINGS







Mapefloor I 370 SL

Two-component multipurpose epoxy formulate for self-levelling or multi-layered industrial floors from 0.8 mm up to 3.5 mm thickness.

| APPLICATION | roller, straight trowel, notched trowel |
|--------------------------------|--|
| CONSUMPTION | 0.6-2.0 kg/m² depending on the system to be applied |
| COLOURS | RAL colours - For the complete colour range please contact the Head Office |
| PACKAGING | 20 kg kit (A+B) |
| CERTIFICATIONS AND MARKINGS | (E SR B20 |



TECHNICAL DATASHEET on mapei.com



Mapefloor I 390 EDF

Two-component, self-levelling epoxy formulate used to form strong, dissipative coatings.

| APPLICATION | rake or notched trowel (with V-notches) |
|-------------|--|
| CONSUMPTION | max. 2.5 kg/m ² |
| COLOURS | RAL colours - For the complete colour range please contact the Head Office |
| PACKAGING | 20 kg kit (A+B) |



CHECK THE DATASHEET on mapei.com



AND MARKINGS







CERTIFICATIONS AND MARKINGS











Back to the table of contents

Mapefloor I 500 W

Two-component, vapour-permeable, neutral-coloured epoxy formulate in water dispersion for industrial floors.

CONSUMPTION • as 2 mm thick smooth self-levelling coating on substrates primed with Mapecoat I 600 W: 4 kg/m²

• as 5 mm thick multi-layered anti-slip coating: as first layer Mapefloor I 500 W - 2-2.5 kg/m² / Quartz 0.5 - 5 kg/m²

Mapefloor I 500 W - 2-2.5 kg/m² / Quartz 0.5 - 5 kg/m² as finishing layer Mapefloor I 500 W - 0.7 kg/m²

COLOUR to be coloured with Mapecolor Paste

PACKAGING 26 kg kit (A+B)

CERTIFICATIONS AND MARKINGS





CHECK THE TECHNICAL DATASHEET on mapei.com



Mapefloor I 900

Two-component epoxy binder used for preparing trowelled mortar with a damp earth consistency for industrial floors.

APPLICATION

- as adhesion promoter: roller, straight metal trowel;
- for mortars: rake, aluminium straight edge

CONSUMPTION

- as adhesion promoter: 0.5-0.7 kg/m²;
- as mortar: suggested mixing ratio for the preparation of mortars: 1 kg of Mapefloor I 900 (A+B) every 8-13 kg of Quartz 1.9. The consumption depends on the application thickness

COLOURS


PACKAGING

CERTIFICATIONS AND MARKINGS





transparent amber



CHECK THE TECHNICAL DATASHEET on mapei.com



Mapefloor I 910

Two-component low-yellowing epoxy binder for trowelled mortar or bonding promoter for resin coatings.

APPLICATION

- as primer: roller, straight metal trowel;
- for mortars: rake, aluminium straight edge

CONSUMPTION

- as adhesion promoter: 0.5-0.7 kg/m²;
- as mortar: suggested mixing ratio for the preparation of mortars: 1 kg of **Mapefloor I 910** (A+B) every 8-13 kg of Quartz 1.9 The consumption depends

on the application thickness

COLOURS PACKAGING transparent and straw 15 kg kit (A+B)

CERTIFICATIONS AND MARKINGS

196







CHECK THE TECHNICAL DATASHEET on mapei.com



Mapefloor I 914

Two-component epoxy protective coating for concrete, with priming function on skim coats and substrates before waterproofing bridge decks with membranes or before installing asphalt layer.

Also suitable for injections, reparation and protection of concrete structure in compliance with requirements defined by EN 1504-5 standard.

APPLICATION rubber trowel, roller or brush

CONSUMPTION 0.25-0.70 kg/m²

(depending on the absorption of the substrate)

COLOUR yellow transparent

PACKAGING 28 kg kit (A+B)

CERTIFICATIONS AND MARKINGS











TECHNICAL DATASHEET on mapei.com



Mapefloor JA

Two-component thixotropic epoxy adhesive for installing Mapejoint 100/25 and Mapejoint 100/12 prefabricated polymer jointing profiles. For carrying out small repairs and grouting on concrete surfaces. Also available in the Mapefloor JA Fast version.

APPLICATION

straight trowel, notched trowel

CONSUMPTION

- 1.60-1.65 kg/m² per mm of thickness
- for bonding Mapejoint 100/25: 5-6 kg per metre of joint, depending on the roughness of the substrate
 • for bonding Mapejoint 100/12: 2.5-3 kg per metre of joint,
- depending on the roughness of the substrate

PACKAGING

6 kg kit (A+B)

CERTIFICATIONS AND MARKINGS







Mapefloor Pore Filler

Two-component, flexible polyurethane resin-based adhesive and pore filler/smoothing compound for Mapefloor Comfort System AL/X and Mapefloor Comfort System AR/X.

APPLICATION

- as adhesive: 3-4 mm notched trowel;
- as pore filler/smoothing compound: plastic or steel straight trowel

CONSUMPTION

approx.0.4-0.8 kg/m² as adhesive. The real consumption is strongly influenced by the substrate type. 0.4-0.5 kg/m² per coat, as smoothing compound on Mapecomfort FL

beige

COLOUR

PACKAGING 12.2 kg kit (A+B)

TECHNICAL DATASHEET on mapei.com





PRODUCTS FOR RESIN AND CEMENTITIOUS FLOORS

Mapefloor PU 400 LV

Two-component, self-levelling, fillerized, highly flexible and low-viscosity polyurethane binder.

| APPLICATION | notched trowe | اد |
|-------------|---------------|----|
|-------------|---------------|----|

CONSUMPTION from 1.5 to 2 kg/m² according to the absorption

of the substrate

COLOUR beige - grey

PACKAGING 20 kg kit (A+B)

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.com



Mapefloor PU 406

Two-component, coloured, self-levelling, flexible polyurethane binder.

APPLICATION straight or notch rake or steel trowel

CONSUMPTION • as protective/wear layer for parking lots: ~1,0 kg/m²

• flexible membrane for Terrazzo systems:

0.5-0.7 kg/m² per layer

COLOURS RAL colours - For the complete colour range

please contact the Head Office

PACKAGING 18 kg kit (A+B)

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.com



Mapefloor PU 410

Two-component, neutral-coloured, self-levelling, flexible polyurethane fillerized binder.

APPLICATION straight trowel and notched trowel

CONSUMPTION as intermediate layer of

Mapefloor Parking System HE:

Mapefloor PU 410 + Mapecolor Paste: 1.0 kg/m²

COLOUR to be coloured with Mapecolor Paste

PACKAGING 19.9 kg kit (A+B)

CERTIFICATIONS AND MARKINGS

198







CHECK THE TECHNICAL DATASHEET on mapei.com



Mapefloor PU 460


Two-component elastic, coloured, aromatic, self-levelling polyurethane resin used to create Mapefloor Comfort System AR and Mapefloor Comfort System AR/X.

| APPLICATION | notched trowel |
|-------------|--|
| CONSUMPTION | approx. 2.5 kg/m² for a 2 mm thick coat |
| COLOURS | RAL colours - For the complete colour range please contact the Head Office |
| PACKAGING | 20 kg kit (A+B) |

CERTIFICATIONS AND MARKINGS







TECHNICAL
DATASHEET
on mapei.com



Mapefloor PU 461

Two-component elastic, coloured, UV-resistant, aliphatic, self-levelling polyurethane resin used to create Mapefloor Comfort System AL and Mapefloor Comfort System AL/X.

| APPLICATION | notched trowel | |
|-------------|--|--|
| CONSUMPTION | approx. 2.8 kg/m² for a 2 mm thick coat | |
| COLOURS | RAL colours - For the complete colour range please contact the Head Office | |
| | | |

CERTIFICATIONS AND MARKINGS

PACKAGING



20 kg kit (A+B)





CHECK THE TECHNICAL DATASHEET on mapei.com



Mapefloor PU 470

Two-component multipurpose, coloured, semi-elastic polyurethane formulate for industrial floors coatings.

APPLICATION notched trowel, steel or rubber straight trowel

CONSUMPTION • self-levelling smooth coating: 1.8-1.9 kg/m²

• multi-layered non-slip coating:

- middle layer: 0.9-1.0 kg/m²

- finishing coat: 0.5-0.6 kg/m²

RAL colours - For the complete colour range please contact the Head Office

PACKAGING 20.1 kg kit (A+B)

CERTIFICATIONS AND MARKINGS

COLOURS







TECHNICAL
DATASHEET
on mapei.con





Primer EP Rustop

APPLICATION

COLOUR

PACKAGING

CONSUMPTION

Two-component epoxy primer for metal surfaces.

0.2 kg/m²

5 kg kit (A+B)

white

roller, brush or airless spray



| CHECK TH |
|-------------------|
| TECHNICA |
| DATASHEE |
| on mapei . |



Primer Grip White

Universal, ready-to-use, synthetic resin-based bonding promoter in water dispersion with silica aggregates and very low emission of volatile organic compounds (VOC). For indoor floors and walls. It promotes the bond of decorative cementitious skimming mortars from the **Ultratop Loft** range.

| APPLICATION | roller, brush |
|----------------|---|
| CONSUMPTION | from 0.20 to 0.3 kg/m² depending on the absorption of the substrate |
| COLOUR | white |
| PACKAGING | 10 kg drums |
| CERTIFICATIONS | (S) LEMICON |





CHECK THE TECHNICAL DATASHEET on mapei.com



Primer LT

Acrylic adhesion promoter for **Ultratop Loft** and cementitious skimming mortars. For indoor surfaces.

| | APPLICATION | roller, brush |
|--|-------------|---|
| | CONSUMPTION | approx. 0.1 kg/m² between the coats of Ultratop Loft ; from 0.1 to 0.2 kg/m² for other substrates, depending on the porosity |
| | COLOUR | light blue |
| | PACKAGING | 5 kg tanks |
| | | |

CERTIFICATIONS AND MARKINGS

200





CHECK THE TECHNICAL DATASHEET on mapei.com



Primer SN

Two-component epoxy primer with fillers. It complies with standards applied to the Radon gas tightness.

| APPLICATION | straight metal trowel or straight rake |
|-------------|--|
| CONSUMPTION | 0.3-0.7 kg/m² per coat, depending on the absorbency and the characteristics of the substrate |
| COLOUR | to be coloured with Mapecolor Paste |
| PACKAGING | 20 kg and 5 kg kits (A+B) |

CERTIFICATIONS
AND MARKINGS







TECHNICAL


DATASHEET

on mapei.com



Primer SN Rasante

Two-component, epoxy skimming product for cementitious surfaces, also on vertical surface.

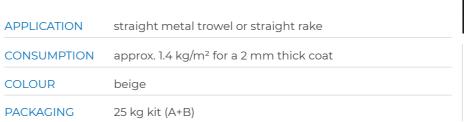



CHECK THE TECHNICAL DATASHEET on mapei.com



Primer W-AS N

Two-component epoxy water-based primer for antistatic conductive and dissipative systems.

| APPLICATION | short pile roller |
|-------------|-------------------------|
| CONSUMPTION | 80-100 g/m ² |
| COLOUR | black |
| PACKAGING | 5 units (A+B) |



CHECK THE TECHNICAL DATASHEET on mapei.com





2. CEMENT BASED PRODUCTS

Mapetop N AR6

Pre-blended, ready-to-use hardener for concrete floors made from special quartz in grain-size distribution curve, Portland cement and special additives.

| APPLICATION | broadcast |
|----------------|--|
| CONSUMPTION | manual application: from 1.5 to 2.5 kg/m² per coat; mechanical application: from 3 to 5 kg/m² |
| COLOUR | grey, light grey, anthracite, green, brown, red |
| PACKAGING | 25 kg bags |
| CERTIFICATIONS | |



CHECK THE TECHNICAL DATASHEET on mapei.com



Mapetop N AR9

AND MARKINGS

Pre-blended, ready-to-use hardener for concrete floors made from special quartz in grain-size distribution curve, Portland cement and special additives.

| APPLICATION | broadcast |
|-------------|---|
| CONSUMPTION | manual application: from 1.5 to 2.5 kg/m² per coat mechanical application: from 3 to 5 kg/m² |
| COLOUR | grey, light grey, other colours available upon request |
| PACKAGING | 25 kg bags |





CHECK THE TECHNICAL DATASHEET on mapei.com



Mapetop S AR3

Pre-blended dry-shake hardener for concrete floors made of special aggregates based on corundum, Portland cement and special additives.

| APPLICATION | broadcast |
|-------------|--|
| CONSUMPTION | manual application: from 2.5 to 5.5 kg/m² per coat; mechanical application: from 5 to 8 kg/m² |
| COLOUR | grey, other colours available upon request |
| PACKAGING | 25 kg bags |
| | |

CERTIFICATIONS AND MARKINGS





CHECK THE TECHNICAL DATASHEET on mapei.com



Mapetop S AR6

Ready-to-use hardener for concrete floors made of special aggregates based on quartz and corundum, Portland cement and special additives.

| APPLICATION | broadcast |
|----------------|--|
| CONSUMPTION | manual application: from 2.5 to 5.5 kg/m² per coat; mechanical application: from 5 to 8 kg/m² |
| COLOUR | light grey, other colours available upon request |
| PACKAGING | 25 kg bags |
| CERTIFICATIONS | |





CHECK THE TECHNICAL DATASHEET on mapei.com



Ultratop

AND MARKINGS

Self-levelling, ultra-quick hardening mortar with special hydraulic binders, applied at a thickness between 5 and 40 mm to create abrasion-resistant floors.

| APPLICATION | manual or pump |
|-------------|---|
| CONSUMPTION | 16.5-17.5 kg/m² per cm of thickness |
| COLOUR | white, beige, light grey, red, anthracite, standard |
| PACKAGING | 25 kg bags |

CERTIFICATIONS AND MARKINGS









CHECK THE **TECHNICAL** DATASHEET on mapei.com



Ultratop Base Coat

One-component acrylic formulation in water dispersion used as a base coat before applying protective finishes on Ultratop, Ultratop Living and Ultratop Loft.

| APPLICATION | waxing mop, mohair roller |
|-------------|--|
| CONSUMPTION | 50-80 g/m² depending on the level of porosity of the substrate |
| COLOURS | transparent milky white |
| PACKAGING | 10 kg tanks |



CHECK THE TECHNICAL DATASHEET on mapei.com





203

Ultratop Easycolor

Ready-mixed pigment for colouring cementitious-based **Ultratop Loft** system.

| APPLICATION | mixed with Ultratop Loft F or Ultratop Loft W using a low-speed electric mixer to form an evenly coloured, lump-free mix |
|-------------|--|
| CONSUMPTION | 1 pc 1.5 l per 5 kg of Ultratop Loft |
| COLOURS | various - for the complete colour range please contact the Head Office |
| PACKAGING | 1.5 l can |







Ultratop Industrial

Ultra-rapid hardening, self-levelling mortar based on special hydraulic binders for creating substrates and industrial, abrasion-resistant flooring, with thickness from 5 to 40 mm.

| APPLICATION | manual or pump |
|-------------|-------------------------------------|
| CONSUMPTION | 16.5-17.5 kg/m² per cm of thickness |
| COLOUR | standard |
| PACKAGING | 25 kg bags |
| | |



Ultratop Living

CERTIFICATIONS

AND MARKINGS

Self-levelling, ultra-quick hardening mortar with special hydraulic binders, applied at a thickness between 5 and 15 mm to create abrasion-resistant indoor floors.

| OFFITIE OATIONS | (In the second s |
|-----------------|--|
| PACKAGING | 25 kg bags |
| COLOURS | white, light grey, anthracite, neutral |
| CONSUMPTION | 16.5-17.5 kg/m² per cm of thickness |
| APPLICATION | manual or pump |

CERTIFICATIONS AND MARKINGS

204









CHECK THE TECHNICAL DATASHEET on mapei.com



Ultratop Loft F

One-component trowellable coarse-textured cementitious paste applied in layers up to 2 mm thick to create decorative floors with a trowelled or mottled effect.

| APPLICATION | rubber, Teflon, or steel straight trowel |
|-------------|---|
| CONSUMPTION | 0.7-1 kg/m² |
| COLOUR | white, neutral |
| PACKAGING | 20 kg bags. Units of 4 kg Alupack bags of 5 kg each |





CERTIFICATIONS AND MARKINGS





Ultratop Loft W

One-component trowellable fine-textured cementitious paste applied in layers up to 2 mm thick to create decorative floors with a trowelled or mottled effect.

| APPLICATION | rubber, Teflon, or steel straight trowel |
|-------------|--|
| CONSUMPTION | 0.7-1 kg/m ² |
| COLOUR | white, neutral |
| PACKAGING | 20 kg bags. Units of 4 kg Alupack bags of 5 kg each. |







Ultratop Outdoor

Rapid-hardening, cementitious smoothing compound for the reparation or creation of outdoor floors up to 20 mm of thickness.

| APPLICATION | straight trowel and straight rake |
|-------------|-------------------------------------|
| CONSUMPTION | 16.5-17.5 kg/m² per cm of thickness |
| COLOUR | standard |

CERTIFICATIONS AND MARKINGS









Ultratop Screed

Thixotropic, rapid-hardening cementitious mortar applicable in layers up to 20 mm thick for levelling off surfaces, including vertical surfaces, before applying **Mapefloor** or **Mapecoat** resin coating systems or **Ultratop Loft** system.

| APPLICATION | straight metal trowel |
|----------------|-------------------------------|
| CONSUMPTION | 1.6 kg/m² per mm of thickness |
| COLOUR | grey or white |
| PACKAGING | 25 kg bags |
| CERTIFICATIONS | STEMICO . |







Ultratop Stucco

AND MARKINGS

Grout made from special hydraulic binders for sealing micro-porosity which forms after the first polishing phase of Ultratop.



CHECK THE **TECHNICAL** DATASHEET on mapei.com



APPLICATION rubber trowel

CONSUMPTION depending on the micro-porosity

COLOURS white, beige, light grey, red, anthracite, standard

PACKAGING 5 kg drums

3. COMPLEMENTARY PRODUCTS FOR RESIN AND CEMENTITIOUS FLOORS

Additix PE

CONSUMPTION

COLOUR

PACKAGING

Admixture to make epoxy and polyurethane products thicker with a thixotropic consistency.

1.5-5% by the weight of the resin

white

1 kg drums



CHECK THE TECHNICAL DATASHEET on mapei.com



Copper Band

Self-adhesive copper strip to make conductive and dissipative coatings.



| LENGTH | 16.5 metres |
|-----------|---|
| HEIGHT | 10 mm |
| PACKAGING | cardboard box containing 20 bags with 1 roll of 16.5 m x 10 mm Copper Band per bag |

Dynastone TZ

Mix of aggregates for Terrazzo resin-based systems.



| for a Terrazzo system of approx. 10 mm of thickness: 15-19 kg/m² (depending on the resin binder used) | | |
|--|--|--|
| yellowish white | | |
| 25 kg bags | | |

2-3% of the total weight of the epoxy binder used (A+B)

CHECK THE **TECHNICAL** DATASHEET on mapei.com



Epoxy Speed

CONSUMPTION

COLOUR

PACKAGING

CONSUMPTION

COLOUR

PACKAGING

Accelerator for epoxy primers.









Back to the table of contents Back to the alphabetical index

light yellow

5 kg drums

Gravel Bardiglio CENE Grey 2-4 mm

Dried Bardiglio CENE grey aggregate in a special granulometric curve from 2 to 4 mm to make decorative surfaces with good drainage properties. Use in combination with **Mapefloor Binder 930** one-component, aliphatic, polyurethane binder.

|--|

| APPLICATION | mixed with Mapefloor Binder 930 one-component aliphatic polyurethane binder |
|-------------|---|
| CONSUMPTION | 20 kg of Gravel Bardiglio CENE Grey 2-4 mm per 1 kg of Mapefloor Binder 930 |
| COLOUR | bardiglio cene grey |
| PACKAGING | 25 kg bags |

Gravel Carrara White 2-4 mm

Dried Carrara white marble aggregate in a special granulometric curve from 2 to 4 mm to make decorative surfaces with good drainage properties. Use in combination with **Mapefloor Binder 930** one-component, aliphatic, polyurethane binder.



| APPLICATION | mixed with Mapefloor Binder 930 one-component aliphatic polyurethane binder |
|-------------|---|
| CONSUMPTION | 20 kg of Gravel Carrara White 2-4 mm per 1 kg of Mapefloor Binder 930 |
| COLOUR | Carrara white |
| PACKAGING | 25 kg bags |

Gravel Ebony Black 2-4 mm

208

Dried ebony black aggregate in a special granulometric curve from 2 to 4 mm to make decorative surfaces with good drainage properties. Use in combination with **Mapefloor Binder 930** one-component, aliphatic, polyurethane binder.



| APPLICATION | mixed with Mapefloor Binder 930 one-component aliphatic polyurethane binder |
|-------------|--|
| CONSUMPTION | 20 kg of Gravel Ebony Black 2-4 mm per 1 kg of Mapefloor Binder 930 |
| COLOUR | ebony black |
| PACKAGING | 25 kg bags |

Mapecomfort FL Rubber matting made from

Rubber matting made from granules of recycled rubber for creating Mapefloor Comfort System AL/X and Mapefloor Comfort System AR/X. Thickness 4 mm.



CHECK THE
TECHNICAL
DATASHEET
on mapei.com



APPLICATION bond to the substrate with the specific polyurethane adhesive Mapefloor Pore Filler

COLOUR black

PACKAGING 1 m x 20 m rolls, 4 mm thickness

Mapefibre Glass HP

Alkali-resistant glass fibres for reinforcing cementitious mortar and resin.



| LENGTH | 6 mm |
|----------------------|-------------------------|
| DIAMETER OF FIBRE | 14 μm |
| CONSUMPTION | max. 5 kg/m³ |
| PACKAGING | 18 kg polvethylene bags |





Mapefloor Cleaner ED

Detergent for normal degreasing operations of floors.



| APPLICATION | manual or with cleaning machine | |
|-------------|---|--|
| COLOUR | green | |
| CONSUMPTION | from 1 to 3% (0.1-0.3 kg per 10 l of water) | |
| PACKAGING | 10 kg tanks | |







Mapefloor Filler

Micrometric fillers to be added to epoxy and polyurethane finishes to form a non-slip finish.



| CHECK THE | |
|--------------|--|
| TECHNICAL | |
| DATASHEET | |
| on mapei.com | |



Mapefloor Maintenance Kit

0.3 kg can

5-10 g/m²

white

Essential products for cleaning and periodic maintenance of resin and cement floors.



CHECK THE TECHNICAL DATASHEET on mapei.com



PACKAGING

CONSUMPTION

COLOUR

PACKAGING

Mapefloor Maintenance Kit is made up of:

- Mapefloor Lucida: 1x5 kg;
- Mapefloor Wax Remover: 1x5 kg;
- Mapefloor Cleaner ED: 2x5 kg

Mapefloor Wax Remover

De-waxing, multi-action detergent for removing all types of metallic wax including the double-reticulation type, such as **Mapelux Lucida** and **Mapelux Opaca**.



- for standard metallic wax: in 5-10% concentration (0.5-1 | per 10 | of water)
- for **Mapelux** range: in 15% concentration (1.5 | per 10 | of water)

| COLORE | pink |
|-----------|-------|
| PACKAGING | 10 ka |



CHECK THE TECHNICAL DATASHEET on mapei.com



Back to the table of contents

Mapejoint 100/12

Precast composite polymeric joint to be inserted in old, damaged and worn joints, including those with large amounts of movement or subject to intense traffic in industrial settings.

| LENGTH | 1000 mm | |
|-----------|-------------|---|
| WIDTH | 120 mm | |
| THICKNESS | 25 mm | 9 |
| COLOUR | grey | |
| PACKAGING | 1000 mm pcs | |
| | | |



CHECK THE TECHNICAL DATASHEET on mapei.com



Mapejoint 100/25

Precast composite polymeric joint to be inserted in old, damaged and worn joints, including those with large amounts of movement or subject to intense traffic in industrial settings.

| LENGTH | 1000 mm | Will be |
|-----------|-------------|---------|
| WIDTH | 250 mm | |
| THICKNESS | 25 mm | |
| COLOUR | grey | |
| PACKAGING | 1000 mm pcs | |



CHECK THE TECHNICAL DATASHEET on mapei.com



Mapelux Lucida

Double-reticulation, high-strength shiny metallic wax.

| APPLICATION | specific waxing mop | 088 |
|-------------|---------------------|-----|
| CONSUMPTION | 50 g/m ² | |
| COLOUR | white-light blue | |
| PACKAGING | 10 kg tanks | |



CHECK THE TECHNICAL DATASHEET on mapei.com





Back to the alphabetical index

210

Mapelux Opaca

Double-reticulation, high-strength matt metallic wax.

specific waxing mop

white-light blue

10 kg tanks

50 g/m²



| CHECK THE |
|-----------|
| TECHNICAL |
| DATASHEET |
| |



PU Catalyst

APPLICATION

COLOUR

PACKAGING

CONSUMPTION

Accelerator for polyurethane Mapefloor Parking System products.

0.5-1.5% of the total weight of the polyurethane



CHECK THE **TECHNICAL** DATASHEET on mapei.com



Quartz 0.25

CONSUMPTION

PACKAGING

SIZE

COLOUR

PACKAGING

Quartz sand used as a "filler" and/or for broadcasting on epoxy and polyurethane systems.

grain size up to 0.25 mm

yellowish-white

25 kg bags

formulate used (a+b)

5 kg drums



CHECK THE TECHNICAL DATASHEET on mapei.com



Quartz 0.5

Quartz sand used as a "filler" and/or for broadcasting on epoxy and polyurethane systems.

grain size up to 0.5 mm

yellowish-white

25 kg bags



TECHNICAL DATASHEET on mapei.com



Ouartz 0.9

SIZE

COLOUR

PACKAGING

Quartz sand used as a "filler" and/or for broadcasting on epoxy and polyurethane systems.



CHECK THE TECHNICAL DATASHEET on mapei.com



Quartz 1.2

SIZE

SIZE

COLOUR

PACKAGING

COLOUR

PACKAGING

Quartz sand used as a "filler" and/or for broadcasting on epoxy and polyurethane systems.

grain size up to 0.9 mm

yellowish-white

25 kg bags





| HECK THE | Ē |
|--------------------|---|
| ECHNICAL | |
| ATASHEET | |
| n mapei.com | Ţ |
| | - |



Back to the table of contents Back to the alphabetical index

yellowish-white

25 kg bags

grain size up to 1.2 mm

Quartz 1.9

Mixture of calibrated spherical quartz used as a filler in Mapefloor I 900 or Mapefloor I 910 for preparing mortar with a consistency similar to a mortar screed.



| T | |
|---|---|
| | |
| C |) |
| | |
| | |



| SIZE | grain size up to 1.9 mm |
|-----------|-------------------------|
| COLOUR | yellowish-white |
| PACKAGING | 25 kg bags |

Rete 320

Glass fibre mesh for reinforcing **Mapefloor System** epoxy systems and **Ultratop System** cementitious systems.



| WEIGHT | 350 g/m ² |
|-----------|----------------------|
| MESH SIZE | 15.7 x 10.1 mm |
| PACKAGING | 50 x 1 m rolls |

CHECK THE TECHNICAL DATASHEET on mapei.com



Triblock WTS

Two-component fillerized epoxy formulate for skimming cementitious sublayers and filling pores before applying resin coating.



| APPLICATION | metal trowel |
|-------------|---|
| CONSUMPTION | approx 1.5 kg/m² per mm of thickness - the consumption depends strongly on the roughness of the substrate |
| PACKAGING | 5 ka units (A+B) |








215

Back to the table of contents



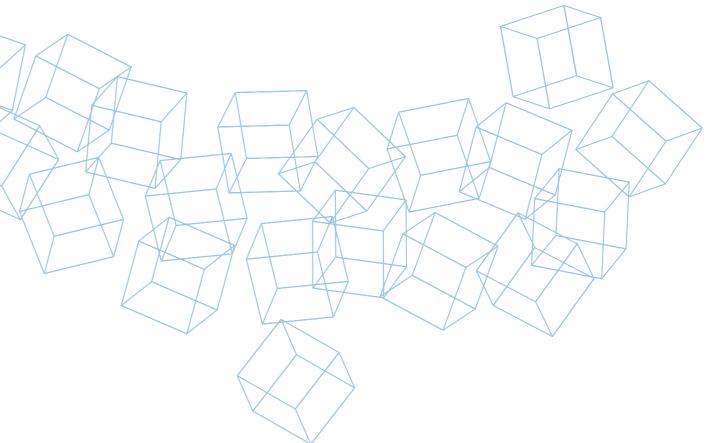



PRODUCTS FOR REPAIRING ASPHALT **PRODUCTS FOR AND HIGHWAY MAINTENANCE**

Mape-Asphalt Repair 0/8

One-component, ready to use, cold-applied reactive asphalt for the repair of potholes.



CHECK THE TECHNICAL DATASHEET on mapei.com



| APPLICATION | gauging trowel, trowel, rake, or shovel |
|-------------|---|
| CONSUMPTION | approx. 23 kg/m² per cm of thickness. |
| PACKAGING | 25 kg drums |

Mapefloor EP 90

Three-component high performance epoxy screed consistency mortar for repairing concrete flooring and forming support layers for beams and joints.

| APPLICATION | gauging trowel |
|-------------|----------------|

approx. 20 kg/m² per cm of thickness CONSUMPTION

PACKAGING

26.75 kg kit:

- 1.95 kg bottles (comp. A);
- 0.80 kg bottles (comp. B);
- 24 kg vacuum-packed polyethylene bags (comp. C)

CERTIFICATIONS AND MARKINGS













TECHNICAL DATASHEET on mapei.com



Mapegrout Betontech HPC 10

Rheoplastic cementitious mortar reinforced with structural fibres, with a strain hardening effect for restoring concrete requiring a high level of ductility.

| APPLICATION | pouring into formwork |
|-------------|---|
| CONSUMPTION | approx. 21 kg/m² per cm of thickness |
| PACKAGING | 25 kg vacuum-packed polyethylene bags and 1000 kg big bags |

CERTIFICATIONS AND MARKINGS

218







CHECK THE TECHNICAL DATASHEET on mapei.com



Mapegrout Colabile TI 20

High-flowing, shrinkage compensated, fibre-reinforced with rigid steel fibres, high-ductility cementitious mortar for restoring concrete.

APPLICATION pouring into formwork CONSUMPTION approx. 20 kg/m² per cm of thickness **PACKAGING** 25 kg vacuum-packed polyethylene bags

CERTIFICATIONS AND MARKINGS







TECHNICAL DATASHEET on mapei.com



Mapegrout SV

High-flowing, quick-setting and hardening, shrinkage compensated high-flowing mortar for repairing concrete and fixing drains, manholes and urban architectural fittings in place.

| APPLICATION | pouring into formwork |
|-------------|---------------------------------------|
| CONSUMPTION | 20 kg/m² per cm of thickness |
| COLOUR | grey or black |
| PACKAGING | 25 kg vacuum-packed polyethylene bags |
| | |

CERTIFICATIONS AND MARKINGS









CHECK THE TECHNICAL DATASHEET on mapei.con



Mapegrout SV Fiber

High-flowing, quick-setting and hardening, shrinkage compensated, fibre-reinforced with rigid steel fibres, high-ductility cementitious mortar for restoring concrete. For application at temperatures up to -5°C.

| APPLICATION | pouring into formwork |
|-------------|---------------------------------------|
| CONSUMPTION | approx. 20 kg/m² per cm of thickness |
| PACKAGING | 25 kg vacuum-packed polyethylene bags |
| | |

CERTIFICATIONS AND MARKINGS









DATASHEET on mapei.con





Mapegrout SV T

CERTIFICATIONS AND MARKINGS

Thixotropic, quick-setting and hardening, shrinkage compensated high-flowing mortar for repairing concrete and fixing drains, manholes and urban architectural fittings in place.

| APPLICATION | trowel or gauging trowel |
|-------------|---------------------------------------|
| CONSUMPTION | 20 kg/m² per cm of thickness |
| COLOUR | black |
| PACKAGING | 25 kg vacuum-packed polyethylene bags |






CHECK THE TECHNICAL DATASHEET on mapei.com







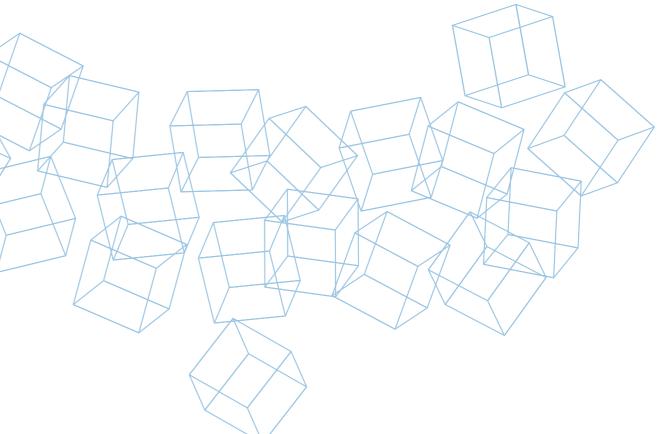



PRODUCTS FOR
THE RESTORATION
OF MASONRY
BUILDINGS

Consolidante 8020

Reversible consolidating product in solvent for the conservative restoration and consolidation of porous stone substrates, lime render and layers of paint.



| The Management of the Control of the |
|--|
| CHECK THE TECHNICAL DATASHEET on mapei.co |



Consolidante ETS

APPLICATION

CONSUMPTION

PACKAGING

PACKAGING

224

Consolidator based on silicic acid ethyl ester in solvent for the conservative renovation and consolidation of porous stone, bricks, terracotta and render.

roller, brush or low-pressure manual pumped sprayer

its porosity and on the depth of the area to be treated)

0.1-1.0 kg/m² (depending on the type of substrate,





| APPLICATION | roller, brush, manual pumped sprayer, injection using manual or power pumps |
|-------------|---|
| CONSUMPTION | 0.1-1.0 kg/m² (depending on the type of substratits porosity and on the depth of the area to be t |

10 kg metal drums

10 kg metal drums



Consolidante ETS WR

Consolidator with water-repellent effect, based on silicic acid ethyl ester in solvent for the conservative renovation and consolidation of porous stone, bricks, terracotta and render.



CHECK THE TECHNICAL

DATASHEET

on mapei.con

| APPLICATION | roller, brush, manual pumped sprayer, injection using manual or power pumps |
|-------------|---|
| CONSUMPTION | 0.1-1.0 kg/m² (depending on the type of substrate, its porosity and on the depth of the area to be treated) |
| PACKAGING | 10 kg metal drums |



Primer 3296

Consolidating and anti-dust acrylic primer in water dispersion.



| APPLICATION | roller, brush or watering can |
|-------------|---|
| CONSUMPTION | 0.1-0.5 kg/m² (depending on the absorption and the porosity of the surface to be treated) |
| PACKAGING | 5 and 10 kg drums |



2. RECONDITIONING AND CONSOLIDATING MASONRY WITH FREE-FLOWING MORTAR

Mape-Antique Colabile

Salt-resistant, high-flow, cement-free natural hydraulic lime and Eco-Pozzolan-based masonry mortar for reconditioning and consolidating masonry.

| APPLICATION | pouring or pumping |
|-------------|------------------------------------|
| CONSUMPTION | 1.83 kg/dm³ of cavity to be filled |
| DACKAGING | 25 kg hags |





CHECK THE **TECHNICAL** DATASHEET on mapei.cor



3. CONSOLIDATING MASONRY AND RENDER BY INJECTING SLURRY

Mape-Antique F21

Super-fluid, cement-free, salt-resistant, fillerized hydraulic binder, based on **lime** and Eco-Pozzolan, for making injection slurries for consolidating masonry and render, including the frescoed one.



| APPLICATION | injection or pouring |
|-------------|------------------------------------|
| CONSUMPTION | 1.04 kg/dm³ of cavity to be filled |
| PACKAGING | 17 kg bags |







PRODUCTS FOR THE RESTORATION OF MASONRY BUILDINGS

Mape-Antique I

Salt-resistant, ,cement-free fillerized hydraulic binder, based on lime and Eco-Pozzolan, for making injection slurries for consolidating masonry.



| CHECK THE TECHNICAL DATASHEET on mapei.co |
|---|
|---|



| APPLICATION | injection or pouring |
|-------------|------------------------------------|
| CONSUMPTION | 1.04 kg/dm³ of cavity to be filled |
| PACKAGING | 20 kg bags |

Mape-Antique I-15

Salt-resistant, cement-free, fillerized hydraulic binder, based on lime and Eco-Pozzolan, for making injection slurries for consolidating masonry.



| CHECK THE | Ē |
|---------------------|---|
| TECHNICAL | Ę |
| DATASHEET | ý |
| on mapei.com | 4 |
| | Ė |

CHECK THE

TECHNICAL

DATASHEET






MapeWall Inject & Consolidate

20 kg bags

injection or pouring

Reactive natural hydraulic lime-based inorganic binder with very low emission of VOC used to make superfluid injection slurry for consolidating masonry.

1.50 kg/dm³ of cavity to be filled

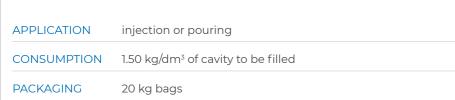

CERTIFICATIONS **AND MARKINGS**

226

APPLICATION

CONSUMPTION

PACKAGING







4. HORIZONTAL CHEMICAL BARRIERS AGAINST CAPILLARY RISING DAMP

Mapestop

APPLICATION

Concentrated silicone micro-emulsion, based on silane and siloxane used to form a chemical barrier against capillary rising damp.



CHECK THE **TECHNICAL** DATASHEET on mapei.com



| CONSUMPTION | depending on the masonry absorption. |
|-------------|---|
| | approx. 8-9 kg/m of solution for a 40 cm thick masonry, |
| | which corresponds to 0.4-0.6 kg/m of pure product |

gravity or suitable injection pump

PACKAGING 1 kg and 10 kg metal can with integrated spout

Mapestop Cream

Monomeric silane-based creamy emulsion for creating chemical barriers against capillary rising damp.

APPLICAZIONE

- sealant gun for 280 ml cartridge
- 600 ml sausage gun such as Mapei Gun 600 Pro
- low-pressure pump for products in 20 kg plastic drum

CONSUMPTION according to type and thickness of masonry.

Approx. 10 ml per metre per cm of thickness of masonry

for 12 mm diam. holes

COLOUR white

PACKAGING

- 12 280 ml cartridges box
- 10 600 ml sausage box with 1 injection tool included
- 20 kg plastic drum



CHECK THE TECHNICAL DATASHEET on mapei.con



Mapestop Cream Tool 280

Injection tube for Mapestop Cream to be used with manual extrusion guns for 280 ml cartridges.



CHECK THE TECHNICAL DATASHEET on mapei.com



PACKAGING 12 pcs boxes

Mapestop Cream Tool 600

Injection tube for Mapestop Cream to be used with manual extrusion guns for 600 ml sausages and Mapei Gun Pro 600.



CHECK THE TECHNICAL DATASHEET on mapei.com



PACKAGING

4 pcs sachet

Mapestop Injectors

Spare parts kit for Mapestop Kit Diffusion



PACKAGING

cardboard box containing 8 of each of the following item:

- Ø 12 mm injectors;
- 50 cm long diffusing tube (outside diameter 12 mm);
- sealing plug

CHECK THE TECHNICAL DATASHEET on mapei.com



Mapestop Kit Diffusion

Complete kit to create a slow-diffusion chemical barrier against capillary rising damp.



PACKAGING

228

cardboard box containing 8 of each of the following item:

- 1.5 litre diffuser in PE HD;
- galvanized support brackets;
- 100 cm long PVC tube (outside diameter 7 mm);
- Ø 12 mm injectors;
- 50 cm long diffusing tube (outside diameter 11 mm);
- sealing plug





5. DE-HUMIDIFYING MASONRY WITH BINDERS AND MORTARS FOR RENDER

Mape-Antique Eco Rinzaffo

Salt-resistant, cement-free, breathable, natural hydraulic lime and Eco-Pozzolan scratch-coat mortar used as a base layer before applying de-humidifying, breathable and "structural" render".

APPLICATION gauging trowel, or continuous feed rendering machine

7.5 kg/m² (per 5 mm of thickness)

PACKAGING 20 kg bags

CERTIFICATIONS AND MARKINGS

CONSUMPTION





TECHNICAL DATASHEET on mapei.com



Mape-Antique LC

Salt-resistant, cement-free, hydraulic binder based on lime and Eco-Pozzolan, to be mixed with aggregates in various grain sizes to make dehumidifying renders and masonry mortars.

APPLICATION

gauging trowel or by pouring into formwork

CONSUMPTION

per cm of thickness approx.:

• 5.0 kg/m² (with fine sand 0.5-2.5 mm); • 4.5 kg/m² (with coarse sand 0.5-5 mm);

• 4.0 kg/m² (with gravel 0-8 mm)

PACKAGING 20 kg bags



DATASHEET on mapei.com



Mape-Antique MC

Macroporous, cement-free, salt-resistant dehumidifying render, based on lime and Eco-Pozzolan, for restoring old masonry, including on buildings of historical interest.

APPLICATION gauging trowel COLOUR white

15 kg/m² (per cm of thickness)

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS

CONSUMPTION









DATASHEET on mapei.com





Mape-Antique MC Macchina

Macroporous, **cement-free**, salt-resistant dehumidifying render, based on **lime** and Eco-Pozzolan, for restoring old masonry, including on buildings of historical interest.

APPLICATION continuous feed rendering machine

CONSUMPTION 16 kg/m² (per cm of thickness)

COLOUR white

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.com



Mape-Antique NHL ECO Rinzaffo

Cement-free, based on pure **natural hydraulic lime** and eco-Pozzolan scratch-coat eco-mortar. To be used as first layer to improve the bond of the render and even out the absorption of the substrate.

APPLICATION gauging trowel, or continuous feed rendering machine

CONSUMPTION 8 kg/m² (per 5 mm of thickness)

PACKAGING 20 kg bags

CERTIFICATIONS AND MARKINGS











CHECK THE TECHNICAL DATASHEET on mapei.com



Mape-Antique NHL ECO Risana

One-component, **cement-free**, salt-resistant, dehumidifying eco-render made from pure **natural hydraulic lime**, with recycled materials for restoring old masonry with rising damp, including masonry of buildings of historical interest.

APPLICATION gauging trowel, or continuous feed rendering machine

CONSUMPTION 11 kg/m² (per cm of thickness)

PACKAGING 20 kg bags

CERTIFICATIONS AND MARKINGS

230











CHECK THE TECHNICAL DATASHEET on mapei.com



PoroMap Deumidificante

Salt-resistant single-product dehumidifying render for renovating masonry with rising damp.

APPLICATION gauging trowel, or continuous feed rendering machine

CONSUMPTION 11-12 kg/m² (per cm of thickness)

PACKAGING 20 kg bags

CERTIFICATIONS AND MARKINGS







TECHNICAL
DATASHEET
on mapei.com



PoroMap Rinzaffo Plus

Salt-resistant, breathable scratch-coat mortar, based on hydraulic pozzolanic reaction binder, to be used as first layer to improve the bond of the render and even out the absorption of the substrate.

APPLICATION gauging trowel, or continuous feed rendering machine

7.5 - 8 kg/m² (per 5 mm of thickness)

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS

CONSUMPTION









CHECK THE TECHNICAL DATASHEET on mapei.com



6. PRODUCTS FOR OF BREATHABLE RENDERS

Mape-Antique Intonaco NHL

Breathable base render made from **natural hydraulic lime** and Eco-Pozzolan, **cement-free**, for application on existing masonry work, including those of historical interest, and on new constructions.

APPLICATION gauging trowel, or continuous feed rendering machine

CONSUMPTION 14.5 kg/m² (per cm of thickness)

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS









TECHNICAL
DATASHEET
on mapei.com





Back to the table of contents

Back to the alphabetical index

231

Mape-Antique NHL ECO Restaura

Cement-free, pure natural **hydraulic lime-based** breathable multi-purpose mortar applied in layers from 3 to 30 mm thick, also on existing paint, for restoring and levelling off substrates, renders and coated surfaces.

APPLICATION gauging trowel, continuous feed rendering machine or straight metal trowel

CONSUMPTION 1.4 kg/m² (per mm of thickness)

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS











CHECK THE TECHNICAL DATASHEET on mapei.com



MapeWall Intonaco Base

Breathable **natural hydraulic lime**-based base render for indoor and outdoor use; to be applied by trowel or with a rendering machine.

APPLICATION gauging trowel, or continuous feed rendering machine

CONSUMPTION 15 kg/dm² (per cm of thickness)

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS









CHECK THE TECHNICAL DATASHEET on mapei.com



7. PRODUCTS FOR STRUCTURAL AND "REINFORCED" RENDERS

Mape-Antique Strutturale NHL

High-performance, **cement-free**, mortar for breathable render and masonry work, based on **pure natural hydraulic lime** and Eco-Pozzolan, particularly suitable for making "reinforced" and installation mortar.

APPLICATION gauging trowel, or continuous feed rendering machine

CONSUMPTION approx. 17 kg/m² (per cm of thickness)

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS

232











CHECK THE TECHNICAL DATASHEET on mapei.com



MapeWall Render & Strengthen

High-performance mortar for breathable render and masonry work, based on **natural hydraulic lime** and Eco-Pozzolan, with very low emission of VOC, particularly suitable for making "reinforced" and installation mortar.

APPLICATION gauging trowel, or continuous feed rendering machine

COLOUR beige and grey

CONSUMPTION approx. 16 kg/m² (per cm of thickness)

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS











TECHNICAL

DATASHEET
on mapei.com



8. SKIMMING OF DE-HUMIDIFYING, BREATHABLE AND STRUCTURAL RENDERS

Mape-Antique FC Civile

Salt-resistant, fine-grained, **cement-free**, **lime** and Eco-Pozzolan, breathable skimming mortar, for a natural finish on render.

APPLICATION straight metal trowel

CONSUMPTION approx. 1.4 kg/m² (per mm of thickness)

COLOUR white

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS









CHECK THE TECHNICAL DATASHEET on mapei.com



Mape-Antique FC Grosso

Salt-resistant, fine-grained, **cement-free**, **lime** and Eco-Pozzolan, breathable skimming mortar, for a coarse finish on render.

APPLICATION straight metal trowel

CONSUMPTION approx. 1.4 kg/m² (per mm of thickness)

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS









TECHNICAL
DATASHEET
on mapei.com





Mape-Antique FC Ultrafine

Salt-resistant, fine-grained, cement-free, lime and Eco-Pozzolan, breathable skimming mortar, for a smooth finish on render.

APPLICATION straight metal trowel CONSUMPTION approx. 1.3 kg/m² (per mm of thickness) PACKAGING 20 kg bags

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.com



Mape-Antique ECO Rasante Civile

Fine-grained, breathable, pure natural hydraulic lime, cement free, smoothing and levelling eco-mortar for a natural finish on render.

APPLICATION straight metal trowel CONSUMPTION approx. 1.4 kg/m² (per mm of thickness)

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS











CHECK THE TECHNICAL DATASHEET on mapei.com



Mape-Antique NHL ECO Rasante Grosso

Coarse-grained, breathable, pure natural hydraulic lime, cement free, smoothing and levelling eco-mortar for a coarse finish on render.

APPLICATION straight metal trowel CONSUMPTION approx. 1.4 kg/m² (per mm of thickness)

PACKAGING 25 kg bags

CERTIFICATIONS **AND MARKINGS**


234











CHECK THE TECHNICAL DATASHEET on mapei.com



Mape-Antique NHL ECO Restaura

Cement-free, pure natural hydraulic lime-based breathable multi-purpose mortar applied in layers from 3 to 30 mm thick, also on existing paint, for restoring and levelling off substrates, renders and coated surfaces.

APPLICATION gauging trowel, continuous feed rendering machine or straight metal trowel

CONSUMPTION 1.4 kg/m² (per mm of thickness)

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS











TECHNICAL DATASHEET on mapei.com



PoroMap Finitura Civile

Fine-grained, lime-based, breathable skimming mortar for a natural finish of de-humidifying renders.

APPLICATION straight metal trowel

CONSUMPTION approx. 1.3 kg/m² (per mm of thickness)

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS









CHECK THE **TECHNICAL** DATASHEET on mapei.com



PoroMap Finitura Granello

Fine-grained, lime-based, breathable skimming mortar for a natural finish of de-humidifying renders.

APPLICATION straight metal trowel

approx. 1.3 kg/m² (per mm of thickness) CONSUMPTION

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS









DATASHEET on mapei.com





9. PRODUCTS FOR BRICK, STONE, TUFF AND MIXED MASONRIES

Mape-Antique Allettamento

Salt-resistant masonry mortar, made from **natural hydraulic lime** and eco-Pozzolan, **cement-free**, for installation layers and pointing on "natural finish" masonry.

| APPLICATION | gauging trowel |
|-------------|----------------------------------|
| CONSUMPTION | 16.5 kg/m² (per cm of thickness) |
| COLOURS | tuff, ivory and cream |
| PACKAGING | 25 kg bags |
| | |

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.com



Mape-Antique Strutturale NHL

High-performance breathable mortar for render and masonry work made from **natural hydraulic lime** and eco-Pozzolan, **cement-free**, particularly suitable for making "reinforced" and installation mortar.

| APPLICATION | gauging trowel, or continuous feed rendering machine |
|-------------|--|
| CONSUMPTION | approx. 17 kg/m² (per cm of thickness) |

PACKAGING 25 kg bags


CERTIFICATIONS AND MARKINGS











CHECK THE TECHNICAL DATASHEET on mapei.com



MapeWall Render & Strengthen

High-performance mortar for breathable render and masonry work, based on **natural hydraulic lime** and Eco-Pozzolan, with very low emission of VOC, particularly suitable for making "reinforced" and installation mortar.

| APPLICATION | gauging trowel, or continuous feed rendering machine |
|-------------|--|
| COLOURS | beige and grey |
| CONSUMPTION | approx. 16 kg/m² (per cm of thickness) |

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS

236













CHECK THE TECHNICAL DATASHEET on mapei.com



MapeWall Muratura Fine

High-strength, breathable, **natural hydraulic lime**-based masonry mortar with very low emission level of VOC for general building work, reinforced masonry and patching and plumbing walls.

APPLICATION gauging trowel

COLOURS tuff, grey and ivory

CONSUMPTION 1.65 kg/dm³ of cavity to be filled

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS









TECHNICAL
DATASHEET
on mapei.com



10. PRODUCTS FOR WATERPROOFING AND PROTECTING CONSTRUCTION ELEMENTS

Mape-Antique Ecolastic

Two-component, elastic, salt-resistant, **cement-free**, **lime** and eco-Pozzolan-based coating for waterproofing and protecting construction features, including in building of historical and artistic interest.

APPLICATION brush, roller, trowel or rendering machine with a skim-coat lance

• roller: 1.65 kg/m² per mm of thickness; • spray: 2.2 kg/m² per mm of thickness

PACKAGING 15 kg units:
• comp. A: 10 kg bags;

• comp. B: 5 kg tanks

CERTIFICATIONS AND MARKINGS

















TECHNICAL


DATASHEET
on mapei.com





237



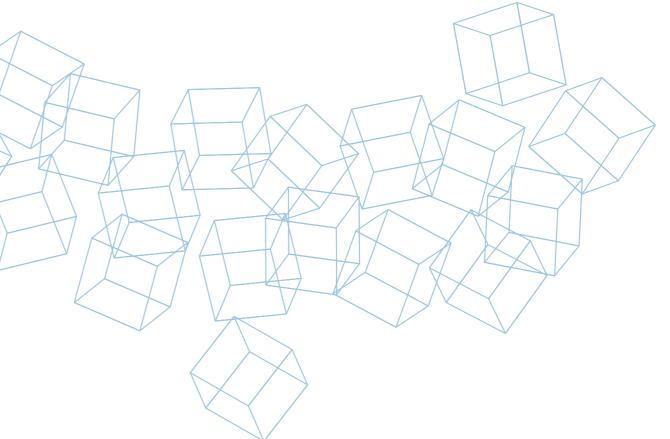



REPAIRING, CONSOLIDATING AND STRENGTHENING WOODEN STRUCTURES

Mapewood Gel 120

Gel epoxy adhesive for restoring wooden structural elements.



| APPLICATION | pouring or special extruder |
|-------------|---|
| CONSUMPTION | 1.01 kg/dm³ of cavity to be filled |
| PACKAGING | 2.5 kg units (comp. A = 2 kg; comp. B = 0.5 kg) |





Mapewood Paste 140

Thixotropic epoxy adhesive for restoring wooden structural elements.



APPLICATION metal trowel 1.59 kg/dm³ of cavity to be filled CONSUMPTION PACKAGING 3 kg units:(comp. A = 2 kg; comp. B = 1 kg.

CHECK THE **TECHNICAL** DATASHEET on mapei.com



Mapewood Primer 100

Fluid epoxy impregnator in water dispersion for consolidating and priming wooden structures.

approx. 150 g/m²



CHECK THE

TECHNICAL DATASHEET

on mapei.com

roller, brush spray or bottle brush 1 kg units: (comp. A 0.5 = kg; comp. B = 0.5 kg)



Back to the table of contents



241


Back to the alphabetical index

APPLICATION

CONSUMPTION

PACKAGING



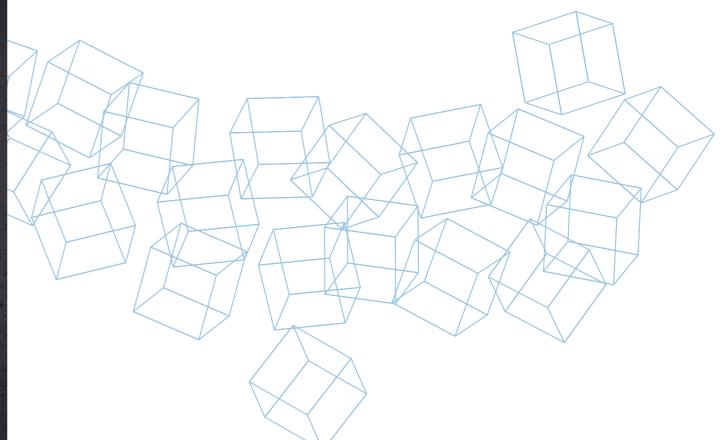



ADHESIVES
AND SMOOTHING
COMPOUNDS
FOR CELLULAR
CONCRETE BLOCKS

Porocol

Cementitious adhesive mortar for foamed block masonry.

APPLICATION straight or notched trowel

CONSUMPTION • as adhesive for flat block walls: 5-7 kg/m²;

 \bullet as skimming layer for flat block walls: 1.4 kg/m 2

per mm of thickness

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS











Porocol FF

One-component, fine-grained, white cementitious mortar for laying cellular concrete blocks and for smoothing over the surface in layers of up to 10 mm thick.

Fire resistance class according to EN 1364-1 EI 240 - E 120.

APPLICATION straight or notched trowel

CONSUMPTION

- as adhesive for flat block walls: 2-4 kg/m²;
- as skimming layer for flat block walls: 1.2 kg/m² per mm of thickness

PACKAGING

25 kg bags

CERTIFICATIONS AND MARKINGS












CHECK THE TECHNICAL DATASHEET on mapei.com






Back to the alphabetical index



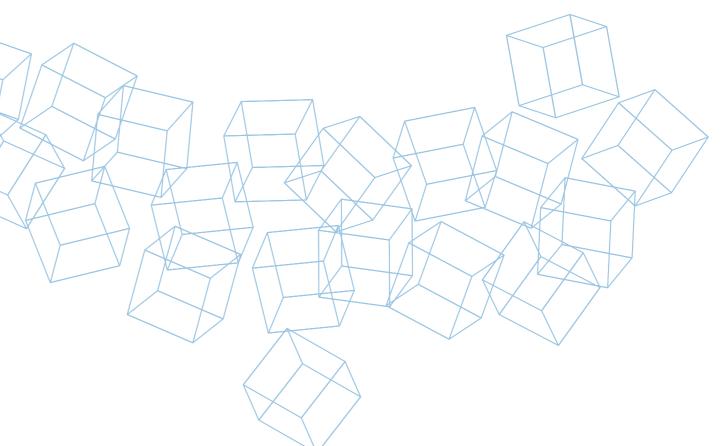



PRODUCTS FOR THE RESTORATION OF CONCRETE

1. PROTECTION OF STEEL REINFORCEMENT RODS

Mapefer

Two-component, anti-corrosion cementitious mortar for steel reinforcement rods.

APPLICATION brush in two coats

CONSUMPTION 120 g/m for an 8 mm rebar (2 mm of product applied)

PACKAGING 2 kg kit:

• 1.5 kg sachets (comp. A);

• 0.5 kg bottles (comp. B).

CERTIFICATIONS AND MARKINGS







TECHNICAL DATASHEET on mapei.com



Mapefer 1K Zero

One-component, anti-corrosion cementitious mortar for steel reinforcement rods.

APPLICATION brush in two coats

CONSUMPTION 100 g/m for an 8 mm rebar

(2 mm of product applied)

PACKAGING

boxes containing 4, 5 kg plastic sachets

CERTIFICATIONS AND MARKINGS

APPLICATION

CONSUMPTION

PACKAGING











CHECK THE **TECHNICAL** DATASHEET on mapei.com




Mapeshield E 25

Self-adhesive zinc plates applied directly on the structure to provide galvanic cathodic protection for rebar and prevent corrosion.

on the external surfaces of concrete

depending on the density of the masonry

1 carton box containing 25 cm x 25 m rolls



CHECK THE TECHNICAL DATASHEET on mapei.com



Mapeshield Corrosion Control

Self-adhesive 12 cm zinc plates applied directly on the surface of concrete to provide galvanic cathodic protection for rebar and prevent corrosion.





CHECK THE **TECHNICAL** DATASHEET on mapei.com



Mapeshield I

Pure zinc anodes coated with a special conductive paste, for galvanic cathodic protection against corrosion of steel reinforcement in new structures and in structures requiring repair.

depending on the density of the masonry



CHECK THE **TECHNICAL** DATASHEET on mapei.com



2. REPAIRS TO CONCRETE WITH SHRINKAGE COMPENSATED MORTARS AND BINDERS

Gravel 0-8 mm

APPLICATION

PACKAGING

CONSUMPTION

Aggregate with an assorted grain size for cementitious mortar, particularly suitable as a filler for Stabilcem.

directly on the rebar

12 pcs boxes

| APPLICATION | added as an aggregate |
|-------------------|------------------------------------|
| AGGREGATE SIZE | particle size range from 0 to 8 mm |
| PACKAGING | 20 kg bags |

CERTIFICATIONS AND MARKINGS







DATASHEET on mapei.con





249

Back to the table of contents Back to the alphabetical index PRODUCTS FOR THE RESTORATION OF CONCRETE

Gravel 0-15

Aggregate with an assorted grain size for cementitious mortar, particularly suitable as a filler for **Stabilcem**.

APPLICATION added as an aggregate

AGGREGATE
SIZE particle size range from 0 to 15 mm

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS



Gravel 3-5

Aggregate with an assorted grain size for cementitious mortar, to be mixed with repair mortars from the **Mapegrout** range.

APPLICATION added as an aggregate

AGGREGATE
SIZE particle size range from 3 to 5 mm

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS





Gravel 6-10

Aggregate with an assorted grain size for cementitious mortar, to be mixed with repair mortars such as **Mapegrout High-Flow** and **Mapegrout SV** or with expansive mortars such as **Mapefill**.

APPLICATION added as an aggregate

AGGREGATE

SIZE particle size range from 6 to 10 mm

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS





Curing admixture for cementitious mortar and concrete to reduce hydraulic shrinkage and the formation of micro-cracks.



CHECK THE TECHNICAL DATASHEET on mapei.com



• mortars: 0.25% by weight of the ready-mixed mortar; • concrete and beton: 5-8 l/m³

PACKAGING 20 kg tanks

Mapefill MF 610

Expansive mortar for precision anchoring in thick layers.

APPLICATION pouring

CONSUMPTION approx. 21 kg/m² per cm of thickness

PACKAGING 25 kg vacuum-packed polyethylene bags

and 1000 kg big bags

CERTIFICATIONS AND MARKINGS









CHECK THE TECHNICAL DATASHEET on mapei.com



Mapegrout 430 Zero

Fine-grained, fibre-reinforced, normal-setting thixotropic mortar for repairing concrete. Can also be applied with continuous-feed rendering machine.

APPLICATION trowel, gauging trowel, or rendering machine, also continuous feed rendering machine

CONSUMPTION 17 kg/m² per cm of thickness

PACKAGING 25 kg vacuum-packed polyethylene bags

CERTIFICATIONS AND MARKINGS











CHECK THE TECHNICAL DATASHEET on mapei.com





Back to the table of contents

Back to the alphabetical index

251

Mapegrout Betontech HPC10

Rheoplastic cementitious mortar reinforced with structural fibres, with a strain hardening effect for restoring concrete requiring a high level of ductility.

APPLICATION pouring into formwork

CONSUMPTION approx. 21 kg/m² per cm of thickness

PACKAGING 25 kg vacuum-packed polyethylene bags and 1000 kg big bags

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.com



Mapegrout BM

Two-component cementitious mortar with a low modulus of elasticity for repairing concrete.

APPLICATION trowel, gauging trowel or rendering machine

CONSUMPTION approx. 21 kg/m² per cm of thickness

PACKAGING 29.7 kg kit:

• 25 kg vacuum-packed polyethylene bags (comp. A);

• 4.7 kg tanks (comp. B)

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.com



Mapegrout Hi-Flow Zero

Fibre-reinforced, compensated-shrinkage, mortar for repairing concrete.

APPLICATION pouring into formwork

CONSUMPTION approx. 20.5 kg/m² per cm of thickness

PACKAGING 25 kg vacuum-packed polyethylene bags

CERTIFICATIONS AND MARKINGS

252

















CHECK THE TECHNICAL DATASHEET on mapei.com



Mapegrout High-Flow B2

Shrinkage-compensated high-flowing fibre-reinforced micro-concrete for repairs to concrete structures.

APPLICATION pouring into formwork

CONSUMPTION approx. 21 kg/m² per cm of thickness

PACKAGING 25 kg vacuum-packed polyethylene bags

CERTIFICATIONS (

AND MARKINGS





and 1000 kg big bags



TECHNICAL
DATASHEET
on mapei.com



Mapegrout Colabile GF

High-flowing, shrinkage-compensated cementitious mortar reinforced with inorganic fibres, for repairing concrete structures where higher ductility is required.

APPLICATION pouring into formwork

CONSUMPTION approx. 21 kg/m² per cm of thickness

PACKAGING 25 kg vacuum-packed polyethylene bags

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.com



Mapegrout Colabile TI 20

High-flowing, shrinkage compensated, fibre-reinforced with rigid steel fibres, high-ductility cementitious mortar for restoring concrete.

APPLICATION pouring into formwork

CONSUMPTION approx. 20 kg/m² per cm of thickness

PACKAGING 25 kg vacuum-packed polyethylene bags

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.com





Mapegrout FMR-PP

Shrinkage-compensated, sulphate-resistant thixotropic mortar with work-hardening behaviour reinforced with structural polymer fibres, particularly suitable for repairing concrete structures where high ductility is required.

APPLICATION trowel, gauging trowel or rendering machine CONSUMPTION 18 kg/m² per cm of thickness

PACKAGING 25 kg vacuum-packed polyethylene bags

CERTIFICATIONS AND MARKINGS







TECHNICAL DATASHEET on mapei.com



Mapegrout GF Betoncino B1

High-flowing, shrinkage-compensated cementitious micro-concrete reinforced with inorganic fibres, for repairing concrete structures where higher ductility is required.

APPLICATION pouring into formwork

CONSUMPTION approx. 21 kg/m² per cm of thickness

PACKAGING 25 kg vacuum-packed polyethylene bags

and 1000 kg big bags

CERTIFICATIONS **AND MARKINGS**







TECHNICAL DATASHEET on mapei.com



Mapegrout LM2K

Two-component, thixotropic, fibre-reinforced, cementitious mortar with a low modulus of elasticity and added organic corrosion inhibitor for repairing concrete, applied in a single layer at a thickness of 3 to 20 mm.

APPLICATION trowel, gauging trowel or rendering machine

CONSUMPTION approx. 21 kg/m² per cm of thickness

PACKAGING 30.25 kg kit:

• 25 kg vacuum-packed polyethylene bags (comp. A);

• 5.25 kg tanks (comp. B)

CERTIFICATIONS AND MARKINGS

254







CHECK THE TECHNICAL DATASHEET on mapei.com



Mapegrout Fast-Set

Fibre-reinforced, rapid-setting and hardening, shrinkage-compensated, mortar for repairing concrete.

APPLICATION trowel or gauging trowel

CONSUMPTION 18 kg/m² per cm of thickness

PACKAGING 25 kg vacuum-packed polyethylene bags

CERTIFICATIONS AND MARKINGS









TECHNICAL DATASHEET on mapei.com



Mapegrout Easy Repair Zero

Normal-setting thixotropic mortar for repairing deteriorated concrete. Can also be applied with continuous-feed rendering machine.

APPLICATION trowel, gauging trowel or rendering machine 17 kg/m² per cm of thickness

PACKAGING 25 kg vacuum-packed polyethylene bags

CERTIFICATIONS AND MARKINGS

CONSUMPTION











TECHNICAL DATASHEET on mapei.com



Mapegrout SV

High-flowing, quick-setting and hardening, shrinkage compensated high-flowing mortar for repairing concrete and fixing drains, manholes and urban architectural fittings in place.

APPLICATION pouring into formwork

CERTIFICATIONS AND MARKINGS

CONSUMPTION

PACKAGING





20 kg/m² per cm of thickness

25 kg vacuum-packed polyethylene bags





DATASHEET on mapei.com





Mapegrout SV Fiber

High-flowing, quick-setting and hardening, shrinkage compensated, fibre-reinforced with rigid steel fibres, high-ductility cementitious mortar for restoring concrete. For application at temperatures up to -5°C.

| APPLICATION | pouring into formwork |
|-------------|---------------------------------------|
| CONSUMPTION | approx. 20 kg/m² per cm of thickness |
| PACKAGING | 25 kg vacuum-packed polyethylene bags |

CERTIFICATIONS AND MARKINGS









CHECK THE TECHNICAL DATASHEET on mapei.com



Mapegrout SV T

High-flowing, quick-setting and hardening, shrinkage compensated high-flowing mortar for repairing concrete and fixing drains, manholes and urban architectural fittings in place.

| APPLICATION | trowel or gauging trowel |
|-------------|---------------------------------------|
| CONSUMPTION | 20 kg/m² per cm of thickness |
| PACKAGING | 25 kg vacuum-packed polyethylene bags |

CERTIFICATIONS AND MARKINGS









CHECK THE TECHNICAL DATASHEET on mapei.com



Mapegrout T40

Medium-strength (40 MPa), shrinkage-compensated, fibre-reinforced thixotropic mortar for repairing concrete.

| APPLICATION | trowel, gauging trowel or rendering machine |
|-------------|---|
| CONSUMPTION | approx. 18.5 kg/m² per cm of thickness |
| PACKAGING | 25 kg vacuum-packed polyethylene bags |

CERTIFICATIONS AND MARKINGS





CHECK THE TECHNICAL DATASHEET on mapei.com



Mapegrout T60

Fibre-reinforced, shrinkage-compensated, sulphate-resistant thixotropic mortar for repairing concrete.

APPLICATION trowel, gauging trowel or rendering machine

CONSUMPTION 18.5 kg/m² per cm of thickness

PACKAGING 25 kg paper bags

CERTIFICATIONS AND MARKINGS







TECHNICAL
DATASHEET
on mapei.com



Mapegrout Thixotropic Zero

Fibre-reinforced, compensated-shrinkage, mortar for repairing concrete.

APPLICATION trowel, gauging trowel or rendering machine

CONSUMPTION 19 kg/m² per cm of thickness

PACKAGING 25 kg paper bags

CERTIFICATIONS AND MARKINGS









TECHNICAL

DATASHEET

on mapei.com



Mapetard ES

Set-retarding admixture for rapid-setting cementitious mortar.

CONSUMPTION 1 0.25 kg bottle per 25 kg bag of Planitop Smooth & Repair or Planitop Smooth & Repair R4

PACKAGING boxes containing 25 0.25 kg bottles

CERTIFICATIONS AND MARKINGS





CHECK THE TECHNICAL DATASHEET on mapei.com





Back to the table of contents

Back to the alphabetical index

257

Planitop Smooth & Repair Zero

R2-class, rapid-setting shrinkage-compensated, thixotropic, fibrereinforced, cementitious mortar for repairing and smoothing concrete, to be applied in a single layer from 3 mm to 40 mm.

APPLICATION trowel or gauging trowel

CONSUMPTION approx. 16.5 kg/m² per cm of thickness

PACKAGING 25 kg vacuum-packed polyethylene bags, 20 kg boxes

four 5 kg Alupack bags

CERTIFICATIONS AND MARKINGS

















TECHNICAL DATASHEET on mapei.com



Planitop Smooth & Repair R4 Zero

R4-class, rapid-setting shrinkage-compensated, thixotropic, fibrereinforced, cementitious structural mortar for repairing and smoothing concrete, to be applied in a single layer from 3 mm to 40 mm.

trowel or gauging trowel APPLICATION

CONSUMPTION approx. 17 kg/m² per cm of thickness

PACKAGING 25 kg vacuum-packed polyethylene bags

CERTIFICATIONS AND MARKINGS























Stabilcem

Very fluid, expanding cementitious binder for injection or anchoring slurries, mortars, micro-concrete and concrete.

APPLICATION injection and pouring into formwork

CONSUMPTION • as injection slurry: 1.6 kg/l of cavity to be filled;

• as mortar and beton: 350-550 kg/m³;

• as concrete: 400 kg/m³

PACKAGING 20 kg vacuum-packed polyethylene bags

CERTIFICATIONS AND MARKINGS








CHECK THE TECHNICAL DATASHEET on mapei.com





Back to the alphabetical index



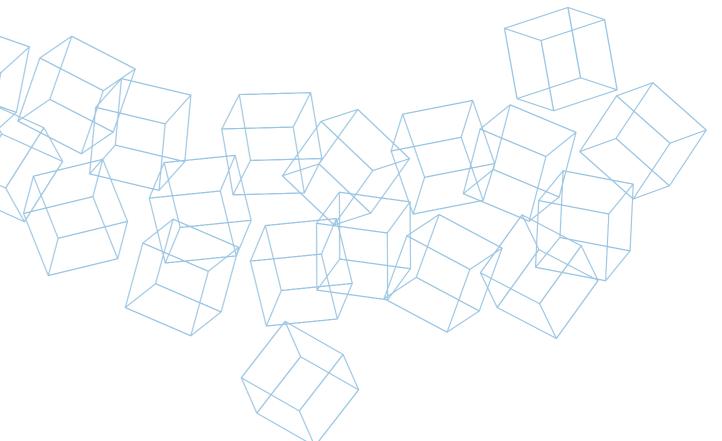



WATER-REPELLENT PRODUCTS FOR THE PROTECTION OF CONCRETE

\<u>\\\</u>

Planiseal WR 40

Ready-mixed, 40% silane-based, hydrophobising, migrating liquid in watery emulsion applied on the surface of reinforced concrete structures in two coats.

| APPLICAZIONE | low-pressure airless pump or roller |
|--------------|---|
| CONSUMPTION | 0.1- 0.2 kg/m² per coat, depending on the porosity of the substrate |
| PACKAGING | 5 kg tanks |

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.com



Planiseal WR 85 Gel

Ready-mixed, hydrophobising, protective, migrating, silane-based, thixotropic gel applied on the surface of reinforced concrete structures.

| PACKAGING | 5 and 15 kg drums |
|--------------|--|
| CONSUMPTION | 0.35 kg/m² (may vary depending on roughness, and porosity of the substrate |
| APPLICAZIONE | high pressure airless pump or roller |

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.com




Planiseal WR 100

Ready-mixed pure silane-based, hydrophobising, protective, migrating liquid applied on the surface of reinforced concrete structures in two coats.

| APPLICAZIONE | low-pressure airless pump or roller |
|--------------|---|
| CONSUMPTION | 0.1- 0.2 kg/m² per coat, depending on the porosity of the substrate |
| PACKAGING | 5 kg tanks |

CERTIFICATIONS AND MARKINGS






CHECK THE TECHNICAL DATASHEET on mapei.com







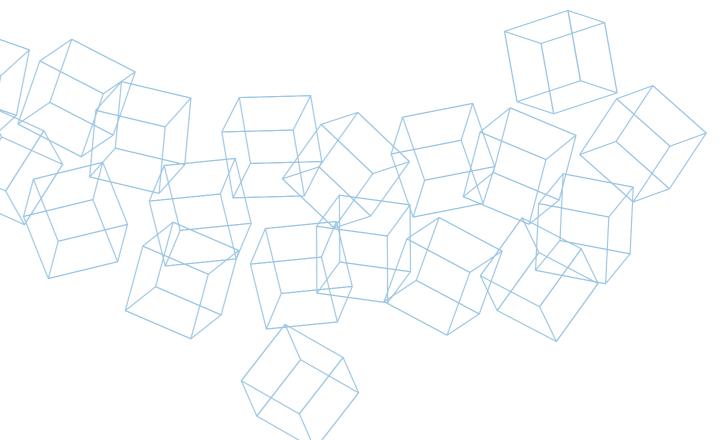



RENDERING AND INSTALLATION MORTARS

Intomap Allettamento

Hydrated lime and cement-based masonry mortar for installing and pointing bricks and concrete blocks.

| APPLICATION | gauging trowel |
|-------------|--------------------------------------|
| CONSUMPTION | approx. 18 kg/m² per cm of thickness |
| PACKAGING | 25 kg bags |

CERTIFICATIONS AND MARKINGS





CHECK THE TECHNICAL DATASHEET on mapei.com



Intomap Allettamento H

Hydrophobic hydrated lime and cement-based masonry mortar for installing and pointing bricks and concrete blocks.

| APPLICATION | gauging trowel | |
|-------------|--|-------|
| CONSUMPTION | approx. 17.5 kg/m² per cm of thickness | |
| | | CUECK |

CERTIFICATIONS AND MARKINGS

PACKAGING



25 kg bags





CHECK THE TECHNICAL DATASHEET on mapei.com



Intomap Maxi Fibro

Coarse-textured, fibre-reinforced lime and hydraulic binder-based base render, for internal and external use.

APPLICATION gauging trowel, or continuous feed rendering machine

CONSUMPTION approx. 14.5 kg/m² per cm of thickness

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS





CHECK THE TECHNICAL DATASHEET on mapei.com



Intomap R2

Air lime and hydraulic binder-based base render for internal and external use.

APPLICATION gauging trowel, or continuous feed rendering machine

CONSUMPTION approx. 14 kg/m² per cm of thickness

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.com



Intomap R2 Fibro

Fibre-reinforced air lime and hydraulic binder-based base render, for internal and external use.

APPLICATION gauging trowel, or continuous feed rendering machine

CONSUMPTION approx. 14 kg/m² per cm of thickness

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS








CHECK THE TECHNICAL DATASHEET on mapei.com







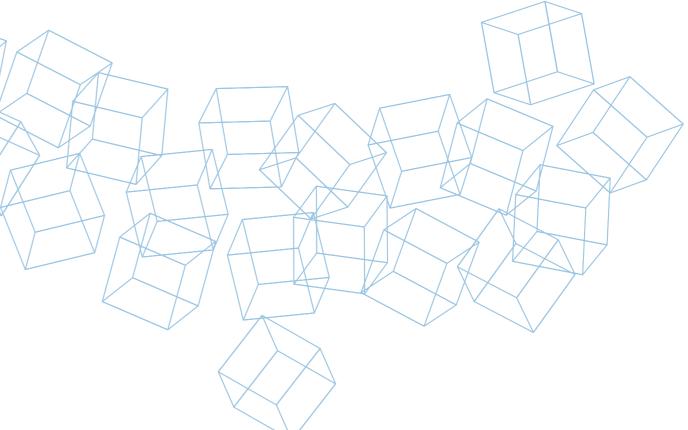



SMOOTHING AND PROTECTIVE PRODUCTS FOR CONCRETE AND RENDER SURFACES

Let

Duresil EB

Anti-acid epoxy paint modified with hydrocarbon resin for protecting concrete and steel surfaces.

| APPLICATION | roller, brush or spray |
|-------------|--|
| CONSUMPTION | 040-0.5 kg/m² per approx 250 μm of thickness |
| COLOURS | black and grey |
| PACKAGING | 10 kg kit (A+B) |

CERTIFICATIONS AND MARKINGS





CHECK THE TECHNICAL DATASHEET on mapei.com



Mapefinish

Two-component cementitious mortar for finishing concrete.

| APPLICATION | trowel |
|-------------|--------|
| | |

1.8 kg/m² per mm of thickness CONSUMPTION

PACKAGING 30 kg kit:

• 24 kg bags (comp. A); • 6 kg tanks (comp. B)

CERTIFICATIONS AND MARKINGS











CHECK THE **TECHNICAL** DATASHEET on mapei.com



Mapelastic Guard Zero

Two-component, elastic cementitious mortar for protecting large concrete structures subjected to high stress.

APPLICATION trowel, or spray with a rendering machine

CONSUMPTION • approx. 1.7 kg/m² per mm of thickness (by trowel);

• approx. 2.2 kg/m² per mm of thickness (by spray)

PACKAGING 32 kg kit:

• 24 kg bags (comp. A);

• 8 kg tanks (comp. B)

CERTIFICATIONS

270









CHECK THE TECHNICAL DATASHEET on mapei.com



Monofinish

One-component, normal-setting cementitious mortar for smoothing concrete and cementitious render.

APPLICATION trowel

PACKAGING 22 kg bags

CERTIFICATIONS AND MARKINGS

CONSUMPTION





1.4 kg/m² per mm of thickness







Nivoplan

Smoothing mortar for walls and ceilings in interior and exterior.

APPLICATION gauging trowel or trowel

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS

CONSUMPTION





14 kg/m² per cm of thickness



CHECK THE TECHNICAL DATASHEET on mapei.com



Planitop 100

Quick-setting, light-grey coloured fine mortar for repairing and smoothing concrete and render.

APPLICATION trowel

CONSUMPTION 1.3 kg/m² per mm of thickness

PACKAGING 25 kg bags.

CERTIFICATIONS AND MARKINGS









CHECK THE **TECHNICAL** DATASHEET on mapei.com





LET LET

Planitop 200

Water-repellent cementitious skimming mortar with a fine, natural finish for concrete, plastic, glass and porcelain coatings.

| APPLICATION | trowel |
|--------------------------------|---|
| CONSUMPTION | 1.3 kg/m² per mm of thickness |
| COLOURS | grey or white |
| PACKAGING | 25 kg bags |
| CERTIFICATIONS AND MARKINGS | C E Segment C E C E C C C C C C C C C C C C C C C |







Planitop 207

Water-repellent cementitious skimming mortar with a medium-grain, natural finish for concrete, plastic, glass and porcelain coatings.

| CEDTIFICATIONS | IN COMPANIES WITH INCIDENCE TO THE INCIDENCE WITH INCIDENCE |
|----------------|---|
| PACKAGING | 25 kg bags |
| COLOURS | grey or white |
| CONSUMPTION | 1.5 kg/m² per mm of thickness |
| APPLICATION | trowel |
| | |

CERTIFICATIONS AND MARKINGS











CHECK THE TECHNICAL DATASHEET on mapei.com



Planitop 210

Water-repellent cementitious skimming mortar with a fine, natural finish for concrete and plastic coatings.

| | IN COMPLIANCE WITH |
|-------------|-------------------------------|
| PACKAGING | 25 kg bags |
| COLOURS | grey or white |
| CONSUMPTION | 1.3 kg/m² per mm of thickness |
| APPLICATION | trowel |
| | |


272











CHECK THE TECHNICAL DATASHEET on mapei.com



Planitop 217

Water-repellent cementitious skimming mortar with a coarse, natural finish for concrete and plastic coatings.

| APPLICATION | trowel |
|-------------|-------------------------------|
| CONSUMPTION | 1.3 kg/m² per mm of thickness |
| COLOURS | grey or white |
| PACKAGING | 25 kg bags |
| | |

CERTIFICATIONS AND MARKINGS











TECHNICAL DATASHEET



Planitop 510

Lime-cement skimming mortar with a fine, natural finish for render.

| APPLICATION | trowel |
|----------------|---------------------------------------|
| CONSUMPTION | 1.3 kg/m² per mm of thickness |
| COLOURS | grey or white |
| PACKAGING | 25 kg bags |
| CERTIFICATIONS | C C C C C C C C C C C C C C C C C C C |



CHECK THE **TECHNICAL** DATASHEET on mapei.com



Planitop 517

AND MARKINGS

Lime-cement skimming mortar with a coarse, natural finish for render.

| APPLICATION | trowel |
|-------------|-------------------------------|
| CONSUMPTION | 1.3 kg/m² per mm of thickness |
| COLOURS | grey or white |
| PACKAGING | 25 kg bags |
| | IN COMPLIANA WITH |

CERTIFICATIONS AND MARKINGS



DATASHEET on mapei.com





LET LET

Planitop 525

Natural-finish, white-coloured lime and cement smoothing compound for "fresh" or hardened internal and external render, applied in layers up to 3 mm thick.

| | APPLICATION | trowel |
|--|----------------|---|
| | CONSUMPTION | 1.3 kg/m² per mm of thickness |
| | COLOUR | white |
| | PACKAGING | 25 kg bags |
| | CERTIFICATIONS | C C (NORMAN AND AND AND AND AND AND AND AND AND A |

AND MARKINGS



TECHNICAL DATASHEET



Planitop 530

Lime-cement skimming mortar with a fine, natural finish for render and concrete.

| | APPLICATION | trowel |
|--|-------------|--------------------------------|
| | CONSUMPTION | 1.25 kg/m² per mm of thickness |
| | COLOURS | grey or white |
| | PACKAGING | 25 kg bags |
| | | |

CERTIFICATIONS AND MARKINGS

274











CHECK THE **TECHNICAL** DATASHEET on mapei.com



Planitop 540

Water-repellent cementitious skimming mortar with a fine, natural finish for render and concrete.

| | OF DELEVOLATION IS | IN COMPANIES NETS DISCHAST STREAMS DISCHAST STREAMS DISCHAST STREAMS DISCHAST STREAMS |
|--|--------------------|---|
| | PACKAGING | 25 kg bags |
| | COLOURS | grey or white |
| | CONSUMPTION | approx. 1.2 kg/m² per mm of thickness |
| | APPLICATION | trowel |
| | | |



CHECK THE TECHNICAL DATASHEET on mapei.com



Back to the table of contents

Planitop 560

Lime-cement skimming mortar with ultra-fine finish for render.

| APPLICATION | trowel |
|----------------|--|
| CONSUMPTION | 1.1 kg/m² per mm of thickness |
| COLOUR | white |
| PACKAGING | 20 kg bags |
| CERTIFICATIONS | In companied all to the Companied and the Compan |



TECHNICAL DATASHEET



Planitop 565

CERTIFICATIONS

AND MARKINGS

AND MARKINGS

AND MARKINGS

Fine-grained, white-coloured lime-cement skimming compound for finishing "fresh" or hardened internal and external cementitious render, applied in layers up to 1 mm thick.

| APPLICATION | trowel |
|-------------|---------------------------------------|
| CONSUMPTION | approx. 1.2 kg/m² per mm of thickness |
| COLOUR | white |
| PACKAGING | 20 kg bags |





CHECK THE **TECHNICAL** DATASHEET on mapei.com



Planitop 600 RasaGesso

Lime-gypsum skimming mortar for internal render.

| APPLICATION | trowel |
|----------------|-------------------------------------|
| CONSUMPTION | approx. 1 kg/m² per mm of thickness |
| COLOUR | white |
| PACKAGING | 15 kg bags |
| CERTIFICATIONS | A COMMANDA RAYA |

CHECK THE DATASHEET on mapei.com





Back to the alphabetical index

LET

Planitop 610 RasaGesso M

Gypsum-based skimming mortar for internal render.

| APPLICATION | trowel |
|--------------------------------|---|
| CONSUMPTION | approx. 1 kg/m² per mm of thickness |
| COLOUR | white |
| PACKAGING | 15 kg bags |
| CERTIFICATIONS AND MARKINGS | © C C C C C C C C C C C C C C C C C C C |



TECHNICAL DATASHEET on mapei.com



Planitop Fast 330

Quick-setting, fibre-reinforced cementitious levelling mortar for internal and external floors and walls, applied in layers from 3 to 30 mm to even out irregularities.

| OF DETIFICATION OF | N. GOPHANG WITH DESCRIPTION OF THE PROPERTY STREETS OF |
|--------------------|--|
| PACKAGING | 25 kg vacuum-packed polyethylene bags |
| CONSUMPTION | 14.5 kg/m² per cm of thickness |
| APPLICATION | trowel |
| | |





CHECK THE **TECHNICAL** DATASHEET on mapei.com



Planitop Fine Finish

CERTIFICATIONS

AND MARKINGS

Ultra fine textured skimming mortar for concrete; recommended for exposed finish surfaces.

| PACKAGING | 20 kg bags |
|-------------|---------------------------------------|
| CONSUMPTION | approx. 1.2 kg/m² per mm of thickness |
| APPLICATION | rubber or metal trowel |
| | |



CHECK THE TECHNICAL DATASHEET on mapei.com

Back to the table of contents

Planitop Raso Max

Smooth-textured, fibre-reinforced, waterproof, lime-cement smoothing and levelling mortar applied in layers from 2 to 10 mm thick over cementitious render, concrete and plastic coatings.

| APPLICATION | trowel |
|-------------|--|
| CONSUMPTION | approx. 1.45 kg/m² per mm of thickness |
| COLOUR | white |
| PACKAGING | 25 kg bags |

CERTIFICATIONS AND MARKINGS











Planitop Superfine

Ultra fine-textured cementitious smoothing/skimming compound for finishing "fresh" or hardened internal and external cementitious render, applied in layers up to 1 mm thick.

| APPLICATION | trowel |
|----------------|--|
| CONSUMPTION | approx. 1.3 kg/m² per mm of thickness |
| COLOUR | white |
| PACKAGING | 20 kg bags |
| CERTIFICATIONS | A STATE OF THE STA |





CHECK THE **TECHNICAL** DATASHEET on mapei.com



Triblock Finish

AND MARKINGS

Three-component, epoxy-cementitious mortar for smoothing damp substrates.

APPLICATION gauging trowel or rendering machine

CONSUMPTION 2 kg/m² per mm of thickness

PACKAGING 31.25 kg kit:

• 1.5 kg drums (comp. A); • 4.75 kg drums (comp. B);

• 25 kg bags (comp. C)

CERTIFICATIONS AND MARKING








CHECK THE DATASHEET on mapei.com





Back to the alphabetical index



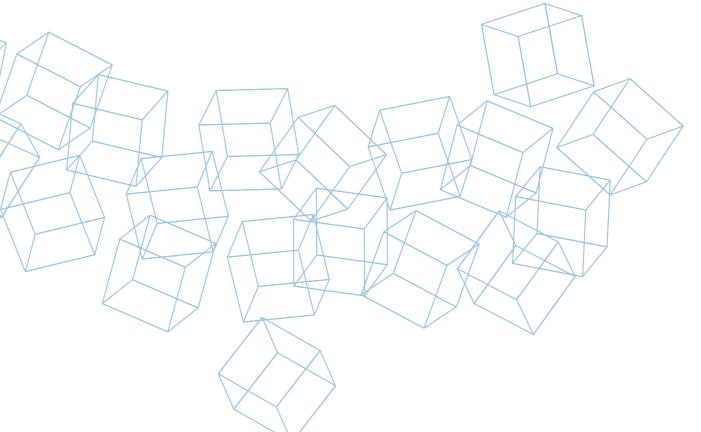



PRODUCTS
FOR ANCHORING
AND RAPID FIXING

Lampocem

Ready-to-use, quick-setting and hardening, anti-shrinkage hydraulic binder.

| | APPLICATION | gauging trowel or trowel |
|--|-------------|---|
| | CONSUMPTION | 1.8 kg/dm³ of cavity to be filled |
| | PACKAGING | 25 kg bag, boxes with 4 sachets 5 kg, packs 91 kg packaging |

CERTIFICATIONS AND MARKINGS







TECHNICAL DATASHEET on mapei.com



Mapefill F

High-performance mortar for anchoring and sealing.

| APPLICATION | pouring |
|-------------|---------------------------------------|
| CONSUMPTION | 1.8 kg/dm³ of cavity to be filled |
| PACKAGING | 25 kg vacuum-packed polyethylene bags |

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.com

CHECK THE

TECHNICAL DATASHEET



Mapefill R

Fluid, rapid-hardening, expansive mortar for anchoring objects in place.

| OF DITIE LOATION C | IN COMPLIANCE SETTING AND ADDRESS OF THE PROPERTY OF THE PROPE |
|--------------------|--|
| PACKAGING | 25 kg vacuum-packed polyethylene bags |
| CONSUMPTION | 1.95 kg/dm³ of cavity to be filled |
| APPLICATION | pouring |

CERTIFICATIONS **AND MARKINGS**

280







Mapefill Zero

Fluid mortar with positive internal tension.

APPLICATION pouring

CONSUMPTION 2 kg/dm³ of cavity to be filled

PACKAGING 25 kg paper bags

CERTIFICATIONS AND MARKINGS













TECHNICAL DATASHEET on mapei.com



Mapefix Metal Sleeve

Cylindrical perforated metal sleeve for applying chemical anchors in drilled substrates. 1 m long cylinder to be cut to size.



DIAMETER

Ø 20 x 1000 mm x 25 pcs. AND LENGTH

Ø 15 x 1000mm x 50 pcs. Ø 11 x 1000mm x 50 pcs.

TO BE USED WITH Mapefix range

Mapefix Plastic Sleeve

Cylindrical perforated plastic sleeve for applying chemical anchors in drilled substrates.

DIAMETER AND LENGTH

Ø 12 x 80 Ø 16 x 85 Ø 16 x 130 Ø 16 x 130+200 Ø 20 x 85 Ø 20 x 130 Ø 20 x 200

TO BE USED WITH

Mapefix range

PACKAGING

10 pcs sachet





Mapefix Combibox VE SF Kit

Styrene-free, vinyl ester, hybrid resin-based chemical fastener for structural loads. Certified for threaded rods, rebar, C1 seismic performance. Kit made up of 12 cartridges of Mapefix VE SF 300 or

Mapefix VE SF 420, 24 mixers, 5 T-shirts, 1 pair of work pants.

APPLICATION extrusion gun (Mapei Gun 310 PRO, Mapei Gun 420 2K,

Mapei Gun 420 Electric M)

PACKAGING 300 ml, 420 ml

CERTIFICATIONS AND MARKINGS















USABLE WITH

Mapefix EP Mixer

Spare static mixers for chemical epoxy anchoring.

Mapefix EP 50, Mapefix EP 100

PACKAGING

12 pcs sachet

Mapefix EP 50

Solvent-free, pure epoxy resin-based chemical anchor for structural loads. High bond strength, also for core-drilled and/or flooded holes. Certified for threaded rods, rebars.

APPLICATION

extrusion gun (Mapei Gun 585 2K, manual; Mapei Gun 585 Electric,

battery; Mapei Gun 585 Air, pneumatic)

COLOUR

PACKAGING 585 ml

CERTIFICATIONS AND MARKINGS













TECHNICAL DATASHEET on mapei.com



Mapefix EP 100

Solvent-free pure epoxy resin-based chemical anchor for structural loads. High bond strength, also for core-drilled and/or flooded holes, 100 years service life. Certified for threaded rods, rebar, C1 C2 seismic performance.

APPLICATION

extrusion gun (Mapei Gun 585 2K, manual; Mapei Gun 585 Electric, battery; Mapei Gun 585 Air, pneumatic)

COLOUR grey

PACKAGING 585 ml

CERTIFICATIONS AND MARKINGS



















Mapefix PE + VE Mixer

Spare static mixers for chemical anchoring.



USABLE WITH

Mapefix PE SF, Mapefix VE SF, Mapefix VinyBond, Mapefix PolyBond, Mapefix UM-H

PACKAGING

12 pcs sachet

Mapefix PE SF

Styrene-free, polyester resin-based chemical fastener for heavy loads. Certified for threaded rods in concrete and masonry.

APPLICATION

extrusion gun (Mapei Gun 310 PRO, Mapei Gun 420 2K and Mapei Gun 420 Electric M)

PACKAGING

300 ml, 420 ml

CERTIFICATIONS AND MARKINGS

















Mapefix PolyBond

Polyester resin-based chemical fastener for heavy loads. Certified for threaded rods in concrete

APPLICATION extrusion gun (Mapei Gun 310 PRO, Mapei Gun 420 2K and Mapei Gun 420 Electric M)

COLOUR grey

PACKAGING 300 ml and 420 ml

CERTIFICATIONS AND MARKINGS





CHECK THE TECHNICAL DATASHEET on mapei.com



Mapefix UM-H 420

Solvent-free methane-methacrylate resin-based chemical fastener for structural loads. High bond strength, high thermal resistance. Certified for threaded rods, rebar, C1 and C2 seismic performance.

APPLICATION extrusion gun (Mapei Gun 420 2K and Mapei Gun 420 Electric M)

COLOUR grey

PACKAGING 420 ml

CERTIFICATIONS AND MARKINGS



Ø8-Ø32







CHECK THE TECHNICAL DATASHEET on mapei.com



Mapefix VE SF

Styrene-free, vinyl ester, hybrid resin-based chemical fastener for structural loads. Certified for threaded rods, rebar, C1 seismic performance.

APPLICATION

extrusion gun (Mapei Gun 310 PRO, Mapei Gun 420 2K and Mapei Gun 420 Electric M)

PACKAGING 300 ml, 420 ml

CERTIFICATIONS AND MARKINGS



284













CHECK THE TECHNICAL DATASHEET on mapei.com



Mapefix VinyBond

Styrene-free, vinyl ester, hybrid resin-based chemical fastener for structural loads. Certified for threaded rods in concrete and rebar in reinforced concrete.

APPLICATION extrusion gun (Mapei Gun 310 PRO, Mapei Gun 420 2K and Mapei Gun 420 Electric M)

COLOUR grey

PACKAGING 300 ml and 420 ml

CERTIFICATIONS AND MARKINGS











CHECK THE **TECHNICAL** DATASHEET on mapei.com



Mapefix V LP

Styrene-free, vinyl ester, hybrid resin-based chemical fastener for structural loads. Certified for threaded rods, rebar, C1 and C2 seismic performance.

extrusion gun (Mapei Gun 310 PRO, Mapei Gun 420 2K and **APPLICATION** Mapei Gun 420 Electric M)

PACKAGING 300 ml, 420 ml


CERTIFICATIONS AND MARKINGS











CHECK THE TECHNICAL DATASHEET on mapei.con



Planibond BA 100

Two-component fluid epoxy resin for anchoring steel bars.

APPLICATION pouring

CONSUMPTION approx. 2 kg/dm³

PACKAGING

• 2.88 kg drums (comp. A);

• 0.12 kg bottles (comp. B)

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.com





 $\langle \not \! \! \rangle$

Planigrout 300

Three-component fluid epoxy mortar for anchorage work.

APPLICATION pouring

CONSUMPTION 2 kg/m² per mm of thickness

PACKAGING

12.2 kg kit:
• 1.6 kg drums (comp. A);

- 0.6 kg drums (comp. B);
- 10 kg vacuum-packed polyethylene bags (comp. C)

36.6 kg unit:

- 4.8 kg drums (comp. A);
- 1.8 kg drums (comp. B);
- 30 kg vacuum-packed polyethylene bags (comp. C)

CERTIFICATIONS AND MARKINGS











Planigrout 310

Three-component free-flowing high-strength rapid-hardening epoxy mortar applied in layers up to 10 cm thick for anchoring and grouting structures.

APPLICATION pouring

CONSUMPTION 2.2 kg/l of cavity to be filled

PACKAGING

96.1 kg units:

- 10.5 kg drums (comp. A);
- 1.6 kg bottles (comp. B);
- 84 kg vacuum-packed polyethylene bags (four 21 kg bags - comp. C)

CERTIFICATIONS AND MARKINGS









CHECK THE TECHNICAL DATASHEET on mapei.com



Planigrout 350

Three-component free-flowing high-strength rapid-hardening epoxy grout applied in layers up to 50 cm thick for anchoring and grouting structures.

APPLICATION

pouring

CONSUMPTION

2.38 kg/l of cavity to be filled

PACKAGING

94.4 kg units:

- 7.0 kg drums (comp. A);
- 3.4 kg drums (comp. B);
- 84 kg vacuum-packed polyethylene bags (four 21 kg bags - comp. C))

CERTIFICATIONS AND MARKINGS









CHECK THE TECHNICAL DATASHEET on mapei.com



Ultrabond Super Grip

Deformable, acrylic assembly adhesive for interior and exterior use, with a high initial sucker effect.

APPLICATION extrusion gun

CONSUMPTION 15 meters of bead, triangular section

COLOUR white

PACKAGING 310 ml cartridges











287



Adesilex PG1

Two-component, thixotropic epoxy adhesive for structural bonds.

APPLICATION trowel

1.65-1.75 kg/m² per mm of thickness CONSUMPTION

PACKAGING 2 kg kit:

• 1.5 kg drums (comp. A);

• 0.5 kg drums (comp. B)

6 kg kits:

• 4.5 kg drums (comp. A);

• 1.5 kg drums (comp. B)

CERTIFICATIONS AND MARKINGS







CHECK THE

TECHNICAL

DATASHEET

on mapei.com



Adesilex PG1 Rapido

Two-component, rapid-setting, thixotropic epoxy adhesive for structural bonds.

APPLICATION trowel

1.65-1.75 kg/m² per mm of thickness CONSUMPTION

PACKAGING 6 kg kit:

• 4.5 kg drums (comp. A);

• 1.5 kg drums (comp. B)

CERTIFICATIONS AND MARKINGS













TECHNICAL DATASHEET on mapei.com



Adesilex PG2

Two-component, thixotropic epoxy adhesive with long workability for structural bonds.

APPLICATION trowel

CONSUMPTION 1.65-1.75 kg/m² per mm of thickness

PACKAGING

6 kg kit:

• 4.5 kg drums (comp. A);

• 1.5 kg drums (comp. B)

CERTIFICATIONS **AND MARKINGS**







CHECK THE TECHNICAL DATASHEET on mapei.com



Adesilex PG4

Two-component, thixotropic epoxy adhesive with modified rheology for bonding Mapeband, Mapeband TPE, PVC strips and Hypalon and for structural bonds.

APPLICATION

1.60-1.65 kg/m² per mm of thickness CONSUMPTION

PACKAGING

- 2 kg kit: 1.5 kg drums (comp. A); 0.5 kg drums (comp. B);
- 6 kg kit: 4.5 kg drums (comp. A); 1.5 kg drums (comp. B);
- 30 kg kit: 22.5 kg drums (comp. A); 7.5 kg drums (comp. B)

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.com



Epojet

Two-component, super-fluid epoxy resin for injection and anchoring.

APPLICATION injection or pouring

CONSUMPTION • sealing cracks: 1.1 kg/l of cavity to be filled;

• bonding steel to concrete: 1.1 kg/m² per mm

PACKAGING

2.5 ka kit:

- 2 kg drums (comp. A);
- 0.5 kg drums (comp. B)
- 3.2 kg drums (comp. A);
- 0.8 kg drums (comp. B)

CERTIFICATIONS AND MARKINGS











TECHNICAL DATASHEET on mapei.com



Epojet LV

Two-component epoxy resin, with very low viscosity for injection in microcracks, also on wet surfaces.

APPLICATION injection or pouring

• sealing cracks: 1.1 kg/l of cavity to be filled; • bonding steel to concrete: 1.1 kg/m² per mm

PACKAGING

CONSUMPTION

2.5 kg kit:

• 2 kg drums (comp. A);

• 0.5 kg drums (comp. B)

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.com





Back to the table of contents Back to the alphabetical index

291

Eporip

Two component solvent-free epoxy adhesive for construction joints and for monolithic sealing of cracks in screeds.

| APPLICATION | brush, trowel or pouring |
|-------------|-------------------------------------|
| CONSUMPTION | 1.35 kg/dm ³ for bonding |

PACKAGING • 10 kg kit:

component A 7.5 kg + component B 2.5 kg

• 2 kg kit:

component A 1.5 kg + component B 0.5 kg

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.com



Eporip SCR

Rapid-hardening, silicate-urethane resin for sealing cracks in screeds and carrying out small repairs.

APPLICATION by extrusion from the nozzle on the bottle

CONSUMPTION 1.7 kg/l of cavity to be filled

PACKAGING box containing 6 300 ml A+B 6 kits, + 6 sachets

containing curved steel clamps

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.com



Eporip Turbo

Rapid-hardening, polyester resin for sealing cracks in screeds and carrying out small repairs.

APPLICATION brush or pouring

CONSUMPTION 1.7 kg/l of cavity to be filled

PACKAGING

6 508 g kits (A+B):

• 500 g metal cans (comp. A);

• 8 g tubes (comp. B)

CERTIFICATIONS AND MARKINGS






CHECK THE **TECHNICAL** DATASHEET on mapei.com







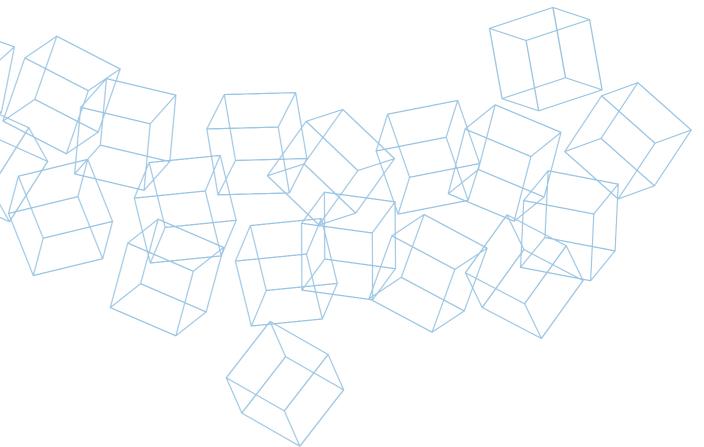



PRODUCTS FOR GALVANIC CATHODIC PROTECTION

Mapeshield Corrosion Control

Self-adhesive 12 cm zinc plates applied directly on the surface of concrete to provide galvanic cathodic protection for rebar and prevent corrosion.

| APPLICATION | on the external surfaces of the repaired concrete, new or existing |
|-------------|--|
| CONSUMPTION | apply the plates continuously along the entire length of the reinforced concrete |
| PACKAGING | 1 carton box containing 12 cm x 15 m rolls |



CHECK THE TECHNICAL DATASHEET on mapei.com



Mapeshield E 25

Self-adhesive 12 cm zinc plates applied directly on the surface of concrete to provide galvanic cathodic protection for rebar and prevent corrosion.



| APPLICATION | on the external surfaces of concrete |
|-------------|---|
| CONSUMPTION | depending on the density of the masonry |
| PACKAGING | 1 carton box containing a 25 cm x 25 m roll |

CHECK THE TECHNICAL DATASHEET on mapei.com



Mapeshield I

Pure zinc anodes coated with a special conductive paste, for galvanic cathodic protection against corrosion of steel reinforcement in new structures and in structures requiring repair.



| APPLICATION | directly on the rebar |
|-------------|---|
| CONSUMPTION | depending on the density of the masonry |
| PACKAGING | 12 pcs boxes |








Back to the table of contents



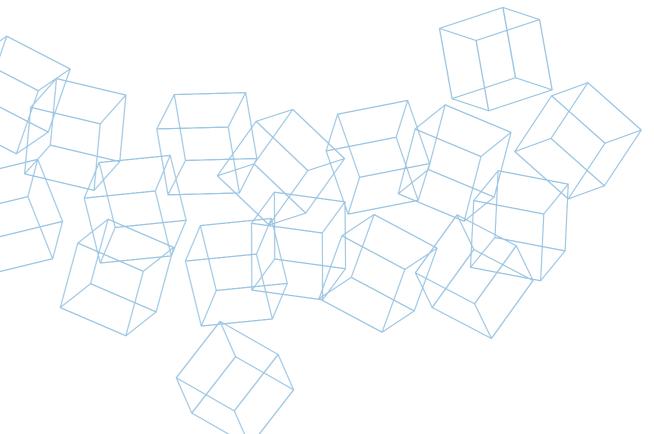



COMPOSITE SYSTEMS FOR STRUCTURAL STRENGTHENING

1. PRODUCTS FOR COMPOSITE SYSTEMS FOR STRUCTURAL STRENGTHENING

Adesilex PG1

Two-component, thixotropic epoxy adhesive for structural bonds.

APPLICATION trowel

CONSUMPTION 1.65-1.75 kg/m² per mm of thickness

PACKAGING 2 kg kit:

> • 1.5 kg drums (comp. A); • 0.5 kg drums (comp. B)

6 kg kits:

• 4.5 kg drums (comp. A);

• 1.5 kg drums (comp. B)

CERTIFICATIONS AND MARKINGS









CHECK THE TECHNICAL DATASHEET on mapei.com



Adesilex PG1 Rapido

Two-component, rapid-setting, thixotropic epoxy adhesive for structural bonds.

APPLICATION trowel

1.65-1.75 kg/m² per mm of thickness CONSUMPTION

PACKAGING 6 kg kit:

• 4.5 kg drums (comp. A);

• 1.5 kg drums (comp. B)

CERTIFICATIONS AND MARKINGS













Adesilex PG2

Two-component, thixotropic epoxy adhesive with long workability for structural bonds.

APPLICATION trowel

CONSUMPTION 1.65-1.75 kg/m² per mm of thickness

PACKAGING

• 4.5 kg drums (comp. A);

• 1.5 kg drums (comp. B)

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.com



Back to the table of contents

Carboplate

Pultruded carbon fibre plate with a protective plastic film on both faces.





TECHNICAL DATASHEET on mapei.com



Carboplate W

Pultruded carbon fibre plate with a protective plastic film on both faces.

| MODULUS OF ELASTICITY | 170 - 200 - 250 GPa |
|--------------------------|---------------------|
| THICKNESS | 1.4 mm |
| WIDTH | 50 - 100 - 150 mm |
| PACKAGING | 25 m rolls |



CHECK THE **TECHNICAL** DATASHEET on mapei.com



Carbotube

TENSILE

MODULUS

OF ELASTICITY

PACKAGING

Pultruded carbon fibre tube preformed with epoxy resin with a protective plastic film for reinforced stitching in masonry.

boxes with 10 pcs of 2 m

170 GPa



CHECK THE TECHNICAL DATASHEET on mapei.com





Back to the alphabetical index

Epojet

Two-component, super-fluid epoxy resin for injection and anchoring.

APPLICATION injection or pouring

CONSUMPTION • sealing cracks: 1.1 kg/l of cavity to be filled;

• bonding steel to concrete: 1.1 kg/m² per mm

PACKAGING

2.5 kg kit:

• 2 kg drums (comp. A);

• 0.5 kg drums (comp. B)

4 kg kits:

• 3.2 kg drums (comp. A);

• 0.8 kg drums (comp. B)

CERTIFICATIONS AND MARKINGS









TECHNICAL DATASHEET on mapei.com



Mapegrid B 250

Alkali-resistant, primed basalt-fibre mesh for structural "reinforced" strengthening of stone masonry, brick, tuff surfaces.



CHECK THE TECHNICAL DATASHEET on mapei.com



TYPE OF FIBRE basalt


| WEIGHT | 250 g/m ² |
|--------|----------------------|

SIZE 6 x 6 mm mesh

PACKAGING 50 x 1 m rolls

Mapegrid B 300

Pre-primed alkali-resistant basalt fibre mesh for structural "reinforced" strengthening of stone masonry, brick, tuff surfaces.



| TYPE OF FIBRE | basalt |
|---------------|----------------------|
| WEIGHT | 300 g/m ² |
| SIZE | 8 x 8 mm mesh |
| PACKAGING | 50 x 1 m rolls |





Mapegrid B 400

Pre-primed alkali-resistant basalt fibre mesh for structural "reinforced" strengthening of stone masonry, brick, tuff surfaces.



TECHNICAL DATASHEET on mapei.com



Mapegrid C 170

basalt

400 g/m²

50 x 1 m rolls

TYPE OF FIBRE

WEIGHT


PACKAGING

TYPE OF FIBRE

WEIGHT

PACKAGING


High-strength carbon fibre mesh for "reinforced" structural strengthening of masonry and concrete structures.



| high-strength carbon | |
|----------------------|--|
| 170 g/m ² | |

10 x 10 mm mesh SIZE

PACKAGING 50 x 1 m rolls



CHECK THE TECHNICAL DATASHEET on mapei.com



Mapegrid C 200

High-strength carbon fibre mesh for "reinforced" structural strengthening of masonry and concrete structures.



| TYPE OF FIBRE | high-strength carbon |
|---------------|----------------------|
| WEIGHT | 200 g/m ² |
| SIZE | 10 x10 mm mesh |
| | |








Back to the table of contents Back to the alphabetical index

50 x 1 m rolls

Mapegrid G 120

Pre-primed, alkali-resistant (A.R.) glass fibre mesh, for localised reinforced "strengthening" of masonry substrates.



| TYPE OF FIBRE | A.R. type glass fibre |
|---------------|-----------------------------------|
| WEIGHT | 125 g/m ² |
| SIZE | 10.5 x 11.5± 2% mesh |
| PACKAGING | 25 x 0,45 m rolls, 50 x 1 m rolls |

CHECK THE TECHNICAL DATASHEET on mapei.com



Mapegrid G 220

Pre-primed alkali-resistant glass fibre mesh for structural "reinforced" strengthening of stone masonry, brick, tuff and mixed masonry surfaces.



| WEIGHT 250 g/m² SIZE 21 x 21 mm mesh PACKAGING 50 m x 1.33 m rolls | TYPE OF FIBRE | A.R. type glass fibre |
|--|---------------|-----------------------|
| 2.7.2 | WEIGHT | 250 g/m ² |
| PACKAGING 50 m x 1.33 m rolls | SIZE | 21 x 21 mm mesh |
| | PACKAGING | 50 m x 1.33 m rolls |





Mapei Steel Bar 304

Ultra high-strength helical bars in AISI 304 stainless-steel for reinforced pointing on masonry structures.



CHECK THE

TECHNICAL DATASHEET

on mapei.com

ultra high-strength AISI 304 steel
6 mm
10 mm rolls



Mapei Steel Bar 316

Ultra high-strength helical bars in AISI 316 stainless steel for reinforced pointing on masonry structures.

ultra high-strength AISI 316 steel



TECHNICAL
DATASHEET
on mapei.com



 $6\,mm$

10 m rolls

Mapei Steel Dry 316

Ultra high-strength "dry-applied" helical AISI 316 stainless-steel bars for strengthening reinforced concrete, masonry and wooden structural

members. Available with 6, 8 and 10 mm diameter. Available upon request in AISI 304 stainless steel.

TIPOLOGIA

LENGTH

TIPOLOGIA

DIAMETER

PACKAGING

ultra high-strength AISI 316 steel

• Ø 6 mm: lengths of 40, 60 and 100 cm;

Ø 8 mm: lengths of 40, 60, 80 e 100 cm;
Ø 10 mm: lengths of 40, 60, 80 cm and 100 cm

PACKAGING

• 50 pcs boxes lengths of 40 and 60 cm;

• 50 pcs tubes lengths of 80 and 100 cm

CERTIFICATIONS AND MARKINGS





CHECK THE TECHNICAL DATASHEET on mapei.com



Mapenet EM 30

Pre-impregnated alkali-resistant A.R. glass fibre mesh (FRP) used to make "reinforced" structural render on concrete and masonry structures.

| TYPE OF FIBRE | A.R. type glass fibre |
|---------------|-----------------------|
| WEIGHT | 420 g/m ² |
| SIZE | 30 x 30 mm mesh |
| PACKAGING | 25 x 1 m rolls |



CHECK THE TECHNICAL DATASHEET on mapei.com





Back to the table of contents

Back to the alphabetical index

TIPOLOGIA

DIAMETER

PACKAGING

Mapenet EM 40

Pre-impregnated alkali-resistant A.R. glass fibre mesh (FRP) used to make "reinforced" structural render on concrete and masonry structures.



| A \$ 12 2 / Amontonionist |
|---------------------------|
| CHECK THE |
| TECHNICAL |
| DATASHEET |
| on mapei.com |

| 自然的 |
|-----|

TYPE OF FIBRE A.R. type glass fibre WEIGHT 270 g/m² SIZE 40 x 40 mm mesh PACKAGING 50 x 1 m rolls

Mapenet EM Connector

Pre-formed "L" shaped fasteners made from alkali-resistant glass fibre and thermo-setting vinylester-epoxy resin, to be used together with **Mapenet EM 30-40** meshes available in different lengths (20, 50, 70 cm).



| TYPE OF FIBRE | A.R. type glass fibre |
|---------------|--|
| SIZE | • 7 mm 200x100 mm • 7 mm 380x100 mm • 7 mm 500x100 mm • 7 mm 700x100 mm |
| PACKAGING | 100 pcs boxes |

Mapenet EMR 33

306

Pre-formed glass fibre mesh (GFRP) with high chemical resistance impregnated with thermosetting resin used to make "reinforced" structural render on concrete and masonry structures.



| TYPE OF FIBRE | E-CR glass fibres |
|---------------|----------------------|
| WEIGHT | 920 g/m ² |
| SIZE | 33 x 33 mm mesh |
| PACKAGING | 13 m x 2 m rolls |



Mapenet EMR 33 Angolare

E-CR glass fibres

33 x 33 mm mesh

720 g/m

Pre-formed glass fibre corner element (GFRP) with high chemical resistance impregnated with thermosetting resin used, to be used together with **Mapenet EMR 33** mesh to make "reinforced" structural render on concrete and masonry structures.



CHECK THE TECHNICAL DATASHEET on mapei.com



Mapenet EMR 66

TYPE OF FIBRE

WEIGHT

PACKAGING

SIZE

Pre-formed glass fibre mesh (GFRP) with high chemical resistance impregnated with thermosetting resin used to make "reinforced" structural render on concrete and masonry structures.

2 m height x 33 cm x 33 cm, 10 pcs



CHECK THE TECHNICAL DATASHEET on mapei.com



| TYPE OF FIBRE | E-CR glass fibres |
|---------------|----------------------|
| WEIGHT | 465 g/m ² |
| SIZE | 66 x 66 mm mesh |
| PACKAGING | 25 m x 2 m rolls |

Mapenet EMR 66 Angolare

Pre-formed glass fibre corner element (GFRP) with high chemical resistance impregnated with thermosetting resin used, to be used together with **Mapenet EMR 66** mesh to make "reinforced" structural render on concrete and masonry structures.



| TYPE OF FIBRE | E-CR glass fibres |
|---------------|------------------------------------|
| WEIGHT | 380 g/m |
| SIZE | 66 x 66 mm mesh |
| PACKAGING | 2 m height x 33 cm x 33 cm, 10 pcs |







Mapenet EMR 99

Pre-formed glass fibre mesh (GFRP) with high chemical resistance impregnated with thermosetting resin used to make "reinforced" structural render on concrete and masonry structures.



| CHECK THE |
|--------------|
| TECHNICAL |
| DATASHEET |
| on manei.com |

| Tarabal Assemble |
|---|
| 1条765000000000000000000000000000000000000 |
| (100 March 1980) |
| |
| 2575520000 |
| |
| |
| CONTROL OF THE |
| |
| 可分分子等的数字形 |
| T K#4 73.7 (30 mag) |

TYPE OF FIBRE E-CR glass fibres WEIGHT 300 g/m² SIZE 99 x 99 mm mesh PACKAGING 25 m x 2 m rolls

Mapenet EMR 99 Angolare

Pre-formed glass fibre corner element (GFRP) with high chemical resistance impregnated with thermosetting resin used, to be used together with **Mapenet EMR 99** mesh to make "reinforced" structural render on concrete and masonry structures.



CHECK THE
TECHNICAL
DATASHEET
on mapei.com



WEIGHT 250 g/m

E-CR glass fibres

SIZE 99 x 99 mm mesh

TYPE OF FIBRE

PACKAGING

Mapenet EMR Connector

Pre-formed glass fibre L-shape fasteners (GFRP) with high chemical resistance, impregnated with thermosetting resin used, to be used together with **Mapenet EMR** range of mesh and corner elements to make "reinforced" structural render on concrete and masonry structures.

2 m height x 33 cm x 33 cm, 10 pcs



| TYPE OF FIBRE | E-CR glass fibres |
|---------------|---|
| SIZE | 7 mm 200x100 mm7 mm 400x100 mm7 mm 800x100 mm |
| PACKAGING | 100 pcs |

CHECK THE TECHNICAL DATASHEET on mapei.com

Maperod C

High tensile pultruded carbon fibre rebars pre-formed with epoxy resin for structural strengthening of damaged concrete, wooden and masonry elements.



CHECK THE TECHNICAL DATASHEET on mapei.com



Maperod G

MODULUS

DIAMETER

PACKAGING

OF ELASTICITY

155 GPa

nominal 8 - 10 - 12 mm

boxes with 10 pcs of 2 m

Pultruded glass fibre rebar pre-formed with epoxy-modified vinylester resin for structural reinforcement of damaged reinforced concrete, brick, stone and tuff elements.



| MODULUS OF ELASTICITY | 40.8 GPa |
|--------------------------|--------------------------|
| DIAMETER | nominal 10 - 12 mm |
| PACKAGING | boxes with 10 pcs of 6 m |



MapeWrap 11

CERTIFICATIONS

AND MARKINGS

Two-component, normal-setting, thixotropic epoxy grout for evening out concrete surfaces and for structural bonding.

| APPLICATION | trowel |
|-------------|-------------------------------------|
| CONSUMPTION | 1.55 kg/m² per mm of thickness |
| PACKAGING | 6 kg kit: • 4.5 kg drums (comp. A); |

• 1.5 kg drums (comp. B)







MapeWrap 12

Two-component, slow-setting, thixotropic epoxy grout for evening out concrete surfaces and for structural bonding.

APPLICATION trowel

CONSUMPTION 1.55 kg/m² per mm of thickness

PACKAGING 6 kg kit:

• 4.5 kg drums (comp. A);

• 1.5 kg drums (comp. B)

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.com



MapeWrap 21

Two-component superfluid epoxy resin for impregnation of **MapeWrap** with "wet system".

APPLICATION: impregnation through immersion

CONSUMPTION depending on the type and the height of fabrics

PACKAGING 5 kg kit:

• 4 kg drums (comp. A);

• 1 kg drums (comp. B)

CERTIFICATIONS AND MARKINGS







CHECK THE
TECHNICAL
DATASHEET
on mapei.com



MapeWrap 31

Two-component, medium-viscosity, epoxy adhesive for impregnation of **MapeWrap** with "wet system".

APPLICATION roller or brush

CONSUMPTION depending on the type and the height of fabrics

PACKAGING 5 k

5 kg kit:

• 4 kg drums (comp. A);

• 1 kg drums (comp. B)

CERTIFICATIONS
AND MARKINGS

310







CHECK THE TECHNICAL DATASHEET on mapei.com



MapeWrap 31 T

Thixotropic epoxy adhesive for impregnating **MapeWrap** fabrics using the "dry system".

APPLICATION trowel

CONSUMPTION depending on the type of fabrics and the height

PACKAGING 5 kg kit:

• 4 kg drums (comp. A);

• 1 kg drums (comp. B)

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.com



MapeWrap B FIOCCO

Unidirectional high strength basalt fibre cord to be impregnated with **MapeWrap 21** (two-component superfluid epoxy resin) to make "structural connections".

TYPE OF FIBRE high-strength basalt

DIAMETER 10, 12 mm

MODULUS

OF ELASTICITY 85 GPa

PACKAGING 10 m rolls



CHECK THE TECHNICAL DATASHEET on mapei.com



MapeWrap B UNI-AX

Unidirectional, high strength basalt fibre fabric.

| WEIGHT | 400-600 g/m ² |
|--------------------------|---|
| THICKNESS | equivalent thickness of dry fabric 0.143-0.215 mm |
| WIDTH | 40 cm |
| MODULUS OF ELASTICITY | 70 GPa |
| PACKAGING | 50 m rolls |



CHECK THE TECHNICAL DATASHEET on mapei.com






MapeWrap C BI-AX W

Bidirectional, balanced, high strength carbon fibre fabric.

| WEIGHT | 300 g/m ² |
|--------------------------|---|
| THICKNESS | equivalent thickness of dry fabric (per direction) 0.082 mm |
| WIDTH | 40-50 cm |
| MODULUS OF ELASTICITY | 252 GPa ± 2% |
| PACKAGING | 50 m rolls |



CHECK THE TECHNICAL DATASHEET on mapei.com



MapeWrap C Connector

20/15/8 mm - 20/15/10 mm - 40/15/8 mm - 30/15/10 mm

Pultruded carbon fibre connector for anchoring with one end to be impregnated with MapeWrap 21.

| TYPE OF FIBRE | high-strength carbon |
|--------------------------|---|
| DIAMETER | 8, 10 mm |
| LENGTH | pre-formed bar 20, 30, 40 cmcord 15 cm |
| MODULUS OF ELASTICITY | 150 GPa |
| PACKAGING | 50 pcs boxes |



CHECK THE TECHNICAL DATASHEET on mapei.com



MapeWrap C FIOCCO

312

Unidirectional high strength carbon fibre cord to be impregnated with **MapeWrap 21** (two-component superfluid epoxy resin) to make "structural connections".

| T/DE OF FIRDE | le independent of the control of the |
|--------------------------|--|
| TYPE OF FIBRE | high-strength carbon |
| DIAMETER | 6 - 8 - 10 - 12 mm |
| MODULUS OF ELASTICITY | 234 GPa |
| PACKAGING | 10 m rolls |



CHECK THE TECHNICAL DATASHEET on mapei.com



MapeWrap C FIOCCO W

Unidirectional high strength carbon fibre cord to be impregnated with **MapeWrap 21** (two-component superfluid epoxy resin) to make "structural connections".

| TYPE OF FIBRE | high-strength carbon |
|--------------------------|----------------------|
| DIAMETER | 8 - 10 - 12 mm |
| MODULUS OF ELASTICITY | 245 GPa |
| PACKAGING | 10 m rolls |



MapeWrap C QUADRI-AX

Quadriaxial, balanced, high strength carbon fibre fabric, with high modulus of elasticity.

| WEIGHT | 380 g/m² |
|--------------------------|--|
| THICKNESS | equivalent thickness of dry fabric (per direction): 0.053 mm |
| WIDTH | 30, 42, 48 cm |
| MODULUS OF ELASTICITY | 230 GPa |
| PACKAGING | 50 m rolls |



CHECK THE TECHNICAL DATASHEET on mapei.com



MapeWrap C UNI-AX

Unidirectional, high strength carbon fibre fabric, with high modulus of elasticity.

| WEIGHT | 300-600 g/m ² |
|--------------------------------|---|
| THICKNESS | equivalent thickness of dry fabric 0.164-0.337 mm |
| WIDTH | 10, 20, 40 cm |
| MODULUS OF ELASTICITY | 252 GPa ± 2% |
| PACKAGING | 50 m rolls |
| CERTIFICATIONS AND MARKINGS | ICC ES |



CHECK THE TECHNICAL DATASHEET on mapei.com





MapeWrap C UNI-AX HM

Unidirectional, high strength carbon fibre fabric with very high modulus of elasticity.

| WEIGHT | 300-600 g/m ² |
|--------------------------|---|
| THICKNESS | equivalent thickness of dry fabric 0.164-0.329 mm |
| WIDTH | 10, 20, 40 cm |
| MODULUS OF ELASTICITY | 390 GPa |
| PACKAGING | 50 m rolls |



TECHNICAL DATASHEET on mapei.com



MapeWrap EQ Adhesive

One-component, ready-to-use, polyurethane-based adhesive in watery dispersion with very low emission level of volatile organic compounds (VOC) for impregnating MapeWrap EQ Net bi-directional, primed glass fibre fabric.

| CONSUMPTION | 0.5-0.6 kg/m ² |
|-------------|---------------------------|
| PACKAGING | 6 kg drums |
| | |





CHECK THE **TECHNICAL** DATASHEET on mapei.com



MapeWrap EQ Net

Bi-directional, primed glass fibre fabric to protect secondary partition walls in buildings from seismic activity and to prevent brick-cement floors collapsing.

| TYPE OF FIBRE | E glass fibres |
|---------------|--|
| WEIGHT | 286 g/m ² |
| THICKNESS | Equivalent thickness of dry fabric: 0.057 mm |
| WIDTH | 100 cm |
| PACKAGING | 50 m rolls |
| | |



CHECK THE TECHNICAL DATASHEET on mapei.com



MapeWrap G FIOCCO

Unidirectional high strength glass fibre cord to be impregnated with MapeWrap 21 (two-component superfluid epoxy resin) to make "structural connections".

| TYPE OF FIBRE | E glass fibres |
|--------------------------|-----------------|
| DIAMETER | 6, 8, 10, 12 mm |
| MODULUS OF ELASTICITY | 81.4 GPa |
| PACKAGING | 10 m rolls |



TECHNICAL DATASHEET on mapei.com



MapeWrap G UNI-AX

Unidirectional, glass fibre fabric.

| TYPE OF FIBRE | E glass fibres |
|--------------------------|--|
| WEIGHT | 900 g/m² |
| THICKNESS | equivalent thickness of dry fabric: 0.342 mm |
| WIDTH | 30-60 cm |
| MODULUS OF ELASTICITY | 80.7 GPa |
| PACKAGING | 50 m rolls |



CHECK THE **TECHNICAL** DATASHEET on mapei.com



MapeWrap Primer 1

Two-component epoxy primer specifically formulated for the **MapeWrap** system.

• 0.5 kg drums (comp. B)

| APPLICATION | roller or brush | |
|-------------|-------------------------------------|---------------------------|
| CONSUMPTION | 250-300 g/m ² | CHECK THE TECHNICAL |
| PACKAGING | 2 kg kit: • 1.5 kg drums (comp. A); | DATASHEET on mapei.com |





315

MapeWrap SG FIOCCO

High-strength galvanized steel fibre cord for structural strengthening.









Planitop HDM Maxi

Two-component ready-mixed, high ductility pozzolan-reaction, fibre-reinforced mortar for structural "reinforced" strengthening work, when used in combination with mesh from the **Mapegrid** range, and for smoothing and levelling concrete and masonry.

approx. 1.85 kg/m² per mm of thickness

| APPLICATION | trowel, gauging trowel or rendering machine |
|-------------|---|
| | |

PACKAGING 31.25 kg kit:

• 25 kg bags (comp. A);

• 6.25 kg tanks (comp. B)

CERTIFICATIONS
AND MARKINGS

CONSUMPTION











CHECK THE
TECHNICAL
DATASHEET
on mapei.com



Planitop HDM Restauro

Two-component, pre-blended, high-ductility, fibre-reinforced, cement-free hydraulic lime (NHL) and **Eco-Pozzolan**-based light-coloured mortar, particularly recommended for "reinforced" structural strengthening of masonry substrates in combination with the **Mapegrid** meshes and for evening out stone, brickwork and tuff substrates.

APPLICATION trowel, gauging trowel or rendering machine

CONSUMPTION approx. 1.9 kg/m² per mm of thickness

PACKAGING 29.75 kg kit:

• 25 kg bags (comp. A);

• 4.75 kg tanks (comp. B)

CERTIFICATIONS
AND MARKINGS

316











CHECK THE TECHNICAL DATASHEET on mapei.com



Planitop HPC

Two-component ultra high-performance shrinkage-compensated free-flowing, high ductility fibre-reinforced cementitious mortar with stiff steel fibres for restoring and repairing concrete.

Note: **Planitop HPC** is sold with **Fibre HPC** (1.625 kg of **Fibre HPC** per 25 kg bag of **Planitop HPC** to be ordered separately).

APPLICATION pouring into formwork

CONSUMPTION approx. 20 kg/m² per cm of thickness


PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS











TECHNICAL

DATASHEET

on mapei.com



Planitop HPC Floor

One-component, ultra-high strength, highly ductile, highly fluid, fibre-reinforced with steel fibres, compensated shrinkage cementitious mortar for strengthening the external face of floor slabs.

approx. 21 kg/m² per cm of thickness

APPLICATION pouring

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS

CONSUMPTION









TECHNICAL
DATASHEET
on mapei.com



Planitop HPC Floor 46

Ultra-high performance, high ductility, free-flowing cementitious micro-concrete reinforced with steel fibres.

APPLICATION pouring

CONSUMPTION approx. 22 kg/m² per cm of thickness

PACKAGING 25 kg bags and 1000 kg big bags

CERTIFICATIONS AND MARKINGS







TECHNICAL
DATASHEET
on mapei.com





Planitop HPC Floor 46 T

Ultra-high performance, high ductility, semi-fluid cementitious micro-concrete reinforced with steel fibres.

| APPLICATION | pouring |
|----------------|--|
| CONSUMPTION | approx. 22.5 kg/m² per cm of thickness |
| PACKAGING | 25 kg bags and 1000 kg big bags |
| CERTIFICATIONS | C C RESPONSABLE RE |







Planitop HPC Floor T

AND MARKINGS

One-component, ultra-high strength, highly ductile, semi-fluid, fibre-reinforced with steel fibres, compensated shrinkage cementitious mortar for strengthening the external face of floor slabs. Particularly suitable for warped wooden floors.

| APPLICATION | pouring |
|-------------|--------------------------------------|
| CONSUMPTION | approx. 21 kg/m² per cm of thickness |
| PACKAGING | 25 kg bags |





CHECK THE TECHNICAL DATASHEET on mapei.com



Planitop HPC LV

CERTIFICATIONS

AND MARKINGS

Ultra high-performance self-compacting expanding cementitious micro-concrete.



CERTIFICATIONS AND MARKINGS











CHECK THE on mapei.com



Planitop HPC Tixo

Two-component, thixotropic, ultra-high performance, fibre-reinforced cementitious mortar, with a work-hardening effect, with steel fibres for restoring and repairing concrete structures.

Note: Planitop HPC Tixo is sold with Fibre HPC (1.625 kg of Fibre HPC per 25 kg bag of Planitop HPC Tixo to be ordered separately).

APPLICATION with spreader, trowel, also without formworks in vertical application or on ceiling

CONSUMPTION approx. 21 kg/m² per cm of thickness

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS







TECHNICAL DATASHEET on mapei.com



Planitop Intonaco Armato

Two component, ready-mixed, cement-free, high-ductility fibre-reinforced natural hydraulic lime (NHL) and Eco-Pozzolan mortar, containing 30% of recycled raw material, particularly recommended for levelling off the surface of stone, bricks and tuff, and for the structural strengthening of existing facing walls, including when extra strengthening mesh is not applied.

APPLICATION with metal straight trowel or rendering machine

CONSUMPTION approx. 1.8 kg/m² per mm of thickness

PACKAGING

• comp. A (powder): 25 kg bags

• 5 kg tanks comp. B (liquid)

CERTIFICATIONS AND MARKINGS











CHECK THE DATASHEET on mapei.com



Planitop U-HPC Floor

Fibre-reinforced, shrinkage-compensated, high-strength, high-ductility, highly-fluid cementitious mortar.

Note: Planitop U-HPC Floor is sold with Fibre HPC (1.625 kg of Fibre HPC per 25 kg bag of Planitop U-HPC Floor to be ordered separately).

APPLICATION pouring

CONSUMPTION approx. 21.5 kg/m² per cm of thickness

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS







Back to the alphabetical index

318

319

2. COMPLEMENTARY FIBRES

Fibre HPC

Stiff steel fibres used in combination with **Planitop HPC**, **Planitop HPC Tixo** and **Planitop U-HPC Floor** mortars.



CONSUMPTION 1.625 kg per 25 kg bag of **Planitop HPC, Planitop HPC Tixo**

and Planitop U-HPC Floor

PACKAGING 6.5 kg boxes

3. ACCESSORY ITEMS

Injectors Ø 23

Plastic injectors with non-return valve for injecting epoxy resins.



DIAMETER external diameter 23 mm, injection hole 5 mm

LENGTH 80 mm

MapeWrap Roller

Metal roller for laminating **MapeWrap** fabrics with epoxy resins .



PACKAGING boxes with 1 pc

320

Spindle for Mapei Steel Dry

Special spindle for inserting **Mapei Steel Dry AISI 316** helical bars. Complete with adapter for SDS hammer drill for dry application.




DIAMETER 8 mm, 10 mm, 12 mm

PACKAGING boxes with 1 pc





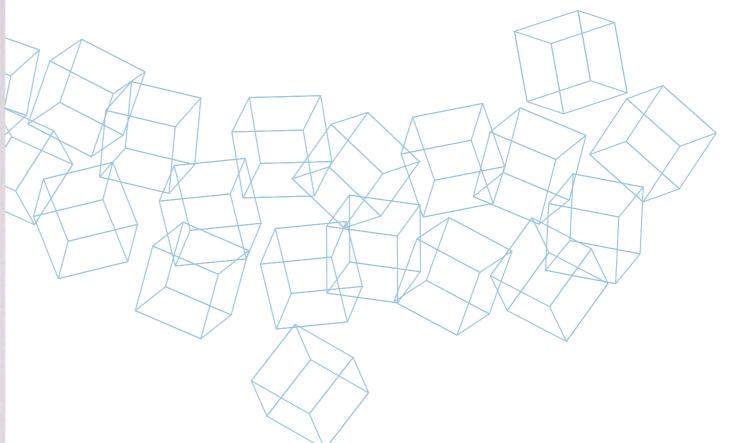



PRODUCTS
EXTERNAL
INSULATION
SYSTEMS

ADHESIVES AND SMOOTHING COMPOUNDS

Mapetherm AR1

One-component cementitious mortar for bonding and smoothing of thermal insulating panels and for external thermal insulation systems.

APPLICATION trowel

CONSUMPTION • 4.0-6.0 kg/m² depending on the bonding technique.

• 1.3-1.55 kg/m² per mm of thickness as smoothing compound (recommended: approx. 4 mm in 2 coats)

COLOUR grey

PACKAGING 25 kg

CERTIFICATIONS AND MARKINGS





CHECK THE TECHNICAL DATASHEET on mapei.com



Mapetherm AR1 GG

One-component cementitious mortar with coarse grain size for bonding and smoothing of thermal insulating panels and for external thermal insulation systems.

APPLICATION

• 4.0-6.0 kg/m² depending on the bonding technique. CONSUMPTION

• 1.35-1.55 kg/m² per mm of thickness as smoothing

compound (recommended: approx. 4 mm in 2 coats)

COLOURS white and grey

PACKAGING 25 kg

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.con



Mapetherm AR1 Light

One-component light-weight cementitious mortar with increased grain size for bonding and smoothing of thermal insulating panels and for external thermal insulation systems.

APPLICATION

CONSUMPTION

• 3.0-5.0 kg/m² depending on the bonding technique.

• 1.20-1.40 kg/m² of thickness as smoothing compound (recommended: approx. 4 mm coats)

COLOUR white

PACKAGING 23 kg

CERTIFICATIONS AND MARKINGS









CHECK THE TECHNICAL DATASHEET on mapei.com



Mapetherm AR1 Maxi

One-component cementitious mortar with increased grain size for bonding and smoothing of thermal insulating panels and for external thermal insulation systems.

APPLICATION

trowel

CONSUMPTION

• 4.0-6.0 kg/m² depending on the bonding technique.

• 1.35-1.55 kg/m² per mm of thickness as smoothing compound (recommended: approx. 4 mm in 2 coats)

COLOURS white and grey

PACKAGING 25 kg

CERTIFICATIONS AND MARKINGS







TECHNICAL DATASHEET on mapei.com



Mapetherm Flex RP

Cement-free, fibre-reinforced, lightweight elastic flexible skimming paste resistant to biological agents for internal and external use. Available in the following grain sizes: 0.5 mm and 1.5 mm.

APPLICATION trowel

CONSUMPTION

• 0.5 mm: 1.9- 2.1 kg/m² per 1 mm of thickness

• 1.5 mm: 4.0- 5.0 kg/m² per 3- 4 mm of thickness

COLOURS

white or various colours using the ColorMap® automatic colouring system

PACKAGING 20 kg drums

CERTIFICATIONS AND MARKINGS

COMPOSITION

COLOUR

PACKAGING









CHECK THE TECHNICAL DATASHEET on mapei.com



Mapetherm Net

Alkali-resistant glass fibre mesh suitable for reinforced skimming layers when repairing façades, or for the installation of Mapetherm thermal insulation systems.



TECHNICAL DATASHEET on mapei.com





325

Back to the alphabetical index Back to the table of contents

white

100% glass fibre

50 x 1 m rolls

2. INSULATING PANELS AND ACCESSORIES

Mapetherm EPS 100 CAM

EPS insulating panel (Sintered Expanded Polystyrene), for external thermal insulation systems.



100x50 cm panels from 2 to 20 cm thick

PACKAGING from 1.5 to 15 m cm² (depending on the thickness)

CERTIFICATIONS AND MARKINGS

SIZE







Mapetherm EPS G CAM

EPS insulating panel (Sintered Expanded Polystyrene) with graphite, for external thermal insulation systems.



100x50 cm panels from 2 to 20 cm thick

PACKAGING from 1.5 to 15 m cm² (depending on the thickness)

CERTIFICATIONS AND MARKINGS

SIZE







Mapetherm EPS G 100 CAM

EPS insulating panel (Sintered Expanded Polystyrene) with graphite, for external thermal insulation systems.



SIZE 100x50 cm panels from 2 to 20 cm thick

PACKAGING from 1.5 to 15 m cm² (depending on the thickness)

CERTIFICATIONS
AND MARKINGS







Mapetherm - Etics Fixing Plugs

Fixing plugs for external thermal insulation systems. **Mapetherm - Ejotherm** series for articles details make reference to the **Mapetherm System - Accessories** catalist.



Mapetherm Fixing Elements

Fixing and mounting elements for external thermal insulation systems. **Mapetherm - Ejotherm** series for articles details make reference to the **Mapetherm System - Accessories** catalist.



Mapetherm PF CAM

PF insulating panel (phenolic resine foram) for external thermal insulation systems.



SIZE 120x60 and 120x120 cm panels

PACKAGING from 2.16 to 25.92 m² (depending on the thickness)

CERTIFICATIONS AND MARKINGS










Mapetherm Profiles


Profiles and starter profiles for external thermal insulation systems.

Mapetherm - Ejotherm series for articles details make reference to the Mapetherm System - Accessories catalist.



Back to the alphabetical index

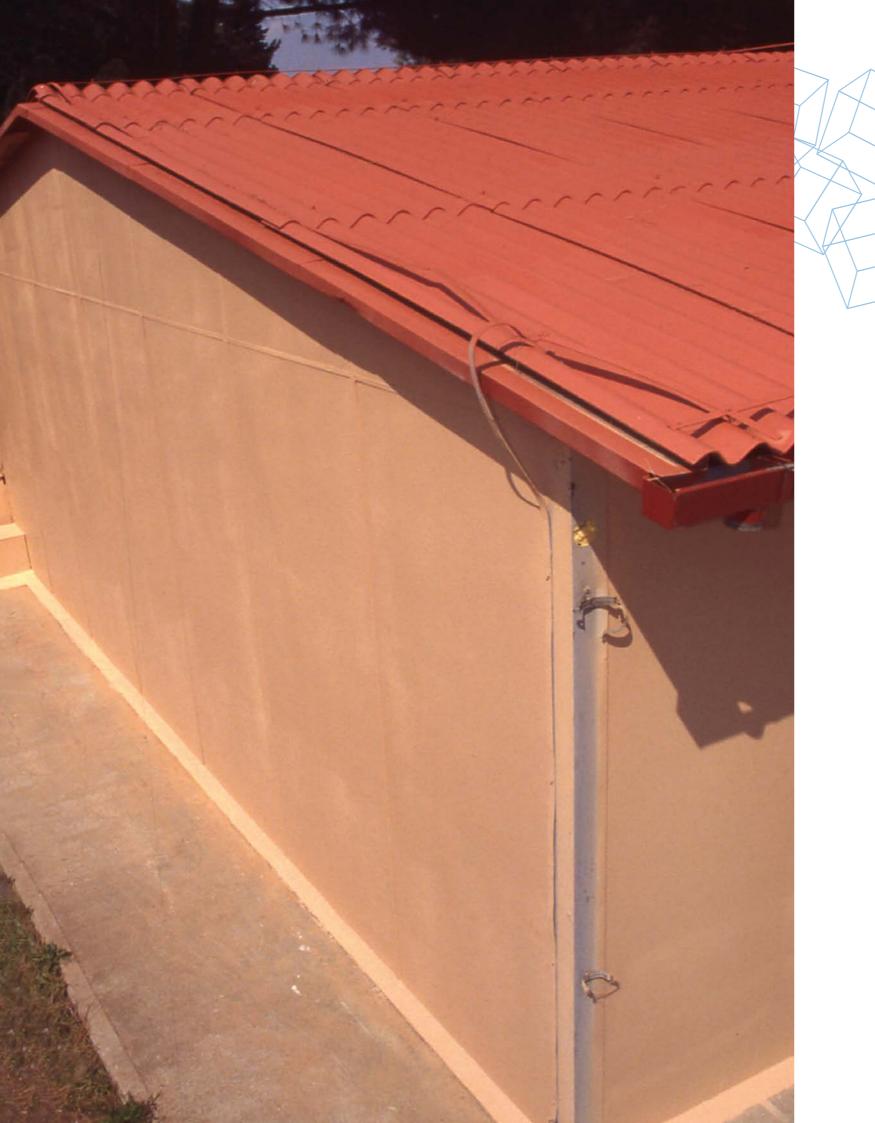

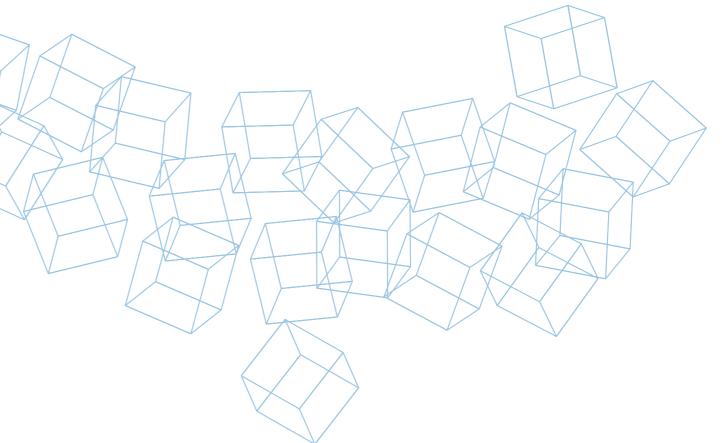



PRODUCTS FOR TREATING ASBESTOS CEMENT SLABS

Aquaflex System

Liquid membrane for permanent encapsulation of asbestos cement and to create a waterproofing membrane for mineral substrates.

| APPLICATION | roller, brush, trowel, or spray |
|-------------|---|
| CONSUMPTION | from 0.25 to 0.7 kg/m² per coat, depending on the type of application. |
| COLOURS | white, red, and grey |
| PACKAGING | 5 and 20 kg drums |



CHECK THE TECHNICAL DATASHEET on mapei.com



Vinavil 03V Special Asbestos


Temporary encapsulation for asbestos-cement panels.



| APPLICATION | roller, brush or pump |
|-------------|-----------------------|
| COLOUR | red |
| CONSUMPTION | approx. 0.2-0.3 kg/m² |
| PACKAGING | 5, 10 and 25 kg |





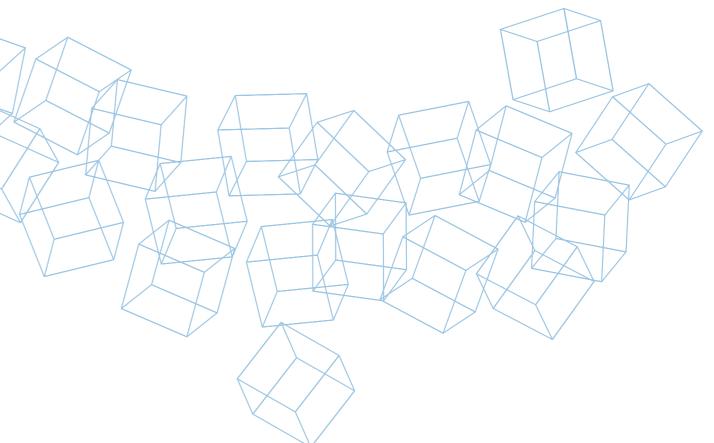



WALL PROTECTIVE AND DECORATIVE COATINGS

Antipluviol

Colourless water-repellent impregnator treatment based on silicon compounds in water solution.

| APPLICATION | roller, brush or spray |
|-------------|--|
| CONSUMPTION | 0.2-1 kg/m² (depending on the porosity of the substrate) |
| COLOUR | transparent |
| PACKAGING | 5 and 25 kg |

CERTIFICATIONS AND MARKINGS





TECHNICAL DATASHEET on mapei.com



Antipluviol S

Colourless water-repellent impregnator treatment based on silane and siloxane compounds in solvent solution.

| APPLICATION | roller, brush or spray |
|-------------|--|
| CONSUMPTION | 0.1-1 kg/m² (depending on the porosity of the substrate) |

COLOUR transparent

CERTIFICATIONS **AND MARKINGS**

PACKAGING



5 and 10 kg







CHECK THE **TECHNICAL** DATASHEET on mapei.com



Antipluviol W

Colourless water-repellent impregnator treatment based on silane and siloxane compounds in water emulsion.

| APPLICATION | roller, brush or spray |
|-------------|--|
| CONSUMPTION | 0.2-1 kg/m² (depending on the porosity of the substrate) |
| COLOUR | milky white |
| PACKAGING | 10 kg |
| | |

CERTIFICATIONS AND MARKINGS

336





CHECK THE TECHNICAL DATASHEET on mapei.com



Colorite Beton

Semi-transparent, anti-carbonatation acrylic paint with a smooth finish for interior and exterior surfaces.

| PPLICATION | roller, brush or spray | |
|------------|------------------------|--|
| | | |

CONSUMPTION 0.25-0.3 kg/m² (per two coats)

COLOURS colour chart or various colours using the ColorMap®

automatic colouring system

PACKAGING 20 kg

CERTIFICATIONS AND MARKINGS







TECHNICAL DATASHEET on mapei.com



Colorite Performance

Protective acrylic paint with high resistance to UV rays interior and exterior surfaces, available in a wide range of colours.

| APPLICATION ro | oller, brush or spray |
|----------------|-----------------------|
|----------------|-----------------------|

CONSUMPTION 0.3-0.4 kg/m² (per two coats)

COLOURS white or various colours using the ColorMap®

automatic colouring system

PACKAGING 5 and 20 kg

CERTIFICATIONS AND MARKINGS







CHECK THE **TECHNICAL** DATASHEET on mapei.com



Dursilac Base Filler

Water-based acrylic undercoat for interior and exterior use with high opacity and filling properties.

| APPLICATION | roller, brush or spray |
|-------------|--|
| COVERAGE | 6-8 m²/litre per coat |
| COLOURS | white or various colours using the ColorMap® automatic colouring system |
| PACKAGING | 0.75 and 2.5 litres |



CHECK THE TECHNICAL DATASHEET on mapei.com





Dursilac Gloss

Water based acrylic urethane enamel paint for interior and exterior use, with excellent flow and providing a hard-wearing, appearance. Gloss Finish.





| APPLICATION | roller, brush or spray |
|-------------|--|
| COVERAGE | 10-12 m²/litre per coat |
| COLOURS | white or various colours using the ColorMap® automatic colouring system |
| PACKAGING | 0.75 and 2.5 litres |

Dursilac Matt

APPLICATION

COVERAGE

COLOURS

PACKAGING

Water based acrylic urethane enamel paint for interior and exterior use, with excellent flow and providing a hard-wearing. Matt finish.

white or various colours using the **ColorMap**®







Dursilac No Rust

Anti-rust solvent-based primer, for interior and exterior application, with excellent adhesion and anti-corrosive power.

roller, brush or spray

10-12 m²/liter per coat

0.75 and 2.5 litres

automatic colouring system



APPLICATION roller, brush or spray COVERAGE 6-8 m²/liter per coat COLOUR grey PACKAGING 0.75 and 2.5 litres



Dursilac No Rust WB

Water-based, odourless, colourable anti-rust primer for application in interior.

| APPLICATION | roller, brush or spray |
|-------------|---|
| COVERAGE | 8-10 m²/litre per coat |
| COLOURS | white or various colours using the ColorMap ® automatic colouring system |
| PACKAGING | 0.75 and 2.5 litres |



TECHNICAL DATASHEET on mapei.com



Dursilac Satin

Water based acrylic urethane enamel paint for interior and exterior use, with excellent flow and providing a hard-wearing. Satin finish.

| APPLICATION | roller, brush or spray |
|-------------|---|
| COVERAGE | 10-12 m²/liter per coat |
| COLOURS | white or various colours using the ColorMap ® automatic colouring system |
| PACKAGING | 0.75 and 2.5 litres |



CHECK THE TECHNICAL DATASHEET on mapei.cor



Dursilite

Highly washable water-based interior paint with high opacity. Ideal for colour design.

| APPLICATION | roller, brush or spray |
|--------------------------------|--|
| COVERAGE | 8-10 m²/litre per coat |
| COLOURS | white or various colours using the ColorMap® automatic colouring system |
| PACKAGING | 1.4 and 14 litres |
| CERTIFICATIONS AND MARKINGS | TESTED according to EN 13300 |









Back to the table of contents

338

Dursilite Base Coat

Smooth, pigmented and colourable uniforming base coat. Ideal for non-homogeneous substrates.

| APPLICATION | roller, brush or spray |
|-------------|--|
| COVERAGE | 5-8 m²/liter per coat |
| COLOURS | white or various colours using the ColorMap® automatic colouring system |
| PACKAGING | 1.4 and 14 litres |



CHECK THE TECHNICAL DATASHEET on mapei.com



Dursilite Gypsos

Mould resistant, highly washable and hiding water-based interior paint. Ideal for plasterboards and modern construction systems.

| APPLICATION | roller, brush or spray |
|-------------|--|
| COVERAGE | 11-12 m²/liter per coat |
| COLOURS | white or various colours using the ColorMap® automatic colouring system |
| PACKAGING | 1.4 and 14 litres |











CHECK THE TECHNICAL DATASHEET on mapei.com



Dursilite Igea

Mould resistant, breathable water-based interior paint. Ideal for kitchens and bathrooms and rooms subject to condensation.

| APPLICATION | roller, brush or spray |
|--------------------------------|---|
| COVERAGE | 9-11 m²/litre per coat |
| COLOURS | white or various colours using the ColorMap ® automatic colouring system |
| PACKAGING | 1.4 and 14 litres |
| CERTIFICATIONS AND MADKINGS | TESTED according to EN 13300 EN 15457 |



CHECK THE TECHNICAL DATASHEET on mapei.com



Dursilite Level

Grouting and skimming paste for interiors, ideal for high quality grouting and skimming applications.

| APPLICATION | trowel |
|----------------|-----------------------|
| YELD | 4 -6 m²/kg per layert |
| COLOURS | white |
| PACKAGING | 0.25 - 1 - 4 - 20 kg |
| CERTIFICATIONS | ECT US |



Dursilite Master

Breathable water-based paint with good opacity. Ideal for large surfaces.

| APPLICATION | roller, brush or spray |
|--------------------------------|---|
| COVERAGE | 9-11 m²/litre per coat |
| COLOURS | white or various colours using the ColorMap ® automatic colouring system |
| PACKAGING | 1.4 and 14 litres |
| CERTIFICATIONS AND MARKINGS | TESTED according to EN 13300 |



CHECK THE TECHNICAL DATASHEET on mapei.com



Dursilite Matt

AND MARKINGS

Washable water-based paint with good opacity. Ideal for extra matt surfaces.

| APPLICATION | roller, brush or spray |
|----------------|---|
| COVERAGE | 8-10.5 m²/litre per coat |
| COLOURS | white or various colours using the ColorMap ® automatic colouring system |
| PACKAGING | 1.4 and 14 litres |
| CERTIFICATIONS | TESTED |



CHECK THE TECHNICAL DATASHEET on mapei.com





MAPE

Back to the table of contents

Elastocolor Net

Alkali-resistant glass fibre mesh for reinforcing fine-graded skimming pastes.



CHECK THE TECHNICAL DATASHEET on mapei.com



| COMPOSITION | 100% glass fibre |
|-------------|------------------|
| COLOUR | white |
| PACKAGING | 50 x 1 m rolls. |

Elastocolor Paint

Elastomeric, crack-bridging, permanently flexible, protective paint with high resistance to chemicals for interior and exterior surfaces.

| APPLICATION | roller, brush or spray |
|-------------|--|
| CONSUMPTION | 0.2-0.4 kg/m² per coat |
| COLOURS | white or various colours using the ColorMap® automatic colouring system |
| PACKAGING | 20 kg |

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.com



Elastocolor Pittura Plus

Elastomeric hygienic paint with crack-bridging ability, for internal and external use, with long-lasting elasticity and mould and algae resistant.

| APPLICATION | roller, brush or spray |
|-------------|--|
| CONSUMPTION | 0.2-0.4 kg/m² per coat |
| COLOURS | white or various colours using the ColorMap® automatic colouring system |
| PACKAGING | 20 kg |

CERTIFICATIONS

AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.com



Back to the table of contents

Elastocolor Primer

Solvent-based high-penetration consolidating primer to even out surfaces.



CHECK THE TECHNICAL DATASHEET on mapei.com



Elastocolor Rasante

Fibre-reinforced, elastomeric, high flexibility finishing filling coat with high hiding capacity, for interior and exterior applications.

APPLICATION

trowel, roller, brush or spray

roller, brush or spray

0.10-0.15 kg/m²

transparent

10 kg

CONSUMPTION

APPLICATION

COLOUR

PACKAGING

CONSUMPTION

- trowel: 0.3-0.4 kg/m² (per coat)
- brush or roller: approx. 0.4 kg/m² (per coat)
- spray: 0.4-0.7 kg/m² (per coat)

COLOURS

white or various colours using the **ColorMap®** automatic colouring system

PACKAGING

20 kg

CERTIFICATIONS AND MARKINGS







Elastocolor Rasante SF

High thickness fibre-reinforced elastomeric coating with high filling properties for interior and exterior applications.

APPLICATION

trowel, roller, brush or spray

CONSUMPTION

- trowel: 0.7-0.8 kg/m² (per coat)
- brush or roller: approx. 0.5 kg/m² (per coat)
- spray: 0.8-1.0 kg/m² (per coat)

COLOURS

white or various colours using the **ColorMap®** automatic colouring system

PACKAGING

CERTIFICATIONS AND MARKINGS



20 kg





CHECK THE TECHNICAL DATASHEET on mapei.com





Back to the alphabetical index

343

Elastocolor Tonachino Plus

Elastic, water-repellent, algae and mould-resistant, hygienising, elastomeric coating product for interior and exterior surfaces. Available in the following grain sizes: 1.2 mm.

| APPLICATION | trowel |
|-------------|---|
| CONSUMPTION | 1.2 mm,1.9. 2.3 kg/m ² |
| COLOURS | white or various colours using the ColorMap ® automatic colouring system |
| PACKAGING | 20 kg |

CERTIFICATIONS AND MARKINGS















Elastocolor Waterproof

Waterproof, easy-to-clean acrylic paint for interior and exterior surfaces in permanent contact with water.

| APPLICATION | roller, brush |
|-------------|---|
| | (spray only for structures which are not immersed in water) |

CONSUMPTION • 0.3-0.5 kg/m² (for two coats) for structures which are not immersed in water)

• 0.6-0.8 kg/m² (for two/three coats) for structures which are immersed in water)

COLOURS white or various colours using the ColorMap® automatic colouring system

PACKAGING 20 kg

CERTIFICATIONS AND MARKINGS





CHECK THE TECHNICAL DATASHEET on mapei.com




Malech

Water-based acrylic undercoat and bonding promoter with a smooth finish.

| APPLICATION | roller, brush or spray |
|-------------|-----------------------------|
| CONSUMPTION | 0.10-0.15 kg/m ² |
| COLOUR | transparent |
| PACKAGING | 2 and 10 kg |
| | |

CERTIFICAZIONI E MARCATURE





CHECK THE TECHNICAL DATASHEET on mapei.com



Back to the table of contents

Mapecoat ACT Matt

Wall enamel, resistant to stains, mould, viruses and bacteria.

APPLICATION roller, brush or spray COVERAGE 8.5-12.5 m²/litre per coat **COLOURS** white or various colours using the ColorMap® automatic colouring system **PACKAGING** 1.4 and 14 litres

CERTIFICATIONS AND MARKINGS











CHECK THE TECHNICAL DATASHEET on mapei.com



Mapecoat ACT Satin

Wall enamel, resistant to stains, mould, viruses and bacteria.

APPLICATION roller, brush or spray COVERAGE 8-10 m²/litre per coat COLOURS white or various colours using the ColorMap® automatic colouring system **PACKAGING** 1.4 and 14 litres

CERTIFICATIONS AND MARKINGS









CHECK THE TECHNICAL DATASHEET on mapei.com



Mapecoat AF

Highly cleanable and durable colourless fluorinated acrylic polymer-based protective finish in water dispersion.

APPLICATION roller, brush or spray 0.05-0.15 kg/m² per coat CONSUMPTION COLOURS white or various colours using the ${\bf ColorMap}^{\rm @}$ automatic colouring system PACKAGING 5 kg

CERTIFICATIONS AND MARKINGS







TECHNICAL DATASHEET on mapei.com





Back to the alphabetical index

Mapecoat DW 25

Two-component epoxy paint for coating concrete surfaces, suitable for contact with drinking water and foodstuff.

| APPLICATION | roller, brush or spray |
|----------------|--------------------------------------|
| CONSUMPTION | 0.4-0.6 kg/m² (per single coat) |
| COLOUR | comp. A: white; comp. B: transparent |
| PACKAGING | 5 kg kit (A+B) |
| CEDTIFICATIONS | (RESTRINGED SP |



TECHNICAL DATASHEET on mapei.com



Ouarzolite Base Coat

AND MARKINGS

Coloured acrylic base coat with a homogeneous finish and good filling and adhesion promoting properties, for interior and exterior applications.

| APPLICATION | roller, brush or spray |
|-------------|--|
| CONSUMPTION | 0.3-0.5 kg/m² per coat |
| COLOURS | white or various colours using the ColorMap® automatic colouring system |
| PACKAGING | 20 kg |



CHECK THE **TECHNICAL** DATASHEET on mapei.com



Quarzolite HF Plus

Durable acrylic hygienising paint with granular quartz fillers with filling properties, resistant to mould and algae for interior and exterior applications.

| APPLICATION | roller, brush or spray |
|----------------|--|
| CONSUMPTION | 0.35-0.45 kg/m² (per two coats) |
| COLOURS | white or various colours using the ColorMap® automatic colouring system |
| PACKAGING | 20 kg |
| CERTIFICATIONS | |



CHECK THE TECHNICAL DATASHEET on mapei.com



Ouarzolite Paint

Acrylic paint with micro-granular quartz with a homogeneous finish for long-lasting protection of interior and exterior surfaces.





TECHNICAL DATASHEET on mapei.com



Ouarzolite Tonachino

High-protection, thick-layered acrylic coating product with high filling properties for interior and exterior surfaces. Available in the following grain sizes: 0.7 mm, 1.2 mm, 1.5 mm and 2.0 mm.

| grain sizes. 0.7 mm, i.z mm, i.s mm and z.0 mm. | |
|---|--|
| APPLICATION | trowel |
| CONSUMPTION | • 0.7 mm: 1.7-2.0 kg/m² • 1.2 mm: 1.9-2.3 kg/m² • 1.5 mm: 2.2-2.6 kg/m² • 2.0 mm: 3.0-3.5 kg/m² |
| COLOURS | white or various colours using the ColorMap® automatic colouring system |
| | |



PACKAGING







CHECK THE **TECHNICAL** DATASHEET on mapei.com



Quarzolite Tonachino Plus

High-protection, acrylic coating plaster for the hygiene of walls in interior and exterior applications, mould and algae resistant. Available in the following grain sizes: 1.2 mm and 1.5 mm.

| APPLICATION | trowel |
|-------------|--|
| CONSUMPTION | • 1.2 mm: 1.9-2.3 kg/m ² • 1.5 mm: 2.2-2.6 kg/m ² |
| COLOURS | white or various colours using the ColorMap® automatic colouring system |
| PACKAGING | 25 kg |

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.com





Back to the table of contents Back to the alphabetical index

AND MARKINGS

Quarzolite Tonachino Pro

High-thickness acrylic coating plaster for interior and exterior applications. Special external insulation system with high protection. Available in the following grain sizes: 1.2 mm and 1.5 mm.

| APPLICATION | roller, brush or spray |
|-------------|--|
| CONSUMPTION | • 1.2 mm: 1.9-2.3 kg/m ² • 1.5 mm: 2.2-2.6 kg/m ² |
| COLOURS | white or various colours using the ColorMap® automatic colouring system |
| PACKAGING | 25 kg |

CERTIFICATIONS AND MARKINGS





TECHNICAL DATASHEET on mapei.com



Ouarzolite Tonachino Pro S

High-thickness acrylic-siloxane coating plaster for interior and exterior applications. Special external insulation system with high protection and water-repellent properties. Available in the following grain sizes: 1.2 mm and 1.5 mm.

| APPLICATION | roller, brush or spray |
|-------------|--|
| CONSUMPTION | • 1.2 mm: 1.9-2.3 kg/m ² • 1.5 mm: 2.2-2.6 kg/m ² |
| COLOURS | white or various colours using the ColorMap® automatic colouring system |

PACKAGING 25 kg

CERTIFICATIONS **AND MARKINGS**

348





CHECK THE **TECHNICAL** DATASHEET on mapei.com



Silancolor AC Paint

Water-repellent acrylic-siloxane paint with high resistance to UV rays for interior and exterior applications.

| APPLICATION | roller, brush or spray |
|-------------|--|
| CONSUMPTION | 0.3-0.4 kg/m² for two coats |
| | <u> </u> |
| COLOURS | white or various colours using the ColorMap® automatic colouring system |
| PACKAGING | 20 kg |



CHECK THE TECHNICAL DATASHEET on mapei.con



Silancolor AC Paint Plus

Acryl-siloxane paint for the hygiene of walls in internal and external applications, water repellent, mould and algae resistant.

| APPLICATION | roller, brush or spray |
|-------------|--|
| CONSUMPTION | 0.3-0.4 kg/m² for two coats |
| COLOURS | white or various colours using the ColorMap® automatic colouring system |
| PACKAGING | 20 kg |

CERTIFICATIONS AND MARKINGS





TECHNICAL DATASHEET on mapei.com



Silancolor AC Tonachino

Water-repellent, thick-layered acrylic-siloxane coating with high filling properties for interior and exterior applications. Available in the following grain sizes: 1.2 mm and 1.5 mm.

| | APPLICATION | trowel |
|--|-------------|--|
| | CONSUMPTION | • 1.2 mm: 1.9-2.3 kg/m ² • 1.5 mm: 2.2-2.6 kg/m ² |
| | COLOURS | white or various colours using the ColorMap® automatic colouring system |
| | | |

PACKAGING

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.con



Silancolor AC Tonachino Plus

trowel

Acryl-siloxane plaster for the hygiene of walls in internal and external applications, water repellent, mould and algae resistant Available in the following grain sizes: 1.2 mm and 1.5 mm.

| CONSUMPTION | • 1.2 mm: 1.9-2.3 kg/m ² • 1.5 mm: 2.2-2.6 kg/m ² |
|-------------|--|
| COLOURS | white or various colours using the ColorMap® automatic colouring system |
| PACKAGING | 25 kg |

CERTIFICATIONS AND MARKINGS

APPLICATION









CHECK THE TECHNICAL DATASHEET on mapei.com





Silancolor Base Coat

Coloured siloxane base coat with filling and hydrophobic properties, for interior and exterior applications for a uniform finish.

| APPLICATION | roller, brush or spray |
|-------------|--|
| CONSUMPTION | 0.3-0.5 kg/m² per coat |
| COLOURS | white or various colours using the ColorMap® automatic colouring system |
| PACKAGING | 20 kg |



CHECK THE TECHNICAL DATASHEET on mapei.com



Silancolor Base Coat Plus

Hygienising siloxane based pigmented base coat, for internal and external application, evens out the surfaces and water repellent, mould and algae resistant.

| | APPLICATION | roller, brush or spray |
|--|-------------|--|
| | CONSUMPTION | 0.2-0.3 kg/m² per coat |
| | COLOURS | white or various colours using the ColorMap® automatic colouring system |
| | PACKAGING | 20 kg |

CERTIFICATIONS AND MARKINGS







CHECK THE **TECHNICAL** DATASHEET on mapei.com



Silancolor Cleaner Plus

High penetration and mould-and algae resistant hygienising treatment in water solution.

| APPLICATION | manual low-pressure pump or brush |
|----------------|--------------------------------------|
| CONSUMPTION | 0.2-1 kg/m² of ready-to-use solution |
| COLOUR | transparent |
| PACKAGING | 1 and 5 kg |
| CERTIFICATIONS | |

AND MARKINGS



Back to the table of contents



Silancolor Pittura

Breathable, water-repellent, siloxane paint resistant to aggressive environments for interior and exterior applications.

| APPLICATION | roller, brush or spray |
|--------------------------------|---|
| CONSUMPTION | 0.3-0.4 kg/m ² for two coats |
| COLOURS | white or various colours using the ColorMap ® automatic colouring system |
| PACKAGING | 5 and 20 kg |
| CERTIFICATIONS AND MARKINGS | Orop € Effect |



TECHNICAL DATASHEET on mapei.con




Silancolor Paint Plus

Breathable, water-repellent, algae and mould-resistant, siloxane paint for interior and exterior applications.

| | APPLICATION | roller, brush or spray |
|--|----------------|--|
| | CONSUMPTION | 0.3-0.4 kg/m² (per two coats) |
| | COLOURS | white or various colours using the ColorMap® automatic colouring system |
| | PACKAGING | 5 and 20 kg |
| | CERTIFICATIONS | Prop g |





CHECK THE **TECHNICAL** DATASHEET on mapei.com



Silancolor Primer

AND MARKINGS

Breathable siloxane primer for homogenous substrates.

| APPLICATION | roller, brush or spray |
|-------------|-----------------------------|
| CONSUMPTION | 0.10-0.15 kg/m ² |
| COLOUR | milky white |
| PACKAGING | 10 kg |



CHECK THE TECHNICAL DATASHEET on mapei.com





Back to the alphabetical index

Silancolor Primer Plus

Hygienising siloxane primer, resistant to algae and mould for homogenous substrates.

| APPLICATION | roller, brush or spray |
|----------------|---------------------------|
| CONSUMPTION | 0.1-0.3 kg/m ² |
| COLOUR | milky white |
| PACKAGING | 2 and 10 kg |
| CERTIFICATIONS | Drop (Effect |





Silancolor Tonachino

Water-repellent, breathable, thick-layered siloxane coating with high filling properties for interior and exterior applications. Available in the following grain sizes: 0.7 mm, 1.2 mm, 1.5 mm and 2.0 mm.

| APPLICATION | trowel |
|-------------|---|
| CONSUMPTION | • 0.7 mm: 1.7-2.0 kg/m ² • 1.2 mm: 1.9-2.3 kg/m ² • 1.5 mm: 2.2-2.6 kg/m ² • 2.0 mm: 3.0-3.5 kg/m ² |
| COLOURS | white or various colours using the ColorMap® automatic colouring system |
| PACKAGING | 25 kg |

CERTIFICATIONS AND MARKINGS

AND MARKINGS









CHECK THE TECHNICAL DATASHEET on mapei.com



Silancolor Tonachino Plus

Siloxane plaster coating for the hygiene of walls in interior and exterior applications, breathable, water repellent, mould and algae resistant. Available in the following grain sizes: 1.2 mm, 1.5 mm and 1.5 mm.

| APPLICATION | trowel |
|----------------|---|
| CONSUMPTION | 0.7 mm: 1.7-2.0 kg/m² 1.2 mm: 1.9-2.3 kg/m² 1.5 mm: 2.2-2.6 kg/m² |
| COLOURS | white or various colours using the ColorMap ® automatic colouring system |
| PACKAGING | 25 kg |
| CERTIFICATIONS | INCOMPANIES WITH DISABLES Drop (|

AND MARKINGS

352











CHECK THE TECHNICAL DATASHEET on mapei.com



Silexcolor Base Coat

Coloured silicate filling base coat, for a homogenous surface in interior and exterior applications, highly breathable in compliance with DIN 18363 standard.

| roller, brush or spray |
|--|
| 0.3-0.5 kg/m² per coat |
| white or various colours using the ColorMap® automatic colouring system |
| 20 kg |
| |





Silexcolor Marmorino

CERTIFICATIONS

AND MARKINGS

Highly decorative, fine-grained, silicate mineral coating product form with high chemical resistance for interior and exterior surfaces, in compliance with DIN 18363 standard.

| APPLICATION | trowel |
|--------------------------------|---|
| CONSUMPTION | 0.8-1.0 kg/m² (depending on the effect desired) |
| COLOURS | white or various colours using the ColorMap ® automatic colouring system |
| PACKAGING | 5 and 20 kg |
| CERTIFICATIONS AND MARKINGS | E WITH C |



CHECK THE TECHNICAL DATASHEET on mapei.con



Silexcolor Paint

AND MARKINGS

Highly breathable silicate paint with a high chemical bond for interior and exterior surfaces, in compliance with DIN 18363 standard.

| | APPLICATION | roller, brush or spray |
|--|----------------|---|
| | CONSUMPTION | 0.35-0.45 kg/m ² for two coats |
| | COLOURS | white or various colours using the ColorMap ® automatic colouring system |
| | PACKAGING | 20 kg |
| | CERTIFICATIONS | OMPLLE |









Silexcolor Primer

Highly breathable silicate primer for a homogenous surface in compliance with DIN 18363 standard.

| APPLICATION | roller, brush or spray |
|----------------|----------------------------|
| CONSUMPTION | 0.1-0.15 kg/m ² |
| COLOUR | transparent colourless |
| PACKAGING | 10 kg |
| CERTIFICATIONS | OMPLYA |



CHECK THE TECHNICAL DATASHEET on mapei.com



Silexcolor Tonachino

AND MARKINGS

Highly breathable, thick-layered silicate coating with high filling properties for interior and exterior surfaces, in compliance with DIN 18363 standard. Available in the following grain sizes: 0.7 mm, 1.2 mm, 1.5 mm and 2.0 mm.

| | APPLICATION | trowel |
|--|----------------|---|
| | CONSUMPTION | • 0.7 mm: 1.7-2.0 kg/m ² • 1.2 mm: 1.9-2.3 kg/m ² • 1.5 mm: 2.2-2.6 kg/m ² • 2.0 mm: 3.0-3.5 kg/m ² |
| | COLOURS | white or various colours using the ColorMap ® automatic colouring system |
| | PACKAGING | 20 kg |
| | CERTIFICATIONS | A COMPANIES STEEL SECURISES |



CHECK THE TECHNICAL DATASHEET on mapei.com



AND MARKINGS

WallGard Graffiti Barrier

Reversible graf ti-resistant protective barrier.




| APPLICATION | brush, roller or spray |
|-------------|--------------------------|
| CONSUMPTION | 0.03-0.15 kg/m² per coat |
| PACKAGING | 5 and 20 kg |
| | |



WallGard Graffiti Remover Gel

Gel detergent for cleaning surfaces damaged by graffiti.




TECHNICAL DATASHEET



| APPLICATION | brush |
|-------------|------------------------|
| CONSUMPTION | 0.1-0.2 kg/m² per coat |
| PACKAGING | 5 kg |

Back to the alphabetical index



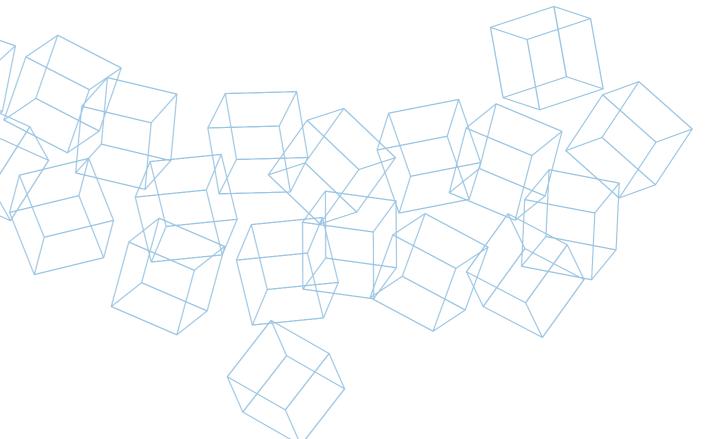



RODUCTS FOR WATERPROOFING

WATERPROOFING PRODUCTS FOR UNDERGROUND STRUCTURES

Idrosilex

Powdered or liquid bulk waterproofer for cementitious mortars.

- CONSUMPTION 25 mm thick render
 - 2% dosage: 250 g/m³
 - 3% dosage: 350 g/m³
 - 4% dosage: 500 g/m³
 - 5% dosage: 600 g/m³
 - 40 mm thick screed

 - 2% dosage: 400 g/m³
 - 3% dosage: 500 g/m³ 4% dosage: 700 g/m³
 - 5% dosage: 850 g/m³

PACKAGING

- Idrosilex Liquid: 25 and 6 kg and 12x1 kg drums
- Idrosilex Powder: 25 x 1 kg boxes



CHECK THE TECHNICAL DATASHEET on mapei.com



Lamposilex

Ultra-fast setting and curing hydraulic binder for stopping water leaks.



CHECK THE **TECHNICAL** DATASHEET on mapei.com



CONSUMPTION

1.8 kg/dm³ of cavity to be filled

PACKAGING

5 kg drums

CERTIFICATIONS AND MARKINGS

CONSUMPTION

PACKAGING



3% by cement weight

5 kg drums

Mapei Waterproofer

Waterproofing agent for render and normal-setting waterproofing mixes.



CHECK THE TECHNICAL DATASHEET on mapei.com



Mapelastic Foundation

Two-component, flexible cementitious mortar for waterproofing concrete surfaces subject to negative and positive hydraulic lift.

APPLICATION

roller or spray

CONSUMPTION

• roller: 1.65 kg/m² per mm of thickness;

• spray: 2.2 kg/m² per mm of thickness

PACKAGING

32 kg kit: (comp. A: 22 kg bag, comp. B: 10 kg tanks)

CERTIFICATIONS AND MARKINGS











TECHNICAL DATASHEET on mapei.com



Mapeproof

Bentonite waterproofing sheets for structures below ground level, suitable for both horizontal and vertical surfaces.

PACKAGING

- 1.1 m x 5 m rolls
- 2.5 m x 22.5 m rolls
- 5 m x 40 m rolls

CERTIFICATIONS AND MARKINGS

PACKAGING

CERTIFICATIONS

AND MARKINGS





CHECK THE TECHNICAL DATASHEET on mapei.com



Mapeproof AL 1200 AP

HDPE self-adhesive membrane to waterproof underground structures after pouring concrete.



TECHNICAL DATASHEET on mapei.com







Back to the table of contents Back to the alphabetical index

 ϵ

1 m x 20 m rolls

Mapeproof AL AP

Fully bonded HDPE membrane for waterproofing underground structures.



CHECK THE TECHNICAL DATASHEET on mapei.com



PACKAGING

1 m x 20 m rolls

CERTIFICATIONS AND MARKINGS



Mapeproof AL Tape D10 AP

Double-sided adhesive tape for jointing, sealing and strengthening the **Mapeproof AL AP** system.



CHECK THE TECHNICAL DATASHEET on mapei.com



PACKAGING

PACKAGING

4 carton box containing 0.1 m x 20 m rolls

Mapeproof AL Tape S15

0.15 m x 20 m rolls

Adhesive tape to form joints between the upper-facing sides of adjacent membranes in the **Mapeproof AL AP** systems.



CHECK THE TECHNICAL DATASHEET on mapei.com



Mapeproof CD

Fixing washers for the bentonite sheets Mapeproof.



TECHNICAL
DATASHEET
on mapei.com



PACKAGING

500 pcs boxes

Mapeproof FBH

Fully-bonded waterproof HDPE sheet membrane, laminated with non-woven fabric for waterproofing underground structures.



PACKAGING

1 m x 20 m rolls

CERTIFICATIONS AND MARKINGS



TECHNICAL
DATASHEET
on mapei.com



Mapeproof FBT

Synthetic fully bonded waterproof sheet membrane, laminated with non-woven fabric for waterproofing underground structures.



CHECK THE TECHNICAL DATASHEET on mapei.com



PACKAGING

1 m x 20 m rolls

CERTIFICATIONS AND MARKINGS





Back to the table of contents

Mapeproof FBT Tape 600

Adhesive tape to form sealed joints over the top of adjacent sheets of Mapeproof FBT System.



CHECK THE TECHNICAL DATASHEET on mapei.com

PACKAGING

0.15 m x 20 m rolls

Mapeproof Fix Tape

Double-sided adhesive tape to hold sheets of Mapeproof FTB in place during installation.



CHECK THE TECHNICAL DATASHEET on mapei.com



PACKAGING

362

0.2 m x 25 m rolls

Mapeproof Liquid Membrane

Two-component polyurethane liquid waterproofing membrane for sealing, detailing and repairing Mapeproof AL AP membranes (before pouring concrete), and Mapethene HT/LT, Mapeproof SA and Mapeproof AL 1200 AP membranes (after pouring concrete)



| APPLICATION | metal trowel or gauging trowel. |
|-------------|--|
| CONSUMPTION | 1.2 kg/m²/mm (consumption on smooth concrete surfaces). Minimum thickness 2.5 mm |

PACKAGING 3.5 kg units (A+B)





Mapeproof Mastic

Bentonite paste made from natural sodium bentonite and plasticising additives for sealing elements which pass through surfaces.



TECHNICAL DATASHEET on mapei.com



APPLICATION gauging trowel

CONSUMPTION 1.5 kg/m²/mm of fresh product

PACKAGING 15 kg drums

Mapeproof SA

Self-adhesive fully bonded HDPE membrane for waterproofing underground structures.



PACKAGING

1 m x 20 m rolls

CERTIFICATIONS AND MARKINGS

APPLICATION

PACKAGING

CONSUMPTION







Mapeproof SA Primer

One-component rapid-drying primer for treating surfaces prior to applying self-adhesive membranes from the Mapeproof and Mapethene ranges.



DATASHEET on mapei.com







Back to the table of contents Back to the alphabetical index

0.3-0.5 kg/m²

10 kg drums

roller

Mapeproof SA Tape

Adhesive tape to form sealed joints under adjacent sheets of **Mapeproof FBT** System.



CHECK THE TECHNICAL DATASHEET on mapei.com



PACKAGING

0.2 m x 20 m rolls

Mapeproof Seal

Natural sodium bentonite in powder form for localised strengthening of waterproofing layers made using **Mapeproof** bentonite sheets.



CHECK THE TECHNICAL DATASHEET on mapei.com



PACKAGING

25 kg bags

Mapeproof SW

Bentonite sheet for waterproofing structures below ground level where saline water is present.



PACKAGING

364

5 m x 40 m rolls

CERTIFICATIONS AND MARKINGS







Mapeproof Swell

Hydro-expansive, rubber-based hydrophilic sealant paste in tubes, applied using an extrusion gun.



CHECK THE TECHNICAL DATASHEET on mapei.com



CONSUMPTION approx. 320 ml for 3 m.

PACKAGING

boxes containing 6 320 ml cartridges

Mapethene HT

Self-adhesive bitumen membrane suitable for application at high temperatures up to 45°C for waterproofing underground structures and coverings.



PACKAGING

1 m x 20 m rolls

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.com



Mapethene HT AP

Self-adhesive bitumen membrane suitable for application at high temperatures up to +35°C for waterproofing underground structures and coverings.



PACKAGING 1 m x 20 m rolls

CERTIFICATIONS AND MARKINGS





CHECK THE TECHNICAL DATASHEET on mapei.com





Mapethene LT

Self-adhesive bitumen membrane suitable for application at low temperatures up to -5°C for waterproofing underground structures and coverings.



CHECK THE TECHNICAL DATASHEET on mapei.com



PACKAGING

1 m x 20 m rolls

CERTIFICATIONS AND MARKINGS



Mapethene LT AP

Self-adhesive bitumen membrane suitable for application at low temperatures up to +5°C for waterproofing underground structures and roofs.



PACKAGING

boxes with 1 m x 20 m rolls

CERTIFICATIONS AND MARKINGS

APPLICATION

PACKAGING

366

CONSUMPTION





roller, brush or spray

0.1-0.2 kg/m²

10 kg drums





Mapethene Primer

Solvent-free bitumen primer for membranes from the Mapethene line.



| CHECK THE TECHNICAL DATASHEET on mapei.com |
|---|
| On maperico |



Mapethene Primer W

One-component primer for membranes from the **Mapethene** line applied at low temperatures.



TECHNICAL
DATASHEET
on mapei.com



APPLICATION roller, brush or spray

CONSUMPTION 0.1-0.15 kg/m²

PACKAGING 10 kg drums

Planiseal 88 (former Idrosilex Pronto)

Osmotic cementitious mortar suitable for contact with drinking water, for waterproofing masonry and concrete structures.

| APPLICATION | roller, brush or spray |
|-------------|-------------------------------|
| CONSUMPTION | 1.5 kg/m² per mm of thickness |
| COLOURS | white and grey |
| PACKAGING | 25 kg hags |

CERTIFICATIONS AND MARKINGS EN 1504-2



CHECK THE TECHNICAL DATASHEET on mapei.com



Planiseal 288

Two-component cementitious mortar for waterproofing structures below ground level and storage tanks.

| APPLICATION | trowel, roller or brush |
|-------------|--|
| CONSUMPTION | approx. 1.9 kg/m² per mm of thickness |
| COLOUR | grey or white |
| PACKAGING | 25 kg kit: (comp. A: 20 kg bag, comp. B: 5 kg tanks) |
| | |

CERTIFICATIONS AND MARKINGS







TECHNICAL
DATASHEET
on mapei.com





Plastimul

Bitumen waterproofing emulsion for general purpose use.

| APPLICATION | trowel, brush or spray | |
|-------------|--|--|
| CONSUMPTION | approx. 1.7 kg/m² per mm of dry product depending on the substrate | |
| PACKAGING | 30 and 12 kg drums | |
| | | |

CERTIFICATIONS AND MARKINGS





TECHNICAL DATASHEET on mapei.com



Plastimul 1K Super Plus

One-component, solvent-free, quick-drying, low-shrinkage, high-yield, high flexibility bitumen waterproofing emulsion containing polystyrene spheres.

| APPLICATION | trowel or rake | |
|-------------|----------------|--|
| | | |

CONSUMPTION approx. 0.8 kg/m² per mm of thickness of dry product depending on the substrate

PACKAGING 19.5 and 7.8 kg drums

CERTIFICATIONS AND MARKINGS








CHECK THE **TECHNICAL** DATASHEET on mapei.con



Plastimul 2K Plus

Two-component, solvent-free, quick-drying, low-shrinkage, high flexibility bitumen waterproofing emulsion containing cellulose fibres.

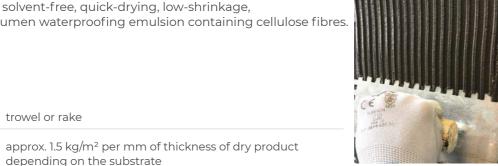

30 kg units (A+B)

CERTIFICATIONS AND MARKINGS

APPLICATION

PACKAGING

CONSUMPTION



trowel or rake





Plastimul 2K Reactive

Two-component, solvent-free, eco-compatible, with high elasticity, instant bitumen waterproofing emulsion, applied by airless spray.

APPLICATION spray

1.3 kg/m² per mm of thickness of dry product CONSUMPTION

depending on the substrate

PACKAGING • 30 kg drums and 1000 kg bottle


• comp. B: 25 kg tanks

CERTIFICATIONS AND MARKINGS









TECHNICAL DATASHEET on mapei.com



Plastimul 2K Super

Two-component, solvent-free, quick-drying, low-shrinkage, high flexibility bitumen waterproofing emulsion containing cellulose fibres.

APPLICATION trowel or rake

CONSUMPTION approx. 0.8 kg/m² per mm of thickness of dry product depending on the substrate

CERTIFICATIONS AND MARKINGS

PACKAGING





roller, brush or spray

approx. 0.1-0.2 kg/m²

5 kg drums

22.9 kg units (A+B)



TECHNICAL DATASHEET on mapei.com



Plastimul C

APPLICATION

PACKAGING

CONSUMPTION

Solvent-free concentrated bitumen emulsion for treating substrates before applying waterproofing products from the Plastimul range.



DATASHEET on mapei.com





Back to the table of contents

368

Plastimul High Flex Plus

Universal, ready-to-use, water-based bituminous waterproofing membrane.

| APPLICATION | roller, brush trowel or spray |
|-------------|-------------------------------|
| | , |
| CONSUMPTION | approx. 1.5-2 kg/m² |
| | |
| PACKAGING | 10 kg drums |
| | IN COMPLIANCE WITH |

CERTIFICATIONS AND MARKINGS





CHECK THE TECHNICAL DATASHEET on mapei.com



Plastimul Primer

Solvent-free, bituminous primer for treating substrates before applying waterproofing products from the **Plastimul** range.



| APPLICATION | roller, brush |
|-------------|---------------------------|
| CONSUMPTION | 0.1-0.2 kg/m ² |
| PACKAGING | 10 kg drums |
| | |





Plastimul Primer SB

High-performance rapid-drying solvent-based bituminous primer for treating concrete surfaces before applying **Plastimul 2K Reactive**.



APPLICATION roller, brush or spray

CONSUMPTION 0.2 kg/m² (depending on the absorbency of the substrate)

COLOUR black

PACKAGING 20 kg drums



Resfoam 1K-M

One-component, ultra-fluid polyurethane resin applied by injection for waterproofing structures and ground and rocks subject to intense percolating water. The reaction time may be regulated.

| PPLICATION | injection |
|-------------|-----------------|
| ONSLIMPTION | in the open air |

in the open air, a mixture of 1 kg of **Resfoam 1K-M** (resin) + 0.1 kg of **Resfoam 1K-M AKS** (catalyser)

forms 50 litres of foam upon contact with 0.1 litre of water

• Resfoam 1K-M (resin): 20 kg plastic drums

• Resfoam 1K-M AKS (catalyser): 1 kg plastic drums



CHECK THE TECHNICAL DATASHEET on mapei.com



2. WATERPROOFING PRODUCTS FOR STRUCTURES ABOVE GROUND LEVEL

Additix P

Thixotropising agent for **Purtop Easy**.



CHECK THE TECHNICAL DATASHEET on mapei.com



CONSUMPTION 0.9 kg every 25 kg of **Purtop Easy**

PACKAGING 0.9 kg boxes

Aquaflex Primer

Synthetic resin-based primer in solvent solution for bituminous, cement-asbestos or loose substrates.



| APPLICATION | roller, brush or spray |
|-------------|-----------------------------|
| CONSUMPTION | approx. 0.20 kg/m² per coat |
| PACKAGING | 6 kg drums and 6 x 1 kg box |







Aquaflex Roof

Ready-to-use flexible liquid membrane with fibres for continuous waterproofing layers on exposed external surfaces.

APPLICATION long pile roller, brush or spray

CONSUMPTION • as waterproofing membrane: at least 2 kg/m²;

- protective finish on bituminous substrates:
- approx. 0.5 kg/m² on smooth membranes
- approx. 0.9 kg/m² on membranes with a slate-chip face

COLOUR according to RAL colour available

PACKAGING 5 and 20 kg drums

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.com



Aquaflex Roof HR

Fibre-filled liquid membrane in water emulsion with high solar reflectance and thermal emittance with a solar reflectance index (SRI) of 105.

APPLICATION long pile roller, brush or spray

CONSUMPTION

- as waterproofing membrane: at least 2 kg/m²
- protective finish on bituminous substrates:
- approx. 0.5 kg/m² on smooth membranes
- approx. 0.9 kg/m² on membranes with a slate-chip face

COLOUR highly reflective white

PACKAGING 20 kg drums

CERTIFICATIONS AND MARKINGS









CHECK THE **TECHNICAL** DATASHEET on mapei.com



Aquaflex Roof Plus

Ready-mixed, high-elasticity, quick-drying, UV-resistant liquid waterproofing membrane.

APPLICATION long pile roller, brush or spray

CONSUMPTION

- as waterproofing membrane: at least 2 kg/m²;
- protective finish on bituminous substrates:
- approx. 0.5 kg/m² on smooth membranes
- approx. 0.9 kg/m² on membranes with a slate-chip face

COLOUR highly reflective white and according to RAL colour available

PACKAGING 5 and 20 kg drums

CERTIFICATIONS AND MARKINGS

372









CHECK THE TECHNICAL DATASHEET on mapei.com



Aquaflex S 1K

One-component, solvent-free, liquid waterproofing membrane based on silane-terminated polymers.

APPLICATION roller, brush or trowel

CONSUMPTION approx. 1.6 kg/m² per mm of dry thickness (final dry thickness at least 1.5 mm)

PACKAGING 5 and 15 kg drums

CERTIFICATIONS AND MARKINGS









CHECK THE **TECHNICAL** DATASHEET on mapei.com

Aquaflex System

Liquid membrane for permanent encapsulation of asbestos cement and to create a waterproofing membrane for mineral substrates.

APPLICATION roller, brush, trowel, or spray CONSUMPTION from 0.25 to 0.7 kg/m² per coat, depending on the type of application COLOURS white, red, and grey PACKAGING 5 and 20 kg drums



CHECK THE **TECHNICAL** DATASHEET on mapei.com



Drain Front

COLOURS

PACKAGING

TPE angular pipe union for terraces and balconies.

ivory and copper

5 pcs boxes



CHECK THE **TECHNICAL** DATASHEET on mapei.com





Back to the alphabetical index

Back to the table of contents

Drain Vertical/Drain Lateral

Complete kit to install floor drains.

Ideal for draining off water from terraces, balconies boiler rooms, wash-rooms, etc.



CHECK THE TECHNICAL DATASHEET on mapei.com



PACKAGING

box containing 1 kit with:

- vertical or lateral polypropylene drain-pipe available in 3 diameters (50-75-90 mm for Drain Lateral) and 5 diameters (50-75-82-90-100 mm for Drain Vertical), with a welded 400x400 mm polypropylene drain-cover;
- telescopic extension;
- "anti-odour" plug;
- removable stainless-steel grate

Isamite

Bitumen paint in solvent.



CHECK THE **TECHNICAL** DATASHEET on mapei.com



APPLICATION

roller, brush or spray

CONSUMPTION

- 0.1-0.15 kg/m² per coat on metal or non-absorbent surfaces;
- 0.25-0.3 kg/m² per coat over concrete and wood

PACKAGING

CONSUMPTION

PACKAGING

374

10 kg drum, ADR-approved packaging

Mapecoat Filler

Micrometric filler material used to create surfaces with a non-slip finish.

5-8% by weight over Mapecoat PU 20 N

2 kg can



CHECK THE TECHNICAL DATASHEET on mapei.com



Mapecoat Filler 250

Micrometric filler material used to create surfaces with a non-slip finish.



CHECK THE TECHNICAL DATASHEET on mapei.com



2 kg can PACKAGING

Mapecoat PU 20 N

CONSUMPTION

Two-component coloured aliphatic polyurethane topcoat for membranes from the **Purtop** range.

5-8% by weight over Mapecoat PU 20 N

| APPLICATION | roller or spray |
|--------------------------------|--|
| CONSUMPTION | approx. 0.15-0.2 kg/m². |
| COLOUR | according to RAL colour available |
| PACKAGING | 15 kg kit: (component A : 12.9 kg, component B : 2.1 kg) |
| CERTIFICATIONS AND MARKINGS | - SRI - RI |



CHECK THE TECHNICAL DATASHEET on mapei.com



Mapecoat TC

Wear-resistant coloured aliphatic polyurethane finish for membranes from the **Purtop** range.



CHECK THE

TECHNICAL

DATASHEET

| APPLICATION | roller or spray |
|-------------|---|
| CONSUMPTION | 0.5-0.6 kg/m² per two coats |
| COLOUR | according to RAL colour available |
| PACKAGING | 18 kg kit (component A = 15 kg, component B = 3 kg) |







Back to the alphabetical index

Back to the table of contents

Mapeguard WP 200

Alkali-resistant waterproofing and anti-fracture membrane for internal use; suitable for overlaying with ceramic, natural stone and LVT floors.



CHECK THE TECHNICAL DATASHEET on mapei.com



MATERIAL 3 layers of polypropylene/polyethylene

PACKAGING 30 m x 1 m and 5 m x 1 m rolls

Mapeguard WP Adhesive

Two-component, rapid-drying, elastic cementitious adhesive for bonding and sealing overlaid **Mapeguard WP 200** and its related special pieces.



CHECK THE TECHNICAL DATASHEET on mapei.com



PACKAGING

PACKAGING

376

6.65 kg kit (component A = 3.5 kg, component B = 3.15 kg)

CERTIFICATIONS AND MARKINGS



Mapegum EPX

Two-component epoxy-polyurethane resin used to form flexible waterproof and chemical-resistant coats before bonding ceramic.

10 kg units (A+B)



| APPLICATION | trowel | CHECK THE TECHNICAL |
|-------------|-------------------------------|------------------------|
| CONSUMPTION | 1.4 kg/m² per mm of thickness | DATASHEET on mapei.com |



Mapegum EPX-T

Two-component epoxy-polyurethane resin used to form flexible waterproof and chemical-resistant coats before bonding ceramic.



CHECK THE TECHNICAL DATASHEET on mapei.com



APPLICATION trowel

CONSUMPTION 1.4 kg/m² per mm of thickness

PACKAGING 10 kg units (A+B)

Mapegum WPS

Quick-drying, flexible liquid membrane for waterproofing internal surfaces.

APPLICATION roller, brush or trowel

CONSUMPTION 1.2 kg/m² per two coats

PACKAGING 5, 10 and 25 kg drums

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.com



Mapelastic AquaDefense

Ready-to-use, ultra quick-drying, flexible liquid membrane for waterproofing internal and external surfaces.

APPLICATION roller, brush or trowel

CONSUMPTION 1.3 kg/m² per mm of thickness


PACKAGING 3.5 kg, 7.5 kg and 15 kg drums

CERTIFICATIONS AND MARKINGS









CHECK THE TECHNICAL DATASHEET on mapei.com





Mapelastic Smart

Two-component, high-flexibility cementitious mortar (with crack-bridging > 2 mm), applied by trowel or with a roller, for waterproofing balconies, terraces, bathrooms and swimming pools.

APPLICATION roller, brush or spray

CONSUMPTION • by roller or trowel approx. 1.6 kg/m² per mm of thickness

• by spray approx. 2.2 kg/m² per mm of thickness

PACKAGING 30 kg kit (component A = 20 kg, component B = 10 kg)

CERTIFICATIONS AND MARKINGS













Mapelastic Turbo

Two-component rapid-drying elastic cementitious mortar for waterproofing terraces and balconies, including at low temperatures and on substrates not completely dry.

APPLICATION trowel

CONSUMPTION approx. 2.4 kg/m² for two coats of product

PACKAGING • 36 kg kit: (component A: 20 kg, component B: 16 kg)

• 18 kg kit: (component A: 10 kg, component B: 8 kg)

CERTIFICATIONS AND MARKINGS





















Mapelastic Zero

Two-component elastic cementitious mortar for waterproofing balconies, terraces, baths and swimming pool, with fully offset CO₂ emissions.

APPLICATION trowel or spray

CONSUMPTION • approx. 1.7 kg/m² per mm of thickness;

• approx. 2.2 kg/m² per mm of thickness

PACKAGING

• 32 kg kit: (comp. A: 24 kg, comp. B: 8 kg)

• 16 kg units :(A+B)

CERTIFICATIONS **AND MARKINGS**















TECHNICAL DATASHEET on mapei.com



Back to the table of contents

Mapenet 150

Alkali-resistant (according to ETAG 004 guideline) fibre glass mesh used to reinforce waterproof protection layers, antifracture membranes and external thermal insulation systems.



CHECK THE TECHNICAL DATASHEET on mapei.com



PACKAGING

1 m x 50 m rolls

MapeSlope

One-component cementitious levelling mortar for building up slopes on roofs over new and old waterproof sheaths.



APPLICATION trowel

approx. 1.6 kg/m² per mm of thickness CONSUMPTION


PACKAGING 25 kg bags





Mapetex 50

Non-woven polypropylene fabric (weight 50 g/m²) for reinforcing waterproof membranes.



CHECK THE DATASHEET on mapei.com



PACKAGING

- 0.20 m x 25 m rolls
- 1 m x 25 m rolls



Back to the alphabetical index

378

Mapetex FG

Glass fibre reinforcing mesh for Purtop Easy.



CHECK THE TECHNICAL DATASHEET on mapei.com



PACKAGING

ING 1 m x 50 m rolls

Mapetex Sel N

Non-woven polypropylene fabric for reinforcing waterproofing membranes.



CHECK THE TECHNICAL DATASHEET on mapei.com



PACKAGING

1 m x 25 m rolls

Monolastic

One-component cementitious elastic waterproofing mortar, with fully offset ${\rm CO_2}$ emissions.

| APPLICATION | trowel |
|-------------|--------|
| | |

CONSUMPTION 1.1 kg/m² per mm of thickness

PACKAGING 20 kg bags

CERTIFICATIONS

AND MARKINGS

380

CKAGING 20 kg ba













CHECK THE TECHNICAL DATASHEET on mapei.com



Primer BI

APPLICATION

CONSUMPTION

Synthetic resin primer in solvent, specific for improving adhesion of polyurethane coating products (from the **Purtop** range) on existing bituminous membranes.



CHECK THE TECHNICAL DATASHEET on mapei.com



PACKAGING 10 kg drums

Primer EP4 Fast

Two-component solvent-free epoxy primer for damp substrates.

roller, brush or spray

0.20 kg/m² per coat



APPLICATION trowel

CONSUMPTION approx. 0.4-0.5 kg/m²

PACKAGING 15 kg kit (component A = 11.95 kg, component B = 3.05 kg)





Primer EP 100W

PACKAGING

Two-component solvent-free water-based epoxy primer for non-absorbent substrates.



APPLICATION roller, brush or spray

CONSUMPTION approx. 0.15-0.3 kg/m²

CHECK THE TECHNICAL DATASHEET on mapei.com

20 kg kit (component A = 5 kg, component B = 15 kg)





Primer FT

Two-component ultra-rapid primer for **Purtop** waterproofing systems

| APPLICATION | roller, trowel or rake |
|-------------|--|
| CONSUMPTION | approx. 0.3 kg/m² per coat |
| PACKAGING | 5.4 kg kit ·(component A = 4.7 kg, B = 0.7 kg) |

CERTIFICATIONS AND MARKINGS



roller, brush

0.1-0.2 kg/m²

50 kg drums

roller or brush

0.1-0.2 kg/m²

50 kg drums



CHECK THE TECHNICAL DATASHEET on mapei.com



Primer P1

One-component solvent-based primer for polyurea coatings (from the Purtop line) on plastic surfaces such as PVC.



| CHECK THE |
|---------------------|
| TECHNICAL |
| DATASHEET |
| on mapei.com |



Primer P2

APPLICATION

CONSUMPTION

PACKAGING

APPLICATION

CONSUMPTION

PACKAGING

One-component solvent-based primer for polyurea coatings (from the **Purtop** line) on plastic surfaces such as TPO.



CHECK THE TECHNICAL DATASHEET on mapei.com



Primer PU 60

Moisture curing solvent polyurethane resin for consolidating and waterproofing screeds.

roller or brush

0.4-1.2 kg/m²

10 kg drums



CHECK THE TECHNICAL DATASHEET on mapei.con



Primer PU Fast

APPLICATION

PACKAGING

CONSUMPTION

Two-component polyurethane primer for absorbent substrates.



CHECK THE TECHNICAL DATASHEET on mapei.com



| APPLICATION | roller or trowel |
|-------------|--|
| CONSUMPTION | approx. 0.15-0.3 kg/m² |
| PACKAGING | 10 kg kit (component A = 4.5 kg; component B = 5.5 kg) |

Purtop 200

Two-component polyurea-based membrane applied manually for waterproofing roofs.



CERTIFICATIONS AND MARKINGS





Back to the alphabetical index

Back to the table of contents

Purtop 400 M

Two-component, solvent-free, hybrid polyurea membrane applied by spray using a high-pressure, bi-mixer type pump to form waterproof coatings on roofs and bridge decks directly on site.

APPLICATION spray using a high-pressure, bi-mixer type pump

CONSUMPTION 2.2 kg/m² per 2 mm of thickness

PACKAGING 445 kg kit: component A: 220 kg bag, component B: 225 kg

CERTIFICATIONS AND MARKINGS









CHECK THE TECHNICAL DATASHEET on mapei.com



Purtop 500 N

Two-component, solvent-free, hybrid polyurea membrane applied by spray using a high-pressure, bi-mixer type pump to form waterproof coatings on roofs directly on site.

APPLICATION spray using a high-pressure, bi-mixer type pump

CONSUMPTION 2.2 kg/m² per 2 mm of thickness

PACKAGING 450 kg kit: component A: 225 kg bag, component B: 225 kg

CERTIFICATIONS AND MARKINGS







TECHNICAL DATASHEET on mapei.com



Purtop 1000

Two-component, solvent-free pure polyurea membrane applied by spray with a high-pressure, bi-mixer type pump, to form waterproof coatings for hydraulic works, roofs and bridge decks directly on site.

APPLICATION spray using a high-pressure, bi-mixer type pump

CONSUMPTION 2.2 kg/m² per 2 mm of thickness

PACKAGING 445 kg kit: component A: 220 kg bag, component B: 225 kg

CERTIFICATIONS AND MARKINGS

384









CHECK THE TECHNICAL DATASHEET on mapei.com



Purtop 1000 N

Two-component, solvent-free pure polyurea membrane applied by spray with a high-pressure, bi-mixer type pump, to form waterproof coatings for hydraulic works, roofs and bridge decks directly on site.

APPLICATION spray using a high-pressure, bi-mixer type pump

2.2 kg/m² per 2 mm of thickness CONSUMPTION

450 kg kit: component A: 225 kg bag, component B: 225 kg **PACKAGING**

CERTIFICATIONS AND MARKINGS











TECHNICAL DATASHEET on mapei.com



Purtop ADY

Admixture for applying **Purtop Easy** waterproofing membranes in just one single coat.



CHECK THE **TECHNICAL** DATASHEET on mapei.com



PACKAGING

boxes containing:

• 6x1.2 l

• 8x2 l

Purtop Easy

One-component, elastic polyurethane waterproofing membrane.

APPLICATION spray or notched trowel

COLOURS white and grey

PACKAGING 15 and 25 kg drums

CERTIFICATIONS AND MARKINGS

Consumption









2 kg/m² corresponds to a dry coat approx. 1.5 mm





CHECK THE TECHNICAL DATASHEET on mapei.com





Purtop Easy DW

Two-component elastic polyurethane membrane for waterproofing drinking water tanks.

| APPLICATION | straight or notched trowel |
|-------------|---|
| CONSUMPTION | 2.5 kg/m² for approx. 2 mm |
| PACKAGING | 15 kg kit (component A = 12.2 kg, component B = 2.8 kg) |

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.com



Purtop Easy T

One-component transparent aliphatic polyurethane waterproofing membrane for terraces and balconies.



CHECK THE TECHNICAL DATASHEET on mapei.com



APPLICATION roller or notched trowel CONSUMPTION 1 kg/m² for approx. 1 mm PACKAGING 15 e 20 kg drums

Purtop Easy T Primer

Colourless primer for non-absorbent substrates to be used before laying ${\bf Purtop\ Easy\ T}.$



CHECK THE

TECHNICAL

DATASHEET

on mapei.com

| APPLICATION | dry, clean cloth |
|-------------|---|
| CONSUMPTION | approx. 0.04-0.06 kg/m² |
| PACKAGING | 4 kg drums6 x 0.9 kg boxes |



Back to the table of contents

Purtop FR

Two-component, solvent-free, hybrid polyurea membrane applied by spray using a high-pressure, bi-mixer type pump to form fire-resistant, waterproofing coatings on resisting site.

APPLICATION spray using a high-pressure, bi-mixer type pump

CONSUMPTION 2.2 kg/m² per 2 mm of thickness

CONFEZIONI 450 kg kit: component A: 225 kg bag, component B: 225

CERTIFICATIONS AND MARKINGS








TECHNICAL
DATASHEET
on mapei.com



Purtop Primer Black

One-component solvent primer, specific for improving adhesion of asphalt flooring on surfaces waterproofed with products from the **Purtop** range.



TECHNICAL
DATASHEET
on mapei.com



APPLICATION roller or spray

PACKAGING 20 kg drums

3. SEALING AND WATERPROOFING JOINTS AND FILLETS

Adesilex PG4

Two-component, thixotropic epoxy adhesive with modified rheology for bonding **Mapeband**, **Mapeband TPE**, PVC strips and Hypalon and for structural bonds.

APPLICATION gauging trowel or straight trowel

CONSUMPTION 1.60-1.65 kg/m² per mm of thickness

PACKAGING • 30 kg units (A+B)

6 kg units (A+B)2 kg units (A+B)

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.com






Idrostop

Hydrophilic, expanding rubber profiles for waterproof working joints.

| APPLICATION | bonding with Idrostop Mastic | |
|-------------|---|--|
| SIZE | Idrostop 10: 20x10 mm Idrostop 15: 20x15 mm Idrostop 25: 20x25 mm | |
| PACKAGING | Idrostop 10: 6 10 m rolls Idrostop 15: 6 7 m rolls Idrostop 25: 6 5 m rolls | |







Idrostop B25

Hydro-expanding bentonite jointing material for sealing construction joints.





Idrostop Mastic

APPLICATION

PACKAGING


SIZE

One-component adhesive for laying Idrostop

nailing

20x25 mm

65 m rolls



CONSUMPTION approx. 300 ml every 5 m of Idrostop

PACKAGING boxes containing 12 300 ml cartridges

CERTIFICATIONS AND MARKINGS







Back to the table of contents

Idrostop PVC

PVC waterstop for sealing expansion and cold joints.

SIZE

second pour joints

- Idrostop PVC RI 15: 150 mm
- Idrostop PVC RI 20: 200 mm
- Idrostop PVC RI 25: 250 mm
- Idrostop PVC RI 30: 300 mm
- Idrostop PVC RE 20: 200 mm
- Idrostop PVC RE 25: 250 mm
- Idrostop PVC BE 25: 250 mm • Idrostop PVC KK: H 120 mm x L 170 mm

• Idrostop PVC BI 20: 200 mm

• Idrostop PVC BI 25: 250 mm • Idrostop PVC BI 30: 300 mm

• Idrostop PVC BI 35: 350 mm

• Idrostop PVC BE 20: 200 mm

rolls of different lengths depending on the waterstop type

structural joints

- Idrostop PVC KR: H 120 mm x L 170 mm







Idrostop Soft

PACKAGING

Hydro-expansive, high-flexibility bentonite jointing profile for waterproofing construction joints and second pours of concrete.



CHECK THE TECHNICAL DATASHEET on mapei.com



APPLICATION bonding with Mapeflex MS 45 or Ultrabond MS Rapid

25 x 20 mm SIZE

PACKAGING 65 m rolls

Mapeband

Rubber tape with alkali-resistant fabric for cementitious waterproofing systems and liquid membranes.

PACKAGING

- 50 m rolls, with 120 mm of total width
- 10 m rolls, with 120 mm of total width
- 90° and 270° corners
- Collars for passing-though pipes 120x120 mm and 400x400 mm
- Special cross and T profiles







CHECK THE TECHNICAL DATASHEET on mapei.com





Back to the alphabetical index

388

Mapeband Easy

Rubber tape sandwiched between two layers of non-woven fabric to form elastic joints in waterproofing systems.



- 30 m rolls
- 10 m rolls
- 90° and 270° corners
- Collars for passing-though pipes 200x200 mm

and 400x400 mm

CERTIFICATIONS AND MARKINGS





CHECK THE TECHNICAL DATASHEET on mapei.com



Mapeband Flex Roll

Tape for flexible sealing and waterproofing of expansion joints and cracks.



CHECK THE TECHNICAL DATASHEET

on mapei.com



SIZE

200 mm, 300 mm, 400 mm, 600 mm e 800 mm

(thickness: 2 mm thickness)

PACKAGING

20 m rolls

CERTIFICATIONS AND MARKINGS



Mapeband PE 120

 $\ensuremath{\mathsf{PVC}}$ tape for waterproofing systems created using liquid membranes.



- 50 m rolls, with 120 mm of total width
- 10 m rolls, with 120 mm of total width
- 90° and 270° corners
- Collars for passing-though pipes 120x120 mm and 425x425 mm

CERTIFICATIONS AND MARKINGS





CHECK THE TECHNICAL DATASHEET on mapei.com



Mapeband SA

Self-adhesive butyl tape with alkali-resistant, non-woven fabric backing for elastic waterproofing systems.

• collars for passing-though pipes 370x370 mm



TECHNICAL
DATASHEET
on mapei.com



CERTIFICATIONS AND MARKINGS

WIDTH

PACKAGING

Mapeband TPE

100 mm

• 25 m rolls

TPE tape for flexible sealing and waterproofing of expansion joints and cracks subject to movement.



TECHNICAL
DATASHEET
on mapei.com



• 17 cm (Mapeband TPE 170) • 32.5 cm (Mapeband TPE 325)

PACKAGING 30 m rolls (for both 170 and 325)

Mapeflex E-PU 30 NS

Two-component, thixotropic epoxy-polyurethane sealant with high modulus of elasticity and high mechanical and chemical resistance.



| APPLICATION | trowel |
|-------------|----------------------------------|
| CONSUMPTION | 0.14 kg/meter (10x10 mm section) |
| COLOUR | grey 113 |
| PACKAGING | 5 kg (A+B) |



Back to the alphabetical index





Back to the table of contents

390

Mapeflex PU 40

Polyurethane sealant with low modulus of elasticity, for movements up to 25%.

| APPLICATION | extrusion gun |
|----------------|---|
| CONSUMPTION | 3.0 meters per 300 ml cartridge;6 meters per 600 ml sausage (10x10 mm section) |
| COLOURS | white, grey 111, grey 112 |
| PACKAGING | 300 ml cartridge, 600 ml sausage |
| CERTIFICATIONS | |





CHECK THE TECHNICAL DATASHEET on mapei.com



Mapeflex PU 45 FT

AND MARKINGS

Rapid-hardening paintable polyurethane sealant and adhesive with a high modulus of elasticity for movements up to 20%.

| PACKAGING | 300 ml cartridge, 600 ml sausage |
|-------------|---|
| COLOURS | white, grey 111, grey 113, black |
| CONSUMPTION | 3.0 meters per 300 ml cartridge;6 meters per 600 ml sausage (10x10 mm section) |
| APPLICATION | extrusion gun |









CHECK THE **TECHNICAL** DATASHEET on mapei.com



Mapeflex PU50 SL

Castable polyurethane sealant with low modulus of elasticity, for movements up to 25%.

| APPLICATION | pouring, extrusion gun, pressure pump |
|-----------------|--|
| CONSUMPTION | 6.0 meters per 600 ml sausage (10x10 mm section) |
| COLOUR | grey 111 |
| PACKAGING | 20 pcs boxes (600 ml sausage) |
| CEDITIFICATIONS | |

CERTIFICATIONS AND MARKINGS

392





CHECK THE TECHNICAL DATASHEET on mapei.com



Mapefoam

Closed-cell, extruded polyethylene foam cord used as a support for elastomer sealants to gauge the correct size of flexible joints. Supplied in rolls in various lengths according to the diameter of the foam.

| COLOUR | grey | | |
|-----------|--|-----------------|---|
| PACKAGING | Ø 6 mm Ø 10 mm Ø 15 mm Ø 20 mm Ø 25 mm Ø 30 mm Ø 40 mm | boxes " " " " " | 550 m - 10 m sachet 550 m - 10 m sachet 550 m - 10 m sachet 350 m - 10 m sachet 200 m 160 m 270 m |



TECHNICAL DATASHEET on mapei.com



Mapeguard DH-L

Left side corner for waterproofing elements at different heights.



CHECK THE TECHNICAL DATASHEET on mapei.con



available in 4 sizes (step heights 15, 20, 28, 38 mm) SIZE

PACKAGING boxes with 10 pcs

Mapeguard DH-R

Right side corner for waterproofing elements at different heights.



CHECK THE TECHNICAL DATASHEET on mapei.com



SIZE

available in 4 sizes (step heights 15, 20, 28, 38 mm)

PACKAGING

boxes with 10 pcs



Mapeguard IC

Special pieces of Mapeguard WP System for waterproofing inner corners, to be used together with Mapeguard WP 200 and Mapeguard Board.



CHECK THE TECHNICAL DATASHEET on mapei.com



LENGTH 12/12/8.5 - 9/6.5 cm

PACKAGING 25 pcs boxes

Mapeguard EC

Special pieces of Mapeguard WP System for waterproofing outer corners, to be used together with Mapeguard WP 200 and Mapeguard Board.



CHECK THE TECHNICAL DATASHEET on mapei.con



LENGTH 12/12/8.5 - 9 cm

PACKAGING 25 pcs boxes

Mapeguard PC

DIAMETER

PACKAGING

Flexible gaskets of Mapeguard WP 200 and Mapeguard Board or waterproofing around pipes and passing-through drainage systems. Suitable for several pipe-diameters.

> Ø 10- 24 mm Ø 15-38 mm Ø 28-50 mm

Ø 50-75 mm

Ø 75-110 mm

25 pcs boxes

Ø 100-130 mm



CHECK THE TECHNICAL DATASHEET on mapei.com



Back to the table of contents

Mapeguard ST

Waterproofing tape in rolls for sealing angles and horizontal/vertical joints between Mapeguard WP 200 sheets and between Mapeguard Board panels.



TECHNICAL DATASHEET on mapei.com



DIMENSIONS width 12 cm, length 10 m, and 30 m

PACKAGING 10 m x 12 cm and 30 m x 12 m rolls

Mapesil AC

Mould-resistant pure acetic silicone sealant for movements up to 25%.

| APPLICATION | extrusion gun |
|-------------|--|
| CONSUMPTION | 3.1 meters per 310 ml cartridge (10x10 mm section) |
| COLOURS | 34 colours and transparent |
| PACKAGING | 310 ml cartridges |
| | |









CHECK THE TECHNICAL DATASHEET on mapei.com



Mapetape

Cold-applied self-adhesive tape for sealing and waterproofing overlapping joints and cracks. Available in various widths (50, 100, 150 and 200 mm) and coloured finishes (aluminium, lead).

| SERVICE TEMPERATURE | -20°/+80°C (-20°C/+65°C for applications on surfaces with slope greater than 45°) | |
|----------------------------|---|--|
| APPLICATION TEMPERATURE | +5°C/+45°C | |
| PACKAGING | 10 m rolls, available in different heights | |



CHECK THE TECHNICAL DATASHEET on mapei.com





Ultrabond MS Rapid

Rapid-setting, deformable, hybrid assembly adhesive for interior and exterior use, with a high initial sucker effect.

APPLICATION extrusion gun

CONSUMPTION 5 meters of kerb, triangular section

PACKAGING 300 ml cartridges

CERTIFICATIONS AND MARKINGS









CHECK THE TECHNICAL DATASHEET on mapei.com



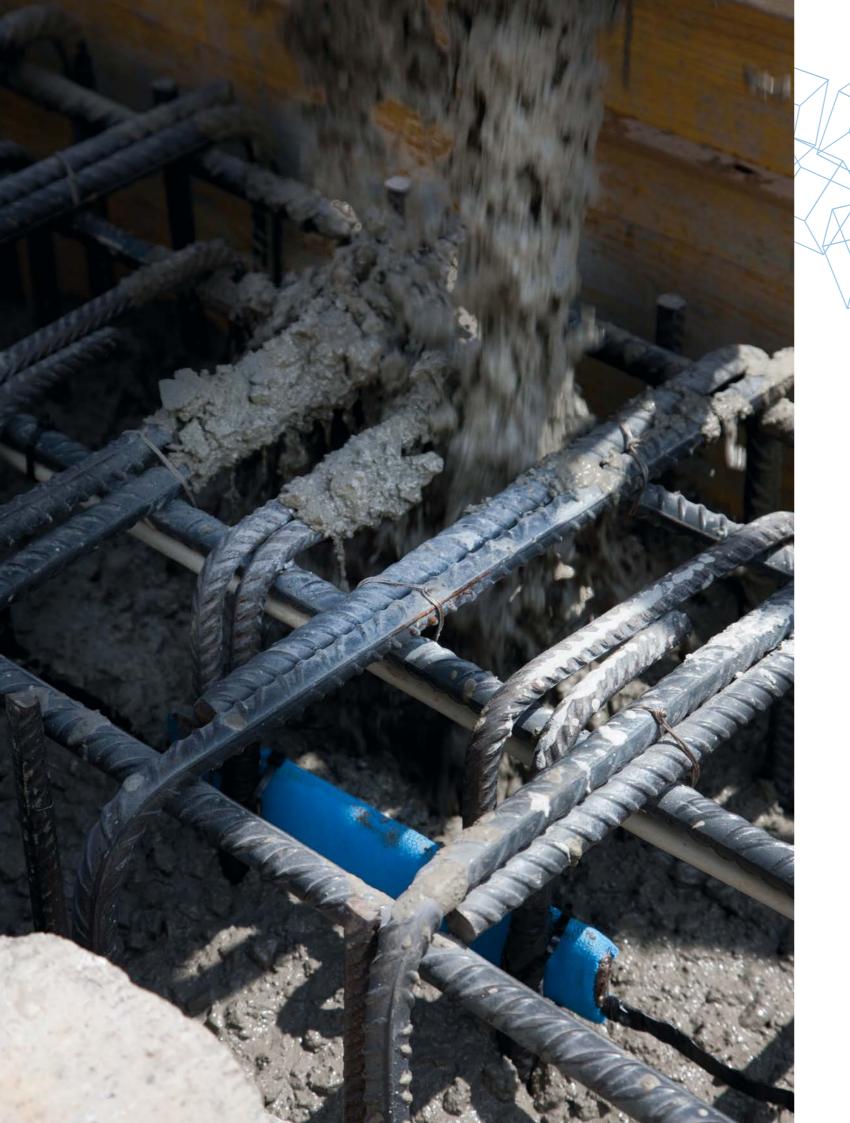

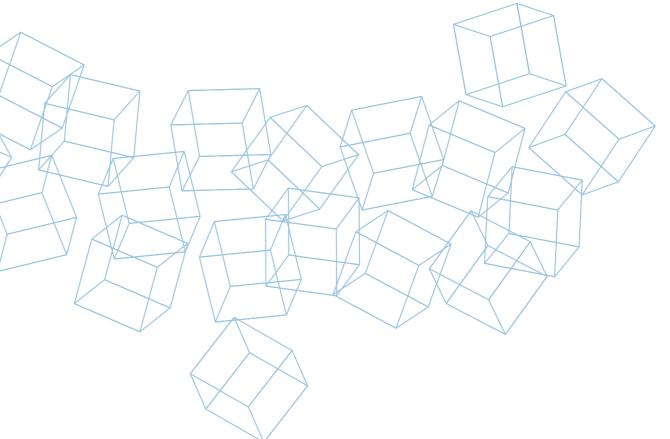



ADMIXTURES FOR CONCRETE

1. ADMIXTURES FOR CONCRETE

Cablejet

Expansive and plasticising admixture the production fluid slurries.



DOSAGE from 2% to 4% by cement weight

PACKAGING 18 kg bags: boxes containing 4, 3 kg water-soluble sachets

CERTIFICATIONS AND MARKINGS







Dynamon SX

Modified acrylic super-plasticiser for concrete, characterised by a low water/cement ratio, very high mechanical strength and long slump retention.

DOSAGE

0.5-2 l every 100 kg of cement, for traditional concrete, or by fines (less than 0.1 mm) for self-compacting concrete

PACKAGING

DOSAGE

PACKAGING

25 kg tanks

CERTIFICATIONS **AND MARKINGS**





CHECK THE TECHNICAL DATASHEET on mapei.com



Expancrete Plus

Expansive agent for controlled-shrinkage concrete.

from 2% to 5% by cement weight

20 kg bags: boxes containing4, 3 kg water-soluble sachets



CHECK THE TECHNICAL DATASHEET on mapei.com



Expanfluid

Expansive admixture for shrinkage-compensating grouting injection.



DOSAGE from 3% to 6% by cement weight

PACKAGING boxes containing 4, 3 kg water-soluble sachets

CERTIFICATIONS AND MARKINGS



CHECK THE TECHNICAL DATASHEET on mapei.com



Idrocrete DM

Bulk water-repellent admixture.

Particularly recommended for concrete with a damp earth consistency.



TECHNICAL DATASHEET on mapei.com



DOSAGE from 0.2 to 0.6 I for every 100 kg of cement

PACKAGING 25 kg tanks

CERTIFICATIONS AND MARKINGS



Idrocrete KR 1000

Powdered crystallising admixture for waterproof concrete.



DOSAGE from 1 to 3 kg for every 100 kg of cement

PACKAGING 20 kg bag and 4 kg box containing 4 water-soluble sachets

CERTIFICATIONS AND MARKINGS









401

Idrocrete S

Bulk water-repellent admixture.



TECHNICAL DATASHEET on mapei.com



DOSAGE from 0.6 to 1.2 kg for every 100 kg of cement

PACKAGING

CERTIFICATIONS AND MARKINGS

Mapeair AE1

Air entraining admixture for concrete.

DOSAGE

• from 15 ml to 100 ml every 100 kg of cement

• cement mortar: from 100 to 300 ml every 100 kg

of binder

PACKAGING

DOSAGE

402


PACKAGING

25 and 10 kg drums

25 and 10 kg drums

CERTIFICATIONS AND MARKINGS





CHECK THE **TECHNICAL** DATASHEET on mapei.com



Mapeair LA/P

Liquid admixture for light-weight mortars and concretes.

0.5 kg per m³ of mix

boxes containing 30, 0.5 kg water-soluble sachets



CHECK THE TECHNICAL DATASHEET on mapei.com



Mapecrete Drain P

Powdered admixture for the production of pervious concrete.



CHECK THE TECHNICAL DATASHEET on mapei.con



Mapecure SRA

DOSAGE

PACKAGING

Curing admixture for cementitious mortar and concrete to reduce hydraulic shrinkage and the formation of micro-cracks.

from 0.5% to 3% by cement weight

boxes containing 4, 3 kg water-soluble sachets



TECHNICAL DATASHEET



DOSAGE • mortar: 0.25-0.5% by weight of mortar; • concrete and beton: 5-8 l/m³

Chloride-based admixture to accelerate setting and hardening

PACKAGING 20 kg tanks

Mapefast C

of cementitious mortar.





DOSAGE from 0.75 to 1.5 kg for every 100 kg of cement

PACKAGING 30, 13 and 7 kg tanks

CERTIFICATIONS AND MARKINGS









Back to the table of contents Back to the alphabetical index

403

Mapefast CF/L

Chloride-free hardening accelerator for concrete and mortar.



CHECK THE TECHNICAL DATASHEET

on mapei.com



DOSAGE from 0.75 to 3 I for every 100 kg of cement

PACKAGING 30, 12 and 6 kg tanks

CERTIFICATIONS **AND MARKINGS**



Mapefast CF/P

Chloride-free hardening accelerator for concrete and mortar.



from 0.5 to 2 kg for every 100 kg of cement

PACKAGING 24x1 kg boxes

CERTIFICATIONS AND MARKINGS

DOSAGE







Mapefibre NS12

Polypropylene microfibres for concrete.



DOSAGE 600 g/m³ of concrete or mortar

PACKAGING boxes containing 30 0,6 kg degradable/pulpable

paper sachets

CERTIFICATIONS AND MARKINGS

404







Mapefibre NS18

Polypropylene microfibres for concrete.

DOSAGE 600 g/m³ of concrete or mortar

> boxes containing 30 0,6 kg degradable/pulpable paper sachets

CERTIFICATIONS AND MARKINGS

PACKAGING





TECHNICAL DATASHEET on mapei.com



Mapefibre Screed 24

24 mm-long polymer fibres specifically designed for the application of screeds.

DOSAGE 0.8-2 kg/m³ of concrete, depending on the performances required

• 6 kg plastic drums

• boxes containing 15 1 kg plastic sachets

CERTIFICATIONS AND MARKINGS

PACKAGING





CHECK THE TECHNICAL DATASHEET on mapei.com



Mapefibre ST 50 Twisted

Structural polymeric fibres of class II, complying with EN 14889-2:2006, developed to improve the performance of conventional and precast concrete and shotcrete.

DOSAGE 1.5-3 kg/m³ of concrete, depending on the performances required

PACKAGING

• 3 kg plastic drums

• carton box containing 10 1.5 kg water-soluble sachets

CERTIFICATIONS AND MARKINGS





TECHNICAL DATASHEET on mapei.com





Mapefibre ST30

Structural polymer macro-fibres for concrete.

DOSAGE

from 1 to 6 kg per cubic metre of mix


PACKAGING

6 kg plastic bags and in boxes containing

15 1 kg plastic bags

CERTIFICATIONS AND MARKINGS





CHECK THE TECHNICAL DATASHEET on mapei.com



Mapefibre ST42

Structural polymer macro-fibres for concrete.

CHECK THE TECHNICAL DATASHEET on mapei.com





from 1 to 5 kg m³ of mix

PACKAGING

5 kg, 6 kg and 1.8 kg plastic bags, with water-soluble pucks

CERTIFICATIONS **AND MARKINGS**



Mapefluid N200

Super-plasticising sulphonated naphthalene admixtures for concrete. Permits the amount of mixing water to be drastically reduced, with a considerable increase in strength, even after short curing periods.



DOSAGE

406

from 0.5 to 1.5 I for every 100 kg of cement

PACKAGING

25 and 10 kg tanks

CERTIFICATIONS AND MARKINGS








Mapefluid PZ500

Pozzolanic-activity super-plasticiser in powder form for high-quality mortar and concrete.

20 a 60 kg per m³ of mix



TECHNICAL DATASHEET on mapei.com



Mapefluid R104

Super-plasticising retardant admixture for concrete, particularly suitable for use in summer to help maintain the slump retention of the mix.

11 kg vacuum-packed polyethylene bags



CHECK THE **TECHNICAL** DATASHEET

on mapei.com



DOSAGE from 0.5 to 1.5 l for every 100 kg of cement

PACKAGING

DOSAGE

PACKAGING

CERTIFICATIONS

AND MARKINGS

25 kg tanks

CERTIFICATIONS AND MARKINGS



Mapeplast PZ300

Powdered admixture made from micronized Pozzolan-activity materials.



DOSAGE from 50 kg to 250 kg per m³ of concrete depending on the site requirements

PACKAGING

20 kg paper bags

CERTIFICATIONS AND MARKINGS









Mapeplast SF

Powdered admixture with pozzolanic action to be used in combination with superplasticizers for high-quality mortar, grout and concrete with thixotropic, plastic, fluid or super-fluid consistency.

DOSAGE from 20 to 60 kg/m³ of concrete depending on the site requirements

PACKAGING • 20 kg bags

• 10 kg water-soluble bags

CERTIFICATIONS AND MARKINGS





on mapei.com

Mapeplast UW

Anti-leaching cohesion-inducing admixture for underwater pours.



CHECK THE TECHNICAL DATASHEET on mapei.com



DOSAGE

from 0.6% to 3% by cement weight

CERTIFICATIONS **AND MARKINGS**

PACKAGING



Mapetard

Retardant admixture for concrete and mortar with a plasticising effect. Retardant action on setting times of cement. Particularly suitable for use in summer to help maintain workability of the mix.

• boxes containing 4, 3 kg water-soluble sachets



DOSAGE from 0.2 to 0.5 I for every 100 kg of cement

PACKAGING 25 kg tanks

CERTIFICATIONS AND MARKINGS







Back to the table of contents

Planicrete

Synthetic rubber latex to improve adhesion of cement mixes.



TECHNICAL DATASHEET on mapei.com



DOSAGE

- to prepare bonding slurries: 100-150 g/m²;
- to prepare screeds and renders 50-80 kg/m³

PACKAGING 5-10-25 kg tanks and 12 x 1 kg packages

2. ADMIXTURES FOR SCREEDS

Mapescreed Advance HR

Admixture for high-strength, quick-drying, controlled-shrinkage, cementitious screed mortar with a semi-dry consistency.



CHECK THE TECHNICAL DATASHEET on mapei.con



DOSAGE from 0.5 to 1.5 I for every 100 kg of cement

PACKAGING 25 kg drums and 1000 l IBC containers

Mapescreed Advance MR

DOSAGE

PACKAGING

Admixture for medium-strength, quick-drying, controlled-shrinkage, cementitious screed mortar with a semi-dry consistency.

from 0.5 to 1.5 l for every 100 kg of cement

25 kg drums and 1000 l IBC containers



TECHNICAL DATASHEET on mapei.com





ADMIXTURES FOR CONCRETE

3. FORM RELEASE AGENTS

Mapeform DMA 1000

Emulsifiable form-release agent for wood formwork. Emulsify one part of product with 5-20 parts of water, depending on the type of formwork.



TECHNICAL DATASHEET



CONSUMPTION

10-30 g/m² of undilute product

PACKAGING

23, 9 and 4.5 kg drums

Mapeform DMA 2000

Ready-to-use form-release agent with chemical and physical action for metal formwork.



CHECK THE TECHNICAL DATASHEET on mapei.com



CONSUMPTION

CONSUMPTION

PACKAGING

20-40 g/m² depending on the type of formwork

PACKAGING

23 and 4.5 kg drums

Mapeform 1500 Plus

Multi-purpose low viscosity chemical/physical action form-release solution, to easy stripping of formworks.

approx. 20-25 g/m² for every type of formwork

bulk, 1000 I IBC containers, 200 I tanks, 22 I drums



TECHNICAL DATASHEET on mapei.com



4. SURFACE CURING COMPOUNDS

Mapecure E

Anti-evaporation agent in water emulsion for protecting the surface of concrete against quickly drying out when exposed to sunlight and winds.



TECHNICAL DATASHEET on mapei.com



CONSUMPTION pure: 70-100 g/m²;

• diluted 1:1 with water: 140-200 g/m²

PACKAGING 25 kg tanks

Mapecure S

Film-forming curing agent in solvent to protect mortar and concrete from drying out too quickly when exposed to sunlight and winds.



CHECK THE TECHNICAL DATASHEET on mapei.con



CONSUMPTION 0.10-0.15 kg/m²

PACKAGING 24 kg tanks

Mapecure WG


CONSUMPTION

PACKAGING

Film-forming curing agent in aqueous emulsion for concrete. Does not need to be removed from the surface before bonding the floor covering.

150-200 g/m²

25 kg tanks



TECHNICAL DATASHEET on mapei.com

Back to the alphabetical index







Back to the table of contents

410

ADMIXTURES FOR CONCRETE

5. MAPEI COLOR PAVING

Color Paving Admix

Ready-mixed multi-purpose powdered admixture for exposed-finish architectural floors and surfaces.



| 25 kg/m³ of concrete |
|---|
| neutral, red, sand, yellow |
| 10 kg boxes containing2 12.5 kg water-soluble sachets |





Color Paving Binder

DOSAGE

COLOURS

PACKAGING

Ready-mixed ready to use screed supplied in big-bags for creating architectural road surfaces in exposed aggregate concrete.



| CHECK THE |
|---------------------|
| TECHNICAL |
| DATASHEET |
| on mapei.com |
| |



| COLOURS | neutral, red, sand, yellow |
|-----------|----------------------------|
| PACKAGING | 970 kg big bags |

Mapecolor Pigment

Powdered oxides to create an even stable colour in concrete mixes.



| DOSAGE | from 1% to 4% by weight of white cement; from 3% to 6% by weight of grey cement |
|-----------|---|
| COLOURS | yellow, red, brown, green, black. Other colours available upon request |
| PACKAGING | 10 kg boxes containing 2 5 kg water-soluble sachets |



Mapewash PO

Biodegradable vegetable oil-based surface set retardant with a curing effect to create architectural floors and surfaces.



| YIELD | 3.5-4 m ² /I by spray |
|-----------|--|
| COLOURS | depending on the type of product: green, blue, violet, yellow, pink, grey |
| PACKAGING | 22 and 2 litres tanks |





Mapewash Protex

Temporary protective gel for substrates applied during laying operations to prevent concrete sticking and Mapewash PO from being absorbed.



CHECK THE **TECHNICAL** DATASHEET on mapei.com



PACKAGING 20 and 5 kg plastic drums







AGGREGATES AND MORTARS FOR THE BUILDING INDUSTRY



1. MORTARS FOR THE BUILDING INDUSTRY

BIOstabilitura

Highly compatible, ecological finishing which responds fully to the construction requirements of eco-friendly building work. Finishing mortar for walls, made entirely with high quality, natural, transpirant,

eco-compatible, raw materials.

Suitable for rendering internal and external surfaces.

YIELD 1.7 kg x m² x mm of render finish

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS





CHECK THE TECHNICAL **DATA SHEET**



FIBROmalta

Special fibre-reinforced render for the best results with the minimum effort. Suitable for render and general wall coatings. The micro-fibres guarantee no crack formation caused by plastic shrinkage when drying out. It is suitable for application with a rendering machine and is even more attractive when applied by hand.

YIELD $18 \text{ kg x m}^2 \text{ x cm of render - } 22 \text{ kg x m}^2 \text{ of wall made}$

of bricks measuring 12x12x24 cm

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS

















FIBROstabilitura

FIBROstabilitura is a transpirant finishing mortar for masonry suitable for internal and external biocompatible render without cracks or crazing. FIBROstabilitura is reinforced with fibres which guarantee that no shrinkage cracks or crazing form during drying, and has unrivalled workability.

FIBROstabilitura is a highly ecological product which responds fully to the construction requirements of ecofriendly building work.

YIELD 1.7 kg x m² x mm of render finish

PACKAGING 25 kg bags

CERTIFICATIONS **AND MARKINGS**





CHECK THE TECHNICAL DATA SHEET on vagaedilizia.c



Grassello di CALCE

Aerial binder for transpirant, ecological finishing compounds and render. Aerial binder for preparing traditional masonry render and mortar on site, the main ingredient for making natural, transpirant paintwork, final smoothing coats on render (fresh on fresh) and for restoring ancient buildings.

YIELD 1.4 kg x m² x mm of render finish

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS









TECHNICAL DATA SHEET



HR10 Fibro

Ready-mixed high-adhesion rendering mortar in double-sealed bags to form rendered surfaces suitable for bonding ceramic tiles in compliance with EN 11493 standards.

YIELD 1 m³ of already mixed mortar is equal to approx. seventy 25 kg. 19 kg/m²/cm of render

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS









DATA SHEET on vagaedilizia.



HR15

For fire-resistant constructions with high tructural characteristics. HR15 is a **high strength render resistant to fire**. It Is particularly suitable for laying concrete and cement blocks and brickwork and is also suitable for rendering. It may be used for protecting and repairing concrete structures, in compliance with EN 1504-3.

YIELD $20 \text{ kg x m}^2 \text{ x cm of render - } 20 \text{ kg x m}^2 \text{ of wall made}$ of cement blocks measuring 20x20x40 cm

PACKAGING

CERTIFICATIONS AND MARKINGS





















MaltaBASTARDA

The innovative formulate to make masonry and render quickly. Ready-mixed mortar with guaranteed performance figures for internal and external render, load-bearing and partition walls, sealing water pipes and/ or cable runs and for installing shower troughs and sanitary fittings.

YIELD $18 \text{ kg x m}^2 \text{ x cm of render - } 22 \text{ kg x m}^2 \text{ of wall made}$ of bricks measuring 12x12x24 cm

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS











DATA SHEET



MaltaVISTA

For highly attractive, natural finish resistant to the trials of time. Its special formulation makes MaltaVISTA suitable for structurally solid, natural finish masonry, guarantees insulation against water ingress and reduces the phenomenon of efflorescence, while its high plasticity makes it possible to adjust the position of blocks and bricks when laying.



CHECK THE TECHNICAL DATA SHEET



YIELD $40 \text{ kg x m}^2 \text{ of wall}$

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS





VAGAlighTher

Ultra-light rendering mortar, particularly recommended to create heat-insulating systems and protective fireproof render in compliance with the prescriptions of Ministerial Decree MD 16th February 2007. Fire-resistance classification of construction products and elements for construction work.

VAGALighTher is characterised by its ease of use and excellent workability and is the ideal product for all those situations where protective, fireproof render and heat-insulating mortar are required.

YIELD 11 kg x m² x cm of render

PACKAGING 20 kg bags

CERTIFICATIONS AND MARKINGS

418









2. PRE-BLENDED MORTARS FOR THE BUILDING INDUSTRY

INTO+

Ready-mixed hydrated lime and cementbased powdered base render with high workability applied with a rendering machine on internal and external substrates made from: hydrated lime, Portland cement, graded sand and additives to improve its workability and adhesion.



TECHNICAL DATA SHEET



YIELD 13.5 kg x m² x cm of render

25 kg bags PACKAGING

CERTIFICATIONS AND MARKINGS





INTO+ Fibro

Ready-mixed fibre-reinforced hydrated lime and cement-based powdered base render applied with a rendering machine on internal and external substrates made from: hydrated lime, Portland cement, graded sand, fibres and additives to improve its workability, adhesion and flexural strength.



YIELD 13.5 kg x m² x cm of render finish

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS









Malta+ Fibro

Ready-mixed fibre-reinforced powdered mortar applied using manual tools on exposed masonry made from: Portland cement, hydraulic lime, graded sand, fibres and additives to improve its application characteristics. Suitable for a wide variety of uses such as general building work and rendering internal and external masonry made from bricks, concrete blocks, stone, etc. Its special formulation facilitates application using manual tools, including by operators not specialised in this type of work. The fibres and special additives in the mortar contrast the effect of hydraulic shrinkage and reduce the risk of crack formation to a minimum, including when rendering heterogeneous substrates.

YIELD 16 kg x m² x cm

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS













Back to the table of contents Back to the alphabetical index

419

RASA+

RASA+ is a one-component waterrepellent normal-hardening fine-textured grey cementitious skimming mortar supplied in powder form made from special high-strength binders, selected aggregates, special admixtures and synthetic polymers.

When RASA+ is mixed with water, its special composition forms a highly-adhesive mortar with excellent workability which makes it easier to apply with a smooth trowel and easier to finish the surface with a metal or sponge float.

YIELD 1.3 kg x m^2 x cm of finish

COLOUR grey

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS











CHECK THE TECHNICAL DATA SHEET on vagaedilizia.com



3. CONCRETE FOR THE BUILDING INDUSTRY

BEtonFLuid

BEtonFLuid is a high-strength (Rck 40 N/ mm²), self-compacting concrete (SCC) made by **Vaga**, ideal for manufacturing all types of structural elements with a natural finish.

BEtonFLuid is particularly suitable for casting into special formwork, including where there is a high density of reinforcement rods, without the risk of segregation.



CHECK THE TECHNICAL DATA SHEET on vagaedilizia.com



YIELD 86 bags = 1 m³

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS



CALCESTRUZZO RCK30

CALCESTRUZZO RCK30 by **Vaga** is ideal for making cast **structural elements** and members with guaranteed mechanical performance characteristics such as beams, pillars, foundation plinths, floor slabs, etc.; **exposed elements** and members such as stairs, floors and walls; **concrete floors**; **cast concrete exposed to (EN 206-1)**: dry surroundings (XC1) and wet surroundings (XC2).



YIELD 86 bags = 1 m^3

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS





CALCESTRUZZO RCK40

CALCESTRUZZO RCK40 by Vaga is ideal for making: high strength cast structural elements and members such as beams, pillars, foundation plinths, floor slabs, etc.; exposed elements and members such as stairs, floors and walls; concrete floors; cast concrete exposed to (EN 206-1): moderately damp surroundings (XC3), cyclical wet/dry surroundings (XC4), airborne salt (XS1), other chlorides (XD2), surroundings with freeze/thaw cycles (XF1), chemical attack (XA1).

YIELD 86 bags = 1 m^3

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS







TECHNICAL
DATA SHEET
on vagaedilizia.com



Dreno

DRENO permeable concrete by **Vaga**: ideal for making floors with very high drainage capacity (> 640 mm/min), including in those places difficult to reach with conventional casting systems.



CHECK THE TECHNICAL DATA SHEET on vagaedilizia.com



YIELD $68 \text{ bags} = 1 \text{ m}^3$

PACKAGING 25 kg bags

ECO-DRENO

Pre-dosed pervious beton, available in 25-kg bags, complying with CAM requirements, with 75 % of recycled material, for highly effective pervious floors, with guaranteed mechanical strengths and very high pervious properties.



YIELD $68 \text{ bags} = 1 \text{ m}^3$

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS





421

EXTRABETON RCK50

EXTRABETON RCK50 by **Vaga** is ideal for making: high-strength, durable cast structural elements and members such as beams, pillars, foundation plinths and floor slabs, including those resistant to chemicals (to be verified with vaga technical services); floors in industrial **environments and floors with vehicle access** (including those resistant to **freeze/thaw cycles**); all types of **containment basins** (e.g. for drinking water, water with aggressive chemicals, depuration basins, sewer systems, etc.); **structural elements** and members such as stairs and floors; **cast concrete exposed to (EN 206-1)**: cyclical wet/dry surroundings (XC4), airborne salt (XS3), other chlorides (XD3), surroundings with freeze/thaw cycles (XF2 - XF3 - XF4) and chemical attack (XA1 - XA2* - XA3*). (* to be verified with **Vaga technical services**)



YIELD 86 bags = 1 m^3

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS





SAETTA

When time is tight and quality is a must. **SAETTA** ultra high performance quick beton with a low shrinkage rate, "and allows the time required for building work to be considerably reduced thanks to a stripping being time of just 2 hours!".



CHECK THE TECHNICAL DATA SHEET on vagaedilizia.com



YIELD $87 \text{ bags} = 1 \text{ m}^3$

PACKAGING 25 kg bags

VAGAQUARZ

VAGAQUARZ is a mixture of particularly hard, natural mineral aggregates (quartz) which is used to protect concrete floors. It is particularly recommended for use in industrial environments and in warehouses where there is a high volume of vehicles in transit. It may be used to create attractive finishes in a variety of colours.

VAGAQUARZ is supplied ready to use, is pre-mixed with cement, additives and fillers and may be applied either manually or with power tools over wet concrete.

| YIELD | manual applpication 5.5 kg x m²; machine application 12 kg x m² | |
|-----------|--|--|
| COLOUR | grey, other colours available upon request | |
| PACKAGING | 25 kg bags | |



CHECK THE TECHNICAL DATA SHEET on vagaedilizia.com



4. SCREEDS FOR THE BUILDING INDUSTRY

 $20 \text{ kg x } \text{m}^2 \text{ x cm}$

25 kg bags

SabbiaCEMENTO

Formulate with special acrylic admixtures for any type of high-performance screed. Ready-mixed cementitious screed suitable for laying all types of bonded and floating screeds, including heated screeds. Set to foot traffic after approximately 16 hours, wait 36 hours before laying ceramic tiles and 14 days for parquet and resilient coverings.



CHE





TurboMASS

YIELD

PACKAGING

CERTIFICATIONS

AND MARKINGS

Special formulate for making fibrereinforced quick-drying ready-mixed screed, particularly suitable for laying flooring substrates, including heated floor substrates, when drying times need to be reduced. **TurboMASS** sets to foot traffic after 3-4 hours and dries after 4 days and is ready for laying parquet and resilient floor coverings.



YIELD 20 kg x m² x cm

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS











5. SERVICE PRODUCTS

MB1 Pavicalce

Ready-mixed masonry and rendering mortar with dry aggregates for internal and external render, load-bearing and partition walls and for sealing hydraulic and electrical pipe-work.



CHECK THE
TECHNICAL
DATA SHEET
on vagaedilizia.co



 $18 \text{ kg x m}^2 \text{ x cm of render - } 22 \text{ kg x m}^2 \text{ of wall}$

PACKAGING 25 kg bags

YIELD



NERO+

NERO+ is a cold, ready to use bitumen conglomerate supplied in bags. It is made from a mixture of aggregates, crushed sand and mineral additives (fillers) hot-blended with bitumen emulsion made with non-toxic flux oils.



CHECK THE TECHNICAL DATA SHEET



PACKAGING 25 kg bags

SABBIASAL

SABBIASAL is a new, freeze-resistant product made from a special mixture of sodium chloride and a calibrated granulometric curve of silica sand, which makes it ideal for protecting road surfaces by reducing the amount of ice and snow that forms and settles on them, thus offering better grip for moving vehicles.







PACKAGING 20 kg bags

VAGASAL

PACKAGING

VAGASAL is high efficiency, damp sodium chloride in a calibrated granulometric curve of 0/10 mm and is used to reduce the amount of ice and snow that forms and settles on the surface of roads.

25 kg bags



CHECK THE TECHNICAL DATA SHEET on vagaedilizia.com



6. DAMP AGGREGATES FOR THE BUILDING INDUSTRY

FRANTUMATA

Crushed washed selected aggregate ideal for coarse and rustic finish render, integrating concrete mixes and making floor screeds.



CHECK THE TECHNICAL DATA SHEET on vagaedilizia.cc



CERTIFICATIONS

AND MARKINGS

PACKAGING



25 kg bagsbulk

• 1.5 t big bags







MISTA

Selected, washed aggregates with the CE symbol, suitable for concrete, bitumen conglomerates and site mortar.

Ideal for preparing beton on site for small building jobs and for all applications which require a blend of calibrated aggregates with a maximum diameter of 10.0 mm.



- 25 kg bags
- bulk
- 1.5 t big bags

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATA SHEET on vagaedilizia.com



TICINO

Selected, washed aggregates with the CE symbol, suitable for concrete, bitumen conglomerates and site mortar.

Ideal for preparing finishing mortar and fine render on site. Also used in horticulture and in all those sectors and applications where the use of extra-fine natural sand is required.



- 25 kg bags
- bulk
- 1.5 t big bags

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATA SHEET on vagaedilizia.com





Back to the table of contents

Back to the alphabetical index

425

VAGLIATA

Selected, washed aggregates with the CE symbol, suitable for concrete, bitumen conglomerates and site mortar.

Ideal for installation substrates for laying self-locking solid blocks, mixing mortar and rough or rustic-finish render on site, installing floor screeds on site and all applications which require graded sand with a maximum diameter of 4.0 mm.



- 25 kg bags
- bulk
- 1.5 t big bags

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL **DATA SHEET**



VAGLIATA Super

Ideal for installation substrates for laying self-locking solid blocks, mixing mortar and rough or rustic-finish render on site, installing floor screeds on site and all applications which require graded sand with a maximum diameter of 4.0 mm.




PACKAGING

- 25 kg bags
- bulk
- 1.5 t big bags

CERTIFICATIONS AND MARKINGS







CHECK THE **TECHNICAL DATA SHEET**



7. DRY AGGREGATES FOR THE BUILDING INDUSTRY

VG03S

Ideal for sealing and filling joints when laying self-locking solid blocks, building sand for wood and bricks and removing the following from surfaces: smog, graffiti, dirt and carbonatation; mediumabrasion and depth sand-blasting to improve the bond of varnish, render, etc. to surfaces.



CHECK THE TECHNICAL DATA SHEET on vagaedilizia.c



PACKAGING

426

- 25 kg bags
- bulk
- 1.5 t big bags

CERTIFICATIONS AND MARKINGS



VG15

Ideal for sealing and filling joints when laying self-locking solid blocks, preparing smoothing and finishing compounds on site and for all those applications which require natural fine sand.



TECHNICAL DATA SHEET



PACKAGING

- 25 kg bags
- bulk
- 1.5 t big bags

CERTIFICATIONS AND MARKINGS



VG16SS

Ideal for sealing and filling joints when laying self-locking solid blocks, sandblasting metallic structures when rust and old surface treatments need to be removed, to create clean surfaces and improve the bond of paints.



PACKAGING

- 25 kg bags
- bulk
- 1.5 t big bags

CERTIFICATIONS AND MARKINGS







VG17FS

Ideal for sealing and filling joints when laying self-locking solid blocks, sandblasting ironwork and highly abrasive, deep-down surface treatments to remove residues of tar, deteriorated concrete, etc.



PACKAGING

- 25 kg bags
- bulk
- 1.5 t big bags

CERTIFICATIONS AND MARKINGS






CHECK THE TECHNICAL DATA SHEET on vagaedilizia.c







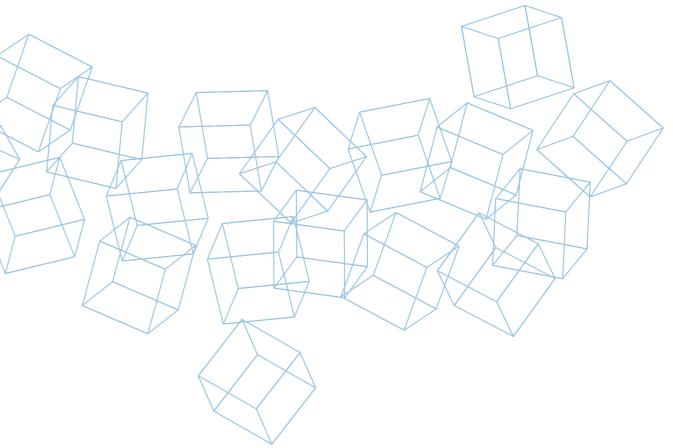



THE GREAT WORKS MAPEI

Linate Airport , Milan - Italy







Durst Pothotechnik, Brixen - Italy







Private flat, Milan - Italy



Palazzo Filangeri-Cutò, Palermo - Italy





Castel Sismondo, Rimini - Italy








Gran Rondò shopping centre, Crema - Italy





Università Cattolica del Sacro Cuore, Cremona - Italy

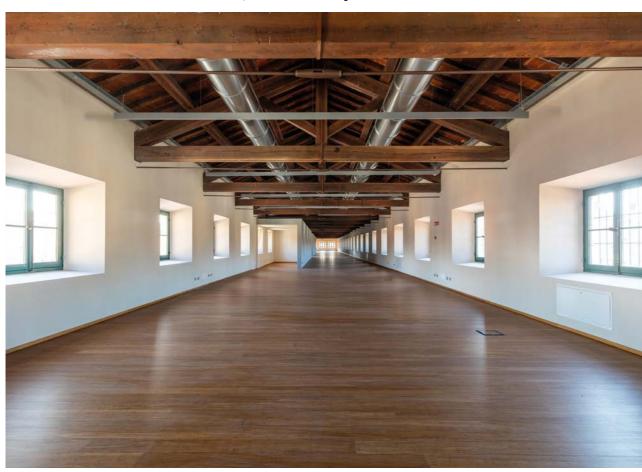

Via del Mare stadium, Lecce - Italy





Animal hospital, Berlin - Germany





Fountain of Neptune, Florence - Italy






MAPE

iQ Hotels, Milan - Italy





Swimming pool, Dervio - Italy

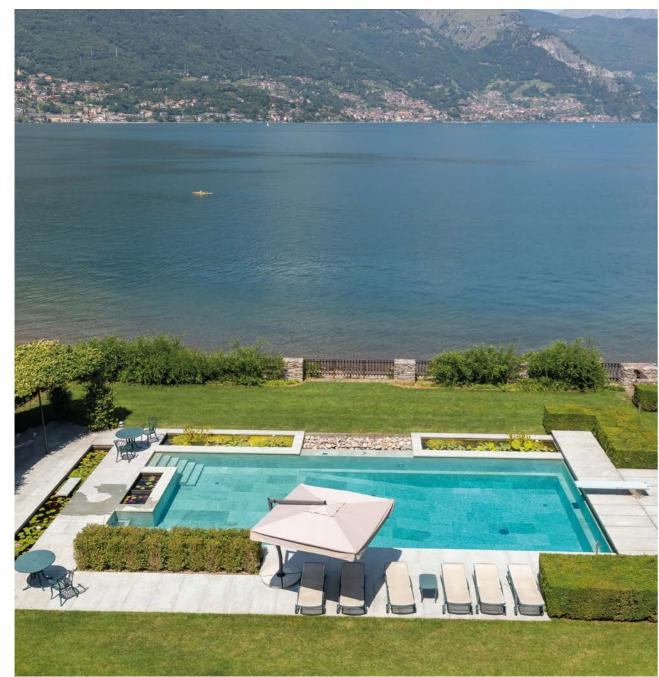

IRRCS Galeazzi hospital, Milan - Italy






Villa Candida tennis club, Foligno - Italy







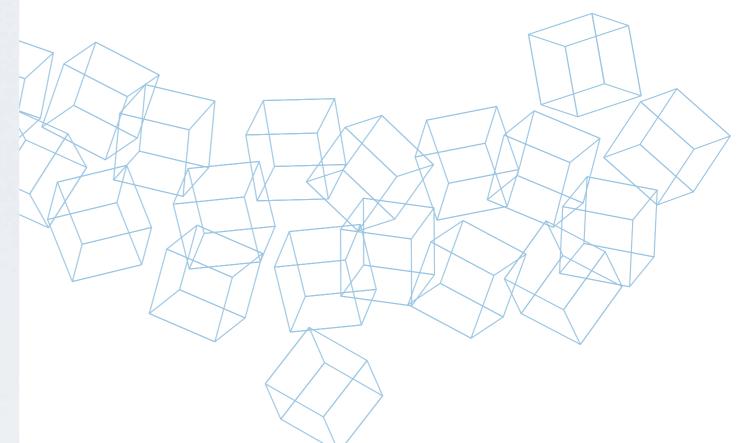



MAPEI HEAD
OFFICES AROUND
THE WORLD

ITALY

MAPEI S.p.A. Con Socio Unico

MILAN

HEADQUARTERS

Via Cafiero, 22 - 20158 Milan Tel. +39 02 37673.1 mapei.com - mapei@mapei.it

OFFICES

- Viale Jenner. 4 20159 Milan
- Via Valtellina, 63 20159 Milan Tel. +39 02 37673.1

MAPEIWORLD MILAN Specification Centre

Viale Jenner, 4 - 20159 Milan Tel. +39 02 37673.1 - training@mapei.it

ROME

OFFICE AND SHOWROOM

Viale Libano 62 - 00144 Rome Tel. +39 06 5929211

LECCE

OFFICE AND SHOWROOM

Via Adriatica, 2 B (ang. viale Porta d'Europa) - 73100 Lecce Tel. +39 0832 246551 ufficio.lecce@mapei.it

CIVITANOVA MARCHE

OFFICE AND SHOWROOM

Viale San Luigi Versiglia, 38/40 62012 Civitanova Marche (MC) Tel. +39 02 376 73 052 ufficio.civitanova@mapei.it

PISA

OFFICE AND SHOWROOM

Via di Gargalone, 9 - 56121 Pisa Tel. +39 338 69 00 793 f.falciani@mapei.it

SASSUOLO

DISTRIBUTION CENTRE OFFICE AND SHOWROOM

Via Valle D'Aosta, 46 41049 Sassuolo (Modena) Tel. +39 0536 803116

PLANTS

- Strada Provinciale, 159 20060 Robbiano di Mediglia (Milan) Tel. +39 02 906911
- Via Mediana S.S. 148, km 81,3 04100 Latina - Tel. +39 0773 2548
- Via del lavoro, 10 41018 San Cesario sul Panaro Tel. +39 059 921462

EUROPE Offices

AUSTRIA Mapei Austria GmbH

Nußdorf ob der Traisen Tel. +43 2783 8891 mapei.at office@mapei.at

BELGIUM and LUXEMBOURG Mapei Benelux SA/NV

Grâce-Hollogne Tel. +32 4 2397070 mapei.be mapei@mapei.be

BULGARIA Mapei Bulgaria E.O.O.D.

Sofia
Tel. +359 (2) 4899775
mapei.bg
info@mapei.bg

CROATIA Mapei Croatia d.o.o.

Sveta Nedelja Tel. +385 1 3647790 mapei.hr mapei@mapei.hr

CZECH REPUBLIC Mapei spol. s r.o.

Olomouc - Hodolany Tel. +420 585 201-151 mapei.cz info@mapei.cz

DENMARK Mapei Denmark A/S

Vejen Tel. +45 69 60 74 80 mapei.dk post@mapei.dk

FINLAND Mapei OY

Espoo Tel. +358 9 867 8900 mapei.fi info@mapei.fi

FRANCE

Mapei France S.A. Saint-Alban

Tel. +33 5 61357305 mapei.fr mapei@mapei.fr

MAPEIWORLD Paris Specification Centre Tel. +33-1-87448032 mapeiworld-paris@mapei.fr

GERMANY MAPEI GmbH

Großostheim Tel. +49 6026 50197-0 mapei.de info@mapei.de

GREECE

Mapei Hellas SA Chalkida

Tel. +30 22620 71906 mapei.gr mapeihellas@mapei.gr

HUNGARYMapei Kft.

Budaörs Tel. +36 23 501670 mapei.hu mapei@mapei.hu

NORWAY Mapei AS

Sagstua
Tel. +47 62 97 20 00
mapei.no
post@mapei.no

POLAND Mapei Polska Sp. z o.o.

Gliwice
Tel. +48 32 7754450
Commercial office: Warsaw
Tel. +48-22-5954200
mapei.pl
info@mapei.pl

PORTUGAL Lusomapei S.A.

Sacavém Tel. +351 918 488 620 mapei.pt geral@mapei.pt MAPEIWORLD Lisboa Specification Centre

ROMANIA Mapei Romania SRL

Bucharest Tel. +40 21 311 78 19/20 mapei.ro office@mapei.ro

RUSSIAN FEDERATION AO Mapei

Moscow Tel. +7 495 258 5520 mapei.ru info@mapei.ru Representative office in Almaty (Kazakhstan)

SERBIA MAPEI SRB d.o.o. Beograd

Leštane, Beograd Tel. +381 (0)11 40 46 977 mapei.rs office@mapei.rs

SLOVAK REPUBLIC Mapei SK s.r.o.

Ivanka pri Dunaji Tel. +421 2 4020 4511 mapei.sk office@mapei.sk

SLOVENIA

Mapei d.o.o.

Novo mesto Tel. +386 1 7865050/51 mapei.si mapei@mapei.si

SPAIN

Mapei Spain SA

Santa Perpetua de Mogoda (Barcelona) Tel. +34 93 3435050 mapei.es mapei@mapei.es

SWEDEN Mapei AB

Stockholm Tel. +46 8 52509080 mapei.se info@mapei.se

SWITZERLAND Mapei Suisse SA

Sorens / FR Tel. +41 26 9159000 mapei.ch info@mapei.ch

THE NETHERLANDS Mapei Nederland B.V.

Apeldoorn Tel. +31 85 00 69 200 mapei.nl verkoop@mapei.nl

TURKEY Mapei Yapı Kimyasalları Inşaat San. ve Tic. A.Ş.

Ankara Office: Tel. +90 312 227 84 84 Istanbul Office: Tel. +90 216 455 20 12 Izmir Office: Tel. +90 232 502 35 02 mapei.com.tr info@mapei.com.tr

UKRAINE Mapei Ukraine LLC

Kyiv Tel. +38 044 221 15 01 mapei.com.ua office@mapei.ua

UNITED KINGDOM Mapei U.K. Ltd

Halesowen Tel. +44 121 5086970 mapei.co.uk info@mapei.co.uk

MAPEIWORLD London Specification Centre, Clerkenwell Tel. +44 203 302 9610 clerkenwell@mapei.co.uk

AMERICA Offices

ARGENTINA Mapei Argentina SA

Escobar, Buenos Aires Tel. +54 (348) 443-5000 mapei.com.ar contacto@mapei.com.ar

BRAZIL Mapei Brasil Materiais de Construção Ltda

São Paulo Tel. +55 11 3386-5151 mapei.com.br info@mapei.com.br

CANADA Mapei Inc.

Laval, Québec Tel. +1 450 662 1212 mapei.ca

COLOMBIA Mapei Colombia S.A.S.

La Estrella, Antioquia Tel. +57-4 444 65 15 mapei.com.co info@mapei.com.co

COSTA RICA Mapei Construction Chemicals Panama S.A. (Costa Rica branch)

San Rafael, Alajuela Tel. +506 2237 3689 mapeicostarica@mapei.com.pa

DOMINICAN REPUBLIC Mapei Dominicana

Santo Domingo Tel. I 800 426 2734 (1 800 42 MAPEI) exportcustomerservice@mapei.com

MEXICO Mapei de Mexico SA de CV

Querétaro, Qro. Tel. +52 442 207 5835 mapei.mx mercadotecniamx@mapei.com

PANAMA Mapei Construction Chemicals Panama S.A.

Panama City Tel. +507 261 9549 mapei.com.pa mapeipanama@mapei.com.pa

Mapei Perù SAC

Lurín - Lima Tel. +5115006180 mapei.com.pe info@mapei.com.pe

PUERTO RICO Mapei Caribe Inc.

Dorado
Tel. +1 787 270 4162
mapei.com/PR
caribecustomerservice@mapei.com

U.S.A.

Mapei Corporation Deerfield Beach, Florida

Tel. +1 954 246 8888 mapei.us

VENEZUELA Mapei de Venezuela CA

Cagua Tel. +58 424 2012799 Mob. + 58 412 0455887 info@mapei.com.co

ASIA Offices

CHINA Mapei Construction Materials (Guangzhou) Co. Ltd

Guangzhou Tel. +86 20 8365 3489 mapei.com.cn

Mapei Building Materials Technology (Zhejiang) Co. Ltd

Huzhou Tel. +86 0572 215 9888 mapei.com.cn enquiry@mapei.com.cn

HONG KONG, CHINA Mapei China Ltd

Hong Kong Tel. +852 21486816 mapei.com.hk mapei@mapei.com.hk

INDIA Mapei Construction Products India Pvt Ltd

Bangalore Tel. +91 80 2222 1810 mapei.co.in infoindia@mapei.co.in

INDONESIA PT MAPEI Indonesia Construction Solutions

Jakarta Tel. +62 21 782 6976 mapei.co.id mapei@mapei.co.id

SOUTH KOREA Mapei Korea Ltd

Seoul Tel. +82 2 2199 2000 mapei.co.kr mapeikr@mapei.co.kr

MALAYSIA

Mapei Malaysia Sdn Bhd

Petaling Jaya Tel. +603 7842 9098 mapei.com.my mapei@mapei.com.my

PHILIPPINES Mapei Philippines Inc.

Binan, Laguna Tel. +63 049 250 2427 admin.ph@mapei.com.ph

QATAR Mapei Doha L.L.C

Tel. +974 4404 7718 mapei.qa info@mapei.qa

SAUDI ARABIA Mapei Saudia L.L.C

Riyadh Tel. +966 (O) 112611668 mapei.com.sa info@mapei.com.sa

SINGAPORE Mapei Far East Pte Ltd

Singapore Tel. +65 68623488 mapei.com.sg mapei@mapei.com.sg

UNITED ARAB EMIRATES Mapei Construction Chemicals L.L.C

Dubai Tel. +971 4 815 6666 mapei.ae info@mapei.ae

VIETNAM Mapei Vietnam Ltd

Ho Chi Minh Tel. +84 28 5412 5618 21 mapei.com.vn marketing@mapei.com.vn

OCEANIA Offices

AUSTRALIA Mapei Australia Pty Ltd

Brisbane Tel. +61 7 3276 5000 mapei.com.au sales@mapei.com.au

NEW ZEALAND MBP (NZ) Ltd

Auckland Tel. +64-9-9211994 MBPltd.co.nz enquiries@MBPltd.co.nz

AFRICA Offices

EGYPT Mapei Egypt For Construction Chemicals S.A.E.


Cairo
Tel. +20 2 2537 0000
mapei.eg
info@mapei.eg

KENYA Mapei East Africa Ltd

Nairobi Tel: +254 709045000 mapei.co.ke info@mapei.co.ke

SOUTH AFRICA Mapei South Africa Pty Ltd

Johannesburg Tel. +27 11 552 8476 mapei.co.za info@mapei.co.za

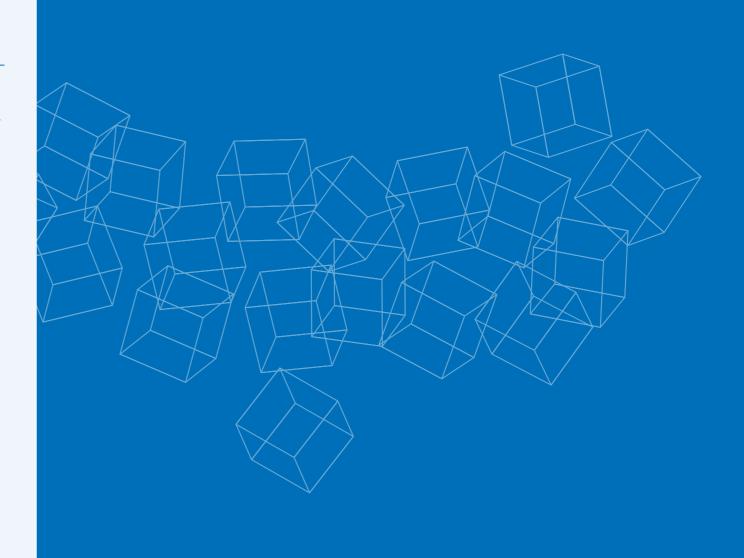

EVERYTHING'S OK, WITH MAPEL

HEAD OFFICE MAPEI SpA Via Cafiero, 22 20158 Milan +39-02-37673.1 mapei@mapei.it mapei.com

