





SYSTEMS FOR RESIN AND CEMENTITIOUS FLOORS

The use of resin and cementitious-based based flooring systems has become consolidated practice in the construction world. Not only are they adopted in the industrial and commercial building sectors, they are also used in the private construction sector and for street furniture and can be applied in various ways in all types of surroundings: from highly automated systems for industry to hospitals and supermarkets, as well as in civil settings for the public and private sectors, such as showrooms, shops and homes.

Mapei has developed a range of cutting-edge systems for the seamless flooring sector and, depending on the individual requirements of clients, they offer practical, efficient systems that can be installed very quickly and provide unquestionable benefits in terms of functionality, strength, durability and aesthetics.

These systems include the various solutions from **Mapefloor System**, a complete range of resin-based systems, and **Ultratop System**, a specific selection of formulations with a cementitious matrix, both of which can be used to create surfaces that always meet with the end user's specific requirements in terms of hygiene, sustainability creativity, exclusivity, comfort and wellbeing in the most diverse settings.

Mapei's seamless flooring portfolio consists of a comprehensive range of solutions that can be tailored to suit the type of application, the thickness of the flooring and the type of formulate employed and come in an infinite array of colours, shades and patterns to create surfaces that are not only unique, but also perfectly suitable for the use specified by the end user.


树脂和水泥基 地坪系统

树脂和水泥基地坪系统已成为建筑领域的综合运用一部分。它们不仅用于工业和商业建筑领域,还用于私人建筑领域和街道设施,可以在各种环境中以各种方式应用:从高度自动化的工业系统到医院和超市,以及公共场所,商店和家庭等公共和私营部门的公共场所等。


马贝为无缝地坪行业开发了一系列尖端产品,并根据客户的个性化需求,提供实用,高效的系统,可以非常快速地安装,并在功能,强度,耐用性和美观性方面提供无可置疑的优势。

这些地坪系统包括了一系列基于树脂类产品和基于特殊水泥基产品组成的系统,两者都可用于创建始终满足最终用户特定的表面在最多样化的环境中,在卫生,可持续性创造力,独特性,舒适性和健康方面的要求。

马贝的无缝地坪产品组合包括一系列全面的解决方案,可根据应用类型,地坪厚度和配方类型进行定制,并提供无数种颜色,色调和图案,以创建不同的表面效果。不仅独特,而且完全适合最终用户指定的用途。

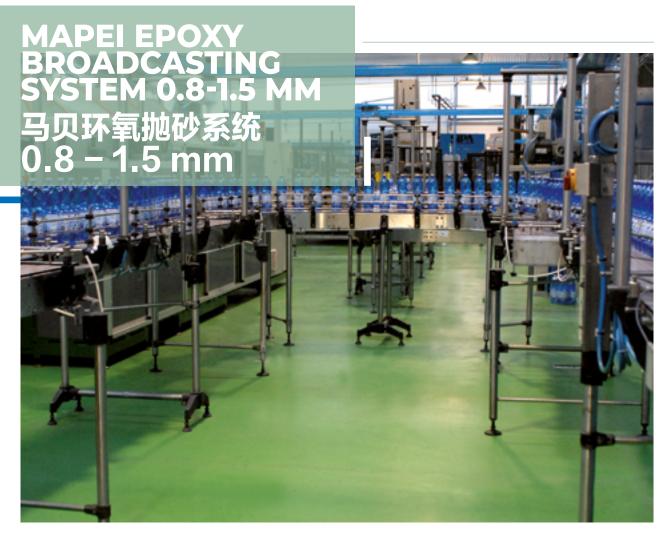

Multi-layered solvent-free epoxy system for industrial floor; thickness 0.8 to 1.5mm. 用于工业地坪的无溶剂, 多层结构环氧体系; 厚度为 0.8 至 1.5 mm。

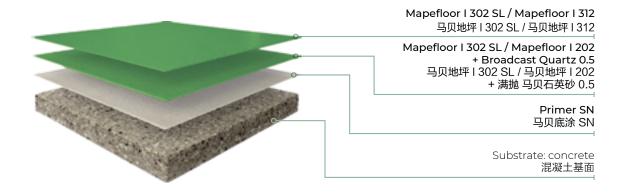



AREAS OF USE 使用范围


- Chemical and pharmaceutical industries.
- Foodsftuffs industry.
- Mechanised warehouses.
- Carpark.
- ●化学和制药行业
- ●食品行业
- ●机械化仓库
- ●停车库

- Non-slip finish.
- Solvent-free, eco-friendly
- Medium resistance to mechanical abrasion
- Resistance to most aggressive chemical products.
- Resistance to scratching
- Easy to clean and sterilize.

- ●防滑表面
- ●无溶剂,环保
- ●中度耐机械磨损
- ●良好的耐化学性
- ●良好的抗划伤性
- ●易于清洁和消毒



Multi-layered solvent-free epoxy system for industrial floor; thickness 3 to 5mm. 用于工业地坪的无溶剂, 多层结构环氧体系; 厚度 3 至 5 mm。

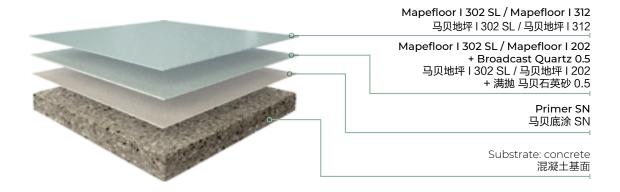



AREAS OF USE 使用范围


- Chemical and pharmaceutical industries.
- Foodsftuffs industry.
- Mechanised warehouses.
- Carpark ramp.
- Mechanical industry and car workshops.
- ●化学和制药行业
- ●食品行业
- ●机械化仓库
- ●停车库坡道
- ●机械工业和汽车车间

- Non-slip finish, with different levels to suit requirements.
- Solvent-free, eco-friendly.
- Resistance to most aggressive chemical products.
- Good resistance to mechanical abrasion
- Resistance to scratching.

- ●防滑表面并可根据需求 调整防滑等级
- ●无溶剂, 环保
- ●高度耐机械磨损
- ●良好的耐化学性
- ●良好的抗划伤性



Self-levelling epoxy system for industrial floor; thickness 2-4mm. 用于工业地坪的无溶剂, 环氧自流平系统; 厚度为 2 至 4 mm。

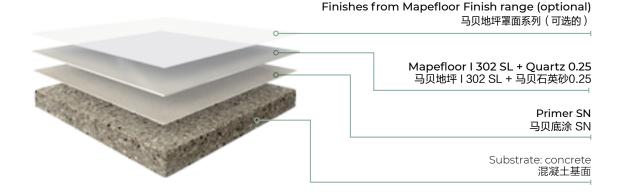



AREAS OF USE 使用范围

- Chemical and pharmaceutical industries.
- Foodsftuffs industry.
- Distribution
- warehouses.
 Mechanised
- warehouses.
- Shopping centres.Aseptic areas.
- Strerile rooms, laboratories and
- hospitals.
 Clean rooms for electronic industry

- ●化学和制药行业
- ●食品行业
- ●配送仓库
- ●机械化仓库
- ●购物中心
- ●无菌区域
- ●操控室, 实验室和 医院
- ●电子行业洁净室




- Smooth finish.
- Solvent-free, eco-friendly
- Medium to high resistance to abrasion.
- Resistance to most aggressive chemical products.
- Thanks to its highly attractive finish, it is particularly suitable for exhibition areas.
- Easy to clean and sterilize.

- ●表面光滑
- ●无溶剂,环保
- ●中至高度的耐磨性
- ●良好的耐化学性
- ●表面美观, 它特别适合 展览区域
- ●易于清洁和消毒





Thin coating, solvent-free epoxy system for industrial floor; thickness 0.6 to 1 mm. 用于工业地坪的无溶剂, 环氧薄涂系统; 厚度 0.6 - 1 mm。

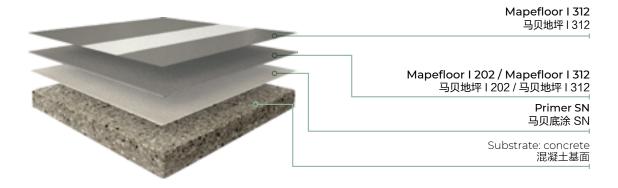



AREAS OF USE 使用范围


- Machine rooms.
- Non-heavy loading area in factories.
- Mechanised warehouses.
- Carparks.
- ●设备房
- ●工厂非重载区域
- ●机械化仓库
- ●停车库的停车位

- Smooth finish.
- Economical.
- Solvent-free, eco-friendly.
- Light resistance to abrasion.
- Resistance to most aggressive chemical products.
- Easy to clean.

- ●表面光滑
- ●经济
- ●无溶剂,环保
- ●轻度的耐磨性
- ●良好的耐化学性
- ●易于清洁



Textured, solvent-free epoxy system for industrial floor; thickness 1 to 2 mm. 用于工业地坪以及停车库的无溶剂, 环氧纹理系统; 厚度 1 - 2 mm。

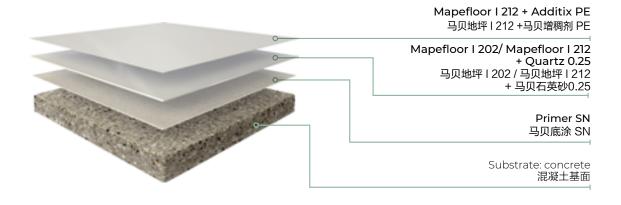



AREAS OF USE 使用范围

- Carparks.
- Chemical and pharmaceutical industries.
- Foodstuffs industry.
- Mechanised warehouses.
- ●停车库
- ●化学和制药行业
- ●食品行业
- ●机械化仓库

- Smooth finish.
- Attractive finish.
- Solvent-free, eco-friendly.
- Medium resistance to abrasion.
- Resistance to most aggressive chemical products.
- Easy to clean.
- Resistance to dust and greasy dirt.

- ●防滑表面
- ●美观
- ●无溶剂,环保
- ●中度的耐磨性
- ●良好的耐化学性
- ●易于清洁
- ●防尘, 耐油污





Self-levelling epoxy system with a coloured granular finish for decorative floors; thickness of approx. 3 mm. 带有彩色颗粒装饰面的环氧树脂自流平地坪系统,厚度约3mm。





AREAS OF USE 使用范围

- Pharmaceutical industry and distribution warehouses.
- Clinics, canteens, locker rooms and laboratories.
- Hotel lobbies, offices, classrooms, showrooms, etc.
- ●制药行业和配送仓库
- ●诊所,食堂,更衣室 和实验室
- ●酒店大堂, 办公室, 教室, 陈列室等

- Smooth finish.
- Solvent-free, eco-friendly.
- High resistance to wear and abrasion, that is higher than traditional self-levelling systems.
- Resistance to most aggressive chemical products.
- Good impact-resistant strength.
- Thanks to its highly attractive finish, it is particularly suitable for exhibition areas.
- Easy to clean and sterilize.


- ●表面光滑
- ●无溶剂,环保
- ●高耐磨,相比传统的环 氧自流平系统其耐磨 度更高
- ●良好的抗冲击性
- ●良好的耐化学性
- ●完工后的表面极具吸引力,因此特别适合展览区域
- ●易于清洁和消毒





Multi-layered vapour-permeable epoxy system in water dispersion with a matt non-slip finish for industrial floors; average thickness 2-3mm.

水性, 哑光防滑的多层结构的环氧地坪系统, 具有透汽功能, 适用于工业地坪; 平均厚度 2-3 mm。

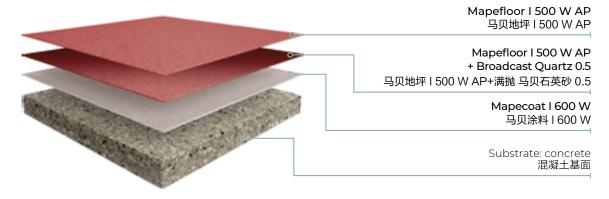



AREAS OF USE 使用范围

- Chemical and pharmaceutical industries.
- Laboratories.
- Mechanised warehouses.
- Foodstuffs industry.
- Canteens and store rooms.
- Underground carpark.
- ●化学和制药行业
- ●实验室
- ●机械化仓库
- ●食品行业
- ●食堂和储藏室
- ●地下停车场

- Non-slip finish, with different levels to suit requirements.
- Permeable to water vapour.
- Water-based product, contains no solvents.
- Medium to high resistance to mechanical abrasion.
- Medium resistance to aggressive chemical products.
- Recommended for use in the foodstuffs industry, especially in areas used for the passage of normal traffic and fork-lift trucks.
- Easy to clean and sterilize


- ●防滑表面并可根据需求 调整防滑等级
- ●可透水汽
- ●水性产品,不含溶剂。
- ●中至高度的耐机械 磨损
- ●中度的耐化学性
- ●建议用于食品行业, 尤 其用于正常交通和叉车 通过的区域
- ●易于清洁和消毒





Epoxy mortar closed-pore system with a high aesthetic effect for industrial and commercial floors; thickness 5.0 to 8.0 mm.

用于工业和商业的具有极高的美观效果的环氧砂浆系统;厚度5.0至8.0mm。

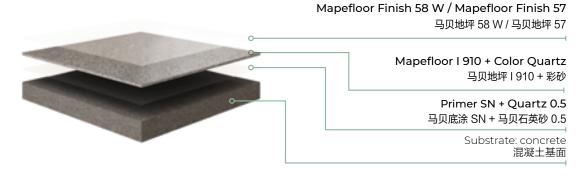



AREAS OF USE 使用范围

- Pharmaceutical and chemical industries.
- Electronics industries. ●食品行业
- Foodstuffs industries. ●展示厅
- Show-rooms.
- Shopping centres and residential compounds.
- ●制药和化学工业
- ●电子行业

- ●购物中心和住宅区

- Dust-free, waterproofing.
- Solvent-free, eco-friendly.
- High resistance to wear and abrasion.
- Resistance to most aggressive chemical products.
- Low yellowing.
- Easy to clean and sterilize.
- Attractive finish.


- ●防尘防水
- ●无溶剂,环保
- ●高耐磨性
- ●中至高度的耐化学性
- ●低黄变
- ●易于清洁和消毒
- ●美观





Self-levelling vapour-permeable epoxy system in water dispersion with a smooth matt finish; thickness 2-3mm.

水性, 哑光光滑表面的环氧自流平地坪系统, 具有透汽功能; 平均厚度 2-3 mm。

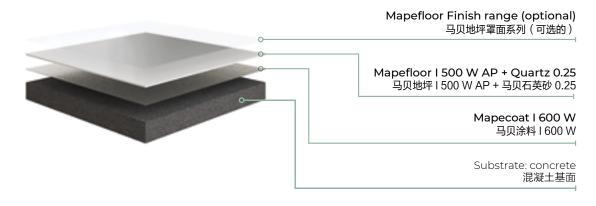



AREAS OF USE 使用范围

- Chemical and pharmaceutical industries.
- Foodstuffs industry.
- Mechanised warehouses.
- · Shopping centres.
- ●化学和制药行业
- ●食品行业
- ●机械化仓库
- ●购物中心

- Smooth finish.
- Matt finish
- Water-based, eco-friendly
- Medium resistance to mechanical abrasion
- Resistance to most aggressive chemical products.
- Thanks to its highly attractive finish, it is particularly suitable for exhibition areas.
- Easy to clean and sterilize.


- ●表面光滑
- ●哑光
- ●水性, 环保
- ●中度的耐机械磨损
- ●良好的耐化学性
- ●由于其极具吸引力的 表面,它特别适合展 览区域
- ●易于清洁和消毒





Levelling and strengthening epoxy mortar system for industrial floors, ideal for renovating old floors; thickness 6 to 15mm.

用于工业场所找平以及表面加固的环氧砂浆地坪系统,是旧地板翻新的理想选择;厚度6至15mm。

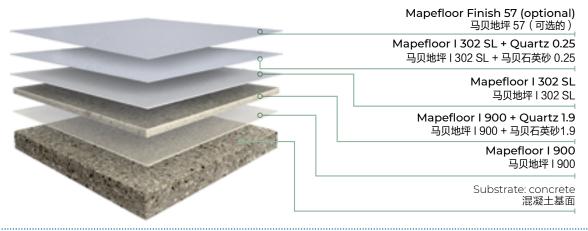



AREAS OF USE 使用范围

- Existing floor renovation
- Levelling and sloping in factories
- Heavy-loading area in industrial factories
- Steel industry
- Machinery industry
- Foodstuffs industry
- ●旧地坪翻新
- ●工业厂房中需要找平 及找坡的区域
- ●钢铁厂
- ●机械制造厂
- ●食品厂

ADVANTAGES 产品优势

- Non-slip finish.
 Solvent-free, eco-friendly.
 Fast restoration of slopes and depressions of badly deteriorated floors.
- Resistance to most aggressive chemical products.
- High resistance to mechanical abrasion.

- Good resistance to temperature variation
 Easy to clean and sterilize.
 Quick to apply, reduces the time required to carry out work so minimizes production down times.
- ●表面防滑
- ●无溶剂,环保
- ●快速修补破损地坪表 面以及找坡
- ●中度的耐化学性
- ●高度的耐机械磨损
- ●良好的耐温性能 ●易于清洁和消毒


工的时间

●施工时间短,从而最大 限度地减少因施工而停





Solvent-free, antistatic self-levelling epoxy system for industrial floors; thickness 2 mm. 用于工业的无溶剂导静电环氧自流平地坪系统; 厚度 2 mm。

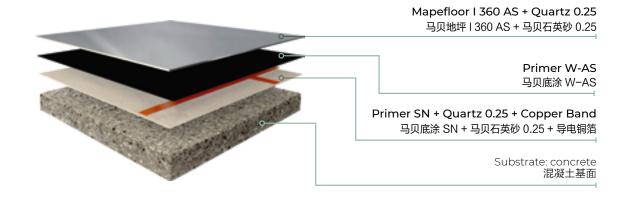



AREAS OF USE 使用范围

- Electric or safety industries such as store rooms or areas used to stock and process inflammable or ●制药行业 explosive substances. ●数据中心
- Clean rooms and hospitals.
- Pharmaceuticals industry.
 Data Centers.
- Automobile manufacturing industry
- ●储存和处理易燃或易 爆物质的区域
- ●洁净室和医院

- ●汽车制造业




- Antistatic.
- Smooth finish.
- Medium to high resistance to mechanical abrasion.
- Good resistance to aggressive chemical products.
- Easy to clean and sterilize.
- Solvent-free.
- Dust-free and waterproofing.

- ●导电
- ●光滑表面
- ●中至高的耐机械磨损
- ●良好的耐化学性
- ●易于清洁和消毒
- ●无溶剂
- ●防尘防水





Solvent-free, self-levelling epoxy system for antistatic, dissipative industrial floors; thickness 2 mm. 用于工业的无溶剂静电耗散型环氧自流平地坪系统; 厚度2mm。

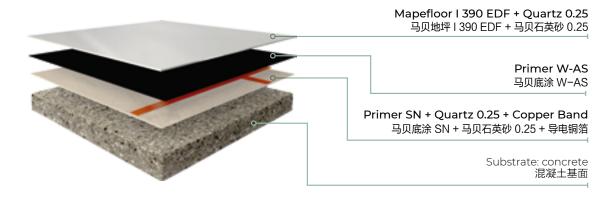



AREAS OF USE 使用范围

●制药行业

●数据中心

●汽车制造业

- Electronic clean rooms ●电子洁净室
- Pharmaceutical industry
- Data Centre
- Automobile
 manufacturing industry


 ●存放易燃物质的房间
- Store rooms for inflammable substances




- Electrically conductive, discharges build-up of static electricity to earthing points.
- Smooth finish.
- Solvent-free.
- Dust-free, waterproofing.
- Medium to high resistance to mechanical abrasion.
- Medium resistance to aggressive chemical products.
- Easy to clean and sterilize.

- ●具有静电耗散功能
- ●光滑表面
- ●无溶剂
- ●防尘防水
- ●中至高度耐机械磨损
- ●中度耐化学性
- ●易于清洁和消毒



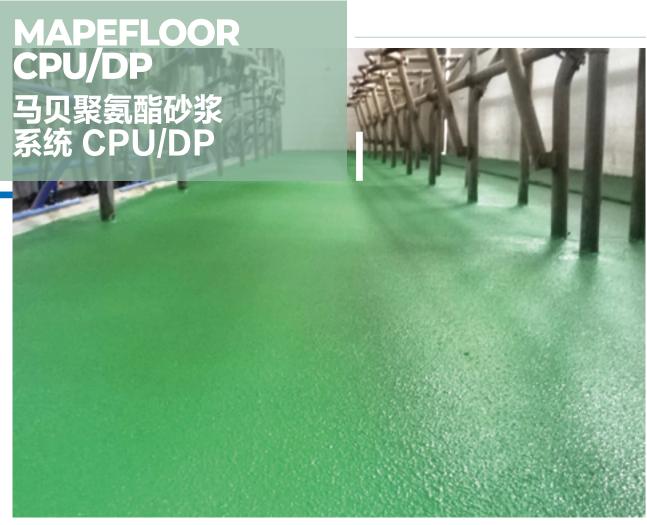

Multi-layered, non-slip polyurethane/cement-based system with high mechanical strength and resistance to chemicals for coating industrial floors; thickness 3 to 4 mm. Complies with standards applied in the foodstuffs sector. 用于工业地坪的多层结构防滑聚氨酯/水泥基砂浆系统,具有高机械强度和耐化学品性; 厚度3至4mm。符合食品行业标准。

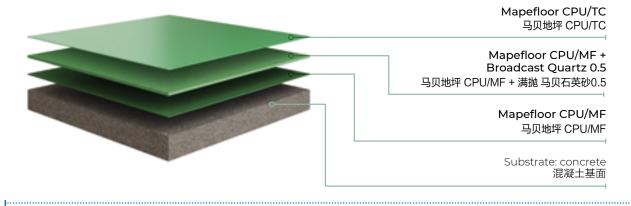



AREAS OF USE 使用范围

- Pharmaceutical, chemical and foodstuffs industries.
- Diary, wineries, breweries and beverage industries in general.
- Sugar processing and mineral water bottling plants.
- ●制药, 化学和食品 行业
- ●乳制品厂, 酿酒厂, 啤酒厂和饮料行业
- ●糖加工和矿泉水装 瓶厂




- Rough, non-slip effect.
- Excellent resistance to thermal shock and high resistance to chemicals such as acids, basic solutions, grease, saline solutions, hydrocarbons, etc.
- Suitable for floors subjected to heavy traffic for its high mechanical resistance and its resistance to abrasion.
- ●粗糙的防滑面效果
- ●优异的抗热冲击性和 对酸,碱性溶液,油脂, 盐溶液,碳氢化合物等 化学品的高耐受性
- ●具有高机械强度和耐磨性,适用于承受重载荷的区域





Self-levelling polyurethane/cement-based system with high mechanical strength and resistance to chemicals for coating industrial floors; thickness 4 to 6 mm. Complies with standards applied in the foodstuffs sector. 用于工业地坪的聚氨酯/水泥基砂浆自流平系统,具有高机械强度和耐化学品性; 厚度4至6mm。符合食品行业标准。

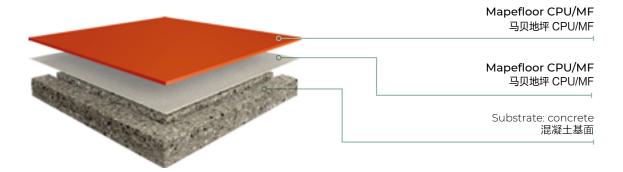



AREAS OF USE 使用范围

- Pharmaceutical, chemical and foodstuffs industries.
- Diary, wineries, breweries and beverage industries in general.
- Sugar processing and mineral water bottling plants.
- ●制药, 化学和食品 行业
- ●乳制品厂, 酿酒厂, 啤酒厂和饮料行业
- ●糖加工和矿泉水装 瓶厂


- Smooth effect.
- Excellent resistance to thermal shock and high resistance to chemicals such as acids, basic solutions, grease, saline solutions, hydrocarbons, etc.
- Suitable for floors subjected to heavy traffic for its high mechanical resistance and its resistance to abrasion.
- ●光滑表面
- ●优异的抗热冲击性和 对酸,碱性溶液,油脂, 盐溶液,碳氢化合物等 化学品的高耐受性
- ●由于其具有高机械强 度和耐磨性,适用于交 通繁忙的区域





High-strength polyurethane/cement-based mortar system with high mechanical strength, resistance to chemicals and thermal shock, for antiskid coatings of industrial floors; thickness 6 to 9 mm. Complies with standards applied in the foodstuffs sector.

用于工业地坪的高强度防滑聚氨酯/水泥基砂浆系统, 具有高机械强度, 耐化学品和耐热冲击性; 厚度6至9mm。符合食品行业标准。

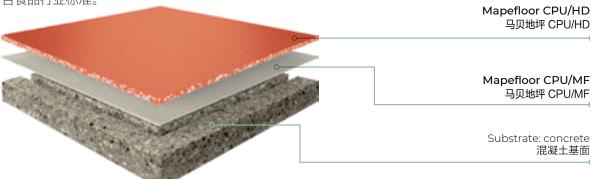



AREAS OF USE 使用范围

- Pharmaceutical, chemical and foodstuffs industries.
- Diary, wineries, breweries and beverage industries in general.
- Sugar processing and mineral water bottling plants.
- ●制药,化学和食品 行业
- ●乳制品厂, 酿酒厂, 啤酒厂和饮料行业
- ●糖加工和矿泉水装 瓶厂
- ●冷库




- Considerable rough, non-slip effect.
- Very good resistance to thermal shock and high resistance to chemicals such as acids, basic solutions, grease, saline solutions, hydrocarbons, etc.
- Suitable for floors subjected to heavy traffic for its high mechanical resistance and its resistance to abrasion.
- ●相对粗糙表面, 防滑 效果
- ●非常好的抗热冲击性 和对酸,碱性溶液,油 脂,盐溶液,碳氢化合 物等化学品的高耐受性
- ●由于其具有高机械强度和耐磨性,适用于交通繁忙的区域





Easy-to-apply, high-strength polyurethane/cement-based system with high mechanical strength, resistance to chemicals and thermal shock for antiskid coatings of industrial floors; thickness 3 to 4 mm. 用于工业地坪的聚氨酯/水泥基砂浆自流平系统, 具有高机械强度和耐化学品性; 厚度3至4mm。

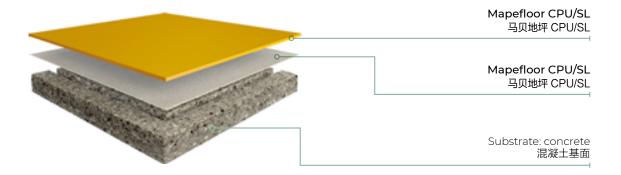



AREAS OF USE 使用范围

- Pharmaceutical, chemical and foodstuffs industries.
- Diary, wineries, breweries and beverage industries in general.
- Sugar processing and mineral water bottling plants.
- ●制药, 化学和食品 行业
- ●乳制品厂, 酿酒厂, 啤酒厂和饮料行业
- ●糖加工和矿泉水装 瓶厂


- Non-slip effect.
- Very good resistance to thermal shock and high resistance to chemicals such as acids, basic solutions, grease, saline solutions, hydrocarbons, etc.
- Suitable for floors subjected to heavy traffic for its high mechanical resistance and its resistance to abrasion.
- ●光滑表面
- ●优异的抗热冲击性和 对酸,碱性溶液、油脂, 盐溶液,碳氢化合物等 化学品的高耐受性
- ●由于其具有高机械强 度和耐磨性,适用于交 通繁忙的区域





Dry-shake floor hardening system; application together with concrete preparation to strengthen the surface mechanical strengt.

与混凝土同时施工,可有效提高混凝土表面性能的干撒式地面硬化剂系统。

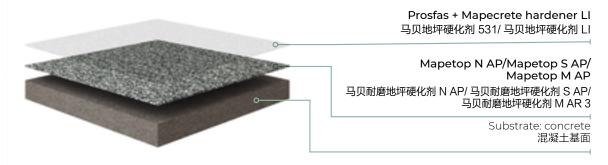



AREAS OF USE

- Repair foundation
- Carparks
- Warehouses
- Mega stores
- Loading ramps
- Industrial floors
- ●维修基地
- ●停车库
- ●仓库
- ●大卖场
- ●装载坡道
- ●工业厂房

n. 3


ADVANTAGES

- Economical.
- Durable.
- Easy to apply.
- Excellent resistance to mechanical abrasion.
- High strength and good impact strength.
- Grade A fire retardant level.
- After cured, can apply liquid hardener.
- ●经济
- ●耐用
- ●施工简单快速
- ●卓越的耐机械磨损 性能
- ●高强度及高耐冲击性
- ●具有A 级防火性能
- ●养护期后,可用液体固 化剂进行进一步抛光 和表面加固





system for abrasion-Resistance floors; thickness 5 to 40 mm. 快速固化, 具有高度耐磨性的水泥基自流平地坪系统; 厚度5-40mm。

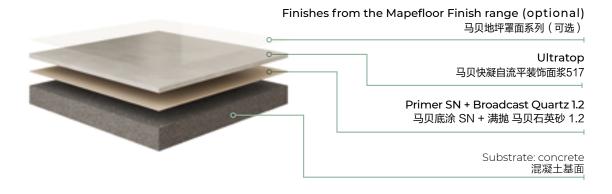



AREAS OF USE 使用范围

- Industrial warehouses. ●工业仓库
- Areas used by pedestrian traffic.
- Warehouses with an average level of wheeled vehicles for handling and moving goods.
- Finished decorative floors in the civil building sector such as shops, showrooms, offices, shopping centres, etc
- ●行人交通频繁使用的 区域。
- ●自动化仓库
- ●民用建筑领域作为装 饰效果的地坪, 如商 店, 陈列室, 办公室, 购物中心等




- Very quick to apply to limit down times.
- Sets to foot traffic within just a few hours of application.
- Good resistance to abrasion without the need for further thick coatings.
- Guarantees perfectly flat surfaces.
- Very good mechanical properties and resistance to abrasion: suitable for coating floors in areas subject to medium traffic of wheeled vehicles.
- ●施工非常快速
- 施工完几个小时后即 可承受步行载荷
- 良好的耐磨性, 无需进一步涂装一个厚的保护涂层
- 超强的找平能力
- 非常好的机械性能和 耐磨性:
- 适用于轮式车辆中等 交通区域的地板涂层





Self-levelling, ultra-fast setting cementitious system for abrasion-Resistance floors with a polished effect; thickness 10 to 40 mm.

快速固化, 具有"抛光效果"的高耐磨性水泥基自流平地坪系统; 厚度10-40mm。

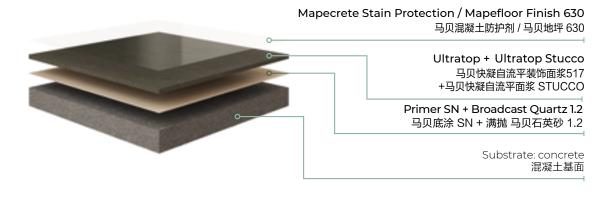



AREAS OF USE 使用范围


- Shops.
- Museums.
- Restaurants.
- Offices, churches, showrooms, apartments, etc.
- Floors with an exposed finish in shopping centres.
- ●商店
- ●博物馆
- ●餐馆
- ●办公室, 教堂, 陈列室, 公寓等
- ●购物中心大堂

- Very quick to apply.
- May be dry-ground within a few days of application.
- The dry polishing technique allows different shades of Ultratop to be used together.
- Good resistance to abrasion without the need for further coatings.
- Guarantees perfectly flat, smooth, light-reflecting surfaces.
- ●施工非常快速
- ●可在施工后几天内进 行干式研磨抛光
- ●可以进行不同颜色的 无缝拼接
- 良好的耐磨性, 无需进一步涂装保护涂层
- 具有完美平整,光滑, 反光的表面效果



Ultra-fast setting cementitious system for creating abrasion-Resistance floors with a "terrazzo alla veneziana" effect; thickness 15 to 40 mm.

快速固话, 具有"磨石"效果的水泥基地坪系统; 厚度15至40mm。

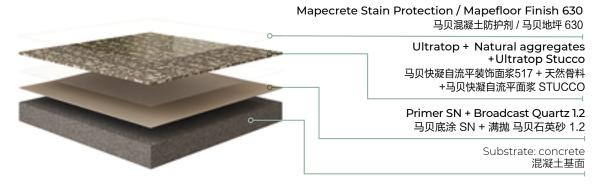




AREAS OF USE 使用范围

- · Shops.
- Restaurants.
- Offices
- Churches.
- Showrooms.
- Museums, theatres, etc. ●博物馆, 剧院等
- Shopping centres.
 ■购物中心
- Hotel receptions, apartments, etc.
- ●商店
- ●餐馆
- ●办公室
- ●教堂
- ●陈列室
- ●酒店大堂,公寓等

- Very quick to apply.
- May be dry-polished within a few days of application.
- Guarantees perfectly flat, smooth, lightreflecting surfaces.
- Good resistance to abrasion without the need for further thick coatings.
- Combining the various colours from the Ultratop range with natural aggregates forms floors with unique patterns.
- ●施工非常快速
- ●可在施工后几天内进 行干式研磨抛光
- ●良好的耐磨性, 无需进 步涂装保护涂层
- ●具有完美平整,光滑, 反光的表面效果
- ●各种颜色的马贝快凝自 流平装饰面浆517与各 种天然骨料相结合,形 成具有独特图案效果 的地板



Cementitious system with a trowelled or mottled effect for creating decorative coatings on floors and walls; thickness up to 2 mm. 具有抹灰或斑驳效果的水泥砂浆系统, 用于在地面和墙壁上形成装饰涂 层: 厚度可达2mm。 Finishes from the Mapefloor Finish range

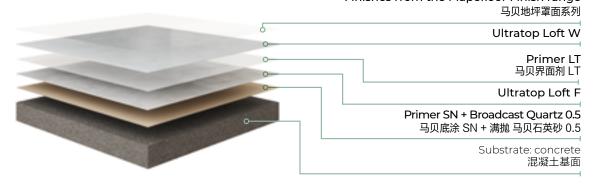



AREAS OF USE 使用范围

- Bars and shops.
- Restaurants.
- Private homes.
- Wellness centres.
- Hotels, resorts.
- Exhibition halls.
- Museums.
- Showrooms.

- ●酒吧和商店
- ●餐馆
- ●私人住宅
- ●健康中心
- ●酒店, 度假村
- ●展览厅
- ●博物馆
- ●陈列室


- Easy to apply, quick-drying.
- High resistance to abrasion in areas exposed to heavy foot traffic.
- Versatile. May also be applied on vertical surfaces when installing new floors and restoring old floors.
- Maximum creative freedom: the various colours available may be combined to create unique, impossible to repeat coatings.
- Treated surfaces may be put into service quickly.

- ●施工简单,固化快速 ●高耐磨性,可适用于频 繁人行荷载区域 ●多种用途,可用于新 地面的涂装和旧地面 的翻新,也可以应用于 再面
- 垂直面 ●最大的创作自由: 可以 组合各种颜色, 创造出 独特的, 不可能重复
- 的效果 ●经过处理的表面可以 快速投入使用





Multi-layered, seamless polyurethane system with high dynamic crack-bridging capacity for pedestrian surfaces and areas with vehicle access exposed to intense traffic, also outdoor. The system complies with Rili DafStb (Guideline of the German Committee on Reinforced Concrete) OS 11a and the concrete surface protection systems according to EN 1504-2; thickness 5 to 5.5 mm. 多层结构整体无缝的聚氨酯地坪系统,具有高动态裂缝桥接能力,适用于繁忙的行人路面和车辆通道的交通 区域, 也适用于室外环境。此系统符合Rili DafStb (德国钢筋混凝土委员会指南) OS 11a标准和符合EN 1504-2的混凝土表面保护系 统标准; 厚度5至5.5mm。

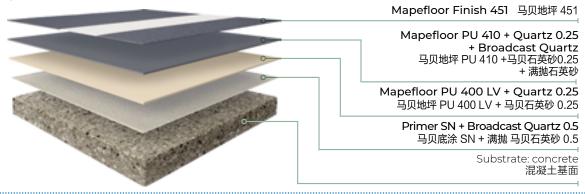




AREAS OF USE 使用范围

- Surfaces in covered carparks.
- Multi-storey carparks.
- Bridges.
- Walkways.
- Flat roofs with vehicle access.
- Apartment block courtyards for vehicle access to garages.
- ●有顶的停车场的地面
- ●多层停车场
- ●桥梁
- ●走廊
- ●屋顶停车库
- ●公寓楼通往车库的 车道


- High crack-bridging capacity down to -20°C.
- Waterproofing effect.
- Good resistance to mechanical stresses.
- Non-slip finish.
- Characterised by its high resistance to wear and abrasion caused by the constant passage of moving vehicles.
- ●在-20° C下仍然具有 裂缝桥接能力
- ●防水
- ●良好的抗机械性能
- ●表面防滑 ●高耐磨性,尤其是抵御 车辆不断通过的磨损



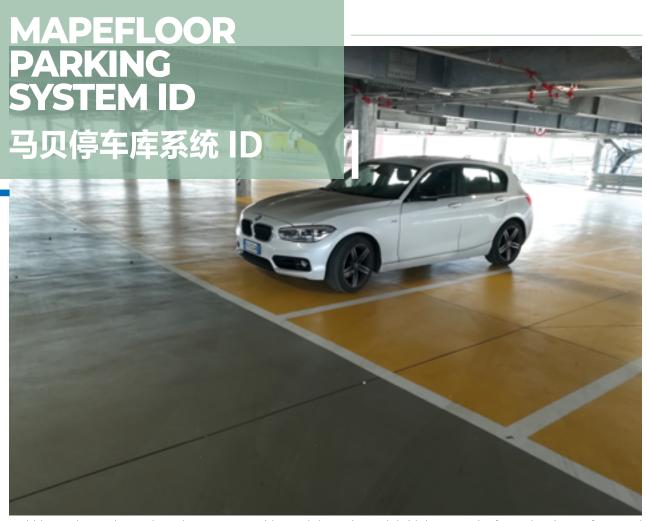

Multi-layered, seamless polyurethane system with good dynamic crack-bridging capacity for pedestrian surfaces and areas with vehicle access exposed to intense traffic indoor. The system complies with Rili DafStb (Guideline of the German Committee on Reinforced Concrete) OS 13 and the concrete surface protection systems according to EN 1504-2. Total thickness 2 to 2.5 mm.

多层结构整体无缝的聚氨酯地坪系统,具有良好的动态裂缝桥接能力,适用于繁忙行人路面和车辆通道的交通区域。该系统符合Rili DafStb (德国钢筋混凝土委员会指南) OS 13标准和符合EN 1504-2的混凝土表面保护系统标准。总厚度2至2.5mm。

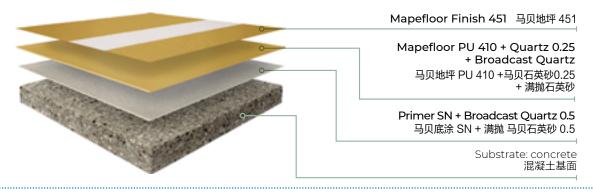



AREAS OF USE 使用范围

- Surfaces in covered carparks.
- Multi-storey carparks.
- Bridges.
- Walkways.
- Multi-storey carparks (intermediate floors) exposed to intense traffic, lanes for internal garages and parking spaces.
- ●有顶的停车场的地面
- ●多层停车场
- ●桥梁
- ●走廊
- ●多层停车场(中间楼 层)繁忙的行人路面, 停车位和行车道




- High crack-bridging capacity down to -10°C.
- Waterproofing effect with a non-slip finish.
- Versatile: may be used to mark out areas according to their different use such as parking areas, transit lanes, pedestrian areas and road markings.
- Characterised by its high resistance to wear and abrasion caused by the constant passage of moving vehicles, excellent resistance to mechanical stresses and aggressive chemicals.
- ●在-10℃下仍然具有裂 缝桥接能力
- ●防滑和防水效果
- ●用途广泛: 如停车区, 公交车道, 步行区和道 路标记
- ●高耐磨性,尤其是抵御 车辆不断通过的磨损
- ●良好的抗机械性能和 耐化学性





Multi-layered, seamless polyurethane system with high dynamic crack-bridging capacity for pedestrian surfaces and areas with vehicle access exposed to intense traffic also outdoor. The system complies with Rili DafStb (Guideline of the German Committee on Reinforced Concrete) OS 11b and the concrete surface protection systems according to EN 1504-2; thickness 4 to 4.5 mm.

多层结构整体无缝的聚氨酯地坪系统,具有高动态裂缝桥接能力,适用于繁忙行人路面和车辆通道的交通区域,也适用于室外环境。该 系统符合Rili DafStb (德国钢筋混凝土委员会指南) OS 11b标准和符合EN 1504-2的混凝土表面保护系统标准; 厚度4至4.5mm。

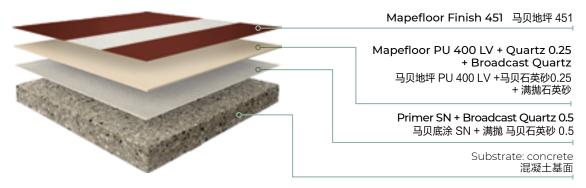



AREAS OF USE 使用范围

- Surfaces in covered carparks.
- Multi-storey carparks.
- Bridges.
- Walkways.
- Multi-storey carparks (intermediate floors) exposed to intense traffic, lanes for internal garages and parking spaces.
- ●有顶的停车场的地面
- ●多层停车场
- ●桥梁
- ●多层停车场(中间楼 层)繁忙的行人路面, 停车位和行车道




- High crack-bridging capacity down to -20°C.
- Waterproofing effect with a non-slip finish.
- Versatile: may be used to mark out areas according to their different use such as parking areas, transit lanes, pedestrian areas and road markings.
- Characterised by its high resistance to wear and abrasion caused by the constant passage of moving vehicles, excellent resistance to mechanical stresses, UV rays and aggressive chemicals.
- ●在-20℃下仍然具有裂 缝桥接能力
- ●防滑和防水效果 ●用途广泛:如停车区, 公交车道,步行区和道 路标记
- ●高耐磨性,尤其是抵御车辆不断通过的磨损良好的抗机械性能抗 紫外线和耐化学性



Multi-layered, solvent-free low flexible polyurethane system for industrial floors and carparks; thickness 2-3 mm.

用于工业地坪以及停车库的无溶剂,多层结构低弹性聚氨酯体系;厚度2-3mm。

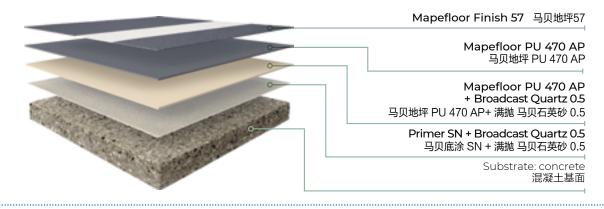



AREAS OF USE 使用范围


- Chemical and pharmaceutical industries
- Foodstuffs industry
- Mechanised warehouses
- Carparks
- ●化学和制药行业
- ●食品行业
- ●机械化仓库
- ●停车场

- Non-slip finish
- Solvent-free, eco-friendly
- Good flexibility
- Resistance to UV rays
- Medium resistance to mechanical abrasion
- Resistance to aggressive chemical products
- Resistance to scratching

- ●防滑表面
- ●无溶剂,环保
- ●良好的韧性
- ●耐紫外线
- ●中度耐机械磨损
- ●良好的耐化学性
- ●良好的抗划伤性



Solvent-free, polyurethane self-levelling system for industrial floors and carparks; thickness 2 to 4 mm. 用于工业地坪和停车库的无溶剂聚氨酯自流平系统; 厚度2至4mm。

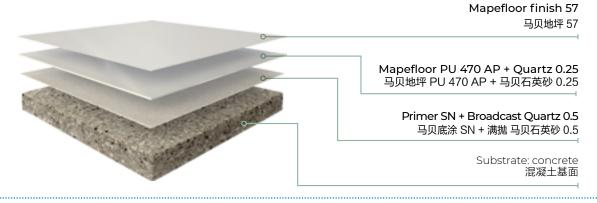



AREAS OF USE 使用范围

- Chemical and pharmaceutical industries
- Foodstuffs industry
- Delivery warehouses
 ●实验室
- Production areas
- Laboratories
- Carparks
- ●化学和制药行业
- ●食品行业
- ●配送仓库
- ●车间
- ●停车库


- Non-slip finish.
- Solvent-free, eco-friendly.
- High resistance to abrasion.
- Resistance to aggressive chemical products
- Good flexibility.
- Easy to clean and sterilize.

- ●防滑表面
- ●无溶剂,环保
- ●高度的耐磨性
- ●良好的耐化学性
- ●良好的韧性
- ●易于清洁和消毒



Self-levelling, elastic, aliphatic polyurethane resin-based system Resistance to UV rays for coating surfaces in civil surroundings; thickness 2 mm.

具有耐紫外线功能的弹性脂肪族聚氨酯自流平系统,适用于民用环境的地面涂装;厚度2mm。

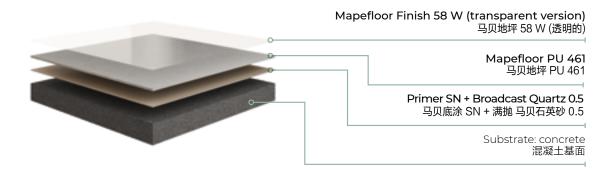



AREAS OF USE 使用范围

- Hospitals.
- Museums.
- Libraries, auditoriums. ●图书馆, 礼堂
- Shops.
- Schools, nurseries.
- Apartments.

- Offices, private studios. ●办公室, 私人工作室
- ●医院
- ●博物馆
- ●商店
- ●学校, 托儿所 ●公寓
- Waiting rooms, doctors' ●候诊室, 手术室 surgeries.

- Easy to apply.
- Very low VOC.
- Reduces noise levels.
- Resistance to UV rays.
- Seamless floors with no distribution joints.
- Greatly reduces the force of impact on the
- Elastic, soft and comfortable to walk on.
- Attractive finish.


- ●易于施工
- ●极低的VOC
- ●降低噪音
- ●抗紫外线
- ●整体无缝
- ●大大降低了对地面的 冲击力
- ●有弹性, 脚感柔软舒适
- 美观的表面





Self-levelling, elastic, flexible, aliphatic polyurethane resin-based system Resistance to UV rays for coating surfaces in civil surroundings; thickness 6 mm.

具有耐紫外线功能的弹性,柔韧性脂肪族聚氨酯地坪系统,适用于民用环境的地面涂装;厚度6mm.

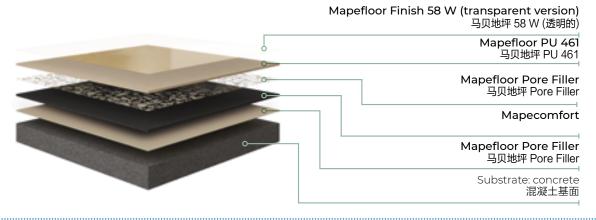



AREAS OF USE 使用范围

- Hospitals.
- Museums.
- Libraries, auditoriums. ●图书馆, 礼堂
- Shops.
- Schools, nurseries.
- Apartments.
- Waiting rooms, doctors' ●候诊室, 手术室 surgeries.
- ●医院
- ●博物馆
- ●商店
- ●学校, 托儿所
- ●公寓
- Offices, private studios. ●办公室, 私人工作室

- High level of comfort underfoot.
- Very low VOC.
- Greatly reduces the force of impact on the ground.
- Reduces noise levels.
- Resistance to UV rays.
- Seamless floors with no distribution joints.
- Elastic, soft and comfortable to walk on.
- Attractive finish.


- ●高度舒适的脚感
- ●低VOC
- ●大大降低了对地面的 冲击力
- ●降低噪音
- ●抗紫外线
- ●整体无缝
- ●有弹性, 柔软舒适
- ●美观的表面效果





Self-levelling, elastic, aromatic polyurethane resin-based system Resistance to UV rays for coating surfaces in internal surroundings; thickness 2 mm.

具有耐紫外线功能的弹性芳香族聚氨酯自流平系统,适用于民用环境的地面涂装;厚度2mm。

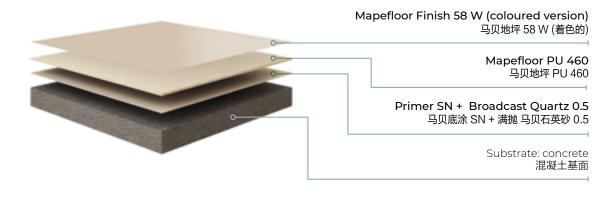



AREAS OF USE 使用范围

- Hospitals
- Museums.
- Libraries, auditoriums. ●图书馆, 礼堂
- Shops.
- Schools, nurseries.
- Apartments.
- Offices, private studios. ●办公室, 私人工作室
- Waiting rooms, doctors' ●候诊室, 手术室 surgeries.
- ●医院
- ●博物馆

- ●商店
- ●学校, 托儿所
- ●公寓


- Easy to apply.
- Very low VOC.
- Reduces noise levels.
- Resistance to UV rays.
- Seamless floors with no distribution joints.
- Greatly reduces the force of impact on the
- Elastic, soft and comfortable to walk on.
- Attractive finish.

- ●易于施工
- ●极低的VOC
- ●降低噪音
- ●抗紫外线
- ●整体无缝
- ●大大降低了对地面的 冲击力
- ●有弹性, 脚感柔软舒适
- ●美观的表面



Self-levelling, elastic, flexible, aromatic polyurethane resin-based system Resistance to UV rays for coating surfaces in internal surroundings; thickness 6 mm.

具有耐紫外线功能的弹性, 柔韧性芳香族聚氨酯地坪系统, 适用于民用环境的地面涂装; 厚度6mm.

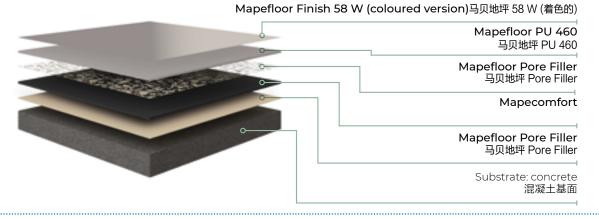



AREAS OF USE 使用范围

- Hospitals.
- Museums.
- Libraries, auditoriums. ●图书馆, 礼堂
- Shops.
- Schools, nurseries.
- Apartments.
- Offices, private studios. ●办公室, 私人工作室
- Waiting rooms, doctors' ●候诊室, 手术室 surgeries.
- ●医院
- ●博物馆
- ●商店
- ●学校, 托儿所
- ●公寓


- High level of comfort underfoot.
- Very low VOC.
- Greatly reduces the force of impact on the ground.
- Reduces noise levels.
- Resistance to UV rays.
- Seamless floors with no distribution joints.
- Elastic, soft and comfortable to walk on.
- Attractive finish.

- ●高度舒适的脚感
- ●低VOC
- ●大大降低了对地面的 冲击力
- ●降低噪音
- ●抗紫外线
- ●整体无缝
- ●有弹性, 柔软舒适
- ●美观的表面效果



Self-draining system based on aliphatic polyurethane-based binder mixed with natural aggregates (2-4 mm or 4-8 mm) for creating decorative external surfaces.

基于脂肪族聚氨酯基粘合剂与天然骨料 (2-4 mm或4-8 mm)混合而成的自排水系统,用于创用于创建装饰性外表面。

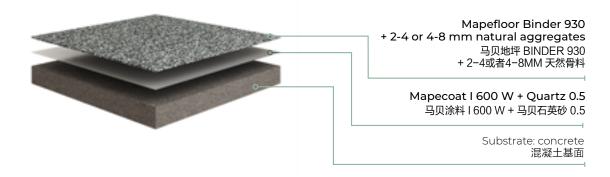



AREAS OF USE

- Decorative surfaces for ●庭院, 通道和人行道 forecourts, walkways and pavements.
- Decorative coatings for terraces, pathways and opinions are opinions and opinion colonnades.
- Decorative selfdraining coatings around swimming pools.
- Decorative flooring in internal surroundings such as exhibition halls, department stores and

- ●室外区域的装饰表 面,如铺砌地面,通道 和柱廊
- 水涂层
- ●室内环境中的装饰表 面,如展厅,百货商店 和商店



ADVANTAGES


- Pronounced non-slip finish.
- Medium resistance to abrasion
- Does not yellow.
- The coloured aggregates in the mix allow floors to be created with a highly decorative finish.
- ●完成面防滑
- ●中度的耐磨性
- ●低黄变
- ●混合的彩色骨料可以创 造出具有高度装饰性 的饰面





Epoxy system for creating highly decorative and durable floors with a "Terrazzo alla veneziana" effect; thickness approx. 10 mm.

用于制作具有"威尼斯人水磨石"效果的高度装饰性和耐用性地板的环氧树脂系统,;厚度约10mm。

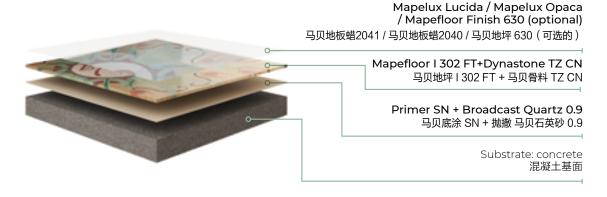



AREAS OF USE 使用范围

- Shopping centres, supermarkets.
- Shops.
- Showrooms.
- Banks, offices.
- Schools.

- Theatres and museums. ●公寓
- Apartments.

- ●购物中心, 超市 ●商店
- ●陈列室
- ●银行, 办事处
- ●学校
- ●剧院和博物馆

- Creates unique patterns and effects.
- Infinite variety of colour schemes and finishes.
- Seamless surfaces with limited number of
- High resistance to wear and abrasion for excellent durability.
- Easy to clean and maintain.

- ●创造独特的图案和 效果
- ●无限多种配色方案和 表面效果
- ●整体无缝(除非有结构 性的伸缩缝)
- ●高耐磨性, 具有出色的
- ●易于清洁和维护









官方抖音

微信公众号

马贝建筑材料(广州)有限公司 Mapei Construction Materials (Guangzhou) Co.,Ltd

エ厂 / Factory:

广东从化经济开发区丰盈路6号

No 6, Fengying Road, Guangdong Conghua Economy Development Zone, China

Tel: +86-20 8781 0701 Web: mapei.com.cn

E-mail: enquiry@mapei.com.cn

广州联络处 / Guangzhou Contact Address:

广州市越秀区沿江中路 313 号康富来国际大厦 2003-2004 室 Room. 2003-4, Hong Fu Loi International Building, No 313, Yan Jiang Zhong Road, Yuexiu District, Guangzhou, China

Tel: +86-20 8365 3489

上海联络处 / Shanghai Contact Address:

上海市闵行区新龙路399弄2号宝龙城T3栋8楼805A室 Room 805A, 8th Floor, Baolong City Block T3, No.2, Lane 399, Xinlong Road, Minhang District, Shanghai, China Tel: +86-21 6207 8088

