
Selection chart of choosing Adhesives for installing parquet







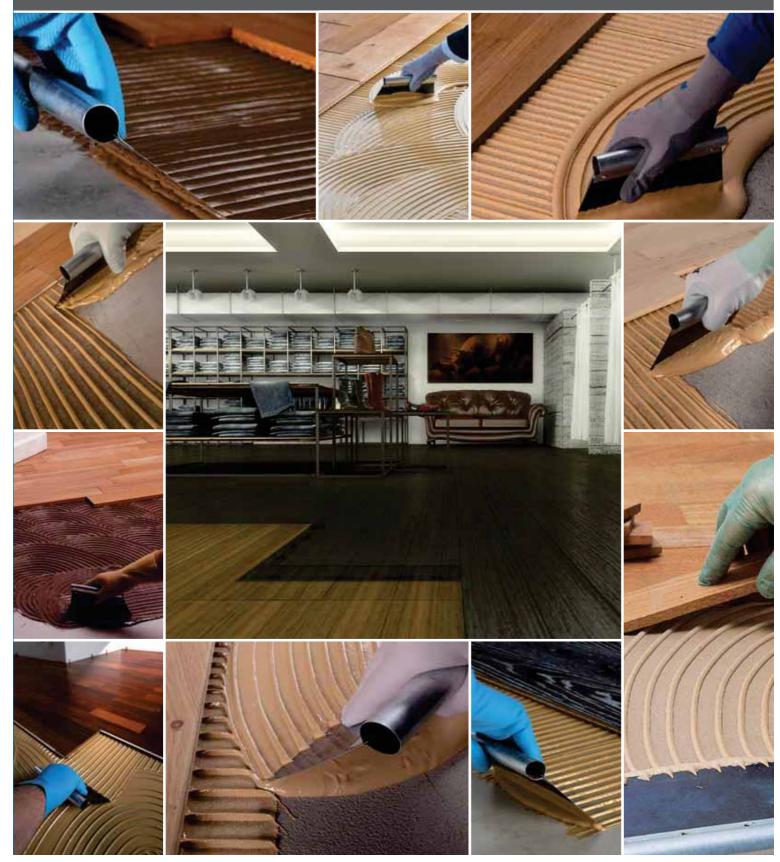

Selection chart of choosing Adhesives for installing parquet

PRIMERS

ADHESIVES

LACQUERS

OILS

MAINTENANCE

5

4


2

3

1		Consolidating cementitious and anhydrite screeds with or without heating system	Waterproofing cementitious screeds	
Primers		Consolidatin and anhydrit or without I	cemen	
	Eco Prim PU 1K			
	Eco Prim PU 1K Turbo			
	Primer MF			
	Primer MF EC Plus			

RECOMMENDED



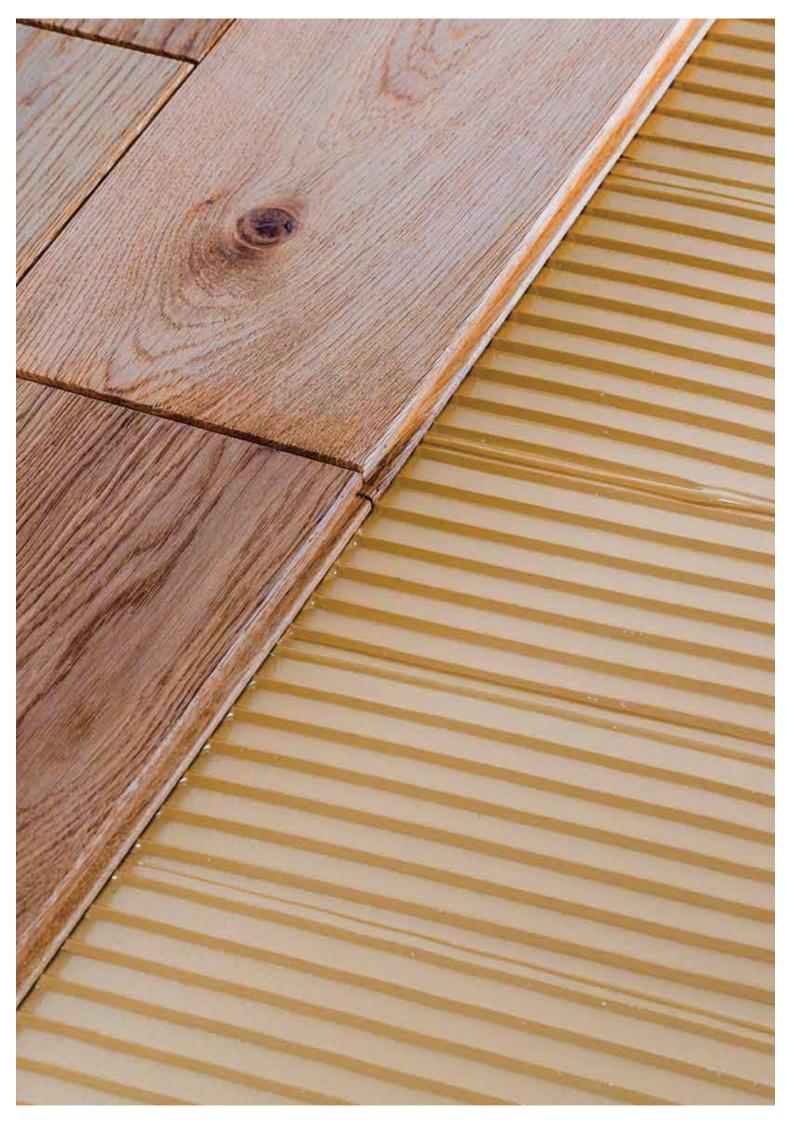

2 Adhe	esives	Large solid wooden planks with tongue and groove joints	Medium solid wooden planks with tonguet	Pre-finished flooring for large sites	Pre-finished flooring for special colours	Small solid wooden planks without tongue and groove joints	Installing external flooring	Pre-finished parquet installed with beads of adhesive	Installation of Mapesonic CR for pre-finished flooring
	Adesilex LC/R								
	Ultrabond S997 1K								
	Ultrabond Eco P909 2K								
	Ultrabond P913 2K								
	Ultrabond P902 2K								
(and a second	Lignobond								
	Ultrabond P980 1K								
	Ultrabond P990 1K							□*	
	Ultrabond Eco P992 1K								
	Ultrabond Eco S940 1K								
	Ultrabond Eco S948 1K								
	Ultrabond Eco S955 1K								
	Ultrabond S965 1K								
	Ultrabond Eco S968 1K								

3		Fire resistant system	Residential system	System with low traffic	System with medium traffic	ntense traffic	Suitable tools
Lacquers		Fire resi	Reside	System wi	System v	System with intense traffic	C)
	Ultracoat Binder						Ultracoat Steel Spatula SR 100
	Ultracoat Aqua Plus						Ultracoat Steel Spatula SR 100
	Ultracoat Universal Base						Ultracoat Roller Plus SR 180/220
	Ultracoat Premium Base						Ultracoat Roller Plus SR 180/220
	Ultracoat Toning Base						Ultracoat Roller Plus SR 180/220
	Ultracoat Easy Plus						Ultracoat Roller Finish SR 220
	Ultracoat High Traffic						Ultracoat Roller Finish SR 220
	Ultracoat Soft Touch Base						Ultracoat Roller Plus SR 220
	Ultracoat Soft Touch Finish						Ultracoat Roller Finish SR 220

RECOMMENDED




4 Oils		Wooden floors for residential use	Low intensity traffic wooden floors	Medium intensity traffic wooden floors
	Ultracoat Oil			
	Ultracoat Oil Plus		□*	□*
	Ultracoat Oil Color		□*	□*
	Ultracoat Oil Wax			
	Ultracoat Oil Care			

□ RECOMMENDED * ONLY IN COMBINATION WITH ULTRACOAT LACQUER



5 Mai	ntenance	One-or two component Maintenance 60 Gloss Lacquers	One-or two component Maintenance 10 and 30 Gloss Lacquers	Floorings treated with Ultracoat Oil , Ultracoat Oil Plus, Ultracoat Oil Color and Ultracoat Oil Wax
	Ultracoat Universal Cleaner			
	Ultracoat Clean Polish			
	Ultracoat Clean WPM			
	Ultracoat Polish Remover	□**	□**	
	Ultracoat Oil Care			

RECOMMENDED * IN ACCORDANCE WITH GLOSS ** ONLY FOR REMOVING OLD COATS OF ULTRACOAT CLEAN POLISH OR ULTRACOAT CLEAN WPM

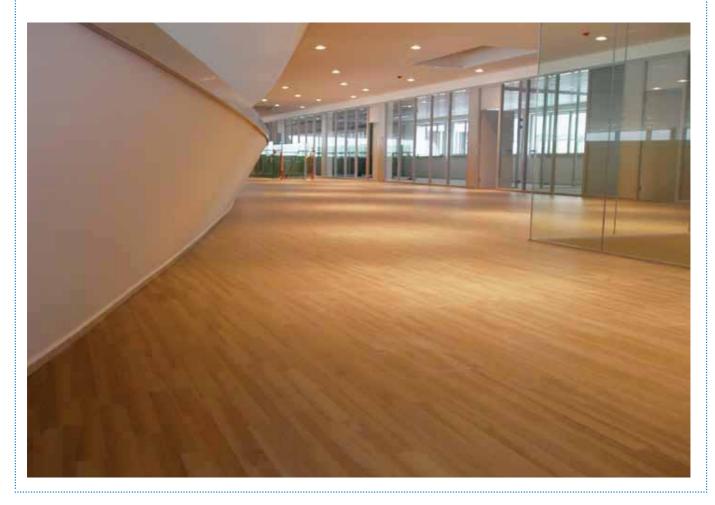

PRIMERS, BONDING PROMO-TERS, CONSOLIDATING AND WATERPROOFING PRODUCTS



Eco Prim PU 1K

One-component, solvent-free, moisture curing polyurethane primer with a very low emission level of volatile organic compounds (VOC), for consolidating and waterproofing cementitious screeds.



One-component, solvent-free, moisture curing, rapid-drying polyurethane primer with a very low emission level of volatile organic compounds (VOC), for consolidating and waterproofing cementitious screeds.

Primer MF



Two-component, solvent-free epoxy primer used as bonding promoter for products from the MAPEFLOOR range, for consolidating and waterproofing against residual damp on cementitious substrates and as anti-dust impregnator on concrete floors.

ADHESIVES AND FINISHING PRODUCTS FOR PARQUET



Quick-setting, solvent-free adhesive in water dispersion for bonding wooden floors. ADESILEX LC/R is suitable

for bonding on cementitious screeds made from MAPECEM, MAPECEM PRONTO, TOPCEM

E

a

Ultrabond P990 1K

One-component, ready-to-use, solvent-free, flexible polyurethane adhesive for all types of parquet on screeds made from MAPECEM, MAPECEM PRONTO, TOPCEM and TOPCEM PRONTO, cementitious screeds, old wooden, ceramic, marble and terrazzo floors, etc. Also suitable for heated substrates

Ultrabond S997 1K

One-component, solvent-free, ready-to-use, flexible, sililate polymer-based thixotropic adhesive for laying wooden steps and parquet mosaic.



Ultrabond P980 1K

One-component, solvent-free polyurethane adhesive with a very low emission level of volatile organic compounds (VOC), for bonding pre-finished, multilayered parquet.



Ultrabond Eco P992 1K

One-component, ready-to-use, solvent-free, flexible polyurethane adhesive with a very low emission level of volatile organic compounds (VOC) for all types of parquet on screeds made from MAPECEM, MAPECEM PRONTO, TOPCEM and TOPCEM PRONTO, cementitious screeds, old wooden ceramic, marble and terrazzo floors, etc. Also suitable for heated substrates.

Ultrabond Eco S940 1K One-component, solvent-free,

sililated polymer-based adhesive, with very low emission of volatile organic compounds (VOC).



One-component, NMP-free, water-based rapid undercoat with very low emission of volatile organic compounds (VOC), for wooden floors.



ALC:

Solvent and NMP-free, waterbased binder, mixed with wood flour filler from any type of wood, including Merbau, for grouting wooden floors. Suitable for ULTRACOAT waterbased varnishing cycles and ULTRACOAT OIL.

Ultracoat Soft

One-component, rapid drying,

Product with low emission of volatile organic compounds (VOC) and no NMP.

water-based primer for preparing wooden floors before applying ULTRACOAT SOFT TOUCH FINISH.

Touch Base

Ultracoat Binder



Ultracoat Soft Touch Finish

Two-component, water-based, 100% polyurethane varnish with no NMP and low emission of volatile organic compounds (VOC). Natural, soft finish for protecting wooden floors in residential and commercial environments.



Natural drying oil resin for treating wooden floors with an oil finish.

Ultracoat Oil

COMPLEMENTARY PRODUCTS FOR LAYING PARQUET



Ultracoat Universal Cleaner

Concentrated detergent developed for cleaning varnished and oiled wooden floors. Also suitable for routine floor cleaning operations and for particularly dirty floors



ready-to-use in dilution. developed specifically for routine maintenance work on wooden floors in residential and commercial environments treated with water-based lacquers from the ULTRACOAT range.

Ultracoat Clean WPM

.



Ready-to-use product, supplied ready-to-use in dilution, developed specifically for routine maintenance work on wooden floors in residential and commercial environments treated with matt and extra-matt water-based lacquers from the ULTRACOAT range.

Plus Solvent and NMP-free, odourless,

water-based binder, mixed with wood flour filler, for grouting wooden floors Suitable for ULTRACOAT waterbased varnishing cycles and LITRACOAT OIL

Ultracoat Aqua




Ultracoat **Universal Base**

Primer MF EC Plus



Two-component, solvent-free, low viscosity, epoxy primer with a very low emission level of volatile organic compounds (VOC), for consolidating and waterproofing cementitious substrates.

Quartz 1.2



Ultrabond P913 2K



Two-component epoxy polyurethane adhesive for medium-sized solid wooden slats and all types of pre-finished wooden floors.

Ultrabond P902 2K

Two-component epoxy polyurethane adhesive for bonding all types and sizes of parquet on screeds made from MAPECEM, MAPECEM PRONTO, TOPCEM or TOPCEM PRONTO. cementitious screeds, old wooden, ceramic, marble, and terrazzo floors, etc. Also suitable for heated substrates.

Lignobond

Two-component, water and solvent-free epoxy-polyurethane adhesive for laying parquet. Suitable for laying any size and type of wood on all substrates. Ideal for heated screeds.



.

0

Two-component, polyuretane adhesive with very low emission level of volatile organic compounds EC1 R, for all types of parquet.



Ultrabond Eco S948 1K

One-component, solvent-free sililated polymer adhesive with very low emission level of volatile organic compounds (VOC)



\$955 1K One-component, solvent-free, sililated polymer adhesive with

Ultrabond Eco

very low emission level of volatile organic compounds (VOC), for all types of parquet.



Ultrabond \$965 1K

One-component, solvent-free sililated polymer adhesive with very low emission level of volatile organic compounds (VOC), for all types of parquet.

Ultrabond Eco \$968 1K

One-component, solvent-free, sililated polymer adhesive with very low emission level of volatile organic compounds (VOC).

Ultracoat Premium Base

Two-component, NMP-free water-based undercoat with very low emission of volatile organic compounds (VOC) and high insulating capacity, for preparing solid and pre-sanded wooden floors and wooden floors under repair for water-based finishing cvcles.





Ultracoat Toning

toning undercoat with high insulating properties, very low emission of volatile organic compounds (VOC) and no NMP for preparing solid and pre-sanded wooden floors and wooden floors under repair prior to applying ULTRACOAT water-based finishing cycles.



Ultracoat Easy Plus

One-component, water-based 100% polyurethane varnish with very low emission level of volatile organic compounds (VOC) and no NMP, highly resistant to wear and abrasion, for wooden floors. Suitable for floors subject to frequent pedestrian use



Ultracoat High Traffic

Two-component, NMP-free, 100% polyurethane water-based varnish with high resistance to wear and abrasion and very low emission of volatile organic compounds (VOC), for wooden floors. Suitable for floors subject to extremely high pedestrian use.

Care

Ultracoat Oil

Natural drying resin oil in water dispersion for finishing wooden floors treated with oil.

Ultracoat Oil Plus

Low-odour urethane oil finish for wooden floors. It can be painted over with the ULTRACOAT finishes



Ultracoat Oil Color

Low-odour urethane oil finish for colouring wooden floors. It can be painted over with the ULTRACOAT finishes.





Ultracoat Polish Remover



Concentrated de-waxing solution, developed specifically for removing ULTRACOAT CLEAN POLISH / ULTRACOAT CLEAN WPM from painted wooden floors. It may also be used to remove small marks from the surface of floors treated with lacquers from the ULTRACOAT range















From the technical area menu you can view the technical documentation divided per product lines and type of document.

HEAD OFFICE MAPEI SpA Via Cafiero, 22 - 20158 Milan Tel. +39-02-37673.1 Fax +39-02-37673.214 Internet: www.mapei.com E-mail: mapei@mapei.it

