

ECO ADHESIVES FOR QUALITY LIVING

ONE-COMPONENT SILYLATED
ADHESIVES WITH VERY LOW
EMISSION OF VOLATILE
ORGANIC COMPOUNDS



Ultrabond Eco S958 1K



Technical Data	
Product identity	
Consistency:	creamy paste
Colour:	beige
EMICODE:	EC1 Plus
Shear strength according to ISO 17178:	2.3

One-component, "Hard-Elastic", silylated polymer-based adhesive with zero solvent content and very low emission of volatile organic compounds. The perfect combination of the strength of its hardness and the advantages of its elasticity, compliant with ISO 17178 standard.

WHY USE ULTRABOND ECO S 958 1K:

particularly recommended for installing solid wood flooring.



Ultrabond Eco S Plus



Technical Data	
Product identity	
Consistency:	creamy paste
Colour:	ivory
EMICODE:	EC1 Plus

One-component, silylated polymer-based adhesive of new generation and technology with very low emission of volatile organic compounds and zero methanol emissions.

WHY USE ULTRABOND ECO S PLUS:

zero methanol emissions; safer for the health of the installer and greater respect for the environment.



ONE-COMPONENT SILYLATED ADHESIVES

The Mapei range of silylated polymer-based adhesives contains no water, solvent, amines and epoxy resin and has very low emission of volatile organic compounds (VOC).


The emission of methanol is currently a much-discussed subject. All Mapei silylated adhesives comply with highly restrictive German standards and are all rigorously below the emission limits specified for methanol. In particular, with **Ultrabond Eco S Plus** Mapei has even anticipated certification guidelines as it has zero methanol emissions.

The adhesives from the Mapei range comply with the requirements of 14293 European standards in the Soft and Hard categories and ISO in the Hard and Hard-Elastic category.

The adhesives from the Mapei range meet all the needs of users and are suitable for installing all types of wooden flooring, from pre-finished engineered flooring to all formats and types of solid wooden flooring, on any type of substrate suitable for wooden flooring.



Ultrabond Eco S958 1K

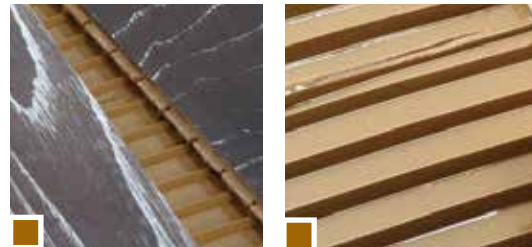

Technical Data	
Product identity	
Consistency:	creamy paste
Colour:	beige
EMICODE:	EC1 Plus
Shear strength according to ISO 17178:	2.3

One-component, "Hard-Elastic", silylated polymer-based adhesive with zero solvent content and very low emission of volatile organic compounds. The perfect combination of the strength of its hardness and the advantages of its elasticity, compliant with ISO 17178 standard.

WHY USE ULTRABOND ECO S 958 1K:

particularly recommended for installing solid wood flooring.



Ultrabond Eco S Plus



Technical Data	
Product identity	
Consistency:	creamy paste
Colour:	ivory
EMICODE:	EC1 Plus

One-component, silylated polymer-based adhesive of new generation and technology with very low emission of volatile organic compounds and zero methanol emissions.

WHY USE ULTRABOND ECO S PLUS:

zero methanol emissions; safer for the health of the installer and greater respect for the environment.



Ultrabond Eco S Lite



Technical Data	
Product identity	
Consistency:	creamy paste
Colour:	light grey
EMICODE:	EC1 Plus

One-component, lightweight, silylated polymer-based adhesive with zero solvent content and very low emission of volatile organic compounds.

WHY USE ULTRABOND ECO S LITE:

very low weight density leading to lower consumption rates per square metre during application, one bucket weights 40% less than traditional buckets.



1 **Ultralite technology:** buckets of **Ultrabond Eco S Lite** have the same volume but weigh less than bags of conventional adhesive. This makes handling easier and savings in transport costs. Moreover, the yield is higher.





Easy to apply, less effort for the installer.



Ideal for installing any type of wooden floor.



PROJECTS

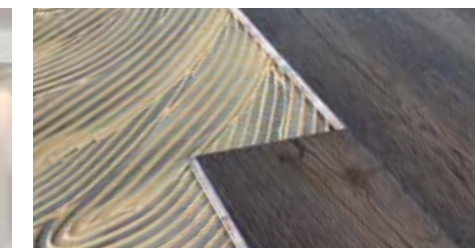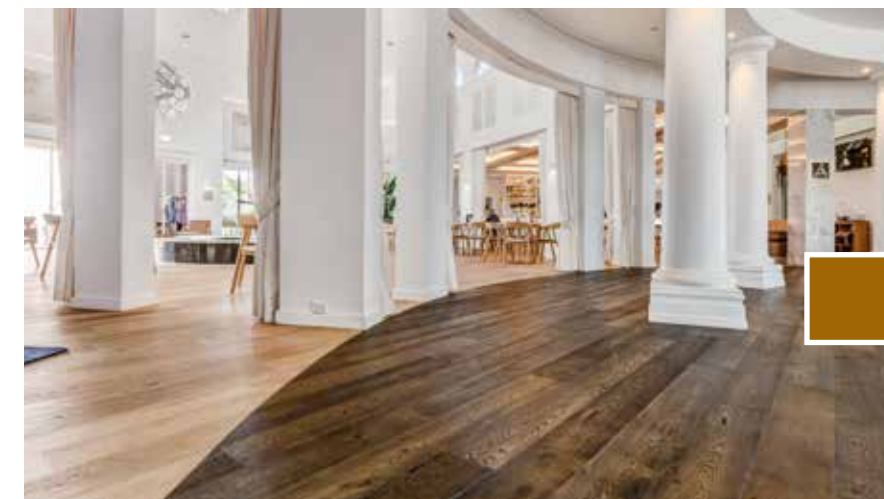

LINKS HOPE ISLAND GOLF CLUB - Gold Coast - Australia

Mapei products were used in this renowned Golf Club in Hope Island, Australia to install and maintain wood flooring during and after the refurbishment and extension work on the clubhouse, designed to host a 5-star luxury hotel.



FHNW UNIVERSITY
Muttensz - Switzerland



Amongst the various works undertaken inside this ultra-modern university, the one that stands out, apart from the installation of ceramic and resilient flooring, is the 20,000 m² of wood flooring installed with **Ultrabond ECO S940 1K** after levelling off the substrates with **Ultraplan Maxi**.



UNIVERSITY OF PADUA
Padua - Italy

In the new site of the Humanistic Studies Faculty of the University of Padua, more than 13,000 m² of wood flooring were installed with **Ultrabond P913** and treated with varnishes from the **Ultracoat** Line. What is more, this site is one of the biggest projects undertaken by a single product Line in Italy this year.

EVERYTHING'S OK WITH MAPEI

HEAD OFFICE

MAPEI SpA

Via Cafiero, 22 - 20158 Milan

Tel. +39-02-37673.1

Fax +39-02-37673.214

www.mapei.com

mapei@mapei.it

