



GENERAL CATALOGUE

September 2023

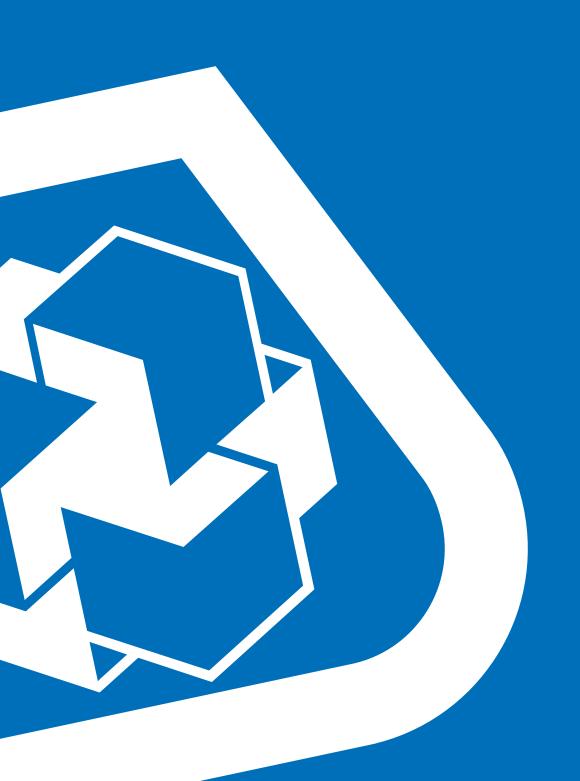

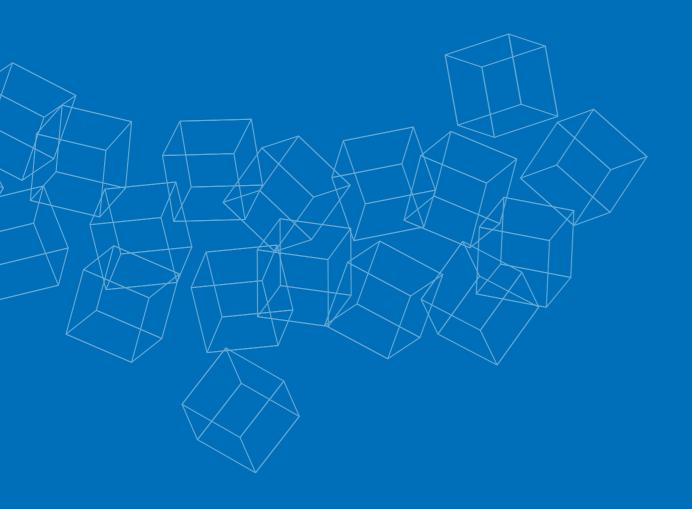

GENERAL CATALOGUE

September 2023

Welcome to the interactive Mapei General Catalogue

With this tool, you will find the products and the insights you need.

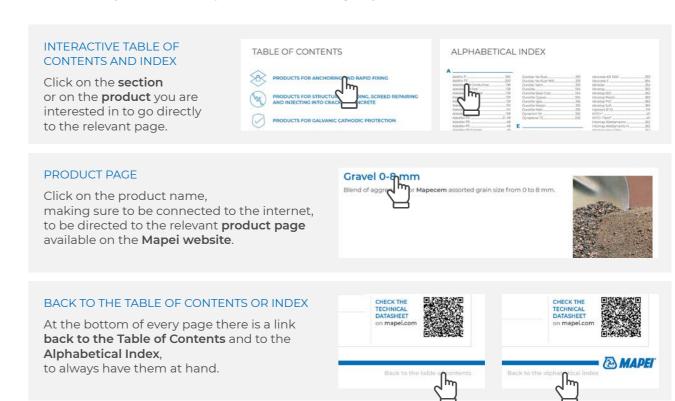


TABLE OF CONTENTS

	SCREEDS AND SMOOTHING COMPOUNDS	11
	1. Products for screeds	12
	2. Products for traditional screeds	
	Products for smoothing	
	4. Products for levelling substrates	∠∠
	PRODUCTS FOR SOUNDPROOFING	25
	TRODUCTS FOR SOUNDERROOTING	25
	PRIMERS, BONDING PROMOTERS CONSOLIDATING	
=====	AND WATERPROOFING PRODUCTS	31
	ADHESIVES FOR CERAMIC TILES, STONE MATERIAL AND MOSAICS	47
	Hydraulic binders-based adhesives	
= }\\	Synthetic resin-based adhesives	
	3. Reactive adhesives	
	GROUTS FOR CERAMIC TILES, STONE MATERIAL AND MOSAICS	61
+	1. Cementitious grouts	
+ () W	2. Epoxy grouts	
	3. Ready-to-use paste products	65
	PROPILETS FOR CLEANING MAINTAINING	
	PRODUCTS FOR CLEANING, MAINTAINING AND PROTECTING SURFACES	69
* _	Cleaning solutions	
	2. Protectors	74
	3. Complementary products	77
	SYSTEMS FOR LAYING AND GROUTING ARCHITECTURAL STONE PAVING	81
(VIIIXX)	ARCHITECTORAL STONE PAVING	OI .
	ELASTIC SEALANTS AND ADHESIVES	89
	Acetic silicone sealants	
	Acetic stillcore sealants 2. Polyurethane sealants and adhesives	
	3. Neutral silicone sealants	95
	4. Hybrid sealants and adhesives	
	Other sealants Adhesives for PVC	
	7. Accessories and primers for sealants	102
	Polyurethane foams Accessories for foams	
	9. Accessories for foaths	
\\\\	ADHESIVES AND FINISHING PRODUCTS FOR WOODEN FLOORS	115
	Adhesives for wooden and laminate floors	115
////	Paints, fillers, base coats and coloured sealants for parquet	
	· · · · · · · · · · · · · · · · · · ·	
	ADHESIVES FOR RESILIENT, LVT AND TEXTILE COVERINGS	133
<u></u>	Adhesives in water dispersion	
	2. Reactive adhesives	144
	Polychloroprenic and elastomeric contact adhesives	
	Powder adhesives Cementitous adhesives	
	6. Adhesive strips	149
	7. Adhesives for synthetic grass	149

	COMPLEMENTARY PRODUCTS FOR CERAMIC TILES, STONE MATERIAL, PARQUET, RESILIENT AND TEXTILE COVERINGS 1. Complementary products for ceramic tiles and stone material	165
	PRODUCTS FOR RESIN AND CEMENTITIOUS FLOORS 1. Resin-based products	202
//! \\	PRODUCTS FOR REPAIRING ASPHALT AND HIGHWAY MAINTENANCE	217
	PRODUCTS FOR THE RESTORATION OF MASONRY BUILDINGS 1. Consolidating various types of weak and crumbly substrates" (porous stone, brickwork, tuff, installation mortar, render, etc.) By impregnating	225 225 227 229 231 232 232 236 237
	REPAIRING, CONSOLIDATING AND STRENGTHENING WOODEN STRUCTURES	239
H H	ADHESIVES AND SMOOTHING COMPOUNDS FOR CELLULAR CONCRETE BLOCKS	243
	PRODUCTS FOR THE RESTORATION OF CONCRETE 1. Protection of steel reinforcement rods	
	WATER-REPELLENT PRODUCTS FOR THE PROTECTION OF CONCRETE	261
	RENDERING AND INSTALLATION MORTARS	265
5/3/	SMOOTHING AND PROTECTIVE PRODUCTS FOR CONCRETE AND DENDED SURFACES	269



TABLE OF CONTENTS

	PRODUCTS FOR ANCHORING AND RAPID FIXING	279
	PRODUCTS FOR STRUCTURAL BONDING, SCREED REPAIRING AND INJECTING INTO CRACKED CONCRETE	289
	PRODUCTS FOR GALVANIC CATHODIC PROTECTION	295
**	COMPOSITE SYSTEMS FOR STRUCTURAL STRENGTHENING 1. Products for composite systems for structural strengthening	320
***	PRODUCTS EXTERNAL INSULATION SYSTEMS 1. Adhesives and smoothing compounds	323 324 326
Caro	PRODUCTS FOR TREATING ASBESTOS CEMENT SLABS	331
	WALL PROTECTIVE AND DECORATIVE COATINGS	335
<u>\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\</u>	PRODUCTS FOR WATERPROOFING 1. Waterproofing products for underground structures	371
	ADMIXTURES FOR CONCRETE 1. Admixtures for concrete	409 410 411
	AGGREGATES AND MORTARS FOR THE BUILDING INDUSTRY 1. Mortars for the building industry	419 420 423 423
++++++	THE GREAT WORKS MAPEI	429
	MAPEI HEAD OFFICES AROUND THE WORLD	439

ALPHABETICAL INDEX

320 Mesh	206		
		Dursilac Base Filler	
Additix P	771	Dursilac Gloss	
Additix PE		Dursilac Matt	
Adesilex G19 Conductive		Dursilac No Rust	
Adesilex G19 Fast		Dursilac No Rust WB	
Adesilex G19 FR Fast		Dursilac Satin	
		Dursilite	
Adesilex G20		Dursilite Base Coat	
Adesilex G20 Fast		Dursilite Gypsos	3
Adesilex LC/R		Dursilite Igea	3
Adesilex LP		Dursilite Level	3
Adesilex MT32		Dursilite Master	
Adesilex P4	22, 48	Dursilite Matt	7
Adesilex P8	48	Dynamon SX	
Adesilex P9	48	Dynastone TZ	
Adesilex P9 Express		Dyriastorie 12	∠
Adesilex P10			
Adesilex P22			
Adesilex PG1		FCO D*	,
	,	ECO-Dreno*	
Adesilex PG1 Rapido	,	Eco Prim Grip Plus	
Adesilex PG2		Eco Prim PU 1K	
Adesilex PG4		Eco Prim PU 1K Turbo	
Adesilex PVC		Eco Prim T Easy	
Adesilex PVC HP		Eco Prim T Plus	
Adesilex V4	134	Eco Prim T Pro	
Adesilex VS45	134	Elastocolor Net	3
Adesilex VZ	148	Elastocolor Paint	
Adesivil D3		Elastocolor Pittura Plus	
Antipluviol	336	Elastocolor Primer	
Antipluviol S		Elastocolor Rasante	
Antipluviol W			
		Elastocolor Rasante SF	
Aquacol T		Elastocolor Tonachino Plus	
Aquaflex Primer		Elastocolor Waterproof	3
Aquaflex Roof		Elastorapid	
Aquaflex Roof HR	372	Epojet	291, 3
Aquaflex Roof Plus	372	Epojet LV	
Aquaflex S 1K	373	Eporip	34, 2
Aquaflex System	332, 373	Eporip SCR	
		Eporip Turbo	
		Epoxy Speed	
BEtonFLuid*	/20	Expancrete Plus	
		· ·	
Biblock		Expanfluid	
BIOstabilitura*	416	EXTRABETON RCK50*	4
Cablaiat	(00)		
Cablejet		Fiberplan	
CALCESTRUZZO RCK30*.		Fibre HPC	3
CALCESTRUZZO RCK40*.		FIBROmalta*	
Carboplate		FIBROstabilitura*	
Carboplate W	301	Fix & Grout Brick	
Carbotube	301	Flexcolor	
Cleaner H	169		
Cleaner L	169	Flexcolor 4 LVT	
Colorite Beton		FRANTUMATA*	
Colorite Performance		Fugolastic	
Color Paving Admix		•	
Color Paving Binder	TIZ		
Consolidante 8020		Glicovil Decor	1
Consolidante ETS	224	Granirapid	50, 1
Consolidante ETS WR	224	Grassello di CALCE*	
Copper Band		Gravel 0-8 mm	
1 1		Gravel 0-15	
		Gravel 3-5	
Drain Front		Gravel 6-10	
Drain Vertical/Drain Latera		Gravel Bardiglio CENE Grey 2-4	
Dreno*	421	Gravel Carrara White 2-4 mm	
Duresil EB	270	Gravel Ebony Black 2-4 mm	2

		н	
ilac Base Filler	337	HR10 Fibro*	417
ilac Gloss	338	HR15*	417
ilac Matt		I	
ilac No Rust			
ilac No Rust WB		Idrocrete DM	
ilac Satin		Idrocrete KR 1000	
ilite		Idrocrete S	
ilite Base Coat		Idrosilex	
ilite Gypsos		Idrostop	
ilite Igea ilite Level		Idrostop B25Idrostop Mastic	
ilite Master		Idrostop PVC	790
ilite Matt		Idrostop Soft	780
mon SX		Injectors Ø 23	320
stone TZ		INTO+*	4]9
	207	INTO+ Fibro*	
		Intomap Allettamento	
		Intomap Allettamento H	266
Dreno*	421	Intomap Maxi Fibro	266
Prim Grip Plus		Intomap R2	
Prim PU 1K		Intomap R2 Fibro	267
Prim PU 1K Turbo		Isamite	374
Prim T Easy		Isolastic	50
Prim T Plus			
Prim T Pro		K	
ocolor Net		Kerabond	50
ocolor Paint		Kerabond Easy	
ocolor Pittura Plus ocolor Primer		Kerabond Plus	
ocolor Primer ocolor Rasante		Kerabond T	
ocolor Rasante SF		Keracolor FF	
ocolor Tonachino Plus		Keracolor GG	62
ocolor Waterproof		Keracolor SF	63
orapid		Keracrete	52
et		Keraflex	
et LV	,	Keraflex Easy S1 Zero	52
ip	34, 292	Keraflex Extra S1 Zero	53
ip SCR	34, 292	Keraflex Maxi S1 Zero	
ip Turbo	35, 292	Keralastic	
y Speed	208	Keralastic T	
ncrete Plus		KerapoxyKerapoxy Adhesive	
nfluid		Kerapoxy CQ	
ABETON RCK50*	422	Kerapoxy Easy Design	
		Kerapoxy IEG	
		Keraquick Maxi S1	
plan	14	Keraset	
HPC			
Omalta*		L	
Ostabilitura*		Lamanaan	200
Grout Brick		Lampocem Lamposilex	
olor	65	Latex Plus	
olor 4 LVT	165	Lignobond	
NTUMATA*	425	Livigum	
lastic	62		
		Malech	35 344
vil Decor	148	Malta+ Fibro*	
irapid		MaltaBASTARDA*	
sello di CALCE*		MaltaVISTA*	
el 0-8 mm		Mapeair AE1	
el 0-15		Mapeair LA/P	
el 3-5	250	Mape-Antique Allettamento	
el 6-10		Mape-Antique Colabile	
I Dandiella CENE Ceau 2	/ 200	A 4 4 4 5 5 1 4 4 5	0



Mape-Antique Ecolastic....

Mape-Antique ECO Rasante Civile...... 233

Mape-Antique Eco Rinzaffo.....

Duresil EB.....

ALPHABETICAL INDEX

Mape-Antique F212	25
Mape-Antique FC Civile2	
Mape-Antique FC Grosso2	
Mape-Antique FC Ultrafine2	55
Mape-Antique I2	
Mape-Antique I-152	
Mape-Antique Intonaco NHL2	231
Mape-Antique LC2	
Mape-Antique MC2	
Mape-Artique MC2	25
Mape-Antique MC Macchina2	
Mape-Antique NHL ECO Rasante Grosso2	
Mape-Antique NHL ECO Raso Fix 2	37
Mape-Antique NHL	
ECO Restaura231, 23	34
Mape-Antique NHL ECO Rinzaffo 23	
Mape-Antique NHL ECO Risana2	
Mape-Antique Strutturale NHL232,2	
Mape-Asphalt Repair 0/82	18
Mapeband38	39
Mapeband Easy39	
Mapeband Flex Roll39	
Mapeband PE 12039	
Mapeband SA3	
Mapeband TPE3	91
Mapecem	12
Mapecem Pronto	
Mapecoat 4 LVT	
Mapecoat ACT Matt3	45
Mapecoat ACT Satin3	45
Mapecoat AF34	45
Mapecoat Decor Easy1	66
Mapecoat Decor Protection10	
Mapecoat DW 25178, 34	
Mapecoat EPN 241	
Mapecoat Filler3	74
Mapecoat Filler 2505	75
Mapecoat Filler 250	
Mapecoat I 241	78
Mapecoat 241' Mapecoat 62 W1'	78 79
Mapecoat I 24	78 79 79
Mapecoat I 24	78 79 79 79
Mapecoat I 24	78 79 79 79 30
Mapecoat I 24	78 79 79 79 30
Mapecoat I 24	78 79 79 79 30
Mapecoat I 24	78 79 79 79 30 30 75
Mapecoat I 24	78 79 79 79 30 30 75
Mapecoat I 24 1 Mapecoat I 62 W 1 Mapecoat I 600 W 36, 1 Mapecoat I 600 W Lucido 36, 1 Mapecoat I 620 W 18 Mapecoat I 650 WT 18 Mapecoat PU 20 N 3 Mapecoat TC 3 Mapecoat Universal 18	78 79 79 79 30 30 75 75
Mapecoat I 24 1 Mapecoat I 62 W 1 Mapecoat I 600 W 36, 1 Mapecoat I 600 W Lucido 36, 1 Mapecoat I 620 W 18 Mapecoat I 650 WT 18 Mapecoat PU 20 N 3 Mapecoat TC 3 Mapecoat Universal 18 Mapecoat Wet & Dry R11 10	78 79 79 79 30 30 75 75 30 66
Mapecoat I 24 1 Mapecoat I 62 W 1 Mapecoat I 600 W 36, 1 Mapecoat I 600 W Lucido 36, 1 Mapecoat I 620 W 18 Mapecoat I 650 WT 18 Mapecoat PU 20 N 3 Mapecoat TC 3 Mapecoat Universal 18 Mapecoat Wet & Dry R11 10 Mapecolor CPU+ 1	78 79 79 79 30 30 75 75 80 66 81
Mapecoat I 24 1 Mapecoat I 62 W 1 Mapecoat I 600 W 36, 1 Mapecoat I 600 W Lucido 36, 1 Mapecoat I 620 W 18 Mapecoat I 650 WT 18 Mapecoat PU 20 N 3 Mapecoat TC 3 Mapecoat Universal 18 Mapecoat Wet & Dry R11 10 Mapecolor CPU+ 1 Mapecolor Metallic 10	78 79 79 79 30 75 75 80 66 81 65
Mapecoat I 24 1 Mapecoat I 62 W 1 Mapecoat I 600 W 36, 1 Mapecoat I 600 W Lucido 36, 1 Mapecoat I 620 W 18 Mapecoat I 650 WT 18 Mapecoat PU 20 N 3 Mapecoat TC 3 Mapecoat Universal 18 Mapecoat Wet & Dry R11 10 Mapecolor CPU+ 1 Mapecolor Metallic 10	78 79 79 79 30 75 75 80 66 81 65
Mapecoat I 24 1 Mapecoat I 62 W 36, 1 Mapecoat I 600 W 36, 1 Mapecoat I 620 W 18 Mapecoat I 650 WT 18 Mapecoat PU 20 N 3 Mapecoat TC 3 Mapecoat Universal 18 Mapecoat Wet & Dry R11 10 Mapecolor CPU+ 1 Mapecolor Paste 1	78 79 79 79 30 75 75 30 66 81 65 81
Mapecoat I 24 1 Mapecoat I 62 W 1 Mapecoat I 600 W 36, 1 Mapecoat I 600 W Lucido 36, 1 Mapecoat I 620 W 18 Mapecoat I 650 WT 18 Mapecoat PU 20 N 3 Mapecoat TC 3 Mapecoat Universal 18 Mapecoat Wet & Dry R11 10 Mapecolor CPU+ 1 Mapecolor Paste 1 Mapecolor Pigment 4	78 79 79 79 30 75 75 80 66 81 65 81
Mapecoat I 24 1 Mapecoat I 62 W 36, 1 Mapecoat I 600 W 36, 1 Mapecoat I 600 W Lucido 36, 1 Mapecoat I 650 WT 18 Mapecoat PU 20 N 3 Mapecoat TC 3 Mapecoat Universal 18 Mapecoat Wet & Dry R11 10 Mapecolor CPU+ 1 Mapecolor Paste 1 Mapecolor Pigment 4 Mapecomfort FL 20	78 79 79 30 75 75 80 66 81 412
Mapecoat I 24 1 Mapecoat I 62 W 1 Mapecoat I 600 W 36, 1 Mapecoat I 600 W Lucido 36, 1 Mapecoat I 650 WT 18 Mapecoat PU 20 N 3 Mapecoat TC 3 Mapecoat Universal 18 Mapecoat Wet & Dry R11 10 Mapecolor CPU+ 1 Mapecolor Paste 1 Mapecolor Pigment 4 Mapecomfort FL 20 Mapecontact Plus 1	78 79 79 79 80 75 75 80 66 81 65 81 12 94
Mapecoat I 24 1' Mapecoat I 62 W 1' Mapecoat I 600 W 36, 1' Mapecoat I 620 W 18 Mapecoat I 650 WT 18 Mapecoat PU 20 N 3 Mapecoat TC 3 Mapecoat Universal 18 Mapecoat Wet & Dry R11 10 Mapecolor CPU+ 1 Mapecolor Paste 1 Mapecolor Pigment 4 Mapeconfort FL 20 Mapecontact Plus 1 Mapecrete Creme Protection 1	78 79 79 79 30 75 75 80 66 81 62 94 49
Mapecoat I 24 1 Mapecoat I 62 W 1 Mapecoat I 600 W 36, 1 Mapecoat I 600 W Lucido 36, 1 Mapecoat I 650 WT 18 Mapecoat PU 20 N 3 Mapecoat TC 3 Mapecoat Universal 18 Mapecoat Wet & Dry R11 10 Mapecolor CPU+ 1 Mapecolor Paste 1 Mapecolor Pigment 4 Mapecomfort FL 20 Mapecontact Plus 1	78 79 79 79 30 75 75 80 66 81 62 94 49
Mapecoat I 24 1 Mapecoat I 62 W 1 Mapecoat I 600 W 36, 1 Mapecoat I 600 W Lucido 36, 1 Mapecoat I 620 W 18 Mapecoat PU 20 N 3 Mapecoat TC 3 Mapecoat Universal 18 Mapecoat Wet & Dry R11 10 Mapecolor CPU+ 1 Mapecolor Paste 1 Mapecolor Pigment 4 Mapecontact Plus 1 Mapecrete Creme Protection 1 Mapecrete Drain P 4	78 79 79 30 75 75 80 66 81 62 99 81 03
Mapecoat I 24 1 Mapecoat I 62 W 1 Mapecoat I 600 W 36, 1 Mapecoat I 600 W Lucido 36, 1 Mapecoat I 650 WT 18 Mapecoat PU 20 N 3 Mapecoat TC 3 Mapecoat Wet & Dry RII 10 Mapecolor CPU+ 1 Mapecolor Paste 1 Mapecolor Pigment 4 Mapecomfort FL 20 Mapecrete Creme Protection 1 Mapecrete Drain P 4 Mapecrete LI Hardener 1	78 79 79 79 30 75 75 86 81 65 81 94 94 91 82
Mapecoat I 24 1' Mapecoat I 62 W 1' Mapecoat I 600 W 36, 1' Mapecoat I 600 W Lucido 36, 1' Mapecoat I 650 WT 18 Mapecoat PU 20 N 3 Mapecoat TC 3 Mapecoat Universal 18 Mapecoat Wet & Dry R11 10 Mapecolor CPU+ 1 Mapecolor Paste 1 Mapecolor Pigment 24 Mapecontact Plus 1 Mapecrete Creme Protection 1 Mapecrete Drain P 4 Mapecrete Li Hardener 1 Mapecrete Lithium + 16	78 79 79 30 75 75 30 66 81 65 81 82 82 82
Mapecoat I 24 1 Mapecoat I 62 W 1 Mapecoat I 600 W 36, 1 Mapecoat I 600 W Lucido 36, 1 Mapecoat I 650 WT 18 Mapecoat PU 20 N 3 Mapecoat TC 3 Mapecoat Wet & Dry RII 10 Mapecolor CPU+ 1 Mapecolor Paste 1 Mapecolor Pigment 4 Mapecomfort FL 20 Mapecrete Creme Protection 1 Mapecrete Drain P 4 Mapecrete Li Hardener 1 Mapecrete Lithium + 1 Mapecrete Lithium Cure 1	78 79 79 79 30 75 75 80 66 81 42 9 49 82 82 82
Mapecoat I 24 1 Mapecoat I 62 W 36, 1 Mapecoat I 600 W 36, 1 Mapecoat I 600 W 18 Mapecoat I 650 WT 18 Mapecoat PU 20 N 3 Mapecoat TC 3 Mapecoat Wet & Dry RII 10 Mapecolor CPU+ 1 Mapecolor Paste 1 Mapecolor Pigment 4 Mapecontact Plus 1 Mapecrete Creme Protection 1 Mapecrete Li Hardener 1 Mapecrete Lithium + 1 Mapecrete Lithium Protector 1	78 79 79 79 30 75 75 86 81 81 82 82 82 83
Mapecoat I 24 1 Mapecoat I 62 W 1 Mapecoat I 600 W 36, 1 Mapecoat I 600 W Lucido 36, 1 Mapecoat I 620 W 18 Mapecoat I 650 WT 18 Mapecoat PU 20 N 3 Mapecoat TC 3 Mapecoat Wet & Dry RII 10 Mapecolor CPU+ 1 Mapecolor Paste 1 Mapecolor Pigment 2 Mapeconfort FL 20 Mapecrete Creme Protection 1 Mapecrete Li Hardener 1 Mapecrete Lithium + 1 Mapecrete Stain Protection 1	78 79 79 79 30 30 75 30 66 81 65 81 82 82 82 83 83
Mapecoat I 24 1 Mapecoat I 62 W 36, 1 Mapecoat I 600 W 36, 1 Mapecoat I 600 W 18 Mapecoat I 650 WT 18 Mapecoat PU 20 N 3 Mapecoat TC 3 Mapecoat Wet & Dry RII 10 Mapecolor CPU+ 1 Mapecolor Paste 1 Mapecolor Pigment 4 Mapecontact Plus 1 Mapecrete Creme Protection 1 Mapecrete Li Hardener 1 Mapecrete Lithium + 1 Mapecrete Lithium Protector 1	78 79 79 79 30 30 75 30 66 81 65 81 82 82 82 83 83
Mapecoat I 24 1' Mapecoat I 62 W 1' Mapecoat I 600 W 36, 1' Mapecoat I 600 W Lucido 36, 1' Mapecoat I 650 WT 18 Mapecoat PU 20 N 3 Mapecoat TC 3 Mapecoat Universal 18 Mapecoat Wet & Dry RII 10 Mapecolor CPU+ 1 Mapecolor Paste 1 Mapecolor Pigment 2 Mapecomfort FL 20 Mapecrete Creme Protection 1 Mapecrete Drain P 4 Mapecrete Li Hardener 1 Mapecrete Lithium Cure 1 Mapecrete Stain Protection 1 Mapecrete U-Protector 1	78 79 79 79 30 75 75 80 65 81 81 82 82 83 83 83
Mapecoat I 24 1 Mapecoat I 600 W 36, 1 Mapecoat I 600 W 36, 1 Mapecoat I 600 W 16 Mapecoat I 650 WT 18 Mapecoat PU 20 N 3 Mapecoat TC 3 Mapecoat Universal 18 Mapecoat Wet & Dry RII 10 Mapecolor CPU+ 1 Mapecolor Paste 1 Mapecolor Pigment 2 Mapeconfort FL 20 Mapecrete Creme Protection 1 Mapecrete Li Hardener 1 Mapecrete Lithium + 1 Mapecrete Stain Protection 1 Mapecrete U-Protector 1 Mapecrete U-Protector 1 Mapecrete U-Protector 1	78 79 79 79 30 75 75 30 66 81 65 81 82 82 83 83 83 35
Mapecoat I 24 1' Mapecoat I 600 W 36, 1' Mapecoat I 600 W Lucido 36, 1' Mapecoat I 620 W 18 Mapecoat I 650 WT 18 Mapecoat PU 20 N 3 Mapecoat TC 3 Mapecoat Universal 18 Mapecoat Wet & Dry R11 10 Mapecolor CPU+ 1 Mapecolor Paste 1 Mapecolor Pigment 4 Mapeconfort FL 20 Mapecontact Plus 1- Mapecrete Creme Protection 1- Mapecrete Lithium + 1- Mapecrete Lithium Cure 1- Mapecrete Stain Protection 1- Mapecrete U-Protector 1- Mapecrete U-Protector 1- Mapecure E 1-	78 79 79 79 30 75 75 30 66 81 65 81 82 82 83 83 83 411
Mapecoat I 24 1 Mapecoat I 600 W 36, 1 Mapecoat I 600 W Lucido 36, 1 Mapecoat I 620 W 18 Mapecoat I 650 WT 18 Mapecoat PU 20 N 3 Mapecoat Universal 18 Mapecoat Wet & Dry R11 10 Mapecolor CPU+ 1 Mapecolor Paste 1 Mapecolor Pigment 4 Mapeconfort FL 20 Mapecontact Plus 1 Mapecrete Creme Protection 1 Mapecrete Li Hardener 1 Mapecrete Lithium Cure 1 Mapecrete Stain Protection 1 Mapecrete Stain Protection 1 Mapecrete U-Protector 1 Mapecure E 2 Mapecure E 2 Mapecure S 2	78 79 79 79 30 75 75 36 81 65 81 81 82 83 83 83 83 83 84 81 81 81 82 83 83 84 81 81 81 81 81 81 81 81 81 81 81 81 81
Mapecoat I 24 1 Mapecoat I 600 W 36, 1 Mapecoat I 600 W Lucido 36, 1 Mapecoat I 620 W 18 Mapecoat I 650 WT 18 Mapecoat PU 20 N 3 Mapecoat Universal 18 Mapecoat Wet & Dry R11 10 Mapecolor CPU+ 1 Mapecolor Paste 1 Mapecolor Pigment 4 Mapeconfort FL 20 Mapecontact Plus 1 Mapecrete Creme Protection 1 Mapecrete Li Hardener 1 Mapecrete Lithium + 1 Mapecrete Stain Protection 1 Mapecrete U-Protector 1 Mapecrete U-Protector 1 Mapecure E 4 Mapecure SRA 251, 4	78 79 79 79 30 37 75 30 66 81 41 82 83 83 83 83 83 83 83 83 83 83 83 83 83
Mapecoat I 24 1' Mapecoat I 62 W 1' Mapecoat I 600 W 36, 1' Mapecoat I 600 W Lucido 36, 1' Mapecoat I 650 WT 18 Mapecoat I 650 WT 18 Mapecoat PU 20 N 3 Mapecoat Universal 18 Mapecoat Wet & Dry R11 10 Mapecolor CPU+ 1 Mapecolor Metallic 1 Mapecolor Paste 1 Mapecolor Pigment 4 Mapecomfort FL 20 Mapecontact Plus 1- Mapecrete Creme Protection 1- Mapecrete Li Hardener 1- Mapecrete Lithium + 1- Mapecrete Stain Protection 1- Mapecrete U-Protector 1- Mapecure E 1- Mapecure SRA 251, 4 Mapecure WG 251, 4	78 79 79 79 30 75 75 30 66 81 65 81 82 83 83 83 83 411 941 941
Mapecoat I 24 1' Mapecoat I 62 W 1' Mapecoat I 600 W 36, 1' Mapecoat I 600 W Lucido 36, 1' Mapecoat I 620 W 18 Mapecoat I 650 WT 18 Mapecoat PU 20 N 3 Mapecoat Universal 18 Mapecoat Wet & Dry R11 10 Mapecolor CPU+ 1 Mapecolor Paste 1 Mapecolor Paste 1 Mapecolor Pigment 4 Mapecontact Plus 1- Mapecontact Plus 1- Mapecrete Creme Protection 1- Mapecrete Lithium + 16 Mapecrete Lithium Cure 16 Mapecrete Stain Protector 1 Mapecrete U-Protector 1 Mapecure E 2 Mapecure SRA 251, 4 Mapecure WG 4 Mapefast C 4	78 79 79 79 30 75 30 66 81 65 81 82 83 83 83 411 63 63 83 83 83 83 81 81 81 81 81 81 81 81 81 81 81 81 81
Mapecoat I 24 1' Mapecoat I 62 W 1' Mapecoat I 600 W 36, 1' Mapecoat I 600 W Lucido 36, 1' Mapecoat I 650 WT 18 Mapecoat I 650 WT 18 Mapecoat PU 20 N 3 Mapecoat Universal 18 Mapecoat Wet & Dry R11 10 Mapecolor CPU+ 1 Mapecolor Metallic 1 Mapecolor Paste 1 Mapecolor Pigment 4 Mapecomfort FL 20 Mapecontact Plus 1- Mapecrete Creme Protection 1- Mapecrete Li Hardener 1- Mapecrete Lithium + 1- Mapecrete Stain Protection 1- Mapecrete U-Protector 1- Mapecure E 1- Mapecure SRA 251, 4 Mapecure WG 251, 4	78 79 79 79 30 75 30 66 81 65 81 82 83 83 83 411 63 63 83 83 83 83 81 81 81 81 81 81 81 81 81 81 81 81 81
Mapecoat I 24 1' Mapecoat I 62 W 1' Mapecoat I 600 W 36, 1' Mapecoat I 620 W 18 Mapecoat I 650 WT 18 Mapecoat PU 20 N 3 Mapecoat TC 3 Mapecoat Wet & Dry R11 10 Mapecolor CPU+ 1 Mapecolor Metallic 1 Mapecolor Paste 1 Mapecolor Pigment 4 Mapecontact Plus 1 Mapecontact Plus 1 Mapecrete Creme Protection 1 Mapecrete Lithium + 1 Mapecrete Lithium Protector 1 Mapecrete Stain Protection 1 Mapecrete U-Protector 1 Mapecure E 2 Mapecure SRA 251, 4 Mapefast C 4 Mapefast CF/L 46	78 79 79 79 80 75 75 86 81 81 82 83 83 83 84 11 81 81 83 83 83 84 84 84 84 85 86 87 87 87 87 87 87 87 87 87 87 87 87 87
Mapecoat I 24 1' Mapecoat I 62 W 1' Mapecoat I 600 W 36, 1' Mapecoat I 650 WT 18 Mapecoat I 650 WT 18 Mapecoat PU 20 N 3 Mapecoat TC 3 Mapecoat Wet & Dry R11 10 Mapecolor CPU+ 1 Mapecolor Paste 1 Mapecolor Pigment 4 Mapecontact Plus 1 Mapecontact Plus 1 Mapecrete Creme Protection 1 Mapecrete Lithium + 1 Mapecrete Lithium Protector 1 Mapecrete U-Protector 1 Mapecrete U-Protector 1 Mapecure S 2 Mapecure SRA 251, 4 Mapefast C 4 Mapefast CF/P 46	78 79 79 79 30 75 75 36 81 81 82 83 83 83 411 94 94 94 94 83 83 83 84 11 94 94 94 94 94 94 94 94 94 94 94 94 94
Mapecoat I 24 1' Mapecoat I 62 W 1' Mapecoat I 600 W 36, 1' Mapecoat I 620 W 18 Mapecoat I 650 WT 18 Mapecoat PU 20 N 3 Mapecoat TC 3 Mapecoat Wet & Dry R11 10 Mapecolor CPU+ 1 Mapecolor Metallic 1 Mapecolor Paste 1 Mapecolor Pigment 4 Mapecontact Plus 1 Mapecontact Plus 1 Mapecrete Creme Protection 1 Mapecrete Lithium + 1 Mapecrete Lithium Protector 1 Mapecrete Stain Protection 1 Mapecrete U-Protector 1 Mapecure E 2 Mapecure SRA 251, 4 Mapefast C 4 Mapefast CF/L 46	78 79 79 79 79 79 79 79 79 79 79 79 79 79

Mapefibre 6 mm	
Mapefibre Glass HP	
Mapefibre NS12	404
Mapefibre NS18	405
Mapefibre Screed 24	405
Mapefibre ST30	
Mapefibre ST42	
Mapefibre ST 50 Twisted	
Mapefill F	
Mapefill MF 610	
Mapefill R	
Mapefill Zero	
Mapefinish	
Mapefix Combibox VE SF Kit	
Mapefix EP 50	
Mapefix EP 100	
Mapefix EP Mixer	
Mapefix Metal Sleeve	281
Mapefix PE + VE Mixer	
Mapefix PE SF	283
Mapefix Plastic Sleeve	281
Mapefix PolyBond	
Mapefix UM-H 420	
Mapefix VE SF	
Mapefix VinyBond	
Mapefix V LP	
Mapeflex AC3	
Mapeflex AC4	
Mapeflex AC-P	
Mapeflex Blackfill	
Mapeflex E-PU21 SL	
Mapeflex E-PU 30 NS	
Mapeflex Firestop 1200°C	
Mapeflex FR	
Mapeflex MS 40	07
	9/
Mapeflex MS 45	
Mapeflex MS 45 Mapeflex MS 55	97 98
Mapeflex MS 45 Mapeflex MS 55 Mapeflex MS Crystal	97 98 98
Mapeflex MS 45 Mapeflex MS 55	97 98 98
Mapeflex MS 45 Mapeflex MS 55 Mapeflex MS Crystal	97 98 98
Mapeflex MS 45	97 98 98 92
Mapeflex MS 45	97 98 98 92 92, 392 93, 392
Mapeflex MS 45	
Mapeflex MS 45 Mapeflex MS 55 Mapeflex MS Crystal Mapeflex PU 35 CR Mapeflex PU 40 Mapeflex PU 45 FT Mapeflex PU50 SL Mapeflex PU 70 NS Mapeflex PU 70 NS Mapeflex PU 70 SL Mapeflex Xpress 80/400 Mapeflex Xpress Mixers Mapefloor Binder 930 Mapefloor CPU+/COVE Mapefloor CPU+/HD	
Mapeflex MS 45 Mapeflex MS 55 Mapeflex MS Crystal Mapeflex PU 35 CR Mapeflex PU 40 Mapeflex PU 45 FT Mapeflex PU 50 SL Mapeflex PU 70 NS Mapeflex PU 70 NS Mapeflex PU 70 SL Mapeflex Xpress 80/400 Mapeflex Xpress Mixers Mapefloor CPU+/COVE Mapefloor CPU+/HD Mapefloor CPU+/MF	
Mapeflex MS 45 Mapeflex MS 55 Mapeflex MS Crystal Mapeflex PU 35 CR Mapeflex PU 40 Mapeflex PU 45 FT Mapeflex PU 50 SL Mapeflex PU 70 NS Mapeflex PU 70 NS Mapeflex PU 70 SL Mapeflex Xpress 80/400 Mapeflex Xpress Mixers Mapefloor CPU+/COVE Mapefloor CPU+/HD Mapefloor CPU+/MF Mapefloor CPU+/NZ	97 98 98 99 92 92, 392 93, 392 93, 392 94 94 94 95 184 210 185
Mapeflex MS 45 Mapeflex MS 55 Mapeflex MS Crystal Mapeflex PU 35 CR Mapeflex PU 40 Mapeflex PU 45 FT Mapeflex PU 50 SL Mapeflex PU 65 Mapeflex PU 70 NS Mapeflex PU 70 SL Mapeflox Xpress 80/400 Mapeflor CPU+/COVE Mapefloor CPU+/COVE Mapefloor CPU+/HD Mapefloor CPU+/MF Mapefloor CPU+/NZ Mapefloor CPU+ Primer	97 98 98 99 92 92, 392 93, 392 93, 392 94 94 94 184 210 184 185 185
Mapeflex MS 45 Mapeflex MS 55 Mapeflex MS Crystal Mapeflex PU 35 CR Mapeflex PU 40 Mapeflex PU 45 FT Mapeflex PU 50 SL Mapeflex PU 65 Mapeflex PU 70 NS Mapeflex PU 70 SL Mapeflor CPU 70 SL Mapeflor CPU+/COVE Mapefloor CPU+/COVE Mapefloor CPU+/HD Mapefloor CPU+/NZ Mapefloor CPU+/NZ Mapefloor CPU+ Primer Mapefloor CPU+/RT	97 98 98 99 92 92, 392 93, 392 93, 392 94 94 94 184 210 184 185 185 185
Mapeflex MS 45 Mapeflex MS 55 Mapeflex MS Crystal Mapeflex PU 35 CR Mapeflex PU 40 Mapeflex PU 45 FT Mapeflex PU 65 Mapeflex PU 70 NS Mapeflex PU 70 SL Mapeflex Xpress 80/400 Mapeflex Xpress Mixers Mapefloor Cleaner ED Mapefloor CPU+/COVE Mapefloor CPU+/HD Mapefloor CPU+/NZ Mapefloor CPU+/NZ Mapefloor CPU+/RT Mapefloor CPU+/RT Mapefloor CPU+/SR	
Mapeflex MS 45 Mapeflex MS 55 Mapeflex MS Crystal Mapeflex PU 35 CR Mapeflex PU 40 Mapeflex PU 45 FT Mapeflex PU 65 Mapeflex PU 70 NS Mapeflex PU 70 SL Mapeflex Xpress 80/400 Mapeflex Xpress Mixers Mapefloor Cleaner ED Mapefloor CPU+/COVE Mapefloor CPU+/HD Mapefloor CPU+/HD Mapefloor CPU+/NZ Mapefloor CPU+/NZ Mapefloor CPU+/RT Mapefloor CPU+/SR Mapefloor CPU+/SR Mapefloor CPU+/TC	
Mapeflex MS 45 Mapeflex MS 55 Mapeflex MS Crystal Mapeflex PU 35 CR Mapeflex PU 40 Mapeflex PU 45 FT Mapeflex PU 50 SL Mapeflex PU 65 Mapeflex PU 70 NS Mapeflex PU 70 SL Mapeflex Vpress Mixers Mapefloor Binder 930 Mapefloor Cleaner ED Mapefloor CPU+/COVE Mapefloor CPU+/HD Mapefloor CPU+/HD Mapefloor CPU+/NZ Mapefloor CPU+/NZ Mapefloor CPU+/RT Mapefloor CPU+/RT Mapefloor CPU+/TC Mapefloor CPU+/UD	
Mapeflex MS 45 Mapeflex MS 55 Mapeflex MS Crystal Mapeflex PU 35 CR Mapeflex PU 40 Mapeflex PU 45 FT Mapeflex PU 50 SL Mapeflex PU 65 Mapeflex PU 70 NS Mapeflex PU 70 SL Mapeflex Vpress Mixers Mapefloor Binder 930 Mapefloor Cleaner ED Mapefloor CPU+/COVE Mapefloor CPU+/HD Mapefloor CPU+/HD Mapefloor CPU+/NZ Mapefloor CPU+/RT Mapefloor CPU+/RT Mapefloor CPU+/TC Mapefloor CPU+/UD Mapefloor CPU+/UD Mapefloor CPU+/UD Mapefloor CPU/TC Glossy	
Mapeflex MS 45 Mapeflex MS 55 Mapeflex MS Crystal Mapeflex PU 35 CR Mapeflex PU 40 Mapeflex PU 45 FT Mapeflex PU 65 Mapeflex PU 70 NS Mapeflex PU 70 SL Mapeflex Vpress Mixers Mapefloor Binder 930 Mapefloor Cleaner ED Mapefloor CPU+/COVE Mapefloor CPU+/HD Mapefloor CPU+/HF Mapefloor CPU+/NZ Mapefloor CPU+/RT Mapefloor CPU+/RT Mapefloor CPU+/TC Mapefloor CPU+/UD Mapefloor CPU-/UD Mapefloor CPU/TC Glossy Mapefloor Decor 700	
Mapeflex MS 45 Mapeflex MS 55 Mapeflex MS Crystal Mapeflex PU 35 CR Mapeflex PU 40 Mapeflex PU 45 FT Mapeflex PU 50 SL Mapeflex PU 65 Mapeflex PU 70 NS Mapeflex PU 70 SL Mapeflex Vpress Mixers Mapefloor Binder 930 Mapefloor Cleaner ED Mapefloor CPU+/COVE Mapefloor CPU+/HD Mapefloor CPU+/HD Mapefloor CPU+/NZ Mapefloor CPU+/RT Mapefloor CPU+/RT Mapefloor CPU+/TC Mapefloor CPU+/UD Mapefloor CPU+/UD Mapefloor CPU+/UD Mapefloor CPU/TC Glossy	
Mapeflex MS 45 Mapeflex MS 55 Mapeflex MS Crystal Mapeflex PU 35 CR Mapeflex PU 40 Mapeflex PU 45 FT Mapeflex PU 65 Mapeflex PU 70 NS Mapeflex PU 70 SL Mapeflex Vpress Mixers Mapefloor Binder 930 Mapefloor Cleaner ED Mapefloor CPU+/COVE Mapefloor CPU+/HD Mapefloor CPU+/HF Mapefloor CPU+/NZ Mapefloor CPU+/RT Mapefloor CPU+/RT Mapefloor CPU+/TC Mapefloor CPU+/UD Mapefloor CPU-/UD Mapefloor CPU/TC Glossy Mapefloor Decor 700	
Mapeflex MS 45 Mapeflex MS 55 Mapeflex MS Crystal Mapeflex PU 35 CR Mapeflex PU 40 Mapeflex PU 45 FT Mapeflex PU 65 Mapeflex PU 70 NS Mapeflex PU 70 SL Mapeflex Vpress Mixers Mapefloor Binder 930 Mapefloor Cleaner ED Mapefloor CPU+/COVE Mapefloor CPU+/HD Mapefloor CPU+/HF Mapefloor CPU+/HF Mapefloor CPU+/RT Mapefloor CPU+/RT Mapefloor CPU+/TC Mapefloor CPU-/UD Mapefloor CPU-/UD Mapefloor CPU-/UD Mapefloor CPU-/TC Glossy Mapefloor EP19 Mapefloor EP19 Mapefloor EP 90	
Mapeflex MS 45 Mapeflex MS 55 Mapeflex MS Crystal Mapeflex PU 35 CR Mapeflex PU 40 Mapeflex PU 45 FT Mapeflex PU 50 SL Mapeflex PU 65 Mapeflex PU 70 NS Mapeflex PU 70 SL Mapeflex Noress Mixers Mapefloor Binder 930 Mapefloor Cleaner ED Mapefloor CPU+/COVE Mapefloor CPU+/HD Mapefloor CPU+/HD Mapefloor CPU+/NZ Mapefloor CPU+/RT Mapefloor CPU+/RT Mapefloor CPU+/TC Mapefloor CPU+/UD Mapefloor CPU+/UD Mapefloor CPU/TC Glossy Mapefloor EP19 Mapefloor EP19 Mapefloor EP19 Mapefloor Filler	
Mapeflex MS 45 Mapeflex MS 55 Mapeflex MS Crystal Mapeflex PU 35 CR Mapeflex PU 40 Mapeflex PU 40 Mapeflex PU 45 FT Mapeflex PU 65 Mapeflex PU 70 NS Mapeflex PU 70 SL Mapefle	
Mapeflex MS 45 Mapeflex MS 55 Mapeflex MS Crystal Mapeflex PU35 CR Mapeflex PU 40 Mapeflex PU 40 Mapeflex PU 45 FT Mapeflex PU 65 Mapeflex PU 70 NS Mapeflex PU 70 SL Mapeflex Npress Mixers Mapefloor Binder 930 Mapefloor Cleaner ED Mapefloor CPU+/COVE Mapefloor CPU+/HD Mapefloor CPU+/HF Mapefloor CPU+/NZ Mapefloor CPU+/RT Mapefloor CPU+/TC Mapefloor CPU+/TC Mapefloor CPU+/UD Mapefloor CPU+/UD Mapefloor CPU-/UD Mapefloor FIIIer Mapefloor FIIIer Mapefloor FIIIer Mapefloor Finish 50 N Mapefloor Finish 50 N	
Mapeflex MS 45 Mapeflex MS 55 Mapeflex MS 55 Mapeflex MS Crystal Mapeflex PU 40 Mapeflex PU 40 Mapeflex PU 45 FT Mapeflex PU 50 SL Mapeflex PU 70 NS Mapeflex PU 70 NS Mapeflex PU 70 NS Mapeflex PU 70 SL Mapeflox OR Mapeflox Spress Mixers Mapefloor Binder 930 Mapefloor Cleaner ED Mapefloor CPU+/COVE Mapefloor CPU+/HD Mapefloor CPU+/HR Mapefloor CPU+/NZ Mapefloor CPU+/RT Mapefloor CPU+/SR Mapefloor CPU+/TC Mapefloor CPU+/TC Mapefloor CPU-/TC Glossy Mapefloor EP19 Mapefloor EP19 Mapefloor EP19 Mapefloor Finish 50 N Mapefloor Finish 50 N Mapefloor Finish 52 W Mapefloor Finish 53 W/L	97 98 98 99 99 99 97 99 98 99 99 99 99 99 99 99 99 99 184 210 185 185 185 186 186 186 186 187 187 187 188 188
Mapeflex MS 45 Mapeflex MS 55 Mapeflex MS 55 Mapeflex MS Crystal Mapeflex PU 40 Mapeflex PU 40 Mapeflex PU 45 FT Mapeflex PU 50 SL Mapeflex PU 70 NS Mapeflex PU 70 NS Mapeflex PU 70 NS Mapeflex PU 70 SL Mapeflor CPU + NE Mapeflor CPU+/COVE Mapeflor CPU+/HD Mapeflor CPU+/HB Mapeflor CPU+/NZ Mapeflor CPU+/NZ Mapeflor CPU+/RT Mapeflor CPU+/TC Mapeflor CPU+/TC Mapeflor CPU+/TC Mapeflor CPU-/TC Glossy Mapeflor EP19 Mapeflor EP19 Mapeflor Finish 50 N Mapeflor Finish 50 N Mapeflor Finish 53 W/L Mapeflor Finish 53 W/L Mapeflor Finish 53 W/L Mapeflor Finish 54 W/S	97 98 98 99 99 99 97 99 98 99 99 97 99 98 99 99 99 99 99 99 184 210 185 185 185 186 186 186 186 187 187 188 188 218 218 218 218 218 388
Mapeflex MS 45 Mapeflex MS 55 Mapeflex MS 55 Mapeflex MS Crystal Mapeflex PU 40 Mapeflex PU 40 Mapeflex PU 45 FT Mapeflex PU 65 Mapeflex PU 70 NS Mapeflex PU 70 NS Mapeflex PU 70 SL Mapeflex Vpress 80/400 Mapeflor CPU + NE Mapefloor CPU+/COVE Mapefloor CPU+/HD Mapefloor CPU+/HD Mapefloor CPU+/NZ Mapefloor CPU+/RT Mapefloor CPU+/RT Mapefloor CPU+/TC Mapefloor CPU+/UD Mapefloor CPU-/TC Mapefloor Finish 50 N Mapefloor Finish 50 N Mapefloor Finish 52 W Mapefloor Finish 53 W/L Mapefloor Finish 54 W/S Mapefloor Finish 58 W	97 98 98 99 99 99 97 99 98 99 99 97 99 98 99 99 99 99 99 99 184 210 185 185 185 185 186 186 186 186 187 187 187 188 218 188 218 210 188 189
Mapeflex MS 45 Mapeflex MS 55 Mapeflex MS 55 Mapeflex MS Crystal Mapeflex PU 40 Mapeflex PU 40 Mapeflex PU 45 FT Mapeflex PU 50 SL Mapeflex PU 70 NS Mapeflex PU 70 NS Mapeflex PU 70 NS Mapeflex PU 70 SL Mapeflor CPU + NE Mapeflor CPU+/COVE Mapeflor CPU+/HD Mapeflor CPU+/HB Mapeflor CPU+/NZ Mapeflor CPU+/NZ Mapeflor CPU+/RT Mapeflor CPU+/TC Mapeflor CPU+/TC Mapeflor CPU+/TC Mapeflor CPU-/TC Glossy Mapeflor EP19 Mapeflor EP19 Mapeflor Finish 50 N Mapeflor Finish 50 N Mapeflor Finish 53 W/L Mapeflor Finish 53 W/L Mapeflor Finish 53 W/L Mapeflor Finish 54 W/S	97 98 98 99 99 99 97 99 98 99 99 97 99 98 99 99 99 99 99 99 99 184 210 184 185 185 185 186 186 186 187 187 187 188 218 188 188 189 189

Mapefloor Finish 415	
	190
Mapefloor Finish 450 EU	191
Mapefloor Finish 451	
Mapefloor Finish 630	
Mapefloor Finish HTR	
Mapefloor I 300 SL	
Mapefloor I 300 SL TRP	192
Mapefloor I 302 SL	
Mapefloor I 306 CR	
Mapefloor I 309 CR	
Mapefloor I 320 SL CONCEPT	194
Mapefloor I 324	194
Mapefloor I 357 ESD	
Mapefloor I 360 AS	
Mapefloor I 370 SL	
Mapefloor I 390 EDF	
Mapefloor I 500 W	196
Mapefloor I 900	196
Mapefloor I 910	
Mapefloor I 914	
Mapefloor JA	
Mapefloor Maintenance Kit	210
Mapefloor Pore Filler	197
Mapefloor PU 400 LV	
·	
Mapefloor PU 406	
Mapefloor PU 410	
Mapefloor PU 460	199
Mapefloor PU 461	199
Mapefloor PU 470	
Mapefloor Wax Remover	
Mapefluid N200	
Mapefluid PZ500	407
Mapefluid R104	407
Mapefoam102	
Mapeform 1500 Plus	/10
Mapeform DMA 1000	410
Mapeform DMA 2000	
	410
MapeGlitter	410 65
MapeGlitter	65
MapeGlitterMapegrid B 250	65 .302
MapeGlitter Mapegrid B 250 Mapegrid B 300	65 .302 .302
MapeGlitter	65 .302 .302 .303
MapeGlitter	65 .302 .302 .303 .303
MapeGlitter	65 .302 .302 .303 .303
MapeGlitter	65 .302 .302 .303 .303 .303
MapeGlitter	65 .302 .302 .303 .303 .303
MapeGlitter	65 .302 .302 .303 .303 .303 .304
MapeGlitter Mapegrid B 250 Mapegrid B 300 Mapegrid B 400 Mapegrid C 170 Mapegrid C 200 Mapegrid G 120 Mapegrid G 220 Mapegrout 430 Zero	65 .302 .302 .303 .303 .303 .304 .304 251
MapeGlitter	65 .302 .302 .303 .303 .303 .304 .304 251 ,252
MapeGlitter	65 .302 .302 .303 .303 .303 .304 .304 251 ,252
MapeGlitter	65 .302 .302 .303 .303 .303 .304 .304 251 ,252
MapeGlitter	65 302 .302 .303 .303 .303 .304 251 ,252 .252
MapeGlitter	65 .302 .302 .303 .303 .303 .304 .304 251 ,252 .252 .253
MapeGlitter	65 .302 .302 .303 .303 .303 .304 .304 251 ,252 .252 .253 ,253
MapeGlitter	65 .302 .302 .303 .303 .303 .304 .304 251 ,252 .252 .253 ,253 .255
MapeGlitter	65 .302 .302 .303 .303 .303 .304 .304 251 ,252 .252 .253 ,253 .255 .255
MapeGlitter	65 .302 .302 .303 .303 .303 .304 .304 251 ,252 .252 .253 ,253 .255 .255
MapeGlitter	65 .302 .302 .303 .303 .303 .304 .304 251 ,252 .252 .253 .255 .255 .255
MapeGlitter	65 302 302 303 303 303 304 251 252 252 253 255 255 254 254
MapeGlitter	65 302 302 303 303 303 304 251 252 252 253 255 255 255 254 252 252
MapeGlitter	65 302 303 303 303 304 251 252 252 253 255 254 254 254 255 255 254
MapeGlitter	65 302 303 303 303 304 251 252 253 255 254 254 252 253 254 252 253
MapeGlitter	65 302 303 303 303 304 251 252 253 255 254 254 252 253 254 252 253 254 252 253 254 252 253
MapeGlitter	65 302 303 303 303 304 251 252 253 255 254 254 252 253 254 252 253 254 252 253 254 252 253
MapeGlitter	65 302 303 303 303 304 251 252 252 253 255 254 252 253 254 252 253 254 252 253 254 255 255 254 255 256 256 256 256 256 256
MapeGlitter	65 302 303 303 303 304 251 252 252 253 255 254 254 255 254 255 254 255 254 255 256 256 256
MapeGlitter	65 302 303 303 303 304 251 252 252 253 255 254 255 254 255 254 255 256 256 256 256
MapeGlitter	65 302 303 303 303 304 251 252 252 253 255 254 255 254 255 254 255 256 256 256 256 257
MapeGlitter	65 302 303 303 303 303 304 251 252 252 253 255 254 252 254 252 253 254 252 253 254 255 254 255 256 256 256 257 257 156
MapeGlitter	65 302 303 303 303 303 304 251 252 252 253 255 254 252 253 254 252 253 254 255 254 255 254 255 256 256 257 257 156 393
MapeGlitter	65 302 303 303 303 303 304 251 252 252 253 255 254 252 253 254 252 253 254 255 254 255 254 255 256 256 257 257 156 393
MapeGlitter	65 302 303 303 303 303 304 251 252 252 253 255 254 252 254 252 253 254 252 253 254 255 254 255 256 256 257 156 393 393
MapeGlitter	65 302 303 303 303 303 304 251 252 252 253 255 255 254 255 254 255 256 256 257 156 393 393 393 393
MapeGlitter	65302303303303303304251252252253255254255254255254255256256257156393393394
MapeGlitter	65 302 303 303 303 303 304 251 252 252 253 255 254 255 254 252 253 255 254 255 254 255 256 256 256 257 156 393 393 394 394 394

Mapeguard ST	395
Mapeguard UM 35	156
Mapeguard WP 200	
Mapeguard WP Adhesive	
Mapegum EPX	
Mapegum EPX-T	
Mapegum WPS	377
Mapei Gun 310	
Mapei Gun 310 PRO	
Mapei Gun 420 2K	
Mapei Gun 585 2K	
Mapei Gun 585 Air	
Mapei Gun 585 Electric	
Mapei Gun 600 2K	
Mapei Gun 600 PRO	
Mapei Gun 600 PRO Electric	
Mapei Gun 825 2K	
Mapei Spray Mop	
Mapei Steel Bar 304	
Mapei Steel Bar 316	
Mapei Steel Dry 316	
Mapei Tile Spacer 7-in-1	162
Mapei Tile Spacer T	162
Mapei Tile Spacer Wedge S	162
Mapei Tile Spacer X	
Mapei Tile Spacer Y	163
Mapei Waterproofer	
Mapejoint 100/12	
Mapejoint 100/25	211
Mapelastic AquaDefense	
Mapelastic Foundation	359
Mapelastic Guard	270
Mapelastic Smart	378
Mapelastic Turbo	378
Mapelastic Zero	
Mapelay	
Mapelectric CP1	
MapeLevel Easy Cap	
MapeLevel EasyClick Cap	
MapeLevel Easy Shield	
MapeLevel Easy T	159
MapeLevel Easy Spacer L - I	158
MapeLevel Easy Spacer L - T	159
MapeLevel Easy Spacer L - X	
MapeLevel EasyWDG	157
MapeLevel EasyWDG Pushing-Pliers	
MapeLevel EasyWDG Spacer M	157
MapeLevel ProWDG	
MapeLevel ProWDG Spacer C MapeLevel ProWDG Spacer C-H	
Mapelux Lucida	
Mapelux Opaca	
Mapenet 150	
Mapenet EM 30	
Mapenet EM 40	
Mapenet EM Connector	
Mapenet EMR 33	
Mapenet EMR 33 Angolare	
Mapenet EMR 66	
Mapenet EMR 66 Angolare	
Mapenet EMR 99	
Mapenet EMR 99 Angolare	
Mapenet EMR Connector	
Mapenet FM	
Mapenet FS	
Mapeplast PZ300	
Mapeplast SF	
Mapeplast UW	
Mapeproof	359
Mapeproof AL 1200 AP	359

	760
Mapeproof AL AP	
Mapeproof AL Tape D10 AP	
Mapeproof AL Tape S15	
Mapeproof CD	.361
Mapeproof FBH	.361
Mapeproof FBT	.361
Mapeproof FBT Tape 600	
Mapeproof Fix Tape	
Mapeproof Liquid Membrane	
Mapeproof Mastic	
Mapeproof Primer	
Mapeproof SA	
Mapeproof SA Primer	
Mapeproof SA Tape	
Mapeproof Seal	364
Mapeproof SW	364
Mapeproof Swell	365
MapePUR All in One Foam	.107
MapePUR Cleaner	
MapePUR Easy Spray	
MapePUR Fire Foam M	
MapePUR Gun Special	110
MapePUR Gun Standard	
MapePUR Multi Adhesive Foam G .	
MapePUR Roof Foam G	
MapePUR Roof Foam M	
MapePUR Thermo Fill G	.109
MapePUR Thermo Fill M	110
MapePUR Thermo Stick G	110
MapePUR Thermo Stick M	110
MapePUR Universal Foam G	
MapePUR Universal Foam M	
MapePUR Dispenser M	
Maper of Cisperiser in	
Maperod G	
Maneloa a	
•	
Mapescreed Advance HR	409
Mapescreed Advance HR Mapescreed Advance MR	409 409
Mapescreed Advance HR Mapescreed Advance MR Mapesept Gel	409 409 .163
Mapescreed Advance HRMapescreed Advance MRMapesept GelMapesept Liquid	409 409 .163 .164
Mapescreed Advance HR	409 409 .163 .164 296
Mapescreed Advance HRMapescreed Advance MRMapesept GelMapesept Liquid	409 409 .163 .164 296
Mapescreed Advance HR	409 409 .163 .164 296 296
Mapescreed Advance HR	409 409 .163 .164 296 296 296 395
Mapescreed Advance HR	409 409 .163 .164 296 296 296 395
Mapescreed Advance HR	409 409 .163 .164 296 296 296 395 90
Mapescreed Advance HR	409 409 .163 .164 296 296 296 395 90
Mapescreed Advance HR	409 409 .163 .164 296 296 296 395 90 95
Mapescreed Advance HR	409 409 .163 .164 296 296 395 90 95
Mapescreed Advance HR	409 409 .163 .164 296 296 296 395 90 95 95 95
Mapescreed Advance HR	409 409 .163 .164 296 296 296 395 90 95 27 95 96
Mapescreed Advance HR	409 409 .163 .164 296 296 395 90 95 95 95 96 96
Mapescreed Advance HR	409 409 .163 .164 296 296 395 90 95 27 95 96 96 96
Mapescreed Advance HR	409 409 .163 .164 296 296 296 395 90 95 95 96 96 96 97 99
Mapescreed Advance HR	409 409 .163 .164 296 296 296 395 90 95 95 96 96 97 996 97
Mapescreed Advance HR	409 409 .163 .164 296 296 296 395 95 95 96 96 97 99 91
Mapescreed Advance HR	409 409 .163 .164 296 296 296 395 90 95 96 97 99 91 91 91
Mapescreed Advance HR	409 409 .163 .164 296 296 296 395 90 95 96 97 99 91 91 91
Mapescreed Advance HR	409 409 .163 .164 296 296 296 395 95 95 96 96 97 99 91 91 91 91
Mapescreed Advance HR	409 409 .163 .164 296 296 296 395 90 95 96 97 99 91 91 91 91 91
Mapescreed Advance HR	409 409 .163 .164 296 296 296 395 90 95 96 97 91 91 91 91 26 26 27
Mapescreed Advance HR	409 409 .163 .164 296 296 296 395 90 95 96 97 91 91 91 91 26 26 27 379
Mapescreed Advance HR	409 409 .163 .164 296 296 296 395 90 95 96 97 91 91 91 26 27 379 27
Mapescreed Advance HR	409 409 .163 .164 296 296 296 395 90 95 96 97 91 91 26 26 27 379 27 28
Mapescreed Advance HR	409 409 .163 .164 296 296 296 395 90 95 96 96 91 91 26 26 27 379 27 28 28
Mapescreed Advance HR	409 409 409 .163 .164 296 296 296 395 95 95 96 96 97 91 26 27 27 27 28 27
Mapescreed Advance HR	409 409 409 .163 .164 296 296 395 90 95 96 96 97 91 91 26 26 27 379 27 28 28 28 28 28
Mapescreed Advance HR	409 409 409 .163 .164 296 296 3959095969697912627272827282827
Mapescreed Advance HR	409 409 409 .163 .164 296 296 395909596969791262728272882828383
Mapescreed Advance HR	409 409 409 .163 .164 296 296 395909596969791912627282728828383
Mapescreed Advance HR	409 409 409 .163 .164 296 296 395909596969791912627282728828383
Mapescreed Advance HR	409 409 409 163 .164 296 296 3959095969696979191912627288282838383

Mapestone PFS PCC 2	
Mapestone Scraper	85
Mapestone TFB 60	85
Mapestone TFB Calcix	86
Mapestone TFB Cube	
Mapestop	
Mapestop Cream	227
Mapestop Cream Tool 280	
Mapestop Cream Tool 600	
Mapestop Injectors	228
Mapestop Kit Diffusion	.228
Mapetape	
Mapetard	/.OQ
Mapetard ES	
Maperara E2	257
Mapetex 50	579
Mapetex FG	
Mapetex Sel N	380
Mapetex System	161
Mapethene HT	365
Mapethene HT AP	365
Mapethene LT	766
Mapethene LT AP	700
Mapethene Primer	366
Mapethene Primer W	367
Mapetherm AR1	324
Mapetherm ARI GG	.324
Mapetherm ARI Light	
Mapetherm AR1 Maxi	
Mapetherm EPS 100 CAM	
Mapetherm EPS G 100 CAM	320
Mapetherm EPS G CAM	
Mapetherm - Etics Fixing Plugs	327
Mapetherm Fixing Elements	327
Mapetherm Flex RP	
Mapetherm Net	325
Mapetherm PF CAM	
Manetherm Profiles	328
Mapetherm Profiles	328
Mapetherm Tile-EJOT SBV-P 8/90 K	328
Mapetherm Tile-EJOT SBV-P 8/90 K Mapetherm Tile-EJOT SDF-S	328 164
Mapetherm Tile-EJOT SBV-P 8/90 K Mapetherm Tile-EJOT SDF-S PLUS Ø 8 UB	328 164 164
Mapetherm Tile-EJOT SBV-P 8/90 K Mapetherm Tile-EJOT SDF-S PLUS Ø 8 UB Mapetiles Removable System	328 164 164 161
Mapetherm Tile-EJOT SBV-P 8/90 K Mapetherm Tile-EJOT SDF-S PLUS Ø 8 UB Mapetiles Removable System Mapetop N AR6	328 164 164 161 201
Mapetherm Tile-EJOT SBV-P 8/90 K Mapetherm Tile-EJOT SDF-S PLUS Ø 8 UB Mapetiles Removable System	328 164 164 161 201
Mapetherm Tile-EJOT SBV-P 8/90 K Mapetherm Tile-EJOT SDF-S PLUS Ø 8 UB Mapetiles Removable System Mapetop N AR6 Mapetop N AR9	328 164 164 161 201 202
Mapetherm Tile-EJOT SBV-P 8/90 K Mapetherm Tile-EJOT SDF-S PLUS Ø 8 UB Mapetiles Removable System Mapetop N AR6 Mapetop N AR9 Mapetop S AR3	328 164 161 201 202 202
Mapetherm Tile-EJOT SBV-P 8/90 K Mapetherm Tile-EJOT SDF-S PLUS Ø 8 UB Mapetiles Removable System Mapetop N AR6 Mapetop N AR9 Mapetop S AR3 Mapetop S AR6	164 164 161 201 202 202
Mapetherm Tile-EJOT SBV-P 8/90 K Mapetherm Tile-EJOT SDF-S PLUS Ø 8 UB Mapetiles Removable System Mapetop N AR6 Mapetop N AR9 Mapetop S AR3 Mapetop S AR6 MapeWall Inject & Consolidate	328 164 164 161 201 202 202 203 226
Mapetherm Tile-EJOT SBV-P 8/90 K Mapetherm Tile-EJOT SDF-S PLUS Ø 8 UB Mapetiles Removable System Mapetop N AR6 Mapetop N AR9 Mapetop S AR3 Mapetop S AR6 MapeWall Inject & Consolidate MapeWall Intonaco Base	164 161 201 202 202 203 226
Mapetherm Tile-EJOT SBV-P 8/90 K Mapetherm Tile-EJOT SDF-S PLUS Ø 8 UB Mapetiles Removable System Mapetop N AR6 Mapetop S AR3 Mapetop S AR6 Mapetop S AR6 MapeWall Inject & Consolidate MapeWall Intonaco Base MapeWall Muratura Fine	164 161 201 202 202 203 226
Mapetherm Tile-EJOT SBV-P 8/90 K Mapetherm Tile-EJOT SDF-S PLUS Ø 8 UB	164 164 161 201 202 202 203 226 231
Mapetherm Tile-EJOT SBV-P 8/90 K Mapetherm Tile-EJOT SDF-S PLUS Ø 8 UB	328 164 164 161 201 202 202 203 226 237 , 236
Mapetherm Tile-EJOT SBV-P 8/90 K Mapetherm Tile-EJOT SDF-S PLUS Ø 8 UB	328 164 164 161 201 202 202 203 226 231 237 , 236 413
Mapetherm Tile-EJOT SBV-P 8/90 K Mapetherm Tile-EJOT SDF-S PLUS Ø 8 UB	328 164 164 161 201 202 203 226 231 237 , 236 413
Mapetherm Tile-EJOT SBV-P 8/90 K Mapetherm Tile-EJOT SDF-S PLUS Ø 8 UB	328 164 164 161 201 202 203 226 231 237 , 236 413
Mapetherm Tile-EJOT SBV-P 8/90 K Mapetherm Tile-EJOT SDF-S PLUS Ø 8 UB	328 164 161 201 202 202 203 226 231 237 , 236 413 413
Mapetherm Tile-EJOT SBV-P 8/90 K Mapetherm Tile-EJOT SDF-S PLUS Ø 8 UB	328 164 164 161 201 202 203 226 237 237 236 413 413 240
Mapetherm Tile-EJOT SBV-P 8/90 K Mapetherm Tile-EJOT SDF-S PLUS Ø 8 UB	328 164 164 161 201 202 203 226 237 237 413 413 240 240
Mapetherm Tile-EJOT SBV-P 8/90 K Mapetherm Tile-EJOT SDF-S PLUS Ø 8 UB	328164164161201202202233226413413413240240240240230
Mapetherm Tile-EJOT SBV-P 8/90 K Mapetherm Tile-EJOT SDF-S PLUS Ø 8 UB	328164164161201202203226237 ,236413413413240240240309310
Mapetherm Tile-EJOT SBV-P 8/90 K Mapetherm Tile-EJOT SDF-S PLUS Ø 8 UB	328164164161201202202233226237237413240240240309310310
Mapetherm Tile-EJOT SBV-P 8/90 K Mapetherm Tile-EJOT SDF-S PLUS Ø 8 UB	328164164161201202202233226237237413240240309310310310
Mapetherm Tile-EJOT SBV-P 8/90 K Mapetherm Tile-EJOT SDF-S PLUS Ø 8 UB	328164164161201202202233226237413413240240309310310311
Mapetherm Tile-EJOT SBV-P 8/90 K Mapetherm Tile-EJOT SDF-S PLUS Ø 8 UB	328164164161201202202233226231237413240240309310310311311
Mapetherm Tile-EJOT SBV-P 8/90 K Mapetherm Tile-EJOT SDF-S PLUS Ø 8 UB	328164164161201202202203226237413413240309310310311311311
Mapetherm Tile-EJOT SBV-P 8/90 K Mapetherm Tile-EJOT SDF-S PLUS Ø 8 UB	328164164161201202202203226231237413240240310310311311312
Mapetherm Tile-EJOT SBV-P 8/90 K Mapetherm Tile-EJOT SDF-S PLUS Ø 8 UB	328164164164161201202203226231237413413240240309310311311311312312312
Mapetherm Tile-EJOT SBV-P 8/90 K Mapetherm Tile-EJOT SDF-S PLUS Ø 8 UB	328164164161201202202233226237413413240240310310311311312312312312312
Mapetherm Tile-EJOT SBV-P 8/90 K Mapetherm Tile-EJOT SDF-S PLUS Ø 8 UB	328164164161201202202233226237413413240240310311311312312312312312312312
Mapetherm Tile-EJOT SBV-P 8/90 K Mapetherm Tile-EJOT SDF-S PLUS Ø 8 UB	328164164161201202203226237237237236413413240309310310311312312313313313313
Mapetherm Tile-EJOT SBV-P 8/90 K Mapetherm Tile-EJOT SDF-S PLUS Ø 8 UB	328164164161201202203226237237237236413413240309310310311312312313313313313
Mapetherm Tile-EJOT SBV-P 8/90 K Mapetherm Tile-EJOT SDF-S PLUS Ø 8 UB	328164164161201202203226237237237236413413240310310310311311312312313313313313
Mapetherm Tile-EJOT SBV-P 8/90 K Mapetherm Tile-EJOT SDF-S PLUS Ø 8 UB	328164164161201202203226237237237237310310310311312312313313313314



* VAGA products

* VAGA products

ALPHABETICAL INDEX

	MapeWrap EQ Net	.314
	MapeWrap G FIOCCO	
	MapeWrap G UNI-AX	. 315
	MapeWrap Primer 1	. 315
	MapeWrap Roller	
	MapeWrap SG FIOCCO	
	MB1 Pavicalce*	
	MISTA*	
	Monofinish	
	Monolastic	.380
N		
	NERO+*	424
	Nivoplan22	
	Nivorapid	
	Novoplan Maxi	
	·	
P		
	Pianocem M	16
	Pianodur R	
	Planex HR	
	Planex HR Maxi	
	Planibond BA 100	
	Planicrete37,	
	Planigrout 300	
	Planigrout 310	
	Planigrout 350	
	Planipatch	
	Planipatch Xtra	
	Planiprep 4 LVT18	
	Planiprep Contract	
	Planiprep Fast Track	19
	Planiprep Remove 4 LVT19,	168
	Planiseal 88 (former Idrosilex Pronto)	367
	Planiseal 288	
	Planiseal WR 40	262
	Planiseal WR 85 Gel	
	Planiseal WR 100	
	Planitop 100	
	Planitop 200	
	Planitop 207	
	Planitop 210	
	Planitop 217	
	Planitop 510	
	Planitop 525	
	Planitop 530	
	Planitop 540	274
	Planitop 560	
	Planitop 565	
	Planitop 600 RasaGesso	275
	Planitop 610 RasaGesso M	
	Planitop Fast 33023,	
	Planitop Fine Finish	276
	Planitop HDM Maxi	.316
	Planitop HDM Restauro	
	Planitop HPC	
	Planitop HPC Floor	. 317
	Planitop HPC Floor 46	
	Planitop HPC Floor 46 T	
	Planitop HPC Floor T	.318
	Planitop HPC LV	.318
	Planitop HPC Tixo	
	Planitop Intonaco Armato	
	Planitop Raso Max	
	Planitop Smooth & Repair R4 Zero	
	Planitop Smooth & Repair Zero	258
	Discourse Communication of	

Planopur19
Plastimul368
Plastimul 1K Super Plus368
Plastimul 2K Plus368
Plastimul 2K Reactive369
Plastimul 2K Super369
Plastimul C369
Plastimul High Flex Plus370
Plastimul Primer370
Plastimul Primer SB370
Porocol244
Porocol FF
PoroMap Deumidificante230
PoroMap Finitura Civile
PoroMap Rinzaffo Plus230
Primer 329637, 225
Primer A106
Primer BI
Primer EP38, 106
Primer EP4 Fast381
Primer EP 100W381
Primer EP Rustop38, 200
Primer FD106
Primer FT382
Primer G38
Primer G Conductive39, 168
Primer Grip White200
Primer KL
Primer LT
Primer M
Primer MF EC Plus40
Primer P
Primer P1
Primer P2
Primer P341
Primer PU6042, 383
Primer PU Fast383
Primer S42
Primer SN42, 201
Primer SN Rasante201
Primer W-AS N201
Prosfas43
PU Catalyst212
Pulicol 2000
Purtop 200
Purtop 400 M
Purtop 500 N
Purtop 1000 N
Purtop ADY385
Purtop Easy385
Purtop Easy DW386
Purtop Easy T386
Purtop Easy T Primer386
Purtop FR387
Purtop Primer Black387
Ouartz 0.5
Quartz 0.5
Quartz 0.9213
Quartz 0.9
Quartz 0.9 213 Quartz 0.25 213 Quartz 1.2 43, 214
Quartz 0.9

Q

...319

Quarzolite Paint....

Quarzolite Tonachino...

our			Quarzolite Tonachino Plus	
าน			Quarzolite Tonachino Pro	
nul 1K Super Plus			Quarzolite Tonachino Pro S	348
nul 2K Plus		_		
nul 2K Reactive		R		
nul 2K Super			RASA+*	420
nul C			Resfoam 1K-M	
nul High Flex Plus			Rollcoll	135
nul Primer nul Primer SB				
		S		
// // FF			SabbiaCEMENTO *	/,27
ap Deumidificante			SABBIASAL*	
ap Finitura Civile			SAETTA*	
ap Finitura Granello			Silancolor AC Paint	348
ap Rinzaffo Plus			Silancolor AC Paint Plus	
3296			Silancolor AC Tonachino	
Α	,		Silancolor AC Tonachino Plus	
BI	37, 381		Silancolor Base Coat	350
EP	38, 106		Silancolor Base Coat Plus	
EP4 Fast	381		Silancolor Cleaner Plus	350
EP 100W	381		Silancolor Paint Plus	351
EP Rustop	38, 200		Silancolor Pittura	351
FD	106		Silancolor Primer	351
FT	382		Silancolor Primer Plus	352
G	38		Silancolor Tonachino	
G Conductive	39, 168		Silancolor Tonachino Plus	
Grip White			Silexcolor Base Coat	
KL			Silexcolor Marmorino	
LT			Silexcolor Paint	
M	,		Silexcolor Primer	
MF			Silexcolor Tonachino	
MF EC Plus			Silwood	
P	,		Spacers 4 LVT	
P1			Spindle for Mapei Steel Dry	
P2	,		Stabilcem	258
P3		-		
PU60 PU Fast		Т		
S			Thinner for Adhesives	43
SN			Thinner PU	
SN Rasante	,		TICINO *	425
W-AS N			Tixobond White	54
S			Topcem	
alyst			Topcem Pronto	
2000			Triblock Finish	277
200			Triblock P	
400 M			Triblock WTS	
500 N			TurboMASS*	423
1000				
1000 N	385	U		
ADY	385		Ultrabond 333	136
Easy	385		Ultrabond Eco 4 LVT	136
Easy DW	386		Ultrabond Eco 375	
Easy T			Ultrabond Eco 380	137
Easy T Primer	386		Ultrabond Eco 388	137
FR			Ultrabond Eco 520	
Primer Black	387		Ultrabond Eco 530	138
			Ultrabond Eco 571 2K	146
			Ultrabond Eco 575	117, 138
0.5	217		Ultrabond Eco Contact	
0.9			Ultrabond Eco Decor Dry	138
0.25			Ultrabond Eco Decor Wet	
1.2			Ultrabond Eco Fast Track	
	10, 217		Ultrabond Eco Fix	139

Ultrabolid Eco P303 ZK Pid:	
Ultrabond Eco P948 1K	
Ultrabond Eco PU 2K	
Ultrabond Eco S940 1K	
Ultrabond Eco S955 1K	
Ultrabond Eco S958 1K	
Ultrabond Eco S968 1K	
Ultrabond Eco S Lite	120
Ultrabond Eco S Plus	120
Ultrabond Eco Tack	
Ultrabond Eco Tack 4 LVT	
Ultrabond Eco Tack TX+	
Ultrabond Eco TX1	
Ultrabond Eco TX2	
Ultrabond Eco TX3	
Ultrabond Eco V4 Evolution	
Ultrabond Eco V4SP	142
Ultrabond Eco V4 SP Condu	uctive142
Ultrabond Eco V4 SP Fiber .	142
Ultrabond Eco VS60	143
Ultrabond Eco VS90 Plus	143
Ultrabond EP 2K	59
Ultrabond MS Rapid	
Ultrabond P902 2K	
Ultrabond P913 2K Plus	121
Ultrabond P980 1K	
Ultrabond P990 1K	
Ultrabond P-R9	
Ultrabond PU Strong	
Ultrabond S965 1K	
Ultrabond S997 1K	
Ultrabond Super Grip	101, 287
Ultrabond Turf 2 Stars	149
Ultrabond Turf 2 Stars Pro	
Ultrabond Turf 2 Stars W	150
Ultrabond Turf Catalyst	
Ultrabond Turf LS	
Ultrabond Turf PU 1K	
Ultrabond Turf PU 1K LC	
Ultrabond Turf PU 2K	
Ultrabond Turf Repair	152
Ultrabond Turf Tape 100	152
Ultrabond Turf Tape 300	153
Ultrabond Turf Tape LS	153
Ultrabond Turf Tape Pro	
Ultrabond TX57	
UltraCare Acid Cleaner	
UltraCare Anti-Mould Prote	
UltraCare Epoxy Off Gel	
UltraCare Grout Cleaner	
UltraCare Grout Protector	
UltraCare Grout Release	75

UltraCare HD Cleaner	
UltraCare Intensifier S	
UltraCare Intensifier W	75
UltraCare Keranet	
UltraCare Keranet Crystals	.71
UltraCare Keranet Easy	
UltraCare Kerapoxy Cleaner	72
UltraCare Mould Remover	72
UltraCare Multicleaner	
UltraCare Multicleaner Spray	
UltraCare Rain Protector S	
UltraCare Rain Protector W	
UltraCare Rust Remover	
UltraCare Smooth Silicone	
UltraCare Stain Protector S	
UltraCare Stain Protector W	
UltraCare Stain Protector W Plus	
UltraCare Stain Remover	
Ultracoat Aqua Plus1	
Ultracoat Base One1	
Ultracoat Binder1	23
Ultracoat Cleaner1	
Ultracoat Easy1	
Ultracoat Easy Plus1	
Ultracoat EL1	
Ultracoat Hard Oil Fast1	
Ultracoat Hard Oil Hardener1	
Ultracoat Hard Oil Wax Plus1	
Ultracoat HT 2K1	26
Ultracoat HT Sport1	
Ultracoat MT 2K1	
Ultracoat Oil Care Plus1	
Ultracoat Oil Care Silver Plus1	27
Ultracoat Oil Pad	
Ultracoat Pad	
Ultracoat Pad Special Stripper	
Ultracoat Polish Anti-Slip1	
Ultracoat Polish Matt1	
Ultracoat Premium Base1	
Ultracoat Remover Plus1	
Ultracoat Renew FL	28
Ultracoat Roller Base Sport1	73
Ultracoat Roller Finish Sport1	
Ultracoat Roller MT81	
Ultracoat Roller MT Sport	
Ultracoat Roller T31	
Ultracoat Roller T51	
Ultracoat Roller T101	
Ultracoat Soft Touch Base	
Ultracoat Soft Touch Finish	
Ultracoat Sport Color	29
Ultracoat Sport Color Hardener1	29

Ultracoat SR	
Ultracoat Steel Spatula	175
Ultracoat Toning Base	129
Ultracoat Top Deck Cleaner	
Ultracoat Top Deck Oil	130
Ultracoat Universal Base	
Ultracolor Plus	
Ultraflex S1 2K	
Ultralite Flex	
Ultralite S1 Flex Quick	
Ultralite S1 Flex Zero	
Ultralite S2 Flex	
Ultralite S2 Flex Quick	
Ultramastic III	
Ultraplan	
Ultraplan Contract	
Ultraplan Eco	
Ultraplan Maxi	
Ultraplan Renovation	
Ultraplan Trade	
Ultraplan Xtra	
Ultratop	203
Ultratop Base Coat	
Ultratop Easycolor	
Ultratop Industrial	
Ultratop Living	
Ultratop Loft F	
Ultratop Loft W	
Ultratop Outdoor	
Ultratop Screed	
Ultratop Stucco	206
VAGAlighTher*	418
VAGAQUARZ*	
VAGASAL*	
VAGLIATA*	
VAGLIATA Super*	426
*/ 10 L// 11 A Dupci	⊤∠∪

VG03S* ..

VG16SS*

VG17FS*

Vinavil 03V Special Asbestos...

WallGard Graffiti Remover Gel355

WallGard Graffiti Barrier..

VG15* .

CO₂ FULLY OFFSET PRODUCTS



* VAGA products

Keraflex Maxi S1 Zero is part of the CO2 Fully Offset in the Entire Life Cycle line of products. CO₂ emissions measured throughout the life cycle of products from the Zero line in 2023 using Life Cycle Assessment (LCA) methodology, verified and certified with EPDs, have been offset through the acquisition of certified carbon credits in support of renewable energy and forestry protection projects. A commitment to the planet, to people and to biodiversity. For more details on how emissions are calculated and on climate mitigation projects financed through certified carbon credits, visit the webpage zero.mapei.com.



..426

..427

..427

Planitop U-HPC Floor...

..347

...347

Ultrabond Eco MS1

Ultrabond Eco MS Easy.....


Ultrabond Eco P909 2K .

Ultrabond Eco P909 2K Fast ...

Ultrabond Eco MS 4LVT Wall&Floor 147

.....117



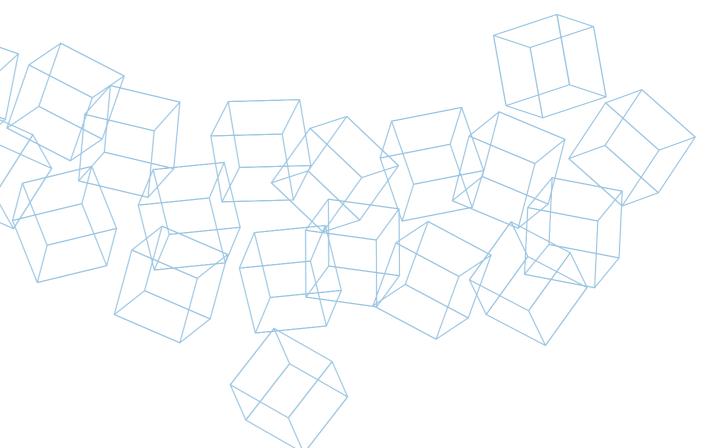



SCREEDS AND SMOOTHING COMPOUNDS

Gravel 0-8 mm

Blend of aggregates for Mapecem assorted grain size from 0 to 8 mm.



CHECK THE TECHNICAL DATASHEET on mapei.com



1.6 kg/m² per mm of thickness CONSUMPTION

PACKAGING 20 kg bags

CERTIFICATIONS **AND MARKINGS**



Mapecem

Special quick-setting and drying (24 hours), controlled-shrinkage hydraulic binder for screeds.


APPLICATION tapping and flattening with a straight edge CONSUMPTION 3.5-4.5 kg/m² per cm of thickness

PACKAGING 20 kg bags

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.com



Mapecem Pronto

Pre-blended, ready-to-use, quick-setting and drying (24 hours), controlled-shrinkage mortar for screeds

APPLICATION tapping and flattening with a straight edge

CONSUMPTION 20 kg/m² per cm of thickness

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS











CHECK THE TECHNICAL DATASHEET on mapei.com



Topcem

Special normal-setting, quick-drying (4 days), controlled-shrinkage hydraulic binder for screeds.

APPLICATION tapping and flattening with a straight edge

CONSUMPTION 2-2.5 kg/m² per cm of thickness

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS









TECHNICAL DATASHEET on mapei.con



Topcem Pronto

Ready-to-use, normal-setting, controlled-shrinkage mortar with high thermal conductivity for quick-drying screeds (4 days).

APPLICATION tapping and flattening with a straight edge

CONSUMPTION 18-20 kg/m² per cm of thickness according to the compaction degree.

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS

DOSAGE

PACKAGING







from 1 to 6 kg per cubic metre of mix

6 kg plastic bags and in boxes containing








CHECK THE **TECHNICAL** DATASHEET on mapei.con



2. PRODUCTS FOR TRADITIONAL SCREEDS

Mapefibre ST30

Structural polymer macro-fibres for concrete.



TECHNICAL DATASHEET on mapei.com





Back to the table of contents Back to the alphabetical index

fifteen 1 kg plastic bags

12

Mapefibre ST42

Structural polymer macro-fibres for concrete.



CHECK THE TECHNICAL DATASHEET on mapei.com



DOSAGE from 1 to 5 kg per cubic metre of mix

PACKAGING 5 kg, 6 kg and 1.8 kg plastic bags,

with water-soluble pucks

3. PRODUCTS FOR SMOOTHING

Fiberplan

Self-levelling, fibre-reinforced, ultra-rapid hardening smoothing compound for thicknesses from 3 to 10 mm. Particularly recommended for wooden substrates.

APPLICATION	trowel or rake

COLOUR pinkish grey

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS

CONSUMPTION





1.6 kg/m² per mm of thickness





CHECK THE TECHNICAL DATASHEET on mapei.com



Mapefibre 6 mm

6 mm fibres for strengthening self-levelling smoothing compounds.



PACKAGING 250 g bags

Mapenet FM

Glass-fibre mesh for reinforcing self-levelling smoothing compounds with min. thickness 5 mm applied over new or existing uneven substrates, subject to movements or vibration, or in general for substrates to be repaired.



TECHNICAL
DATASHEET
on mapei.com



PACKAGING 0.9 m x 100 m rolls

Mapenet FS

Glass fibre mesh for reinforcing joints, cracks, and adjacent substrates made of different materials, and, in general, for repairing new or existing uneven substrates, subject to movements or vibrations.



CHECK THE TECHNICAL DATASHEET on mapei.com



PACKAGING 0.8 m x 45 m rolls

Nivorapid

Quick-drying, thixotropic, cementitious smoothing compound for thicknesses from 1 to 20 mm, including on vertical surfaces. Ideal for localised repair works.

APPLICATION	metal trowel
CONSUMPTION	1.6 kg/m² per mm of thickness
COLOUR	grey

CERTIFICATIONS AND MARKINGS

PACKAGING



25 kg bags







CHECK THE TECHNICAL DATASHEET on mapei.com





Novoplan Maxi

Rapid-hardening, fibre-reinforced, free-flowing cementitious levelling mortar with high thermal efficiency applied in layers from 3 to 40 mm thick, specifically designed for underfloor heating/cooling systems.

APPLICATION trowel, rake, levelling bar or pump

CONSUMPTION 1.8 kg/m² per mm of thickness

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS









CHECK THE TECHNICAL DATASHEET on mapei.com



Pianocem M

Quick-drying, thixotropic, cementitious smoothing compound for thicknesses from 1 to 5 mm, including on vertical surfaces.

1.4 kg/m² per mm of thickness

APPLICATION trowel

COLOUR white

PACKAGING

CONSUMPTION

25 kg bags

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.com



Pianodur R

Fine-grained, ultra quick-setting self-levelling smoothing compound for thicknesses up to 3 mm per coat, suitable for floors subject to intense traffic.

APPLICATION	trowel or rake
CONSUMPTION	1.5 kg/m² per mm of thickness
COLOUR	grey
PACKAGING	22 kg bags

CERTIFICATIONS AND MARKINGS

16





CHECK THE TECHNICAL DATASHEET on mapei.com



Planex HR

Rapid-drying, moisture-resistant, self-levelling, smoothing compound, for thicknesses from 1 to 10 mm. Also suitable for smoothing off internal surfaces; smoothing off substrates before bonding non-welded resilient floor tiles with reactive adhesives in areas that need to be washed or rinsed frequently; smoothing over concrete substrates with rising damp before placing PVC uncoupling sheets (such as Mapelay).

APPLICATION	trowel, rake, or pump
CONSUMPTION	1.7 kg/m² per mm of thickness
COLOUR	grey

CERTIFICATIONS
AND MARKINGS

PACKAGING



25 kg bags







TECHNICAL
DATASHEET
on mapei.com



Planex HR Maxi

Rapid-drying, moisture-resistant, self-levelling, smoothing compound, for thicknesses from 2 to 20 mm. Also suitable for smoothing off internal surfaces; smoothing off substrates before bonding non-welded resilient floor tiles with reactive adhesives in areas that need to be washed or rinsed frequently; smoothing over concrete substrates with rising damp before placing PVC uncoupling sheets (such as **Mapelay**).

APPLICATION	trowel, rake, or pump
CONSUMPTION	1.7 kg/m² per mm of thickness
COLOUR	grey

CERTIFICATIONS AND MARKINGS

PACKAGING



25 kg bags







CHECK THE TECHNICAL DATASHEET on mapei.con



Planipatch

Fine-grained, ultra quick-drying, thixotropic cementitious smoothing compound for thicknesses from 0 to 10 mm, including on vertical surfaces.

APPLICATION	trowel
CONSUMPTION	1.5 kg/m² per mm of thickness
COLOUR	grey
PACKAGING	25 kg bags

CERTIFICATIONS AND MARKINGS











CHECK THE TECHNICAL DATASHEET on mapei.com





Planipatch Xtra

Fine-grained, ultra-fast drying thixotropic cementitious patching compound for local repairing. Installation of resilient flooring after 45-60 minutes.

APPLICATION trowel

CONSUMPTION 1.4 kg/m² per mm of thickness

COLOUR grey

CERTIFICATIONS AND MARKINGS

PACKAGING



5 and 23 kg bags









CHECK THE TECHNICAL DATASHEET on mapei.com



Planiprep 4 LVT


Ready-to-use grout smoother before installing LVT floors. For smoothing over (down to a feather edge up to up to 2 mm thick) existing interior ceramic and stone surfaces. It fills the joints between the tiles and forms a fine-textured, smooth finish suitable for the very quick (2 hours) installation of loose-lay LVT, or bonded LVT with reactive adhesives, such as **Ultrabond Eco MS 4 LVT Wall&Floor**.

APPLICATION	trowel
CONSUMPTION	approx. 80-100 g/m ²
COLOUR	grey
PACKAGING	10 kg drums

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.com



Planiprep Contract

Fine textured cementitious skimming compound, suitable for levelling and skimming, also in more than one coat, new and existing internal substrates (also ceramic) to make them suitable for bonding all types of floors covering, from 1 to 3 mm of thickness.

APPLICATION	trowel
CONSUMPTION	1.25 kg/m² per mm of thickness
COLOUR	grey or white
PACKAGING	22 kg bags

CERTIFICATIONS AND MARKINGS

18









CHECK THE
TECHNICAL
DATASHEET
on mapei.com



Planiprep Fast Track

Ultra rapid-drying fine textured thixotropic cementitious skimming compound, suitable for and skimming (from a feather-edge up to 3 mm) new and existing internal substrates to make them suitable for bonding all types of floor covering very quickly (2 hours), including resilient and textile flooring.

APPLICATION	trowel
CONSUMPTION	approx. 1.0 kg/m² per mm of thickness
COLOUR	grey
PACKAGING	6 kg boxes containing four 4 kg plastic sachets

CERTIFICATIONS AND MARKINGS







TECHNICAL
DATASHEET
on mapei.com



Planiprep Remove 4 LVT

Ready-to-use grout smoother for existing substrates before the application of looselay LVT. Easy to remove without leaving any residual. For levelling off and smooth over (also down to a feather edge or in layers up to 2 mm thick) existing interior ceramic and stone surfaces. It fills joints and gaps between tiles and forms a fine, smooth finish suitable for loose-lay LVT tiles and planks.

APPLICATION	trowel
CONCLIMENTO	1 approx 0.0 10 leg/gs?
CONSUMPTION	N approx. 0.8-1.0 kg/m ²
COLOUR	white
PACKAGING	10 kg drums

CERTIFICATIONS AND MARKINGS





CHECK THE TECHNICAL DATASHEET on mapei.com



Planopur

Two-component, self-levelling, flexible, polyurethane levelling compound for all types of substrate, especially the deformable type.

APPLICATION	rake or flat metal trowel
CONSUMPTION	approx. 1.5 kg/m² per mm of thickness
COLOUR	comp. A: beige, comp. B: brown
PACKAGING	14 kg units



CHECK THE TECHNICAL DATASHEET on mapei.com





Ultraplan

Self-levelling, ultra quick-hardening smoothing compound for thicknesses from 1 to 10 mm.

APPLICATION trowel, rake, or pump

CONSUMPTION 1.6 kg/m² per mm of thickness

COLOUR pinkish grey

PACKAGING 23 kg bags

CERTIFICATIONS AND MARKINGS









CHECK THE TECHNICAL DATASHEET on mapei.com



Ultraplan Contract

Self-levelling, ultra quick-hardening smoothing compound ideal for large sites and retails for thicknesses from 1 to 10 mm.

APPLICATION trowel, rake, or pump

CONSUMPTION 1.6 kg/m² per mm of thickness

COLOUR grey

PACKAGING 24 kg bags

CERTIFICATIONS AND MARKINGS









CHECK THE TECHNICAL DATASHEET on mapei.com



Ultraplan Eco

Self-levelling, ultra quick-hardening smoothing compound for thicknesses from 1 to 10 mm.

APPLICATION trowel, rake, or pump

CONSUMPTION 1.6 kg/m² per mm of thickness

COLOUR grey

PACKAGING 23 kg bags

CERTIFICATIONS AND MARKINGS













CHECK THE TECHNICAL DATASHEET on mapei.com



Ultraplan Maxi

Self-levelling, ultra rapid-hardening smoothing compound for thicknesses from 3 to 40 mm.

APPLICATION trowel or pump

CONSUMPTION 1.7 kg/m² per mm of thickness

COLOUR grey

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS









TECHNICAL

DATASHEET

on mapei.com



Ultraplan Renovation

Self-levelling, fibre-reinforced, ultra rapid drying smoothing compound for thicknesses from 3 to 40 mm. Particularly suitable for levelling off existing substrates, even wooden substrates.

APPLICATION trowel or pump

CONSUMPTION 1.8 kg/m² per mm of thickness

COLOUR grey

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS









TECHNICAL

DATASHEET

on mapei.com



Ultraplan Trade

Fast hardening, self-levelling compound for thicknesses from 3 to 40 mm.

APPLICATION trowel or pump

CONSUMPTION 1.7 kg/m² per mm of thickness

COLOUR grey

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS











TECHNICAL

DATASHEET

on mapei.com





Back to the table of contents

Back to the alphabetical index

20

Ultraplan Xtra

Self-levelling, ultra quick-drying smoothing compound for thicknesses from 1 to 20 mm. Ideal for installing wooden, textile, ceramic, and natural stone coverings already after 6 hours at +23°C in thicknesses up to 5 mm.

APPLICATION trowel or rake

CONSUMPTION 1.6 kg/m² per mm of thickness

COLOUR pinkish grey

PACKAGING 23 kg bags

CERTIFICATIONS AND MARKINGS











CHECK THE TECHNICAL DATASHEET on mapei.com



4. PRODUCTS FOR LEVELLING SUBSTRATES

Adesilex P4

Quick-hardening cementitious levelling compound for internal and external surfaces.

APPLICATION no. 6 or 10 rounded notched trowel

CONSUMPTION 4-10 kg/m²

COLOUR grey

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS













CHECK THE TECHNICAL DATASHEET on mapei.com



Nivoplan

Smoothing mortar for walls and ceilings in interior and exterior for thicknesses from 2 to 20 mm.

APPLICATION trowel

 ${\color{red} {\sf CONSUMPTION}} \qquad {\color{blue} {\sf 1.4~kg/m^2~per~mm~of~thickness}}$

COLOUR grey or white

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.com



Planitop Fast 330

Quick-setting, fibre-reinforced cementitious levelling mortar for internal and external floors and walls, applied in layers from 3 to 30 mm to even out irregularities.

APPLICATION straight trowel

CONSUMPTION 1.45 kg/m² per mm of thickness

COLOUR grey

PACKAGING 25 kg vacuum-packed polyethylene bags

CERTIFICATIONS AND MARKINGS














CHECK THE TECHNICAL DATASHEET on mapei.com



MAPE



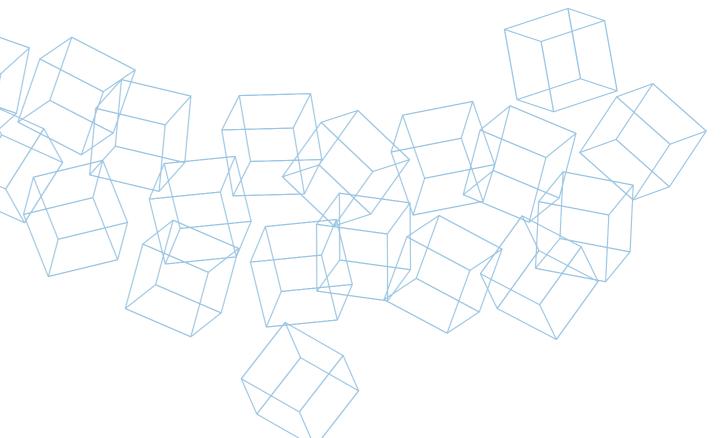



PRODUCTS FOR SOUNDPROOFING

Mapesilent Band R

Closed-cell, expanded polyethylene adhesive band applied to perimeter walls and around the edges of elements which pass through screeds to avoid the formation of acoustic bridges, designed to be easily applied in a L-shape. The product can be used in combination with all the products from the **Mapesilent** range. Available in two different heights depending on the total thickness of floating screeds.

FORMAT	light blue roll
THICKNESS	5 mm
LENGTH	50 m
HEIGHT	100 - 160 mm
PACKAGING	4 50 m rolls



CHECK THE TECHNICAL DATASHEET on mapei.com



Mapesilent Comfort

Dry soundproofing system for floating screeds made from high density, closed-cell foam polyethylene sandwiched to a special protective film.

FORMAT	1.2 x 42 m (50 m²) rolls
THICKNESS	6 mm
PACKAGING	50 m² rolls





CHECK THE TECHNICAL DATASHEET on mapei.com



Mapesilent Panel

Tiles with a bitumen and special polymer-based elasto-plastomeric membrane with polyester reinforcement, sandwiched to a resilient layer of polyester fibre.

FORMAT	1 m x 1 m tiles
THICKNESS	13 mm
WEIGHT	5 kg/m²
PACKAGING	75 tiles

CERTIFICATIONS AND MARKINGS



CHECK THE TECHNICAL DATASHEET on mapei.com



Mapesilent Roll

Sheets with a bitumen and special polymer-based elasto-plastomeric membrane with polyester reinforcement sandwiched to a layer of resilient polyester fibre coated with blue, non-woven polypropylene fabric with a 5 cm wide self-adhesive border along the sides.

FORMAT	10 x 1 m rolls with a 5 cm border along the sides
THICKNESS	8 mm
WEIGHT	1.8 kg/m²
PACKAGING	1.05 x 10 m rolls
CERTIFICATIONS	(JEMICO)



CHECK THE TECHNICAL DATASHEET on mapei.com



Mapesilent Tape

AND MARKINGS

Adhesive sealing tape made in closed-cell expanded polyethylene, ideal for sealing rolls and panels from the **Mapesilent** range. It prevents the formation of acoustic bridges ensuring the seamlessness of the soundproofing system.

FORMAT	white roll
THICKNESS	3 mm
WIDTH	100 mm
LENGTH	25 m
PACKAGING	12 rolls boxes



CHECK THE TECHNICAL DATASHEET on mapei.com



Mapesonic CR

Soundproofing mat in sheets of rubber and cork applied on substrates before installing ceramic, stone, resilient and multi-layered wooden floors.

FORMAT	20 x 1 m (2 mm) rolls; 10 x 1 m (4 mm) rolls
THICKNESS	2 mm, 4 mm
PACKAGING	• 20 x 1 m (2 mm) rolls; • 10 x 1 m (4 mm) rolls

CERTIFICATIONS
AND MARKINGS



CHECK THE TECHNICAL DATASHEET on mapei.com





Back to the table of contents

Mapesonic Strip

Adhesive strip made of closed-cell expanded polyethylene to be applied around the edge of flooring and any pillars passing through the flooring to prevent the formation of acoustic bridges along the perimeter of the walls. Specific for use with **Mapesonic CR** to ensure the seamlessness of the soundproofing system.

FORMAT	grey roll
THICKNESS	3 mm
WIDTH	50 mm
LENGTH	11 m
PACKAGING	4 rolls boxes



CHECK THE TECHNICAL DATASHEET on mapei.com





Biblock

Two-component, epoxy curing product in water dispersion for concrete with consolidating and anti-dust properties.

Suitable for not absorbent substrates before the application of Triblock P.



CHECK THE
TECHNICAL
DATASHEET
on mapei.com



APPLICATION roller, brush or spray CONSUMPTION 0.10-0.15 kg/m² COLOUR comp. A: straw yellow; comp. B: amber PACKAGING 2.5 + 2.5 kg drums

Eco Prim Grip Plus

Multi-purpose, ready-to-use, low odour, bonding promoter primer with a very low emission of volatile organic compounds (VOC) for render, smoothing and levelling compounds and cementitious adhesives, for internal and external application.

APPLICATION	roller, brush
CONSUMPTION	0.2-0.3 kg/m ²
COLOUR	grey
PACKAGING	1, 5 and 10 kg drums



32







Eco Prim PU 1K

One-component, solvent-free, moisture curing polyurethane primer with a very low emission level of volatile organic compounds (VOC) for consolidating and waterproofing cementitious screeds.

APPLICATION	roller, brush
CONSUMPTION	0.2-0.4 kg/m ²
COLOUR	brown
PACKAGING	10 kg drums
CERTIFICATIONS	(Standard





CHECK THE TECHNICAL DATASHEET on mapei.com



Eco Prim PU 1K Turbo

One-component, solvent-free, moisture curing, rapid-drying polyurethane primer with a very low emission level of volatile organic compounds (VOC) for consolidating and waterproofing cementitious screeds.

APPLICATION	roller, brush
CONSUMPTION	0.2-0.4 kg/m² per coat
COLOUR	brown
PACKAGING	10 kg drums

CERTIFICATIONS AND MARKINGS







TECHNICAL DATASHEET on mapei.com



Eco Prim T Easy

Ready to use acrylic primer for absorbent substrates.

APPLICATION	roller, brush
CONSUMPTION	0.1-0.15 kg/m ²
COLOUR	light blue
PACKAGING	10 kg drums

CERTIFICATIONS AND MARKINGS





CHECK THE TECHNICAL DATASHEET on mapei.com



Eco Prim T Plus

Universal acrylic primer for all absorbent and non-absorbent substrates.

APPLICATION	roller, brush
CONSUMPTION	0.03-0.15 kg/m ²
COLOUR	light blue
PACKAGING	20, 10 and 5 kg drums

CERTIFICATIONS AND MARKINGS







TECHNICAL DATASHEET on mapei.com





Eco Prim T Pro

Multi-purpose acrylic primer for absorbent substrates and ceramic.

APPLICATION roller, brush CONSUMPTION 0.05-0.15 kg/m² COLOUR light blue PACKAGING 10 and 1 kg drums **CERTIFICATIONS** EC 1 AND MARKINGS







Eporip

Two component solvent-free epoxy adhesive for construction joints and for monolithic sealing of cracks in screeds.

APPLICATION brush, trowel, or pouring CONSUMPTION 1.35 kg/dm³ for bonding

COLOUR comp. A: grey; comp. B: white

PACKAGING • 10 ka kit:

(component A 7.5 kg + component B 2.5 kg) • 2 kg kit: (component A 1.5 kg + component B 0.5 kg)

CERTIFICATIONS AND MARKINGS







CHECK THE **TECHNICAL** DATASHEET on mapei.com



Eporip SCR

Rapid-hardening, silicate-urethane resin for sealing cracks and joints in screeds and carrying out small repairs.

APPLICATION roller, brush

PACKAGING boxes containing 6 (A+B) kits

(comp. A: 300 ml; comp. B: 300 ml)

CERTIFICATIONS AND MARKINGS

CONSUMPTION





Approx. 1.7 kg/dm³ of cavity to be filled



CHECK THE TECHNICAL DATASHEET on mapei.com



Eporip Turbo

Two-component, quick-hardening polyester resin for monolithic sealing of cracked screeds.

APPLICATION	pouring
CONSUMPTION	1.7 kg/dm³ of cavity to be filled
COLOUR	comp. A: grey; comp. B: white
PACKAGING	508 g metal can (comp. A = 500 g; component B 8 g).
CERTIFICATIONS	Facal (1)



TECHNICAL DATASHEET on mapei.com



Livigum

AND MARKINGS

Synthetic resin-based admixture in water dispersion to be added to cementitious mortar and smoothing compounds to improve mechanical performances and adhesions.

60-90 g/m² per mm of skim coat;

1.5-2 kg per bag of Pianocem M



TECHNICAL DATASHEET on mapei.com





Malech

PACKAGING

CONSUMPTION

Water-based acrylic undercoat and bonding promoter with a smooth finish.

25 kg tanks



APPLICATION	roller, brush or spray
CONSUMPTION	0.10-0.15 kg/m ²
COLOUR	transparent
PACKAGING	2 and 10 kg







Mapecoat I 600 W

Two-component, transparent epoxy primer in water dispersion.

APPLICATION	roller, spray or airless spray
CONSUMPTION	300-500 g/m², depending on the absorbency rate of diluted primer
COLOUR	opalescent mix
PACKAGING	5.9 kg and 11.8 kg kits (A+B)



CHECK THE TECHNICAL DATASHEET on mapei.com



Mapecoat I 600 W Lucido

Two-component transparent epoxy primer in water dispersion.

APPLICATION	roller, spray or airless spray
CONSUMPTION	300-500 g/m², depending on the absorbency rate of diluted primer
COLOUR	opalescent mix
PACKAGING	5.9 kg kit (A+B)



CHECK THE TECHNICAL DATASHEET on mapei.com



Mapeproof Primer

PVDC based primer in water dispersion for suppressing residual moisture up to 4,5% (95% R.H.) in cementitious screeds.

APPLICATION	roller, brush
CONSUMPTION	approx. 250 g/m² as a two coats application (coverage 4 m²/kg)
PACKAGING	10 kg tanks

CERTIFICATIONS AND MARKINGS





CHECK THE TECHNICAL DATASHEET on mapei.com



Planicrete

Synthetic rubber latex to improve adhesion and performance of cement mixes and prepare bonding slurries for screeds.



TECHNICAL
DATASHEET
on mapei.com



Primer 3296

CONSUMPTION


PACKAGING

Acrylic primer in water dispersion with high penetration, consolidating and anti-dust properties for screeds.

• to prepare bonding slurries: 100-150 g/m²;

5-10-25 kg tanks and 12 x 1 kg packages

• to prepare screeds and renders: 50-80 kg/m³.

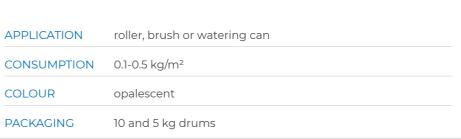



CHECK THE TECHNICAL DATASHEET on mapei.com



Primer BI

Synthetic resin primer in solvent, specific for improving adhesion of polyurethane coating products (from the **Purtop** range) on existing bituminous membranes.



CONSUMPTION	0.20 kg/m² per coat, depending on the characteristics of the substrate
COLOUR	transparent
PACKAGING	10 kg







Primer EP

APPLICATION

CONSUMPTION

COLOUR

PACKAGING

Two-component epoxy primer in solvents for consolidating and waterproofing cementitious screeds and industrial floors.

roller, brush or watering can



CHECK THE
TECHNICAL
DATASHEET
on manei com



Primer EP Rustop

Two-component epoxy primer for metal surfaces.

 $0.5-0.7 \text{ kg/m}^2$

transparent

5 +5 kg drums



APPLICATION	roller, brush or airless spray
CONSUMPTION	0.2 kg/m ²
COLOUR	white mix
PACKAGING	5 kg kit (A+B)





Primer G

Synthetic resin primer in water dispersion

APPLICATION	roller, brush
CONSUMPTION	0.1-0.2 kg/m² depending on the use
COLOUR	light blue
PACKAGING	25, 10 and 5 drums and 12x1 kg
CERTIFICATIONS	TEMICA 490N Q JON 000Up

AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.com



Primer G Conductive

brush

black

0.1-0.15 kg/m²

10 kg drums

Dark-coloured, solvent-free conductive synthetic resin primer in water dispersion.



CHECK THE TECHNICAL DATASHEET on mapei.com



Primer KL

APPLICATION

COLOUR

PACKAGING

CONSUMPTION

Adhesion promoter in solvent for two-component epoxy, epoxy-polyurethane and polyurethane adhesives and thinner for **Primer MF**.

APPLICATION	soaked cotton rag
CONSUMPTION	0.3-0.4 kg/m ²
COLOUR	pinkish grey
PACKAGING	boxes of 12x0.8 litre bottles and 8 kg metal drums



TECHNICAL DATASHEET on mapei.com

Back to the alphabetical index



Primer M

APPLICATION

brush

One-component, solvent-free primer for polyurethane sealants, for use absorbent and compact surfaces.



CONSUMPTION	5-10 g/m (for a 1 cm deep joint)	CHECK THE TECHNICAL
COLOUR	brown	DATASHEET on mapei.com
PACKAGING	250 g bottles, 2 kg metal drums	







Primer MF

Two-component, solvent-free epoxy primer for consolidating and waterproofing cementitious substrates.



CHECK THE
TECHNICAL
DATASHEET
on mapei.com



APPLICATION	roller, brush
CONSUMPTION	0.20-0.40 kg/m ²
COLOUR	yellow transparent
PACKAGING	1 kg (A+B) and 6 kg (A+B) units

Primer MF EC Plus

Two-component, solvent-free, low-viscosity, epoxy primer with very low emission of volatile organic compounds for consolidating and waterproofing cementitious substrates.

APPLICATION	roller, brush or metal straight trowel
CONSUMPTION	0.2-0.3 kg/m² per coat
COLOUR	yellow transparent
PACKAGING	5 kg units (A+B)

CERTIFICATIONS AND MARKINGS









CHECK THE TECHNICAL DATASHEET on mapei.com



Primer P

One-component primer for sealants applied on plastic materials.



APPLICATION brush 5-10 g/m (for a 1 cm deep joint) CONSUMPTION COLOUR transparent PACKAGING 150 g bottles



Primer P1

One-component solvent-based primer for polyurea coatings (from the Purtop line) on plastic surfaces such as PVC.



CHECK THE TECHNICAL DATASHEET on mapei.com



Primer P2

COLOUR

PACKAGING

CONSUMPTION 0.1-0.2 kg/m²

yellowish

50 kg tanks

One-component solvent-based primer for polyurea coatings (from the **Purtop** line) on plastic surfaces such as TPO.



CHECK THE **TECHNICAL** DATASHEET on mapei.com



CONSUMPTION 0.1-0.2 kg/m² COLOUR yellowish PACKAGING 50 kg tanks

Primer P3

Two-component solvent-based polyurethane primer for products from the **Purtop** line.



CONSUMPTION	approx. 50-100 g/m² as adhesion promoter for polyurethane finishes; 150-200 g/m² as primer for bitumen membranes.
COLOUR	comp. A: yellow-transparent; comp. B: dark brown
PACKAGING	5 +1.20 kg and 1.24 kg kits (A+B)

CHECK THE TECHNICAL DATASHEET on mapei.com





Primer PU60

Moisture curing polyurethane resin for consolidating and waterproofing damp screeds.

roller, brush or watering can



CHECK THE
TECHNICAL
DATASHEET
on manei com



Primer S

PACKAGING

APPLICATION

COLOUR

CONSUMPTION

Waterproofing primer in water dispersion.

0.4-1.2 kg/m²

10 kg drums

brown



CHECK THE
TECHNICAL
DATASHEET
on mapei.com
-



APPLICATION roller, brush CONSUMPTION 0.1 kg/m² per coat COLOUR pink PACKAGING 5 kg bottles

Two-component epoxy primer with fillers. May be coloured with **Mapecolor Paste.**

	APPLICATION	straight metal trowel or straight rake
	CONSUMPTION	0.3-0.7 kg/m² per coat, depending on the absorbency and the characteristics of the substrate
	COLOUR	neutral
	PACKAGING	20 kg and 5 kg kits (A+B)

CERTIFICATIONS AND MARKINGS

Primer SN





CHECK THE TECHNICAL DATASHEET on mapei.com



Prosfas

APPLICATION

COLOUR

PACKAGING

CONSUMPTION

Water-based, solvent-free consolidator with high penetration properties for cementitious substrates.

roller, scrubber or brush

0.5-0.7 kg/m²

transparent

25 kg tanks



TECHNICAL
DATASHEET
on mapei.com



Quartz 1.2

Selected graded silica sand to improve the bond on resin or epoxy primers.



CHECK THE TECHNICAL DATASHEET on mapei.com



COLOUR beige - grey

PACKAGING 25 kg bags

Thinner for Adhesives

Note: Packaging approved according to ADR as specified in Italian Ministerial Decree 22/2/1990.



CHECK THE TECHNICAL DATASHEET on mapei.com





Thinner PU

Thinners for **Primer PU 60**.



	CONSUMPTION	0.25-1 litre per litre of Primer PU 60 according to dilution rate considered.
	COLOUR	transparent
	PACKAGING	9 kg drums





Triblock P

Three-component epoxy-cementitious primer for waterproofing non-absorbent damp substrates.



APPLICATION	roller, brush
CONSUMPTION	0.5 kg/m ²
COLOUR	comp. A white; comp. B white; comp. C white
PACKAGING	5 kg drums (A+B+C)





45



1. HYDRAULIC BINDERS-BASED ADHESIVES

Adesilex P4

High-performance, self-buttering, quick-setting grey cementitious adhesive for ceramic tiles and stone material.

Note: May also be used for smoothing internal and external surfaces.

APPLICATION notched trowel to be selected depending on the format

of the tiles

CONSUMPTION $4-10 \text{ kg/m}^2$

COLOUR grey

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS











CHECK THE TECHNICAL DATASHEET on mapei.com



Adesilex P8

Improved adhesion cementitious adhesive with no vertical slip and extended open time, for ceramic tiles and stone materials.

APPLICATION notched trowel to be selected depending on the format

of the tiles

CONSUMPTION 2-5 kg/m²

COLOUR white and grey

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS









CHECK THE TECHNICAL DATASHEET on mapei.com



Adesilex P9

High-performance cementitious adhesive with no vertical slip and extended open time for ceramic tiles and stone material. Note: The white version has excellent whiteness and workability.

APPLICATION notched trowel to be selected depending on the format of the tiles

CONSUMPTION 2-5 kg/m²

COLOUR grey or white

PACKAGING 25 kg bags and 4x5 kg Alupack boxes

CERTIFICATIONS AND MARKINGS

48









CHECK THE TECHNICAL DATASHEET on mapei.com



Adesilex P9 Express

High-performance rapid-setting cementitious adhesive with extended open time for bonding ceramic tiles.

APPLICATION notched trowel to be selected depending on the format of the tiles

CONSUMPTION 2.5-5 kg/m²

COLOUR grey or white

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS













TECHNICAL DATASHEET on mapei.com



Adesilex P10

High-performance cementitious adhesive with no vertical slip and extended open time for glass mosaic, ceramic and marble coverings.

APPLICATION notched trowel to be selected depending on the format of the tiles

CONSUMPTION 2-5 kg/m²

COLOUR white

CERTIFICATIONS AND MARKINGS

PACKAGING



25 kg bags







TECHNICAL DATASHEET on mapei.com



Elastorapid

Two-component, high-performance, highly-deformable, quick-setting and drying cementitious adhesive with no vertical slip and extended open time for ceramic tiles and stone material.

APPLICATION notched trowel to be selected depending on the format of the tiles

CONSUMPTION 3-8 kg/m²

COLOUR grey or white

PACKAGING Elastorapid white: 31.25 kg kit, Elastorapid grey: 31.25 kg kit. Comp. A: 25 kg / comp. B: 6.25 kg

CERTIFICATIONS AND MARKINGS









TECHNICAL DATASHEET on mapei.com





Granirapid

Two-component, high-performance, deformable, quick-setting and hydrating cementitious adhesive for ceramic tiles and stone material.

APPLICATION notched trowel to be selected depending on the format

of the tiles

CONSUMPTION 3-8 kg/m²

COLOUR grey or white

PACKAGING Granirapid white: 28 kg kit, Granirapid grey: 30.5 kg kit. Comp. A: 25 kg / comp. B: 5.5 kg

CERTIFICATIONS AND MARKINGS









CHECK THE TECHNICAL DATASHEET on mapei.com



Isolastic

Elasticising latex mixed with **Kerabond**, **Kerabond Easy**, **Kerabond T**, **Kerabond Plus** and **Adesilex P10**. **Kerabond**, **Kerabond Plus** and **Kerabond T** mixed with **Isolastic** become high performance, highly deformable adhesives with extended open time (C2E/S2). When **Adesilex P10** is mixed with **Isolastic** (dilution rate 1:1 with water), becomes a high-performance, deformable adhesive with extended open time (C2E/S1).

APPLICATION notched trowel to be selected depending on the format of the tiles

CONSUMPTION 1-2 kg/m²

PACKAGING 25 and 5 kg tanks

CERTIFICATIONS AND MARKINGS





TECHNICAL
DATASHEET
on mapei.com



Kerabond

Cementitious adhesive for ceramic tiles.

APPLICATION notched trowel to be selected depending on the format

of the tiles

CONSUMPTION 2-5 kg/m²

COLOUR grey or white

PACKAGING 25 kg bags and 4x5 kg Alupack boxes

CERTIFICATIONS AND MARKINGS

50









CHECK THE TECHNICAL DATASHEET on mapei.com



Kerabond Easy

Cementitious adhesive for ceramic tiles.

APPLICATION notched trowel to be selected depending on the format of the tiles

TOTTIAL OF LIFE LIFES

CONSUMPTION 2-5 kg/m²

COLOUR grey or white

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS









CHECK THE TECHNICAL DATASHEET on mapei.com



Kerabond Plus

Improved adhesion cementitious adhesive with extended open time for ceramic tiles.

APPLICATION notched trowel to be selected depending on the format of the tiles

CONSUMPTION 2-5 kg/m²

CERTIFICATIONS AND MARKINGS

COLOUR

PACKAGING



grey or white

25 kg bags







CHECK THE TECHNICAL DATASHEET on mapei.com



Kerabond T

Cementitious adhesive with no vertical slip for ceramic tiles.

APPLICATION notched trowel to be selected depending on the format of the tiles

CONSUMPTION 2-5 kg/m²

COLOUR grey or white

PACKAGING 25 kg bags

CERTIFICATIONS
AND MARKINGS









CHECK THE TECHNICAL DATASHEET on mapei.com





Keracrete

Synthetic latex rubber mixed with sand and cement.

APPLICATION notched trowel to be selected depending on the format of the tiles

CONSUMPTION 0.5-1 kg/m²

PACKAGING 25 kg tanks

CERTIFICATIONS AND MARKINGS





TECHNICAL DATASHEET on mapei.com



Keraflex

High-performance cementitious adhesive with no vertical slip and extended open time for ceramic and stone tiles.

APPLICATION notched trowel to be selected depending on the format

of the tiles

CONSUMPTION 2-5 kg/m²

COLOUR grey or white

PACKAGING 25 kg bags and 4x5 kg Alupack boxes

CERTIFICATIONS AND MARKINGS









CHECK THE TECHNICAL DATASHEET on mapei.com



Keraflex Easy S1 Zero

High-performance, easy to apply, deformable cementitious adhesive with extended open time, with high wetting capacity, very low emission of volatile organic compounds and fully offset Greenhouse Gas emissions, for ceramic tiles and stone material. It is particularly recommended for bonding large-sized tiles over large areas of flooring. Suitable for application in layers up to 10 mm thick.

APPLICATION notched trowel to be selected depending on the format of the tiles

CONSUMPTION 2-5 kg/m²

COLOUR grey or white

PACKAGING 25 kg bags

CERTIFICATIONS **AND MARKINGS**











Keraflex Extra S1 Zero

High-performance, deformable cementitious adhesive with variable rheology, with no vertical slip or with high wetting capacity, extended open time, with very low emission of volatile organic compounds and fully offset Greenhouse Gas emissions, for ceramic tiles and stone material including in large format.

APPLICATION notched trowel to be selected depending on the format of the tiles

CONSUMPTION 1,2 kg/m² per mm of thickness

COLOUR grey or white

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS















Keraflex Maxi S1 Zero

High-performance cementitious adhesive with no vertical slip, with Low Dust technology, extended open time and deformable with excellent workability. Suitable for laying large-format ceramic tiles and stone material, with very low emission of volatile organic compounds and fully offset greenhouse gas emissions. Suitable for high thickness adhesives up to 15 mm.

APPLICATION notched trowel to be selected depending on the format of the tiles

CONSUMPTION 1.2 kg/m² per mm of thickness

COLOUR grey or white **PACKAGING** 25 kg bags

CERTIFICATIONS **AND MARKINGS**

















Keraquick Maxi S1

High-performance, deformable, rapid-setting and hydrating, non-slip cementitious adhesive with very low emission of volatile organic compounds for ceramic tiles and in particular for stone, including large formats. Suitable for high thickness adhesives up to 15 mm.

APPLICATION notched trowel to be selected depending on the format of the tiles

CONSUMPTION 1.2 kg/m² per mm of thickness

COLOUR grey or white

PACKAGING 25 kg and 23 kg bags and 4x5 kg Alupack

CERTIFICATIONS AND MARKINGS
















TECHNICAL DATASHEET on mapei.com





Keraset

Cementitious adhesive for ceramic tiles.

APPLICATION notched trowel to be selected depending on the format of the tiles

CONSUMPTION 2-5 kg/m²

COLOUR grey or white

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.com



Latex Plus

Elasticising latex mixed with Keraquick Maxi S1. When Keraquick Maxi S1 is mixed with Latex Plus it forms a high-performance, quick-setting, highly-deformable adhesive (C2F/S2).

APPLICATION notched trowel to be selected depending on the format of the tiles

CONSUMPTION to be calculated according to the amount of Keraquick Maxi S1 and to the mixing ratio

PACKAGING 10 kg tanks

CERTIFICATIONS AND MARKINGS





CHECK THE TECHNICAL DATASHEET on mapei.com



Tixobond White

High-performance, ultra-white cementitious adhesive with no vertical slip and extended open time for ceramic tiles.

APPLICATION notched trowel to be selected depending on the format of the tiles

CONSUMPTION 1.2 kg/m² per mm of thickness

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS









CHECK THE TECHNICAL DATASHEET on mapei.com



Back to the table of contents

Ultraflex S1 2K

Two-component, high-performance, deformable cementitious adhesive with extended open time, resistant to vertical slip, for laying ceramic tiles and stone material, particularly suitable for outdoor installation.

APPLICATION notched trowel to be selected depending on the format

CONSUMPTION 1.2 kg/m² per mm of thickness

COLOUR

PACKAGING 32.5 kg kit: comp. A 25 kg bag, comp. B 7.5 kg drum

CERTIFICATIONS AND MARKINGS







TECHNICAL DATASHEET on mapei.com



Ultralite Flex

One-component, high-performance, moderately deformable, lightweight, cementitious adhesive with no vertical slip and extended open time, Low Dust technology and extremely high yield. Easy to apply by trowel with excellent back-buttering capacities, for ceramic and stone tiles and mosaics.

APPLICATION notched trowel to be selected depending on the format of the tiles

CONSUMPTION 0.8 kg/m² per mm of thickness

PACKAGING 15 kg bags

CERTIFICATIONS AND MARKINGS















Ultralite S1 Flex Quick

One-component, high-performance, highly deformable, lightweight, cementitious adhesive with rapid setting and hydration and extended open time, Low Dust technology and extremely high yield. Easy to apply by trowel with excellent back-buttering capacities, for ceramic, mosaic and stone tiles. Ideal for large-format tiles.

APPLICATION notched trowel to be selected depending on the format of the tiles

CONSUMPTION 0.8 kg/m² per mm of thickness

COLOUR white and grey

PACKAGING 15 kg bags

CERTIFICATIONS AND MARKINGS





















Ultralite S1 Flex Zero

One-component, high-performance, deformable, lightweight, cementitious, adhesive with no vertical slip and extended open time, Low Dust technology and extremely high yield. Easy to apply by trowel with excellent back-buttering capacities, very low emission of volatile organic compounds and fully offset Greenhouse Gas emissionss. For ceramic and stone tiles, ideal for large-format tiles.

APPLICATION notched trowel to be selected depending on the format

of the tiles

CONSUMPTION 0,8 kg/m² per mm of thickness

COLOUR grey or white

PACKAGING 15 kg bags

CERTIFICATIONS AND MARKINGS















CHECK THE

TECHNICAL

DATASHEET



Ultralite S2 Flex

One-component, high-performance, highly deformable, lightweight, cementitious adhesive with extended open time, Low Dust technology and extremely high yield. Easy to apply by trowel with excellent back-buttering capacities, for ceramic, mosaic and stone tiles. Particularly suitable for laying large format-tiles.

APPLICATION notched trowel to be selected depending on the format

of the tiles

CONSUMPTION 0.8 kg/m² per mm of thickness

COLOUR white and grey

PACKAGING 15 kg bags

CERTIFICATIONS **AND MARKINGS**

















on mapei.com



Ultralite S2 Flex Quick

One-component, high-performance, highly deformable, lightweight, cementitious adhesive with rapid setting and hydration and extended open time, Low Dust technology and extremely high yield. Easy to apply by trowel with excellent back-buttering capacities, for ceramic, mosaic and stone tiles. Ideal for large-format tiles.

APPLICATION notched trowel to be selected depending on the format of the tiles

CONSUMPTION 0.8 kg/m² per mm of thickness

COLOURS white and grey

PACKAGING 15 kg bags

CERTIFICATIONS **AND MARKINGS**

56















CHECK THE TECHNICAL DATASHEET on mapei.com



2. SYNTHETIC RESIN-BASED ADHESIVES

Adesilex P22

Ready-to-use adhesive paste with no vertical slip and long open time for ceramic tiles.

APPLICATION notched trowel to be selected depending on the format of the tiles

CONSUMPTION 1.5-2.5 kg/m²


COLOUR white

PACKAGING 5 - 10 and 25 kg drums and 1x12 packs

CERTIFICATIONS AND MARKINGS







TECHNICAL DATASHEET on mapei.com



Ultramastic III

Ready-to-use, high-performance adhesive paste with no vertical slip and long open time, for laying ceramic tiles on walls and floors.

APPLICATION notched trowel to be selected depending on the format of the tiles

PACKAGING 1.5-2.5 kg/m² on walls, 3-4 kg/m² on floors

COLOUR white

PACKAGING 16 - 10 - 5 and 1 kg drums

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.con



3. REACTIVE ADHESIVES

Keralastic

Two-component, high-performance polyurethane adhesive for ceramic tiles and stone material.

APPLICATION notched trowel to be selected depending on the format of the tiles CONSUMPTION 2.5-5 kg/m²

COLOUR grey or white

PACKAGING 5 and 10 kg units (A:B = 94:6 parts by weight)

CERTIFICATIONS AND MARKINGS







TECHNICAL DATASHEET on mapei.com





Keralastic T

Two-component, high-performance polyurethane adhesive with no vertical stone material.

APPLICATION	notched trowel to be selected depending on the format of the tiles	
CONSUMPTION	2-5 kg/m ²	

COLOUR grey or white

PACKAGING 5 and 10 kg units (A:B = 94:6 parts by weight)

CERTIFICATIONS AND MARKINGS









Kerapoxy Adhesive

Two-component epoxy adhesive with no vertical slip for ceramic tiles and stone material.

APPLICATION	notched trowel to be selected depending on the format
	of the tiles

CONSUMPTION 1.5 kg/m² per mm of thickness

grey or white

COLOUR

PACKAGING 10 kg units

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.com



Ultrabond Eco PU 2K

Two-component, solvent-free, high-performance, non-slip polyurethane adhesive with very low emission level of volatile organic compounds (VOC) for ceramic and stone tiles.

APPLICATION notched trowel to be selected depending on the format of the tiles

CONSUMPTION 2.5-5 kg/m²

COLOUR grey or white

PACKAGING 10 kg units (A:B = 88:12 parts by weight)

CERTIFICATIONS AND MARKINGS

58







Ultrabond EP 2K

Two-component high-performance reactive adhesive with improved workability for bonding ceramic tiles, mosaics and stone to all types of substrate.

APPLICATION notched trowel to be selected depending on the format of the tiles

CONSUMPTION 2.5-5 kg/m²

COLOUR white

PACKAGING 10 kg kit: component A: 9 kg drum,

comp. B: 1 kg can

CERTIFICATIONS AND MARKINGS







TECHNICAL DATASHEET on mapei.con






Back to the table of contents Back to the alphabetical index

59



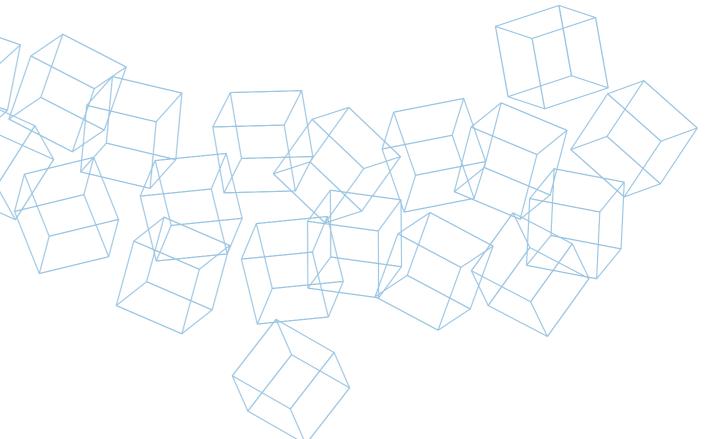

GROUTS FOR
CERAMIC TILES,
STONE MATERIAL
AND MOSAICS

GROUTING CERAMIC TILES, STONE MATERIAL AND MOSAICS

1. CEMENTITIOUS GROUTS

Fugolastic

Polymer liquid admix for Keracolor FF, Keracolor GG and Keracolor SF.



CHECK THE		
TECHNICAL		
DATASHEET		
on mapei.com		



APPLICATION rubber trowel according to the size of the joints and tiles CONSUMPTION PACKAGING 10 and 5 kg tanks and 10x1 kg packages

Keracolor FF

Pre-blended, high-performance, polymer-modified cementitious mortar with water-repellent **DropEffect®** technology for grouting joints up to 6 mm wide.

'	
APPLICATION	rubber trowel
CONSUMPTION	according to the size of the joints and tiles
COLOUR	20
PACKAGING	25 kg bags and 4x5 kg Alupack boxes depending on the colour





CHECK THE TECHNICAL DATASHEET on mapei.com



Keracolor GG

Pre-blended, high-performance polymer-modified cementitious mortar for grouting joints between ceramic and stone tiles. For joints from 4 to 15 mm.

APPLICATION	rubber trowel
CONSUMPTION	according to the size of the joints and tiles
COLOUR	20
PACKAGING	25 kg bags and 4x5 kg Alupack boxes depending on the colour

CERTIFICATIONS AND MARKINGS





CHECK THE TECHNICAL DATASHEET on mapei.com



Keracolor SF

High-performance, super-fine, white cementitious mortar for grouting joints between ceramic and stone tiles and mosaics. For joints up to 4 mm.

APPLICATION	rubber trowel
CONSUMPTION	according to the size of the joints and tiles
COLOUR	white
PACKAGING	22 kg bags and 4x5 kg Alupack boxes

CERTIFICATIONS AND MARKINGS







TECHNICAL DATASHEET on mapei.com



Ultracolor Plus

High-performance, anti-efflorescence, quick-setting and drying polymer-modified mortar free from Portland cement with water-repellent **DropEffect®** and mould-resistant **BioBlock®** technology, with very low emission of volatile organic compounds and fully offset Greenhouse Gas Emissions, for grouting joints ceramic, stone and mosaic tiles.

For Joints up to 20 mm wide.	
APPLICATION	rubber trowel
CONSUMPTION	according to the size of the joints and tiles
COLOUR	40
PACKAGING	22 kg bags, 4x5 kg or 8x2 kg Alupack boxes depending

CERTIFICATIONS AND MARKINGS















CHECK THE **TECHNICAL** DATASHEET on mapei.con



2. EPOXY GROUTS

Kerapoxy

Two-component, anti-acid epoxy mortar for grouting ceramic tiles and stone material. For joints of at least 1 mm. Can also be used as an adhesive.

APPLICATION	rubber trowel
CONSUMPTION	 used as grout: according to the size of the joints and tiles; used as adhesive: 2-4 kg/m²
COLOUR	17
PACKAGING	10-15 kg units and 12x2 kg boxes

CERTIFICATIONS AND MARKINGS













CHECK THE DATASHEET on mapei.com





Kerapoxy CQ

AND MARKINGS

Two-component anti-acid epoxy grout, easy to apply and to clean, with bacteriostatic agent (BioBlock® technology), ideal for grouting ceramic and stone tiles and mosaics. For joints of at least 1 mm. Can also be used as an adhesive.

Product certified according to ISO 22196:2011 standards as a grouting mortar protected against the formation and proliferation of micro-organisms.

APPLICATION	rubber trowel
CONSUMPTION	 used as grout: according to the size of the joints and tiles; used as adhesive: 2-4 kg/m²
COLOUR	17
PACKAGING	3 kg or 10 kg containers for the coloured versions 113 cement grey, 114 anthracite, 132 beige 2000, 282 bardiglio grey and 100 white
CERTIFICATIONS	





Kerapoxy Easy Design

Two-component, epoxy grout with a bacteriostatic agent and BioBlock® technology, easy to apply and clean. Versatile, decorative, acid-resistant, ideal for grouting ceramic tiles, glass mosaic and stone material. To be used also in combination with MapeGlitter and Mapecolor Metallic. For grouting joints from 1 to 15 mm wide. Can also be used as an adhesive.

Certified according to ISO 22196:2011 standards as a grouting mortar protected against the formation and proliferation of micro-organisms.

construction and p	or emercation or rimere enganismis.
APPLICATION	rubber trowel
CONSUMPTION	• used as grout: according to the size of the joints and tiles; • used as adhesive: 2-4 kg/m 2
COLOUR	41
PACKAGING	3 kg units









Kerapoxy IEG

Two-component epoxy mortar with extremely high chemical resistance for grouting ceramic and stone tiles. For joints of at least 3 mm.

	APPLICATION	rubber trowel
	CONSUMPTION	according to the size of the joints and tiles
	COLOUR	113 and 130
	PACKAGING	10 kg units

CERTIFICATIONS AND MARKINGS









CHECK THE TECHNICAL DATASHEET on mapei.com



Mapecolor Metallic

Powder pigment based on very high-quality pearlescent mica, to be mixed with **Kerapoxy Easy Design** to create a metallic effect.



TECHNICAL DATASHEET on mapei.com



COLOURS Moonlight (similar to platinum), Sahara (similar to gold), Shining (similar to silver), Red Clay (similar to copper), Stardust (similar to dark silver)

PACKAGING boxes with 10x90 g sachets

MapeGlitter

Polyester, aluminium and epoxy resin metal-effect coloured glitter used for mixing with Kerapoxy Easy Design.



TECHNICAL



DATASHEET on mapei.com



3. READY-TO-USE PASTE PRODUCTS

silver and gold

boxes with 10x100 g sachets

Flexcolor

COLOURS

PACKAGING

Ready-to-use, polymer filler paste with water-repellent DropEffect® and mould-resistant BioBlock® technology for grouting joints in ceramic tiles and mosaic from 2 to 10 mm wide.

	APPLICATION	rubber trowel
	CONSUMPTION	according to the size of the joints and tiles
	COLORI	100 white, 110 manhattan 2000, 111 silver grey, 112 medium grey, 132 beige 2000
	PACKAGING	5 kg drums

CERTIFICATIONS AND MARKINGS




DATASHEET on mapei.com





MAPEI GROUT COLOUR CHART

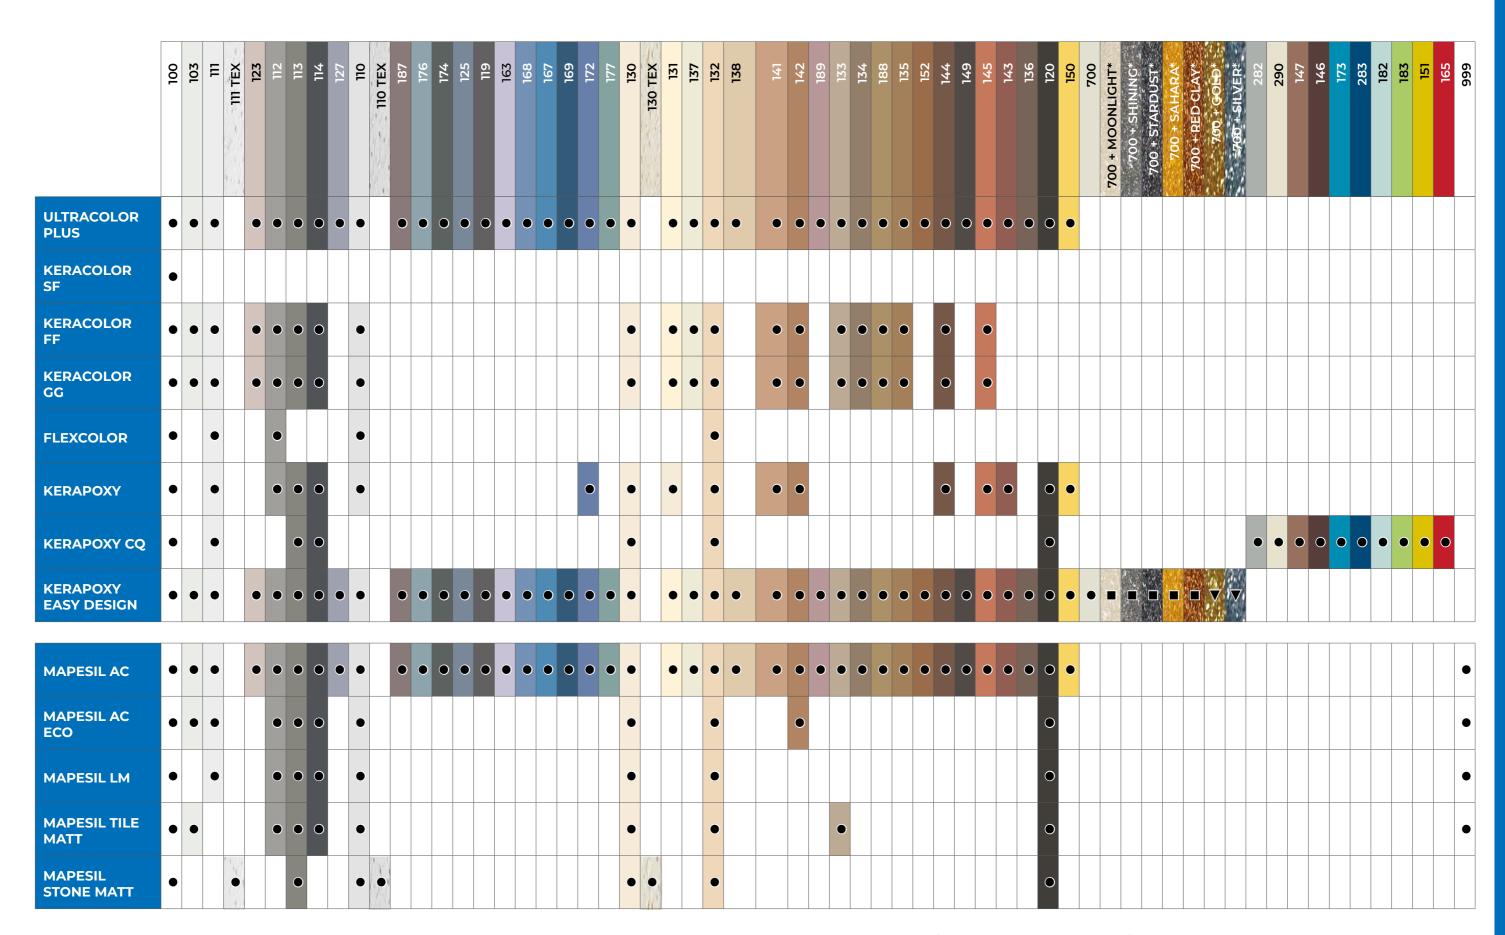

Due to the printing process involved, the colours shown are merely indicative.

[►] Kerapoxy Easy Design may be mixed with MapeGlitter





67

^{*} For the correct use of MapeGlitter and Mapecolor Metallic,

[■] Kerapoxy Easy Design may be mixed with Mapecolor Metallic



CLEANING SOLUTIONS

UltraCare Acid Cleaner

Concentrated acid-based cleaner in liquid form to remove stubborn cementitious grout residues from glass mosaic, ceramic and acid-resistant natural stone. Ideal for cleaning after installation and to remove salt and limescale efflorescence. With fully offset greenhouse gas emissions.

APPLICATION	rotary-head cleaner or abrasive pad
CONSUMPTION	depending on dilution, the degree of dirt and the surface to be treated

PACKAGING 1 and 5 litres tanks

CERTIFICATIONS AND MARKINGS





CHECK THE TECHNICAL DATASHEET on mapei.com



UltraCare Epoxy Off Gel

Special high-viscosity cleaner to remove epoxy residues.



CHECK THE
TECHNICAL
DATASHEET
on mapei.com



Thanks to its viscosity, it is ideal for application on walls.



PACKAGING 1 I tanks

APPLICATION

CONSUMPTION

UltraCare Grout Cleaner

to be treated

Ready to use concentrated cleaner, specific for both epoxy and cementitious grouts. With fully offset greenhouse gas emissions.

APPLICATION	abrasive pad, suitable brush
CONSUMPTION	depending on the type of surface, the level of dirt and the size of the grouts to be cleaned
PACKAGING	750 ml bottle with spray

CERTIFICATIONS AND MARKINGS

70





CHECK THE TECHNICAL DATASHEET on mapei.com



UltraCare HD Cleaner

Concentrated high performing professional detergent to remove organic dirt and to undertake a deep clean of surfaces.

It is also effective as wax remover for water-based and metal-flake waxes. With fully offset greenhouse gas emissions.

APPLICATION rotary-head cleaner or abrasive pad

depending on dilution, the degree of dirt and the surface CONSUMPTION

to be treated

PACKAGING 1 and 5 litres tanks

CERTIFICATIONS AND MARKINGS





CHECK THE **TECHNICAL** DATASHEET on mapei.com



UltraCare Keranet

Acid-based concentrated cleaning product in liquid form to remove cementitious residues from porcelain, ceramic and all acid-resistant materials. Ideal for cleaning operations after completing laying work, for removing salt and limescale efflorescence and rust stains. With fully offset greenhouse gas emissions.

APPLICATION rotary-head cleaner or abrasive pad

CONSUMPTION depending on dilution, the degree of dirt and the surface to be treated

1 - 5 and 20 litres tanks PACKAGING

CERTIFICATIONS AND MARKINGS

PACKAGING





CHECK THE TECHNICAL DATASHEET on mapei.con



UltraCare Keranet Crystals

Concentrated powder acid cleaner to remove cementitious residues. Ideal for cleaning after installation and to remove salt and limescale efflorescence.

APPLICATION rotary-head cleaner or abrasive pad depending on the degree of dirt/residues and the surface CONSUMPTION to be treated



CHECK THE TECHNICAL DATASHEET on mapei.com





Back to the table of contents Back to the alphabetical index

1 and 5 litres tanks

UltraCare Keranet Easy

Ready to use acid spray cleaning product that also removes cementitious residues immediately after grouting.

Removes surface residues of cement, lime and efflorescence. Suitable for cleaning the back side of porcelain tiles.



APPLICATION	damp cellulose sponge
CONSUMPTION	depending on the degree of dirt/residues and the surface to be treated
PACKAGING	750 ml bottle with spray





UltraCare Kerapoxy Cleaner

Ready to use special cleaning product to remove epoxy residues. With fully offset greenhouse gas emissions.

APPLICATION	abrasive pad
CONSUMPTION	depending on dilution, the degree of dirt and the surface to be treated

750 ml bottle with spray and 5 litres tanks

CERTIFICATIONS AND MARKINGS

PACKAGING





CHECK THE TECHNICAL DATASHEET on mapei.com



UltraCare Mould Remover

High penetration detergent with immediate effect to remove mould.



APPLICATION	cloth
CONSUMPTION	depending on the absorbency and the surface finish of the substrate to be treated
PACKAGING	750 ml bottle with spray



Back to the table of contents

UltraCare Multicleaner

Concentrated cleaner with a very high yield for everyday cleaning and maintenance of surfaces. With fully offset greenhouse gas emissions.

APPLICATION	11001 Clearler
CONSUMPTION	depending on dilution, the degree of dirt and the surface to be treated

CERTIFICATIONS AND MARKINGS

PACKAGING



1 and 5 litres tanks



TECHNICAL DATASHEET on mapei.com



UltraCare Multicleaner Spray

Ready-to-use professional cleaner.



APPLICATION dry cloth depending on the degree of dirt/residues and the surface CONSUMPTION to be treated

PACKAGING 750 ml bottle with spray



on mapei.com

UltraCare Rust Remover

Fast-acting, acid-free, thick consistency cleaner in aqueous solution, with slightly alkaline pH, for the removal of rust stains.



APPLICATION	brush
CONSUMPTION	depending on the degree of dirt/residues and the surface to be treated
PACKAGING	125 ml bottles

CHECK THE **TECHNICAL** DATASHEET on mapei.com





Back to the alphabetical index

UltraCare Stain Remover

High performance professional cleaner in water solution with thick consistency and high extracting properties, for removing organic stains from Terracotta, natural and engineered stone and cementitious surfaces.



APPLICATION	trowel
CONSUMPTION	depending on the degree of dirt/residues and the surface to be treated
PACKAGING	0,5 l bucket

CHECK THE TECHNICAL DATASHEET on mapei.com

2. PROTECTORS

APPLICATION

CONSUMPTION

PACKAGING

UltraCare Anti-Mould Protector

High performance, mould resistant water-based protective solution.




CIOCIT	— CHECK
depending on the absorbency and the surface finish of the substrate to be treated	TECHN DATAS on ma
750 ml bottle with spray	





UltraCare Grout Protector

Water dispersion for protecting cementitious grouts and porcelain tiles.

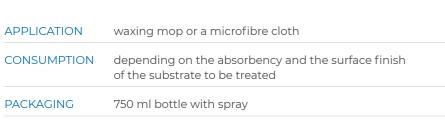

CERTIFICATIONS EC 1 AND MARKINGS



CHECK THE TECHNICAL DATASHEET on mapei.com



Back to the table of contents

UltraCare Grout Release

Product in water dispersion for protecting pre-grouting on pervious materials.

APPLICATION waxing mop or a microfibre cloth

CONSUMPTION depending on the absorbency and the surface finish of the substrate to be treated

PACKAGING 11 tanks

CERTIFICATIONS AND MARKINGS





CHECK THE TECHNICAL DATASHEET on mapei.com



UltraCare Intensifier S

Solvent-based blend of polymers with high penetration capacity, for a colour enhancing and protective effect.



APPLICATION brush, cloth or waxing mop

CONSUMPTION depending on the absorbency and the surface finish of the substrate to be treated

PACKAGING 1 I tanks





UltraCare Intensifier W

Water-based polymeric microemulsion with high penetration capacity and protecting and enhancing effect.

APPLICATION brush, cloth or waxing mop

CONSUMPTION depending on the absorbency and the surface finish of the substrate to be treated

1 I tanks

PACKAGING

CERTIFICATIONS AND MARKINGS EC 1



CHECK THE TECHNICAL DATASHEET on mapei.com





Back to the alphabetical index

UltraCare Rain Protector S

Solvent-based, protective and consolidating water-repellent treatment with very high contact angle, for temporary protection of flooring on terraces, balconies, horizontal surfaces exposed to the weather.



APPLICATION	waxing mop
CONSUMPTION	depending on the absorbency and the surface finish of the substrate to be treated
PACKAGING	lltanks



UltraCare Rain Protector W

Consolidating and protective water-repellent treatment with high contact angle, solvent-free, for temporary protection of exterior flooring in contact with rainwater.



PACKAGING	11 tanks
CONSUMPTION	depending on the absorbency and the surface finish of the substrate to be treated
APPLICATION	waxing mop





UltraCare Stain Protector S

76

Solvent-based, natural effect blend of polymers with protective and stain-resistant properties.



APPLICATION	brush, cloth or waxing mop
CONSUMPTION	depending on the absorbency and the surface finish of the substrate to be treated
PACKAGING	lltanks



UltraCare Stain Protector W

Water-based, natural effect polymer emulsion with protective and stain-resistant properties for matt surfaces.

APPLICATION	brush, cloth or waxing mop
CONSUMPTION	depending on the absorbency and the surface finish of the substrate to be treated

CERTIFICATIONS AND MARKINGS

PACKAGING



11 tanks



CHECK THE TECHNICAL DATASHEET on mapei.com



UltraCare Stain Protector W Plus

Water-based, natural effect polymer emulsion with protective and stain-resistant properties.

APPLICATION brush, cloth or waxing mop	
--	--

CONSUMPTION depending on the absorbency and the surface finish of the substrate to be treated

PACKAGING 1 I tanks

CERTIFICATIONS AND MARKINGS





CHECK THE **TECHNICAL** DATASHEET on mapei.com



3. COMPLEMENTARY PRODUCTS

UltraCare Fuga Fresca

Polymeric paint to refresh the colour of the cementitious grout joints between tiles.

APPLICATION	brush or from the bottle
CONSUMPTION	according to the size of the joints and tiles
COLOURS	40
PACKAGING	1 kg drums and 160 g bottle



		回回的是中华



UltraCare Smooth Silicone

Smoothing product for finishing sealants during application. With fully offset greenhouse gas emissions.

APPLICATION	suitable tools
CONSUMO	the type of sealant and the size of the joints
PACKAGING	750 ml bottle with spray

CERTIFICATIONS AND MARKINGS






CHECK THE TECHNICAL DATASHEET on mapei.com



79



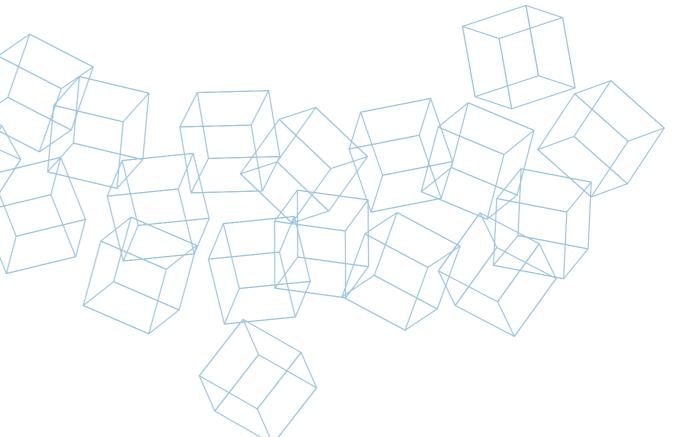



SYSTEMS FOR LAYING AND GROUTING ARCHITECTURAL STONE PAVING

Mapestone GR-ECO

Premixed mortar made of natural fibres and specific aggregates, for grouting stone architectural paving subject to foot and light vehicular traffic.




CHECK THE
TECHNICAL
DATASHEET
on manei com

其一种发展

CONSUMPTION depending on the width of joints and the size of stone elements COLOUR neutral PACKAGING 23 kg bags

Mapestone GR-ECO Fill

Pre-blended grouting mortar made from natural fibres, special aggregates and inorganic materials with a pozzolanic reaction, specifically designed for grouting decorative pavings made from butted blocks, bricks, porcelain tiles or natural stone, subject to light pedestrian and traffic loads.



CHECK THE TECHNICAL
DATASHEET
on mapei.com



CONSUMPTION depending on the width of joints and the size of stone elements COLOUR neutral PACKAGING 23 kg bags

Mapestone GR7

Pre-blended grouting mortar made from natural fibres, special aggregates and inorganic materials with a pozzolanic reaction, for grouting joints in decorative stone paving subject to light pedestrian and traffic loads.



CHECK THE TECHNICAL

DATASHEET

CONSUMPTION	depending on the width of joints and the size of stone elements
COLOUR	neutral
PACKAGING	23 kg bags



Back to the table of contents

Mapestone Joint

One-component, solvent-free, non-flammable polyurethane binder with a characteristic odour for creating elastic and pervious architectural road surfaces.

In compliance with UNI 11714-1:2018 standard

APPLICATION

- sealing grout lines between blocks, setts and pebbles used to create architectural road; surfaces for vehicle use installing and sealing paving for pedestrian and light vehicle use;
- installing and sealing paving slabs for pedestrian and light vehicle use.

CONSUMPTION	with 1 kg of Mapestone Joint it is possible to seal 1 m ²
	of approx. 8-10 cm blocks

PACKAGING 25 kg tanks, 200 l drums and 1000 kg IBC



TECHNICAL DATASHEET on mapei.com



Mapestone Joint Cleaner

Specific odourless cleaner for residues of Mapestone Joint and application tools. It can be used on any type of stone.



CONSUMPTION	depending on the amount of residues to remove
COLOUR	transparent
PACKAGING	5 and 25 litres tanks





Mapestone PFS 2

Pre-blended mortar for grouting joints in architectonic stone flooring, with exceptional physical-chemical characteristics suitable for areas exposed to dry/damp cycles specified by exposure class XF4, with high compressive strength and good resistance to de-icing salts, freeze-thaw cycles and seawater.

In compliance with UNI 11714-1:2018 standard

APPLICATION	Mapei rubber trowel or rake
CONSUMPTION	depending on the width of joints and the size of stone elements
COLOURS	neutral and Dark Grey
PACKAGING	25 kg bags



TECHNICAL DATASHEET on mapei.con





Back to the alphabetical index

Mapestone PFS2 Flex

Pre-blended, low-elastic modulus (25 GPa) mortar for grouting decorative stone paving subjected to heavy traffic in compliance with UNI 11714-1:2018. It meets the requirements of exposure classes XF4 and XS3 according to EN 206-1 for its high mechanical properties and resistance to de-icing salts, freeze-thaw cycles and sea spray.



CHECK THE	
TECHNICAL	
DATASHEET	
on mapei.com	

CONSUMPTION	depending on the width of joints and the size of stone elements
COLOUR	neutral
PACKAGING	25 kg bags

Mapestone PFS 2 Visco

Pre-blended, low-viscosity mortar for grouting architectural slab and block-paved road surfaces, with exceptional physical-chemical characteristics suitable for areas exposed to dry/damp cycles specified by exposure class XF4, with high compressive strength and good resistance to de-icing salts, freeze-thaw cycles and seawater.

In compliance with UNI 11714-1:2018 standard

APPLICATION	pour directly in joints using suitable containers
CONSUMPTION	depending on the thickness of the stone elements and the width and depth of the joints
COLOURS	neutral and Dark Grey
PACKAGING	25 kg bags



CHECK THE TECHNICAL DATASHEET on mapei.com



Mapestone PFS Calcix

Pre-blended, lime-based, cement-free mortar specific for grouting architectural stone paving subject to foot and light vehicle traffic, included those of historical interest, in class P4, P5, P6 and P7 according to UNI 11714-1:2018 standard. It features good mechanical strength and resistance to freezing conditions.



CHECK THE TECHNICAL

DATASHEET

on mapei.con

CONSUMPTION	depending on the width of joints
COLOURS	light (Mapestone PFS Calcix) and dark grey (Mapestone PFS Tenebris)
PACKAGING	25 kg bags



Mapestone PFS PCC 2

Pre-blended, polymerer-modified mortar for grouting architectural stone paving with low modulus of elasticity, with exceptional physical-chemical characteristics suitable for areas exposed to dry/damp cycles specified by exposure class XF4, with high compressive strength and good resistance to de-icing salts, freeze-thaw cycles and seawater.

In compliance with UNI 11714-1:2018 standard

CONSUMPTION	depending on the width of joints and the size of stone elements
COLOUR	neutral
PACKAGING	25 kg bags



TECHNICAL
DATASHEET
on mapei.com



Mapestone Scraper

Acid-based cleaner for architectural stone paving.

APPLICATION	leave it to react for around 5-10 minutes and then scrape off the encrusted material with a spreader or abrasive sponge (medium-grain Scotch-Brite® pad) until there are no marks or stains.
CONSUMPTION	depending on the need
PACKAGING	5 kg, 25 kg tanks and 12 x 1 kg boxes



CHECK THE TECHNICAL DATASHEET on mapei.com



Mapestone TFB 60

Pre-blended mortar for installation screeds of architectural stone paving with exceptional physical-chemical characteristics suitable for areas exposed to dry/damp cycles specified by exposure class XF4, with high compressive strength and good resistance to de-icing salts, freeze-thaw cycles and seawater.

20 kg/m² per cm of thickness

In compliance with UNI 11714-1:2018 standard

CONSUMPTION

PACKAGING



CHECK THE TECHNICAL DATASHEET on mapei.com





Back to the table of contents

Back to the alphabetical index

25 kg bags

Mapestone TFB Calcix

Pre-blended, lime-based, cement-free bedding mortar specific for architectural stone paving subject to foot and light vehicle traffic, included those of historical interest, in class P4, P5, P6 and P7 according to UNI 11714-1:2018 standard. It features good mechanical strength and resistance to freezing conditions.



CHECK THE TECHNICAL DATASHEET on mapei.com



CONSUMPTION 20 kg/m² per cm

PACKAGING 25 kg bags

Mapestone TFB Cube

Pre-blended mortar for installation screeds of architectural stone paving in exposure class XF4 and XS3 with high compressive strength and resistance to de-icing salts, freeze-thaw cycles and seawater.

In compliance with UNI 11714-1:2018 standard



CHECK THE TECHNICAL DATASHEET on mapei.com




CONSUMPTION 20 kg/m² per cm of thickness

PACKAGING 25 kg bags

MAPE



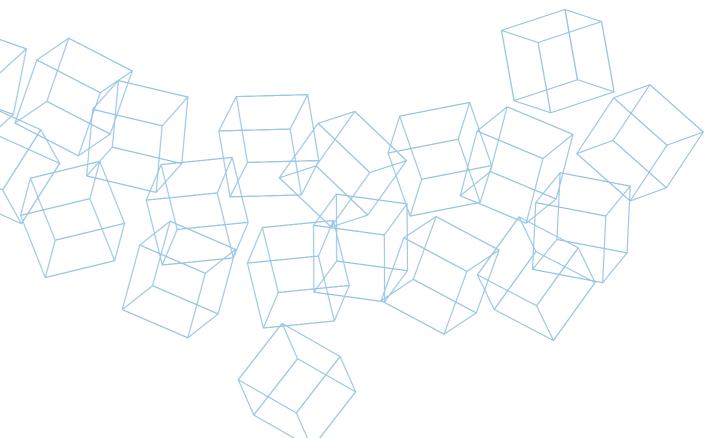



ELASTIC SEALANTS AND ADHESIVES

1. ACETIC SILICONE SEALANTS

Mapesil 300°C

Acetic silicone sealant for high temperatures.

APPLICATION extrusion gun (Mapei Gun 310, Mapei Gun 310 PRO) CONSUMPTION 3.0 meters per 300 ml cartridge (10x10 mm section)

COLOUR black

PACKAGING 300 ml cartridges

CERTIFICATIONS AND MARKINGS





TECHNICAL DATASHEET on mapei.com



Mapesil AC

Pure, mould-resistant, acetic silicone sealant with **BioBlock®** technology for movements up to 25%.

extrusion gun (Mapei Gun 310, Mapei Gun 310 PRO) **APPLICATION**

COLOURS 40 colours + transparent

PACKAGING 310 ml cartridges

CERTIFICATIONS AND MARKINGS


CONSUMPTION







3.1 meters per 310 ml cartridge (10x10 mm section)



CHECK THE TECHNICAL DATASHEET on mapei.com



Mapesil AC ECO

Pure acetic, mould-resistant, silicone sealant for movements up to 25%. Produced without the use of fossil resources, with recycled plastic cartridge.

APPLICATION extrusion gun (Mapei Gun 310, Mapei Gun 310 PRO) CONSUMPTION 3.1 meters per 310 ml cartridge (10x10 mm section) COLOURS 11 colours + transparent PACKAGING 310 ml cartridges

CERTIFICATIONS AND MARKINGS

90







Mapesil U

Universal mould-resistant acetic silicone sealant for movements up to 20%

APPLICATION extrusion gun (Mapei Gun 310, Mapei Gun 310 PRO) CONSUMPTION 2.8 meters per 280 ml cartridge (10x10 mm section) COLOURS transparent, white PACKAGING 280 ml cartridges

CERTIFICATIONS AND MARKINGS





CHECK THE TECHNICAL DATASHEET on mapei.com



Mapesil Z Plus

Universal mould-resistant acetic silicone sealant for sinks and sanitary ware. For movements up to 20%.

APPLICATION	extrusion gun (Mapei Gun 310, Mapei Gun 310 PRO)
CONSUMPTION	2.8 meters per 280 ml cartridge (10x10 mm section)
COLOURS	transparent, white, grey 113
PACKAGING	280 ml cartridges

CERTIFICATIONS AND MARKINGS







TECHNICAL DATASHEET on mapei.cor



2. POLYURETHANE SEALANTS AND ADHESIVES

Mapeflex E-PU21 SL

Two-component, castable epoxy-polyurethane sealant with high modulus of elasticity and high mechanical and chemical resistance.

APPLICATION	pouring
CONSUMPTION	0.14 kg/meter (10x10 mm section)
COLOURS	grey 113, neutral and colourless
PACKAGING	5 kg (A+B)



CHECK THE TECHNICAL DATASHEET on mapei.com





Back to the table of contents Back to the alphabetical index

91

Mapeflex E-PU 30 NS

Two-component, thixotropic epoxy-polyurethane sealant with high modulus of elasticity and high mechanical and chemical resistance.



CHECK THE
TECHNICAL
DATASHEET
on manei.com



APPLICATION	trowel
CONSUMPTION	0.14 kg/meter (10x10 mm section)
COLOURS	grey 113, neutral and colourless
PACKAGING	5 kg (A+B)

Mapeflex PU35 CR

Polyurethane sealant with high modulus of elasticity, resistant to chemicals, suitable for clean rooms and in environments with food and beverages. Also suitable for drinking water.

APPLICATION	extrusion gun (Mapei Gun 600 PRO,
	Mapei Gun 600 PRO Electric)

CONSUMPTION 6.0 meters per 600 ml sausage

COLOUR grey 113

PACKAGING 600 ml sausage

CERTIFICATIONS AND MARKINGS













TECHNICAL DATASHEET on mapei.com



Mapeflex PU 40

Paintable polyurethane sealant with low modulus of elasticity, for movements up to 25%.

APPLICATION extrusion gun (Mapei Gun 310, Mapei Gun 310 PRO, Mapei Gun 600 PRO, Mapei Gun 600 PRO Electric)

CONSUMPTION • 3.0 meters per 300 ml cartridge

• 6 meters per 600 ml sausage (10x10 mm section)

COLOURS white, grey 111, grey 112

PACKAGING 300 ml cartridge, 600 ml sausage

CERTIFICATIONS AND MARKINGS

92





TECHNICAL DATASHEET on mapei.com



Mapeflex PU 45 FT

Rapid-hardening paintable polyurethane sealant and adhesive with a high modulus of elasticity for movements up to 20%.

extrusion gun (Mapei Gun 310, Mapei Gun 310 PRO, APPLICATION Mapei Gun 600 PRO, Mapei Gun 600 PRO Electric) CONSUMPTION 3.0 metres per 300 ml cartridge; 6.0 metres per 600 ml

COLOURS white, 111 grey, 113 grey, brown, beige, black

sausage (10x10 mm section)

PACKAGING 300 ml cartridge, 600 ml sausage

CERTIFICATIONS AND MARKINGS







TECHNICAL DATASHEET on mapei.com



Mapeflex PU50 SL

Paintable, castable polyurethane sealant with low modulus of elasticity, for movements up to 25%.

APPLICATION	pouring, peristaltic pump (Mapeflex SPP)
CONSUMPTION	6.0 meters per 600 ml sausage (10x10 mm section)
COLOUR	grey 111
PACKAGING	600 ml sausage and 12 kg drums

CERTIFICATIONS AND MARKINGS



TECHNICAL DATASHEET on mapei.con



Mapeflex PU 65

Two-component, castable polyurethane sealant for sealing joints in roads up to surface level, mixed with **Quartz 0.5** sand at a ratio of up to 1:1 by weight. Setting and hardening may be accelerated by adding a specific liquid accelerator Mapeflex PU 65 Catalyst.



APPLICATION	pouring
CONSUMPTION	0.12 kg/meter (10x10 mm section).
COLOUR	black
PACKAGING	10 kg drums (A+B)







Mapeflex PU 70 NS

Two-component, thixotropic polyurethane sealant with low modulus of elasticity, resistant to hydrocarbons, for movements up to 25%.



CHECK THE TECHNICAL DATASHEET on mapei.com

APPLICATION	spreader
CONSUMPTION	0.15 kg/meter (10x10 mm section)
COLOUR	black
PACKAGING	5 kg drums (A+B)

Mapeflex PU 70 SL

Two-component castable polyurethane sealant with low modulus of elasticity, resistant to hydrocarbons, for movements up to 25%.

APPLICATION	pouring, peristaltic pump (Mapeflex SPP)
CONSUMPTION	0.15 kg/meter (10x10 mm section)
COLOUR	grey, black
PACKAGING	10 kg drums (A+B)
CERTIFICATIONS AND MARKINGS	BS 5212 Fed. Spec. SS-S-200-E



CHECK THE TECHNICAL DATASHEET on mapei.com



Mapeflex Xpress 80/400

Two-component, cold-applied, ultra-rapid setting polyurea sealant for horizontal joints with a limited amount of movement and subject to intense mechanical stresses.

Sandable after 30 minutes, passable after 3 hours.



APPLICATION	extrusion gun (Mapei Gun 600 2K)
COLOUR	grey, black
PACKAGING	600 ml cartridge, 20 litres bucket (comp. A), 20 litres bucket (comp. B)



Mapeflex Xpress Mixers

Additional mixers for 600 ml bi-axial cartridges of Mapeflex Xpress 80/400. The mixer is fitted with a ring for tightening it to the top of the cartridge.



USABLE WITH

600 ml cartridge of Mapeflex Xpress 80/400

and Mapeflex Asphalt Crack Repair

PACKAGING sachet with 12 mixers + 3 tightening rings

3. NEUTRAL SILICONE SEALANTS

Mapesil BM

Neutral silicone sealant for metal-work for movements up to 25%.

extrusion gun (Mapei Gun 310, Mapei Gun 310 PRO) **APPLICATION** CONSUMPTION 3.1 meters per 310 ml cartridge (10x10 mm section) COLOURS transparent, grey, copper and dark brown PACKAGING 310 ml cartridges

CERTIFICATIONS AND MARKINGS





CHECK THE TECHNICAL DATASHEET on mapei.com



Mapesil FR

Neutral silicone sealant for fire-resistant joints for movements up to 25%

APPLICATION extrusion gun (Mapei Gun 600 PRO, Mapei Gun 600 PRO Electric) CONSUMPTION 6 meters per 600 ml cartridge (10x10 mm section) COLOURS PACKAGING 600 ml cartridges

CERTIFICATIONS AND MARKINGS





TECHNICAL DATASHEET on mapei.com





Mapesil GP

Neutral mould-resistant silicone sealant for building work for movements up to 20%.

APPLICATION	extrusion gun (Mapei Gun 310, Mapei Gun 310 PRO)
CONSUMPTION	2.8 meters per 280 ml cartridge (10x10 mm section)
COLOURS	transparent, white, grey-white, grey, copper and dark brown
PACKAGING	280 ml cartridges

CERTIFICATIONS AND MARKINGS





CHECK THE TECHNICAL DATASHEET on mapei.com



Mapesil LM

Neutral silicone mould-resistant sealant for stone material with **BioBlock**® technology for movements up to 25%.

APPLICATION	extrusion gun (Mapei Gun 310, Mapei Gun 310 PRO)
CONSUMPTION	3.1 meters per 310 ml cartridge (10x10 mm section)

COLOURS 9 colours + transparent

PACKAGING 310 ml cartridges

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.com



Mapesil Stone Matt

Neutral, silicone, mould-resistant, matt sealant for stone material with for movements up to 25%.

APPLICATION extrusion gun (Mapei Gun 310, Mapei Gun 310 PRO)	
CONSUMPTION 3 meters per 300 ml cartridge (10x10 mm section)	
COLOURS 8 colours	
PACKAGING 300 ml cartridges	

CERTIFICATIONS AND MARKINGS

96





CHECK THE TECHNICAL DATASHEET on mapei.com



Mapesil Tile Matt

Neutral, silicone, mould-resistant, matt sealant for ceramics with for movements up to 25%.

APPLICATION extrusion gun (Mapei Gun 310, Mapei Gun 310 PRO)

3 meters per 300 ml cartridge (10x10 mm section)


COLOURS 10 colours + transparent

PACKAGING 300 ml cartridges

CERTIFICATIONS AND MARKINGS

CONSUMPTION





TECHNICAL DATASHEET on mapei.com



4. HYBRID SEALANTS AND ADHESIVES

Mapeflex MS 40

Paintable hybrid sealant with low modulus of elasticity also for wet substrates, for movements up to 25%.

APPLICATION extrusion gun (Mapei Gun 600 PRO, Mapei Gun 600 PRO Electric)

CONSUMPTION 6 meters per 600 ml sausage (10x10 mm section)

COLOURS white, grey 113

PACKAGING 600 ml sausage

CERTIFICATIONS AND MARKINGS







TECHNICAL DATASHEET on mapei.com



Mapeflex MS 45

Paintable hybrid sealant and adhesive with high modulus of elasticity also for wet substrates, for movements up to 20%.

APPLICATION extrusion gun (Mapei Gun 310, Mapei Gun 310 PRO, Mapei Gun 600 PRO, Mapei Gun 600 PRO Electric)

CONSUMPTION 3.0 meters per 300 ml cartridge (10x10 mm section)

COLOURS white, 113 grey, 111 grey, brown, black

PACKAGING 300 ml cartridge, 600 ml sausage

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.com





Mapeflex MS 55

Hybrid sealant and adhesive with high modulus of elasticity also for wet substrates, for movements up to 20%. Also suitable for drinking water. Paintable after polymerization.

APPLICATION extrusion gun (Mapei Gun 310, Mapei Gun 310 PRO)

CONSUMPTION 2,9 meters per 290 ml cartridge (10x10 mm section)

COLOURS white, 113 grey

PACKAGING 290 ml cartridge

CERTIFICATIONS AND MARKINGS









CHECK THE TECHNICAL DATASHEET on mapei.com



Mapeflex MS Crystal

Crystal clear, flexible, hybrid sealant and adhesive with high modulus of elasticity, also for wet substrates.

APPLICATION extrusion gun (Mapei Gun 310, Mapei Gun 310 PRO)

CONSUMPTION 3.0 meters per 300 ml cartridge (10x10 mm section)

COLOUR crystal clear

PACKAGING 300 ml cartridges.

CERTIFICATIONS AND MARKINGS







TECHNICAL

DATASHEET
on mapei.com



5. OTHER SEALANTS

Mapeflex AC3

Paintable acrylic sealant with a smooth finish for movements up to 7,5%.

APPLICATION	extrusion gun (Mapei Gun 310, Mapei Gun 310 PRO)
CONSUMPTION	3.1 meters per 310 ml cartridge (10x10 mm section)
COLOURS	white and grey
PACKAGING	310 ml cartridges

CERTIFICATIONS AND MARKINGS

98







CHECK THE TECHNICAL DATASHEET on mapei.com



Mapeflex AC4

Paintable acrylic sealant with a smooth finish for movements up to 12,5%.

APPLICATION extrusion gun (Mapei Gun 310, Mapei Gun 310 PRO, Mapei Gun 600 PRO, Mapei Gun 600 PRO Electric)

CONSUMPTION 3.1 meters per 310 ml cartridge (10x10 mm section)

COLOURS white and grey

PACKAGING 310 ml cartridge and 550 ml sausage and 25 kg drum

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.com



Mapeflex AC-P

Paintable acrylic sealant with a render finish for movements up to 12,5%.

APPLICATION extrusion gun (Mapei Gun 310, Mapei Gun 310 PRO),

CONSUMPTION 3.1 meters per 310 ml cartridge (10x10 mm section)

COLOUR white

PACKAGING 310 ml cartridges

CERTIFICATIONS AND MARKINGS







TECHNICAL
DATASHEET
on mapei.con



Mapeflex Blackfill

Bitumen sealant for sealing bituminous membrane.

APPLICATION extrusion gun (Mapei Gun 310, Mapei Gun 310 PRO), spreader

CONSUMPTION 3.0 meters per 300 ml cartridge (10x10 mm section)

COLOUR black

PACKAGING 300 ml cartridges




CHECK THE TECHNICAL DATASHEET on mapei.com





Mapeflex Firestop 1200°C

Refractory grout for sealing for rigid seals in ovens and barbeques in direct contact with fire.

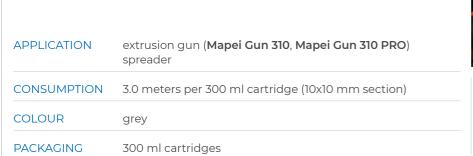



TECHNICAL DATASHEET on mapei.com



Mapeflex FR

Paintable, elasto-plastic acrylic sealant for fire-break joints, for movements up to 12.5% of the width of the joint. Reaction to fire certified up to EI 240.

APPLICATION	extrusion gun (Mapei Gun 600 PRO , Mapei Gun 600 Electric)
COLOUR	grey
PACKAGING	550 ml cartridges











CHECK THE **TECHNICAL** DATASHEET on mapei.com



Ultrabond MS Rapid

Rapid-setting, deformable, hybrid assembly adhesive for interior and exterior use, with a high initial sucker effect.

APPLICATION	extrusion gun (Mapei Gun 310, Mapei Gun 310 PRO)
CONSUMPTION	5 meters of kerb, triangular section
COLOUR	white
PACKAGING	290 ml cartridges

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.com



Ultrabond PU Strong

Ultra-rapid assembly polyurethane adhesive for structural bonds of construction details for interior and exterior use.

APPLICATION	extrusion gun (Mapei Gun 310, Mapei Gun 310 PRO)
CONSUMPTION	15 meters of bead, triangular section
COLOUR	beige
PACKAGING	300 ml cartridges
CERTIFICATIONS	7.00



TECHNICAL DATASHEET on mapei.com



Ultrabond Super Grip

AND MARKINGS

Deformable, acrylic assembly adhesive for interior and exterior use, with a high initial sucker effect.

APPLICATION	extrusion gun (Mapei Gun 310, Mapei Gun 310 PRO)
CONSUMPTION	15 meters of bead, triangular section
COLOUR	white
PACKAGING	310 ml cartridges
CERTIFICATIONS	STEMICON.



6. ADHESIVES FOR PVC

Adesilex PVC

AND MARKINGS

Adhesive for bonding PVC pipes carrying fluids at low pressure.

APPLICATION	brush
CONSUMPTION	depending on the need
COLOUR	transparent
PACKAGING	125 g tube
CERTIFICATIONS AND MARKINGS	CE





Back to the alphabetical index

Adesilex PVC HP

Adhesive for bonding PVC pipes carrying fluids at low and high pressure.

APPLICATION	brush
CONSUMPTION	depending on the need
COLOUR	red
PACKAGING	125 g tube
CERTIFICATIONS AND MARKINGS	() () () () () () () () () ()





7. ACCESSORIES AND PRIMERS FOR SEALANTS


Mapefoam

Closed-cell, extruded polyethylene foam cord used to gauge the correct size of joints to be sealed with **Mapei** sealants.

Supplied in rolls in various lengths according to the diameter of the foam.



DENSITY	40 kg/m³.		
PACKAGING	Ø 6 mm Ø 10 mm Ø 15 mm Ø 20 mm Ø 25 mm Ø 30 mm Ø 40 mm	boxes boxes boxes boxes boxes	550 m and 10 m sachet 550 m and 10 m sachet 550 m and 10 m sachet 350 m and 10 m sachet 200 m 160 m 270 m

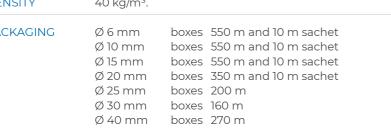

Mapei Gun 310

Pro-grade manual extrusion gun for 280, 300 and 310 ml cartridges of sealants and chemical anchors.

SIZE	cartridges with max Ø 51 mm, length 218 mm
USABLE WITH	Mapesil (all), Mapeflex (one-component), Ultrabond (one-component), Mapefix (all formats with 300 ml cartridges)
WEIGHT	920 g
EXTRUSION RATE	18:1
PUSHER TRAVEL	4.5 mm each pull of trigger.



Mapei Gun 310 PRO

Pro-grade manual tube extrusion gun for 280, 300 and 310 ml cartridges of sealants and chemical anchors.

SIZE	cartridges with max Ø 51 mm, length 218 mm
USABLE WITH	Mapesil (all), Mapeflex (one-component), Ultrabond (one-component), Mapefix (all formats with 300 ml cartridges)
WEIGHT	830 g
EXTRUSION RATE	18:1
PUSHER TRAVEL	4.5 mm each pull of trigger



Mapei Gun 420 2K

SIZE


WEIGHT


USABLE WITH

EXTRUSION RATE

PUSHER TRAVEL

Pro-grade manual extrusion gun for co-axial cartridges up to 420 ml of chemical anchor.

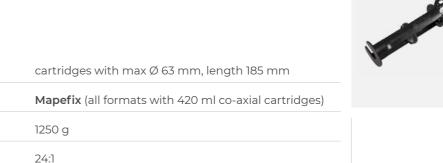



Mapei Gun 585 2K

Pro-grade manual extrusion gun for 385, and 585 ml bi-axial Mapefix cartridges.

3 mm each pull of trigger

SIZE	bi-axial cartridges with max Ø 54 +30 mm, length 247 mm
USABLE WITH	Mapefix EP 100, Mapefix EP 50
WEIGHT	1350 g
EXTRUSION RATE	24:1
PUSHER TRAVEL	3 mm each pull of trigger





Mapei Gun 585 Air

Pro-grade pneumatic extrusion gun for bi-axial 385 and 585 ml Mapefix cartridges with 3:1 mixing ratio.



USABLE WITH	Mapefix EP 100, Mapefix EP 50
WEIGHT	3000 g
MAXIMUM THRUST	4.0 kN
EQUIPMENT	spare battery 18V, 2Ah

Mapei Gun 585 Electric

Pro-grade power extrusion gun for bi-axial 385 and 585 ml Mapefix cartridges with 3:1 mixing ratio.




USABLE WITH	Mapefix EP 100, Mapefix EP 50
WEIGHT	3300 g
MAXIMUM THRUST	2.8 kN
BATTERY	18V, 2Ah, fully recharged in 60 minutes
EQUIPMENT	spare battery 18V, 2Ah

Mapei Gun 600 2K

PUSHER TRAVEL

Pro-grade manual extrusion gun for bi-axial 600 ml cartridges with mixing ratio 1:1 by volume.

3 mm each pull of trigger

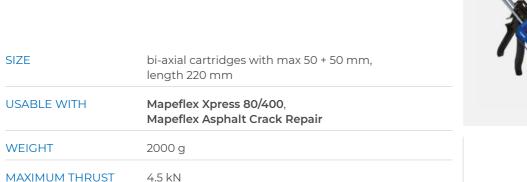



Back to the table of contents

Mapei Gun 600 PRO

Pro-grade manual tube extrusion gun for 550 and 600 ml sausages.

SIZE	cartridges with max Ø 51 mm, length 335 mm
USABLE WITH	Mapeflex and Mapesil (all formats with max. 600 ml sausages)
WEIGHT	1170 g
EXTRUSION RATE	18:1
PUSHER TRAVEL	4.5 mm each pull of trigger



Mapei Gun 600 PRO Electric

Pro-grade power extrusion gun for max. 600 ml Mapefix and **Mapesil** sausages.



BATTERY	110.8V, 5Ah, fully recharged in 30 minutes
USABLE WITH	sausages up to 600 ml
WEIGHT	1900 g
MAXIMUM THRUST	2.5 kN
EQUIPMENT	spare battery 10.8V, 1.5Ah



Pro-grade power extrusion gun for max. 600 ml Mapefix and **Mapesil** sausages.



SIZE	bi-axial cartridges with max Ø 78 +28 mm, length 216 mm
USABLE WITH	Mapefix VE SF 825
WEIGHT	1400 g
EXTRUSION RATE	24:1
PUSHER TRAVEL	3 mm each pull of trigger



105

Back to the alphabetical index

104

Primer A

Polyurethane solvent-free primer for absorbent substrate to promote adhesion of **Mapeflex** one-component polyurethane sealants on all types of porous absorbent building substrates such as concrete, mortar, wood and brick.



CHECK THE TECHNICAL DATASHEET on mapei.com
of mapendom

Primer EP

APPLICATION

CONSUMPTION

PACKAGING

Two-component epoxy primer in solvent for epoxy-polyurethane sealants.

5-10 g/m (for a 1 cm deep joints)

250 g and 2 kg bottle



CHECK THE TECHNICAL DATASHEET on mapei.com



Primer FD

APPLICATION

CONSUMPTION

COLOUR

106

PACKAGING

One-component primer for silicone and hybrid sealants.

roller, brush

transparent

10 kg can (A+B)

5-10 g/m (for a 1 cm deep joint)



APPLICATION	brush
CONSUMPTION	5÷10 g/m (for a 1 cm deep joint)
COLOURS	transparent and straw
PACKAGING	200 g and 900 g bottle



Primer M

APPLICATION

COLOUR

PACKAGING

CONSUMPTION

brush

brown

One-component, solvent-free primer for polyurethane sealants, for use absorbent and compact surfaces.



CHECK THE TECHNICAL DATASHEET on mapei.com



Primer P

APPLICATION

CONSUMPTION

COLOUR

YELD

COLOUR

PACKAGING

PACKAGING

One-component primer for sealants applied on plastic materials.

5÷10 g/m (for a 1 cm deep joint)

5÷10 g/m (for a 1 cm deep joint)

200 g bottles, 2 kg metal can



on mapei.com	TECHNICAL DATASHEET	CHECK THE		TECHNICAL DATASHEET
	on mapei.co r	DATASHEET	TECHNICAL DATASHEET	



8. POLYURETHANE FOAMS

MapePUR All in One Foam

yellow

750 ml spray can

brush

transparent

150 g bottles

Multi-functional and multi-purpose, self-expanding polyurethane foam for filling, insulating and soundproofing.

Thanks to the special spray nozzle, it is available for manual use or for use with the specific gun MapePUR Gun Standard or MapePUR Gun special.

70 meter (kerb with diameter of 30 mm),

10-12 m² insulating panels



CHECK THE
TECHNICAL
DATASHEET
on mapei.com






MapePUR Cleaner

Solvent-based cleaning solution for removing traces of wet polyurethane foam from clothes and tools.

Spray on the surface to be cleaned or screw to a polyurethane foam gun.



TECHNICAL DATASHEET on mapei.com



COLOUR transparent

PACKAGING 500 ml spray can

MapePUR Fire Foam M

Expanding polyurethane foam adhesive for filling, insulating and soundproofing. Certified fire resistant up to El 240. Available for manual application.



CHECK THE **TECHNICAL** DATASHEET on mapei.com



COLOUR pink

PACKAGING 750 ml spray can

MapePUR Multi Adhesive Foam G

Multi-purpose, low-expanding polyurethane foam adhesive for bonding construction elements, also made of different materials, for both interiors and exteriors.

Available in gun version for use with the specific gun MapePUR Gun Standard o MapePUR Gun Special.



YELD	70 meter (kerb with diameter of 30 mm), 10-12 m² insulating panels

COLOUR yellow

PACKAGING 750 ml spray can



CHECK THE TECHNICAL DATASHEET on mapei.com



MapePUR Roof Foam G

Expanding polyurethane foam adhesive for bonding, filling, soundproofing and insulating. Available in gun version MapePUR Gun Standard o MapePUR Gun Special.



TECHNICAL DATASHEET on mapei.con



MapePUR Roof Foam M

Expanding polyurethane foam adhesive for bonding, filling, soundproofing and insulating. For manual application.

750 ml spray can



DATASHEET on mapei.com



COLOUR grey

YELD

COLOUR

PACKAGING

COLOUR

PACKAGING

PACKAGING 750 ml spray can

MapePUR Thermo Fill G

Polyurethane foams for filling. For gun application.

up to 40 l

750 ml spray can

beige



CHECK THE DATASHEET on mapei.com





Back to the alphabetical index

Back to the table of contents

MapePUR Thermo Fill M

Polyurethane foams for filling. For manual application.



CHECK THE TECHNICAL
DATASHEET
on mapei.com
on mapei.com

CHECK THE TECHNICAL DATASHEET on mapei.com

YELD up to 40 l COLOUR

MapePUR Thermo Stick G

PACKAGING

110

Polyurethane foams for bonding. For gun application.

750 ml spray can



YELD	up to 40 l
COLOUR	grey
PACKAGING	750 ml spray can





MapePUR Thermo Stick M

Polyurethane foams for bonding. For manual application.



CHECK THE

TECHNICAL

DATASHEET

on mapei.com

YELD	up to 40 l
COLOUR	grey
PACKAGING	750 ml spray can



MapePUR Universal Foam G

Expanding multi-purpose polyurethane foam for filling, insulating and soundproofing. For gun application using the special tool MapePUR Gun Standard or MapePUR Gun Special.



TECHNICAL DATASHEET on mapei.com



COLOUR yellow

PACKAGING 750 ml spray can

MapePUR Universal Foam M

Expanding multi-purpose polyurethane foam for filling, insulating and soundproofing. For manual application.



CHECK THE **TECHNICAL** DATASHEET on mapei.con



COLOUR yellow

PACKAGING 750 ml spray can

9. ACCESSORIES FOR FOAMS

MapePUR Dispenser M

Spare nozzle for **MapePUR** type "M".



USABLE WITH MapePUR Fire Foam M,

MapePUR Roof Foam M, MapePUR Thermo Fill M, MapePUR Thermo Stick M, MapePUR Universal Foam M

PACKAGING 12 pcs sachet



MapePUR Easy Spray

Ergonomic grip for polyurethane foam cans (manual application type).



USABLE WITH	MapePUR Fire Foam M, MapePUR Roof Foam M, MapePUR Thermo Fill M, MapePUR Thermo Stick M, MapePUR Universal Foam M
WEIGHT	100 g

5 pcs boxes

MapePUR Gun Special

PACKAGING

Professional Teflon-coated extrusion gun for **MapePUR** type "G" (spray can be used with guns).



USABLE WITH	MapePUR "G" version
WEIGHT	655 g
NOZZLE	Ø 2 mm
LENGTH OF TUBE	200 mm
PACKAGING	box containing 1 piece


MapePUR Gun Standard


Gun for **MapePUR** "G" version (spray can be used with guns).



USABLE WITH	MapePUR "G" version
WEIGHT	440 g
NOZZLE	Ø 2 mm
LENGTH OF TUBE	145 mm
PACKAGING	box containing 1 piece



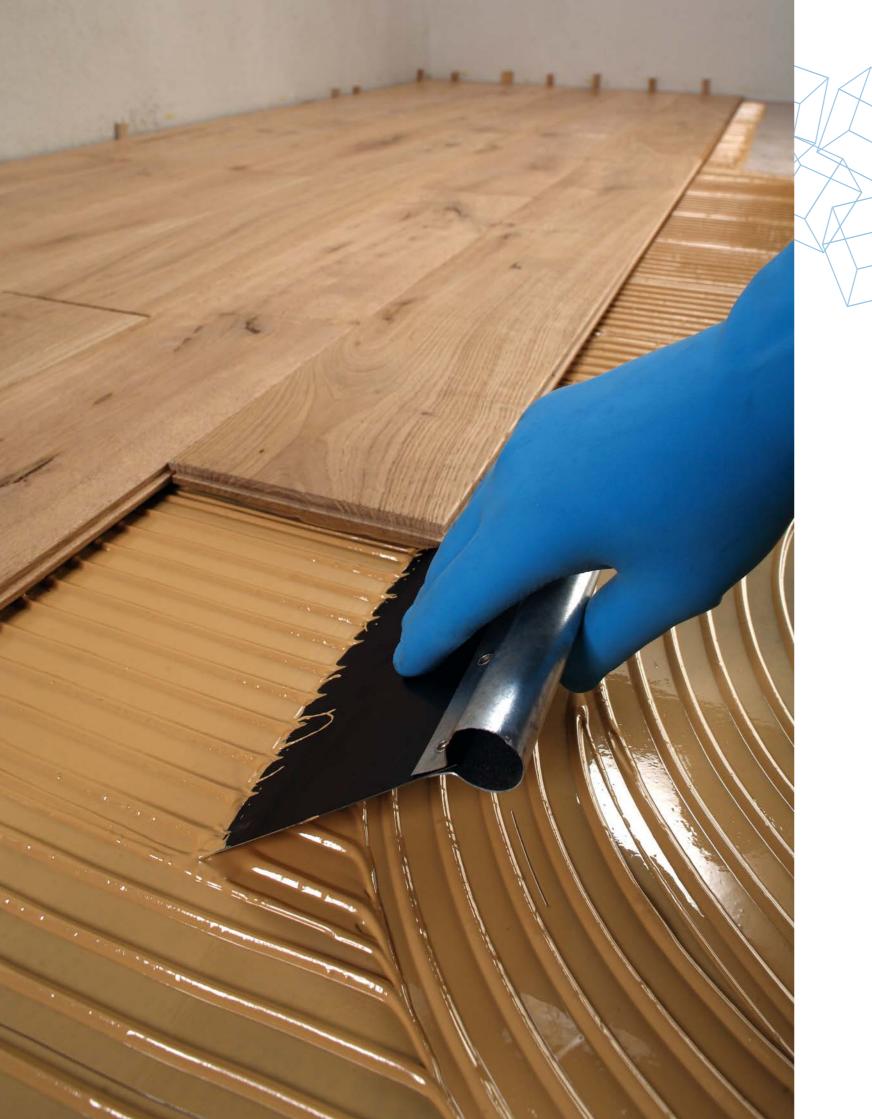

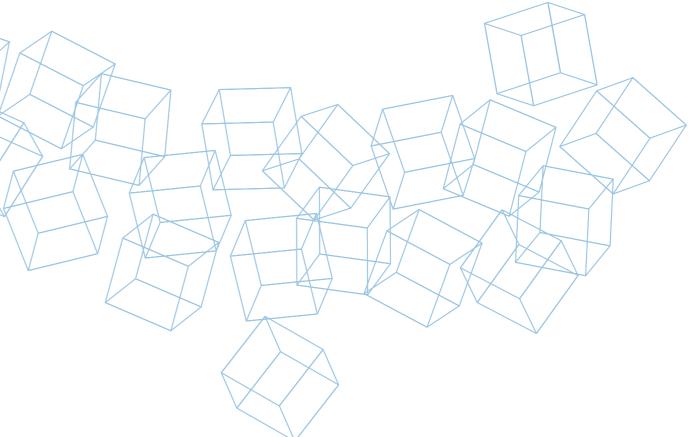



ADHESIVES
AND FINISHING
PRODUCTS FOR
WOODEN FLOORS

1. ADHESIVES FOR WOODEN AND LAMINATE FLOORS

Adesilex LC/R

Quick-setting, solvent-free adhesive in water dispersion for bonding wooden floors. Adesilex LC/R is suitable for bonding on cementitious screeds made from Mapecem, Mapecem Pronto, Topcem or **Topcem Pronto**, wooden substrates, chipboard, masonite panels and heated floors.

	APPLICATION	n. 2 or 4 notched trowel for wood
	CONSUMPTION	0.8-1.0 kg/m ²
	COLOUR	beige

PACKAGING 15 kg drums

CERTIFICATIONS AND MARKINGS



TECHNICAL DATASHEET on mapei.com



Adesivil D3

Solvent-free, water-resistant vinyl adhesive for floating floors in pre-finishes wood or rigid, melamine and laminated amino-plastic.



CHECK THE **TECHNICAL** DATASHEET on mapei.com



APPLICATION by extrusion from the nozzle on the bottle 0.025 kg/m; 0.1-0.2 kg/m² CONSUMPTION COLOUR white

0.5 kg bottles

Lignobond

PACKAGING

116

Two-component epoxy-polyurethane adhesive for installing wood flooring Suitable for laying any size and type of wood on all substrates. Also suitable for heating screeds.



APPLICATION	n. 2 or 4 notched trowel for wood
CONSUMPTION	800-1000 g/m ²
COLOUR	comp. A: brown or beige; comp. B: whitish
PACKAGING	10 and 5 kg drums (A+B)



Ultrabond Eco 575

Solvent-free adhesive based on synthetic polymers in water dispersion with strong, with very low emission of volatile organic compounds (VOC) for bonding skirtings.

APPLICATION	extrusion gun
CONSUMPTION	325 ml every 12 m
COLOUR	beige
PACKAGING	310 ml cartridges

CERTIFICATIONS AND MARKINGS

AND MARKINGS





TECHNICAL DATASHEET on mapei.com



Ultrabond Eco P909 2K

Two-component, solvent-free, polyurethane quick adhesive with very low emission level of volatile organic compounds, class EC1 Plus, for all types of parquet.

APPLICATION	notched trowel
CONSUMPTION	800-1000 g/m ²
COLOUR	comp. A: ochre; comp. B: dark brown
PACKAGING	9 + 1 kg kit
CERTIFICATIONS	(SEMICO)







Ultrabond Eco P909 2K Fast Two-component, solvent-free, polyurethane adhesive with very low

emission level of volatile organic compounds (VOC) for all types of parquet.

APPLICATION	notched trowel
CONSUMPTION	800-1000 g/m ²
COLOUR	comp. A: ochre; comp. B: dark brown
PACKAGING	10 kg units (8.8 kg + 1.2 kg)

CERTIFICATIONS AND MARKINGS





TECHNICAL DATASHEET on mapei.com





Ultrabond Eco P909 2K Plus

Two-component, solvent-free, polyurethane adhesive with very low emission level of volatile organic compounds (VOC) for all types of parquet.

	APPLICATION	spreader for wood
	CONSUMPTION	800-1000 g/m ²
	COLOUR	comp. A: ochre; comp. B: dark brown
	PACKAGING	10 kg units (9 kg+1 kg)

CERTIFICATIONS AND MARKINGS





CHECK THE TECHNICAL DATASHEET on mapei.com



Ultrabond Eco P948 1K

One-component, solvent-free, silylated polymer-based adhesive with very low emission level of volatile organic compounds (VOC).

APPLICATION	Mapei spreader for wood
CONSUMPTION	800-1200 g/m ²
COLOUR	light beige
PACKAGING	15 kg and 7 kg drums (2x7 kg)

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.com



Ultrabond Eco S940 1K

One-component, solvent-free, silylated polymer-based adhesive with very low emission level of volatile organic compounds.

	APPLICATION	notched spreader for wood
	CONSUMPTION	800-1200 g/m ²
	COLOUR	light beige
	PACKAGING	15 kg in plastic drums.
	CEDTIFICATIONS	NEMICON.

CERTIFICATIONS
AND MARKINGS

118



CHECK THE TECHNICAL DATASHEET on mapei.com



Ultrabond Eco S955 1K

One-component, solvent-free, silylated polymer-based adhesive for all types of parquet with very low emission level of volatile organic compounds.

APPLICATION	n. 2 or 4 notched trowel for wood
CONSUMPTION	800-1200 g/m ²
COLOUR	beige

CERTIFICATIONS AND MARKINGS

PACKAGING





15 kg drums and 600 ml sausage



TECHNICAL

DATASHEET

on mapei.com



Ultrabond Eco S958 1K

One-component, totally solvent-free, silylated polymer-based adhesive with very low emission level of volatile organic compounds.

APPLICATION	n. 2 or 4 notched trowel for wood
CONSUMPTION	800-1200 g/m ²
COLOUR	beige
PACKAGING	15 kg drums and 600 ml sausage

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.com



Ultrabond Eco S968 1K

One-component, totally solvent-free, silylated polymer-based adhesive with very low emission level of volatile organic compounds.

APPLICATION	Mapei spreader for wood
CONSUMPTION	800-1200 g/m ²
COLOUR	beige
PACKAGING	15 kg drums

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.com





Ultrabond Eco S Lite

One-component, lightweight solvent-free, silylated polymer-based adhesive with very low emission level of volatile organic compounds. Suitable for the installation of all types of pre-finished or pre-polished multi-layered flooring and solid wood, medium format flooring.

APPLICATION	Mapei spreader for wood
CONSUMPTION	600-800 g/m ²
COLOUR	light grey
PACKAGING	11 kg plastic drums
CERTIFICATIONS	STEMPER TO THE PROPERTY OF THE





CHECK THE TECHNICAL DATASHEET on mapei.com



Ultrabond Eco S Plus

One-component, silylated polymer-based adhesive of new generation and technology with very low emission of volatile organic compounds, zero methanol emissions, ideal for the installation of any type of species and format of pre-finished solid wood on all kinds of substrate, including heating screeds.

APPLICATION	Mapei spreader for wood
CONSUMPTION	600-1200 g/m ²
COLOUR	light beige
PACKAGING	15 kg plastic drums





CHECK THE TECHNICAL DATASHEET on mapei.con



Ultrabond P902 2K

Two-component, epoxy-polyurethane adhesive for bonding all types and sizes of parquet on screeds made from Mapecem, Mapecem Pronto, Topcem and Topcem Pronto, cementitious screeds, old wooden, ceramic, marble, and terrazzo etc.

Also suitable for heated substrates.

120



APPLICATION n. 2 or 4 notched trowel for wood CONSUMPTION 1.0-1.5 kg/m² COLOUR comp. A: beige or brown; comp. B: whitish PACKAGING 10 kg drums (A+B)



Ultrabond P913 2K Plus

Two-component epoxy-polyurethane adhesive for installing any format and type of wood flooring.

Mapei spreader for wood

1000-1200 g/m²

10 kg (A+B)



TECHNICAL DATASHEET on mapei.com



Ultrabond P980 1K

APPLICATION

COLOUR

PACKAGING

CONSUMPTION

One-component, solvent-free, silylated polymer-based adhesive for all types of parquet with very low emission level of volatile organic compounds.

comp. A: beige or dark brown; comp. B: whitish

APPLICATION	notched trowel
CONSUMPTION	0.8-1 kg/m ²
COLOUR	beige
PACKAGING	15 kg aluminium bags contained in plastic drums





CHECK THE TECHNICAL DATASHEET on mapei.con



Ultrabond P990 1K

One-component, ready-to-use, solvent-free, flexible polyurethane adhesive for all types of parquet on screeds made from Mapecem, Mapecem Pronto, Topcem and Topcem Pronto, cementitious screeds, old wooden, ceramic, marble and terrazzo floors, etc. Also suitable for heated substrates.

APPLICATION	n. 2 or 4 notched trowel for wood
CONSUMPTION	0.8-1 kg/m ²
COLOURS	beige or brown
PACKAGING	15 and 7 kg aluminium bags contained in plastic drums. Boxes containing 20x600 cc sausages.

CERTIFICATIONS AND MARKINGS





TECHNICAL DATASHEET on mapei.com





Ultrabond S965 1K

One-component, solvent-free, silylated polymer-based adhesive for all types of wood-block flooring, parquet with very low emission level of volatile organic compounds.

APPLICATION	n. 2 or 4 notched trowel for wood
CONSUMPTION	800-1200 g/m ²
COLOUR	beige
PACKAGING	15 kg in plastic drums.

CERTIFICATIONS AND MARKINGS



CHECK THE TECHNICAL DATASHEET on mapei.com



Ultrabond S997 1K

One-component, solvent-free, ready-to-use, flexible, silylated polymer-based thixotropic adhesive for laying wooden steps and parquet mosaic.

'	
APPLICATION	extrusion
CONSUMPTION	 laying wooden steps: 2 m² per sausage (diagonal kerbs every 5-10 cm); laying three-layered pre-finished parquet: yield approx. 4/6 m² per sausage (diagonal kerbs every 10-15 cm); laying wooden baseboards: yield approx.15 ml of kerbs per sausage; laying parquet mosaic on walls 0,5 kg/m²

COLOUR ochre

PACKAGING boxes containing 20x600 cc aluminium sausages.







CHECK THE
TECHNICAL
DATASHEET
on mapei.com



2. PAINTS, FILLERS, BASE COATS AND COLOURED SEALANTS FOR PARQUET

Silwood

Acrylic sealant in water dispersion for wooden floors.

extrusion gun for sausages
depending on the size of the joint to be filled calculating that its density is equal to 1.75 g/cm ³ .
white, 112 grey, oak, iroko, doussié, wengé, teak, walnut, cherry, faded beech, birch maple
310 ml cartridges

CERTIFICATIONS AND MARKINGS

122





CHECK THE TECHNICAL DATASHEET on mapei.com



Ultracoat Aqua Plus

Solvent and NMP-free, odourless, water-based binder, mixed with wood flour filler, for grouting wooden floors. Suitable for **Ultracoat** water-based varnishing cycles and **Ultracoat Hard Oil Fast**.

COLOUR 100-120 g/m² per coat whitish

PACKAGING 5 | tanks, boxes 2 x 5 |

CERTIFICATIONS AND MARKINGS





TECHNICAL
DATASHEET
on mapei.com



Ultracoat Base One

One-component quick-drying water-based toning basecoat with low emission level of volatile organic compounds and no NMP.

CONSUMPTION 100 ml/m²

COLOUR translucent straw-yellow

PACKAGING 51 tanks, boxes 2 x 5 l

CERTIFICATIONS AND MARKINGS





CHECK THE TECHNICAL DATASHEET on mapei.com



Ultracoat Binder

Solvent and NMP-free, water-based binder, mixed with wood flour filler from any type of wood, including Merbau, for grouting wooden floors. Suitable for **Ultracoat** water-based varnishing cycles and **Ultracoat** Hard **Oil Fast**.

CONSUMPTION 100-120 g/m² per coat

COLOUR transparent

CERTIFICATIONS AND MARKINGS

PACKAGING



5 I tanks



TECHNICAL

DATASHEET

on mapei.com





Ultracoat Easy

One-component, water-based acrylic polyurethane varnish for wooden floors with good resistance to wear and abrasion.
Suitable for floors subjected to normal pedestrian use.



CHECK THE
TECHNICAL
DATASHEET
on manoi com



CONSUMPTION 80-100 ml/m² for the first coat 50-70 ml/m² for the subsequent coats

milky white

PACKAGING 5 | tanks, boxes 2x5 |

COLOUR

Ultracoat Easy Plus

One-component, water-based 100% polyurethane varnish with low emission level of volatile organic compounds (VOC), highly resistant to wear and abrasion, for wooden floors.

Suitable for floors subject to frequent pedestrian use.


CONSUMPTION	80-100 ml/m² for the first coat
	50-70 ml/m ² for the subsequent coats

COLOUR transparent

PACKAGING 5 | tanks, boxes 2x5 |

CERTIFICATIONS AND MARKINGS





CHECK THE TECHNICAL DATASHEET on mapei.com



Ultracoat EL

CONSUMPTION

PACKAGING

Slow-evaporating mixture to increase the open time of varnish for parquet.

depending on the dilution rate, from 5 to 10%

of varnish consumption

11 tanks, boxes 6 x 11



CHECK THE TECHNICAL DATASHEET on mapei.com



Ultracoat Hard Oil Fast

Wood staining oil for finishing of the surface of wooden floors; available in neutral and various colours.

APPLICATION	roller, brush
CONSUMPTION	1 l pro 20-25 m² depending on the absorption of the wooden floor
COLOURS	neutral and colour chart
PACKAGING	1 and 3 l bottles



CHECK THE TECHNICAL DATASHEET on mapei.com



Ultracoat Hard Oil Hardener

Admixture specific to promote hardening of Ultracoat Hard Oil Fast.



CHECK THE TECHNICAL DATASHEET on mapei.com



COLOUR	transparent
PACKAGING	600 ml bottles and boxes containing 6 100 ml bottles

Ultracoat Hard Oil Wax Plus

Water and oil resistant, low odour oil/wax finish to protect and gently tone wood surfaces giving them a warm hue.

APPLICATION	roller or trowel
CONSUMPTION	1 I pro 20-25 m² depending on the absorption of the wooden floor
COLOUR	neutral
PACKAGING	11 hottles



CHECK THE TECHNICAL DATASHEET on mapei.com





125

Ultracoat HT 2K

Two-component, 100% polyurethane water-based lacquer for wooden floor with very low emission of volatile organic compounds (EMICODE EC1 Plus), with very high resistance to wear and abrasion. Suitable for finishing wooden floors subject to extremely high pedestrian use.

CONSUMPTION 80-100 ml/m² for the first coat 50-70 ml/m² for the subsequent coats

COLORE comp. A: whitish; comp. B: transparent

PACKAGING (A+B) 5.5 | x 2 11 | units

CERTIFICATIONS AND MARKINGS







TECHNICAL DATASHEET on mapei.com



Ultracoat HT Sport

Two-component, water-based polyurethane varnish for wooden playing surfaces. Ultracoat HT Sport complies with European standards for indoor playing surfaces and multi-purpose playing surfaces (EN 14904:2006). Its surface hardness combined with its strength and resistance to chemicals make Ultracoat HT Sport a highly reliable product.



CHECK THE TECHNICAL DATASHEET on mapei.com



COLOUR

comp. A: milky white; comp. B: transparent

PACKAGING

CERTIFICATIONS AND MARKINGS



Ultracoat MT 2K

Two-component water-based acrylic-polyurethane lacquer for wooden floors with very low emission of volatile organic compounds (EMICODE EC1 Plus) with high resistance to wear and abrasion. Suitable for floors subject to frequent pedestrian use.

CONSUMPTION 80-100 ml/m² for the first coat

50-70 ml/m² for the subsequent coats


COLORE comp. A: whitish; comp. B: transparent

PACKAGING (A+B) 4.5 l x 0.25 l units

CERTIFICATIONS AND MARKINGS

126





CHECK THE TECHNICAL DATASHEET on mapei.com



Ultracoat Oil Care Plus

APPLICATION

PACKAGING

APPLICATION

PACKAGING

CONSUMPTION

CONSUMPTION

Water-based microemulsion based on waxy resin, modified oils and natural waxes for maintaining wooden floors finished with Ultracoat Hard Oil Fast.



TECHNICAL DATASHEET on mapei.com



Ultracoat Oil Care Silver Plus

waxing mop

11 bottles

25/35 m²/l per coat

Wax oil in water emulsion with nanometre particles of colloidal silver for maintaining wooden floors.



CHECK THE **TECHNICAL** DATASHEET on mapei.con



Ultracoat Premium Base

waxing mop

11 bottles

25/35 m²/l per application

Two-component, NMP-free, water-based undercoat with low emission of volatile organic compounds (VOC) and high insulating capacity, for preparing solid and pre-sanded wooden floors and wooden floors under repair for water-based finishing cycles.

CONSUMPTION 80-100 g/m² per coat

COLOUR comp. A: milky white; comp. B: transparent

(A+B) 6 l, 2 6 l units **PACKAGING**

CERTIFICATIONS AND MARKINGS





TECHNICAL DATASHEET on mapei.con





Ultracoat Renew FL

Two-component, adhesion promoter primer for two-component, water-based **Ultracoat** lacquers.



CHECK THE
TECHNICAL
DATASHEET
on mapei.com



APPLICATION CONSUMPTION $20/35 \text{ m}^2$ COLOUR transparent PACKAGING 1.18 (A+B) units (2x 3,19 l box)

Ultracoat Soft Touch Base

One-component, rapid drying, water-based primer for preparing wooden floors before applying **Ultracoat Soft Touch Finish**. Product with very low emission of volatile organic compounds.

CONSUMPTION	80-100 g/m ²
COLOUR	milky white
PACKAGING	5 units (2x5 box)









CHECK THE **TECHNICAL** DATASHEET on mapei.com



Ultracoat Soft Touch Finish

Two-component, water-based, 100% polyurethane varnish with low emission of volatile organic compounds. Natural, soft finish for protecting wooden floors in residential and commercial environments.

CONSUMPTION	50-70 ml/m² per coat
COLOUR	comp. A: whitish; comp. B: colourless
PACKAGING	5.5 units (A+B) (2x5, 5 box)

CERTIFICATIONS AND MARKINGS

128





CHECK THE TECHNICAL DATASHEET on mapei.com



Ultracoat Sport Color

One-component water-based coloured acrylic paint for marking out playing areas on wooden sports surfaces.



TECHNICAL DATASHEET on mapei.com



Ultracoat Sport Color Hardener

 $1.120 \pm 0.005 \, \text{kg/l}$

transparent

various colours

Admixture for Ultracoat Sport Color.

CONSUMPTION 80-100 ml/m² per coat

5 I

COLOUR

DENSITY

COLOUR

PACKAGING

PACKAGING

PACKAGING



CHECK THE **TECHNICAL** DATASHEET on mapei.com



Ultracoat Toning Base

Two-component, NMP-free, water-based toning undercoat with low emission of volatile organic compounds (VOC) and high insulating capacity, for preparing solid and pre-sanded wooden floors and wooden floors under repair for **Ultracoat** water-based finishing cycles.

boxes containing 611 bottles



CONSUMPTION	80-100 g/m² per coat	CHECK THE TECHNICAL
COLOUR	comp. A: milky white; comp. B: transparent	DATASHEET on mapei.co







Back to the table of contents Back to the alphabetical index

6 I units (A+B)

Ultracoat Top Deck Cleaner

Ready-to-use alkaline solution used for maintaining outdoor wooden flooring treated with **Ultracoat Top Deck Oil**.



CHECK THE TECHNICAL DATASHEET on mapei.com



CONSUMPTION	depending on the floor

PACKAGING 4 litres

APPLICATION

CONSUMPTION

COLOURS

PACKAGING

Ultracoat Top Deck Oil

Oil finishing product for treating outdoor wooden floors.



roller, brush	
1 every 12-15 m²	
teak and neutral	
5	





Ultracoat Universal Base

One-component, NMP-free, water-based rapid undercoat, with low emission of volatile organic compounds (VOC) for wooden floors.

CONSUMPTION	80-100 ml/m² per coat
COLOUR	transparent
PACKAGING	5 I units

CERTIFICATIONS AND MARKINGS






CHECK THE TECHNICAL DATASHEET on mapei.com







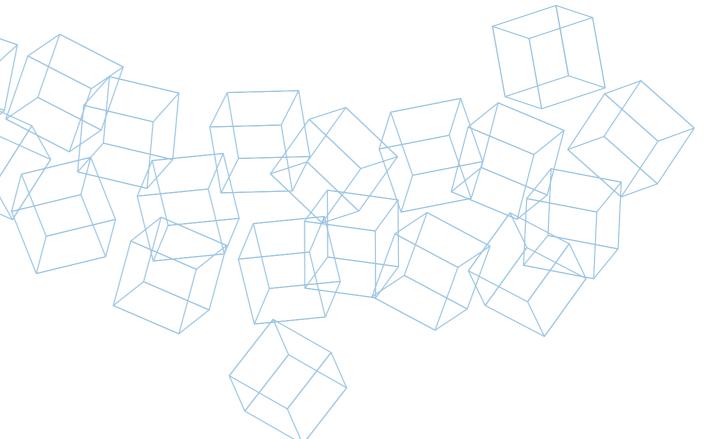



ADHESIVES
FOR RESILIENT,
LVT AND TEXTILE
COVERINGS

1. ADHESIVES IN WATER DISPERSION

Adesilex MT32

Adhesive for laying all types of wall coverings, wallpaper, glass-fibre fabrics and non-woven fabrics.

APPLICATION	n. 1 Mapei trowel, TKB A1 trowel or roller
CONSUMPTION	150-250 g/m ²
COLOUR	white
PACKAGING	20, 10 5 and 1 kg drums
CERTIFICATIONS	(Semicon)






AND MARKINGS

Adesilex V4

Multi-purpose adhesive for bonding vinyl and textile flooring.

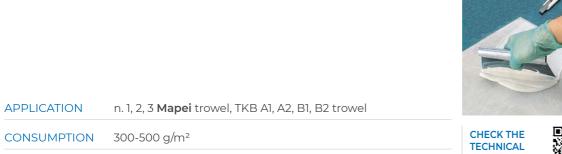





DATASHEET COLOUR white on mapei.com PACKAGING 16 and 5 kg drums

Adesilex VS45

High and fast initial tack adhesive for laying resilient wall coverings.

APPLICATION	n. 1 Mapei trowel, TKB A1, A2 trowel
CONSUMPTION	200-300 g/m ²
COLOUR	white
PACKAGING	14 and 5 kg drums
CERTIFICATIONS AND MARKINGS	ECT



CHECK THE TECHNICAL DATASHEET on mapei.com



Aquacol T

Hard-set adhesive with long open time for textile and linoleum flooring.

APPLICATION	n. 2, 3 Mapei trowel, TKB A2, B1, B2 trowel
CONSUMPTION	300-450 g/m ²
COLOUR	light beige
PACKAGING	25, 16 and 5 kg drums





TECHNICAL DATASHEET on mapei.con



Mapecryl Eco

CERTIFICATIONS

AND MARKINGS

Multi-purpose adhesive for vinyl, textile and linoleum wall and floor coverings.

APPLICATION	n. 1, 2, 3 Mapei notched trowel, TKB A1, A2, B1, B2 trowel
CONSUMPTION	250-450 g/m ²
COLOUR	light beige
PACKAGING	25, 16 and 5 kg drums





light beige

16, 5 and 1 kg drums





CHECK THE **TECHNICAL** DATASHEET on mapei.con



Rollcoll

APPLICATION


COLOUR

PACKAGING

CONSUMPTION

Multi-purpose adhesive for laying vinyl and textile wall and floor coverings.

by trowel: 300-500 g/m²; by roller: 200-300 g/m²

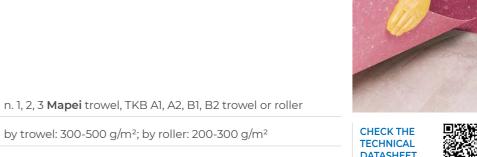

DATASHEET on mapei.com





Back to the alphabetical index

Ultrabond 333

Multi-purpose adhesive with long open time for vinyl textile and linoleum wall and floor coverings.



CHECK THE
TECHNICAL
DATASHEET
on manei com



APPLICATION n. 1, 2, 3 Mapei notched trowel, TKB A1, A2, B1, B2 trowel

CONSUMPTION 300-500 g/m²

COLOUR light beige

PACKAGING 25 and 16 kg drums

Ultrabond Eco 4 LVT

Fibre-reinforced adhesive. Specifically developed for the installation of LVT, SPC and rigid LVT coverings, it guarantees the highest performances in terms of adhesion and dimensional stability.

APPLICATION	n. 1 Mapei notched trowel, TKB A1, A2 trowel
CONSUMPTION	200-300 g/m ²

COLOUR light beige

PACKAGING 14 and 5 kg drums

CERTIFICATIONS AND MARKINGS













CHECK THE TECHNICAL DATASHEET on mapei.com



Ultrabond Eco 375

Adhesive with long open time for vinyl floor and wall coverings.

APPLICATION	n. 1 Mapei trowel, TKB A1, A2 trowel
CONSUMPTION	200-300 g/m ²
COLOUR	light beige

PACKAGING 14 kg drums

CERTIFICATIONS AND MARKINGS

136











CHECK THE **TECHNICAL** DATASHEET on mapei.com



Ultrabond Eco 380

"Pressure sensitive" adhesive with strong and fast initial tack, very long open time, for vinyl floor and wall coverings.





TECHNICAL DATASHEET on mapei.com



Ultrabond Eco 388

Pressure sensitive adhesive for PVC and LVT with excellent wet grab, early build-up of strength and extended open time.

APPLICATION	n. 1 Mapei notched trowel, TKB A1, A2 trowel
CONSUMPTION	200-300 g/m ²
COLOUR	light beige
PACKAGING	16 kg drums
CERTIFICATIONS	(Second




Ultrabond Eco 520

AND MARKINGS

Adhesive with high initial tack for linoleum floors and resilient wall coverings.

APPLICATION	n. 2, 3 Mapei trowel, TKB B1, B2 trowel
CONSUMPTION	300-450 g/m ²
COLOUR	light beige
PACKAGING	16 kg drums
	IEMICO

CERTIFICATIONS AND MARKINGS



CHECK THE **TECHNICAL** DATASHEET on mapei.con





Ultrabond Eco 530

Adhesive with high and fast initial bond. For the wet-bed installation of linoleum and resilient wall coverings.

APPLICATION	n. 2, 3 Mapei trowel, TKB B1, B2 trowel
CONSUMPTION	300-450 g/m ²
COLOUR	light beige

PACKAGING 16 kg drums

CERTIFICATIONS AND MARKINGS









CHECK THE TECHNICAL DATASHEET on mapei.com



Ultrabond Eco 575

Synthetic polymer adhesive in water dispersion for installing skirtings.

	APPLICATION	extrusion
	CONSUMPTION	325 ml every 12 m
	COLOUR	beige
	PACKAGING	310 ml cartridges

CERTIFICATIONS
AND MARKINGS



CHECK THE TECHNICAL DATASHEET on mapei.com



Ultrabond Eco Decor Dry

Ready to use adhesive for decorative fibre glass and wallpaper in dry area.

APPLICATION	n. 1 Mapei trowel, TKB A1, roller
CONSUMPTION	150-250 g/m ²
COLOUR	white
PACKAGING	3 kg drums

CERTIFICATIONS AND MARKINGS

138





CHECK THE TECHNICAL DATASHEET on mapei.com



Ultrabond Eco Fast Track

Fast set, universal adhesive for quick renovation of resilient and textile floor coverings. Suitable also and for installing, coves and stairs.

APPLICATION n. 1, 2, 3 Mapei trowel, TKB A1, A2, B1 and B2 trowel

CONSUMPTION 200-400 g/m²

COLOUR beige

PACKAGING 5 kg drums

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.com



Ultrabond Eco Fix

Adhesive and fixative with high residual tack for loose-lay flooring.

APPLICATION n. 1 Mapei trowel, TKB A1, A4 trowel and roller

CONSUMPTION 80-150 g/m²

COLOUR light beige

PACKAGING 10 and 5 kg drums

CERTIFICATIONS AND MARKINGS











TECHNICAL DATASHEET on mapei.com



Ultrabond Eco Tack

Adhesive and slip-resistant fixative with high residual tack for loose-lay carpet tiles.

APPLICATION roller

CONSUMPTION 100-200 g/m²

COLOUR light beige

CERTIFICATIONS
AND MARKINGS

PACKAGING



15 kg drums



TECHNICAL

DATASHEET

on mapei.com





Ultrabond Eco Tack 4 LVT

Slip-resistant fixative for loose-lay LVT, SPC and rigid LVT.

APPLICATION roller 90-130 g/m² CONSUMPTION COLOUR white PACKAGING 15 kg rectangular drums

CERTIFICATIONS **AND MARKINGS**







CHECK THE TECHNICAL DATASHEET on mapei.com



Ultrabond Eco Tack TX+

Slip-resistant fixative for loose-lay carpet tiles.

APPLICATION roller 50-100 g/m² CONSUMPTION COLOUR transparent/white

5 and 10 kg tanks and 15 kg drums

CERTIFICATIONS AND MARKINGS

PACKAGING














CHECK THE TECHNICAL DATASHEET on mapei.com



Ultrabond Eco TX1

Hard set "standard" adhesive for textile and linoleum flooring.

APPLICATION n. 2, 3 Mapei notched trowel, TKB A2, B1, B2 CONSUMPTION 350-500 g/m²

COLOUR light beige

PACKAGING 16 kg drums

CERTIFICATIONS AND MARKINGS

140













CHECK THE TECHNICAL DATASHEET on mapei.com



Ultrabond Eco TX2

"Pro-grade" adhesive with high initial tack and long open time, for textile flooring.

APPLICATION n. 2, 3 Mapei notched trowel, TKB A2, B1, B2

300-450 g/m² CONSUMPTION

COLOUR light beige

16 and 5 kg drums PACKAGING

CERTIFICATIONS AND MARKINGS









CHECK THE TECHNICAL DATASHEET on mapei.com



Ultrabond Eco TX3

"Premium" adhesive with excellent wet grab and early build-up of strength for textile and linoleum flooring.

n. 2, 3 Mapei notched trowel, TKB B1, B2 APPLICATION

CONSUMPTION 350-500 g/m²

light beige

CERTIFICATIONS AND MARKINGS

COLOUR

PACKAGING













CHECK THE **TECHNICAL** DATASHEET on mapei.com



Ultrabond Eco V4 Evolution

16 kg drums

"All in one" universal adhesive with strong, rapid initial tack and long open time for resilient and textile floor and wall-coverings.

APPLICATION n. 1, 2, 3 Mapei notched trowel, TKB A1, A2, B1, B2, roller

CONSUMPTION 200-450 g/m²

COLOUR light beige

PACKAGING 14, 5 and 1 kg drums

CERTIFICATIONS AND MARKINGS



















Ultrabond Eco V4SP

Universal, high-performance adhesive for laying resilient and textile flooring and covering.

APPLICATION n. 1, 2, 3 Mapei notched trowel, TKB A1, A2, B1, B2

CONSUMPTION 200-450 g/m²

COLOUR light beige

PACKAGING 14 and 5 kg drums

CERTIFICATIONS **AND MARKINGS**











CHECK THE TECHNICAL DATASHEET on mapei.com



Ultrabond Eco V4 SP Conductive

Light-coloured adhesive in water dispersion for installing conductive floors with very low emission of volatile organic compounds (VOC).

APPLICATION Mapei notched trowel

CONSUMPTION 300-400 g/m²

PACKAGING 16 kg drums

CERTIFICATIONS **AND MARKINGS**

COLOUR



light grey





CHECK THE TECHNICAL DATASHEET on mapei.com



Ultrabond Eco V4 SP Fiber

Universal, fibre-reinforced, high-performance adhesive for laying resilient and textile flooring.

APPLICATION n. 1, 2, 3 Mapei notched trowel, TKB A1, A2, B1, B2 CONSUMPTION 200-450 g/m²

COLOUR light beige

PACKAGING 14 kg drums

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.com



Ultrabond Eco VS60

Multi-purpose adhesive with strong tack for vinyl, textile, linoleum and LVT floor and wall coverings.

APPLICATION n. 1, 2, 3 Mapei notched trowel, TKB A1, A2, B1, B2, roller

200-450 g/m² CONSUMPTION

COLOUR light beige

16 kg drums **PACKAGING**

CERTIFICATIONS AND MARKINGS







Ultrabond Eco VS90 Plus

Universal adhesive with strong tack for laying resilient and textile flooring.

APPLICATION n. 1, 2, 3 Mapei trowel, TKB A1, A2, Bland B2

14 and 5 kg drums

CONSUMPTION 200-450 g/m²

COLOUR beige

CERTIFICATIONS AND MARKINGS

PACKAGING

PACKAGING



16 kg drums











CHECK THE TECHNICAL DATASHEET on mapei.com



Ultrabond TX57

High and fast initial tack adhesive for laying textile and linoleum flooring.

n. 2, 3 Mapei notched trowel, TKB A2, B1, B2 **APPLICATION** 300-550 g/m² CONSUMPTION COLOUR light beige



CHECK THE TECHNICAL DATASHEET on mapei.com





143

Back to the table of contents

142

2. REACTIVE ADHESIVES

Adesilex G19

APPLICATION

Two-component epoxy-polyurethane adhesive for installing indoor or outdoor resilient and textile flooring onto both absorbent and non-absorbent substrates.

Specifically developed for the installation of rubber athletic tracks.

CHECK THE **TECHNICAL** DATASHEET on mapei.com



CONSUMPTION 350-1000 g/m² COLOUR comp. A: beige, red, green, black; comp. B: transparent PACKAGING 2, 5 and 10 kg drums

1, 2, 3, 4 Mapei notched trowel, TKB A1, A2, B1, B2, C1

Adesilex G19 Conductive

wo-component epoxy-polyurethane adhesive for installing conductive resilient flooring onto both absorbent and non-absorbent substrates.



CHECK THE TECHNICAL DATASHEET on mapei.com



APPLICATION n. 1, 2 Mapei notched trowel, TKB A2, B1, B2, B3 CONSUMPTION $300-450 \text{ g/m}^2$ COLOUR comp. A:black; comp. B: straw yellow **PACKAGING** 10 kg drums

Adesilex G19 Fast

Fast setting, two-component epoxy-polyurethane adhesive for installing indoor or outdoor resilient and textile flooring onto both absorbent and non-absorbent substrates.

Specifically developed for the installation of rubber athletic tracks.

APPLICATION	1, 2, 3, 4 Mapei notched trowel, TKB A1, A2, B1, B2, C1
CONSUMPTION	0.35-1.0 kg/m ²
COLOUR	comp. A: beige, red, green, black; comp. B: transparent
PACKAGING	10 kg kit

CERTIFICATIONS AND MARKINGS

144



CHECK THE TECHNICAL DATASHEET on mapei.com



Adesilex G19 FR Fast

Solvent free, two component, fast setting, epoxy-polyurethane adhesive for resilient and textile flooring in transportation equipment industry. Complies with the requirements of EN 45545-2:2013 for the Hazard Levels HL1-HL2, requirements set R10. Also meets the requirements of smoke-gas toxicity specified in the Chinese Standards TB/T3237:2010 and TB/T3139:2006. It is suitable for marine equipment in compliance with the Marine Equipment Directive (MED) 96/98/EC and subsequent amendments.

APPLICATION	1, 2, 3 Mapei notched trowel, TKB A1, A2, B1, B2, C1
CONSUMPTION	400-800 g/m ²
COLOUR	comp. A: beige; comp. B: transparent
PACKAGING	10 kg kit
SEDTIFICATIONS.	





TECHNICAL DATASHEET on mapei.com



Adesilex G20

Low-viscosity, two-component epoxy-polyurethane adhesive for installing indoor or outdoor resilient and textile flooring onto both absorbent and non-absorbent substrates. Particularly suitable for installing thin flooring, also onto waterproofing glass-fibre reinforced underlays such as Mapelay, in order to avoid the ribs of adhesive may show through.

APPLICATION	1, 2, 3 Mapei notched trowel, TKB A1, A2, B1, B2
CONSUMPTION	350-600 g/m ²
COLOUR	comp. A: beige; comp. B: transparent
PACKAGING	5 and 10 kg kit

CERTIFICATIONS AND MARKINGS





CHECK THE TECHNICAL DATASHEET on mapei.com



Adesilex G20 Fast

Fast setting, low-viscosity, two-component epoxy-polyurethane adhesive for installing indoor or outdoor resilient and textile flooring onto both absorbent and non-absorbent substrates. Particularly suitable for installing thin flooring, also onto waterproofing glass-fibre reinforced underlays such as Mapelay, in order to avoid the ribs of adhesive may show through.

APPLICATION	1, 2, 3 Mapei notched trowel, TKB A1, A2, B1, B2
CONSUMPTION	350-600 g/m ²
COLOUR	comp. A: beige; comp. B: transparent
PACKAGING	10 kg kit
CERTIFICATIONS AND MARKINGS	Factor Control of the



CHECK THE TECHNICAL DATASHEET on mapei.con





Ultrabond Eco 571 2K

Two-component, low-viscosity polyurethane adhesive with no water or solvents for bonding indoor and outdoor PVC and rubber flooring.

APPLICATION n. 1, 2, 3 Mapei notched trowel, TKB A1, A2, B1, B2

CONSUMPTION 300-600 g/m²

COLOUR comp. A: grey; comp. B: brown

PACKAGING 5 and 10 kg drums

CERTIFICATIONS AND MARKINGS





CHECK THE TECHNICAL DATASHEET on mapei.com



Ultrabond Eco Decor Wet

One-component, silylated polymer-based adhesive for decorative fibreglass and wallpaper in wet areas.

APPLICATION straight or notched trowel (such as **Mapei** n. 1, TKB A1, A4)

CONSUMPTION 200 g/m²

COLOUR transparent

PACKAGING 3 kg drums

CERTIFICATIONS AND MARKINGS





CHECK THE TECHNICAL DATASHEET on mapei.com



Ultrabond Eco MS1

One-component, universal silylated polymer-based adhesive for resilient and textile flooring.

APPLICATION n. 1, 2, 3 **Mapei** trowel TKB A1, A2, B1, B2

CONSUMPTION 350-400 g/m²

COLOUR ivory

PACKAGING 15 kg drums

CERTIFICATIONS AND MARKINGS

146













Ultrabond Eco MS 4LVT Wall&Floor

One-component, silylated polymer-based adhesive for laying LVT, SPC and rigid LVT on walls. Also suitable for floors. Particularly recommended for installation in wet areas and on non-absorbent substrates.

APPLICATION n. 1 Mapei notched trowel or TKB A1, A2

CONSUMPTION 250-350 g/m²

COLOUR ivory

PACKAGING 7 kg drums

CERTIFICATIONS AND MARKINGS













Ultrabond Eco MS Easy

One-component, thixotropic, sylilated polymer-based adhesive for laying PVC, SPC and rigid LVT panels on walls.

APPLICATION	cartridge
YELD	5 linerar meters of bead for cartridge
COLOUR	ivory
PACKAGING	300 ml cartridges
	AFMICO.

CERTIFICATIONS AND MARKINGS






CHECK THE TECHNICAL DATASHEET on mapei.com



3. POLYCHLOROPRENIC AND ELASTOMERIC CONTACT ADHESIVES

Adesilex LP

Polychloroprenic contact adhesive in solvent for laying profiles, covings and resilient floors and wall coverings where immediate setting is required.

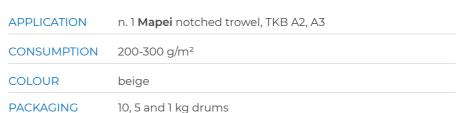



CHECK THE TECHNICAL DATASHEET on mapei.com





Adesilex VZ

Polychloroprenic adhesive in solvent for back-buttering for laying profiles, covings and resilient floors and coverings where immediate setting is required.



CHECK THE
TECHNICAL
DATASHEET
on mapei.com



APPLICATION n. 1 Mapei notched trowel, TKB A2, A3 CONSUMPTION 200-300 g/m² COLOUR beige PACKAGING 10, 5 and 1 kg drums

Ultrabond Eco Contact

Solvent-free contact adhesive for laying resilient and textile flooring and covering. Particularly recommended for installing covings, steps, skirtings and corners.

CONSUMPTION	150-200 g/m² per coat on every surface type
COLOUR	white
PACKAGING	2.5 and 5 kg drums





CHECK THE **TECHNICAL** DATASHEET on mapei.com



4. POWDER ADHESIVES

Glicovil Decor

148

Universal powder adhesive for laying wallpapers with all kinds of backing.



CHECK THE TECHNICAL

DATASHEET

APPLICATION	roller, brush
CONSUMPTION	80-100 g/m ²
COLOUR	white
PACKAGING	250 g boxes



5. CEMENTITOUS ADHESIVES

Granirapid

Two-component, high-performance, deformable, quick-setting and hydrating cementitious adhesive for rubber tiles bonded to cement.

APPLICATION	n. 10 Mapei notched trowel
CONSUMPTION	8 kg/m²
COLOURS	grey or white
PACKAGING	• Granirapid white: 28 kg kit

comp. A: 22.5 kg bag comp. B: 5.5 kg drum
• Granirapid grey: 30.5 kg kit comp. A: 25 kg bag, comp. B: 5.5 kg drum.

CERTIFICATIONS AND MARKINGS







DATASHEET on mapei.com



6. ADHESIVE STRIPS

Mapecontact Plus

Double sided reinforced adhesive strip for laying profiles, skirtings, covings and resilient and textile coverings on steps.

COLOUR	transparent adhesive and orange reinforcement

PACKAGING

- 25 mm: boxes with 12 rolls of 50 m;
- 40 mm: boxes with 7 rolls of 50 m;
- 85 mm: boxes with 3 rolls of 50 m; • 95 mm: boxes with 3 rolls of 50 m;
- 145 mm: boxes with 2 rolls of 50 m;
- 240 mm: boxes with 1 rolls of 50 m.

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.con



7. ADHESIVES FOR SYNTHETIC GRASS

Ultrabond Turf 2 Stars

Two-component, solvent-free polyurethane adhesive for the installation of synthetic turf.

	APPLICATION	n. 3, 4 Mapei notched trowel
	CONSUMPTION	0.3-0.4 kg per metre of 30 cm wide jointing strip (10 kg of adhesive for 25-33 metres)
	COLOUR	comp. A: green; comp. B: brown
	PACKAGING	5 and 15 kg drums

CERTIFICATIONS AND MARKINGS





TECHNICAL DATASHEET on mapei.com





Ultrabond Turf 2 Stars Pro

Two-component, solvent-free polyurethane adhesive for the installation of synthetic turf of the latest generation.

APPLICATION	n. 3, 4 Mapei notched trowel
CONSUMPTION	0.3-0.4 kg per metre of 30 cm wide jointing strip (10 kg of adhesive for 25-33 metres)
COLOURS	comp A: green/white/Swiss red /yellow /Sidney blue comp B: dark amber
PACKAGING	5 and 15 kg drums
CERTIFICATIONS AND MARKINGS	EC I'u







Ultrabond Turf 2 Stars W

Two-component, solvent-free polyurethane adhesive for the installation of synthetic turf at low temperatures.

APPLICATION	n. 3, 4 Mapei notched trowel
CONSUMPTION	0.3-0.4 kg per metre of 30 cm wide jointing strip (10 kg of adhesive for 25-33 metres)
COLOUR	comp. A: green; comp. B: dark amber
PACKAGING	15 kg drums



150



CHECK THE TECHNICAL DATASHEET on mapei.com



Ultrabond Turf Catalyst

Hardening accelerator for two-component polyurethane adhesives from the **Ultrabond Turf** range.




CONSUMPTION	approx. 0.1-0.2% (approx. 1 or 2 lids) by the total weight of the adhesive
COLOUR	colourless, slightly straw yellow
PACKAGING	0.9 kg bottles



Ultrabond Turf LS

One-component, ready-to-use silylated polymer-based adhesive for bonding decorative synthetic turf.

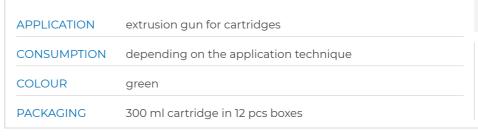



CHECK THE TECHNICAL DATASHEET on mapei.com



Ultrabond Turf PU 1K

One-component, ready-to-use, polyurethane adhesive for bonding synthetic turf.

APPLICATION	n. 3, 4 Mapei notched trowel
CONSUMPTION	0.23-0.26 kg per metre of 30 cm wide jointing strip (10 kg of adhesive for 43.5-38.5 metres)
COLOUR	green
PACKAGING	15 and 7 kg drums and 600 ml aluminium sausages in 20 pcs boxes



CHECK THE TECHNICAL DATASHEET on mapei.com



Ultrabond Turf PU 1K LC

One-component, ready-to-use, polyurethane adhesive for bonding jointing strips between rolls of synthetic turf.

APPLICATION	n. 3, 4 Mapei notched trowel
CONSUMPTION	0.23-0.26 kg per metre of 30 cm wide jointing strip (10 kg of adhesive for 43.5-38.5 metres)
COLOUR	green
PACKAGING	15 and 7 kg drums





Back to the alphabetical index

Ultrabond Turf PU 2K

Two-component polyurethane adhesive for bonding synthetic turf, with very low emission level of volatile organic compounds (VOC).

	APPLICATION	n. 3, 4 Mapei notched trowel
	CONSUMPTION	0.4-0.5 kg per metre of 40 cm wide jointing strip (10 kg of adhesive for 20-25 metres)
	COLOUR	green
	PACKAGING	15 kg drums
	CERTIFICATIONS AND MARKINGS	(ECT)







Ultrabond Turf Repair

One component, polyurethane ready-to-use adhesive with modified viscosity for repairing artificial turf surfaces.



CHECK THE TECHNICAL DATASHEET on mapei.com



APPLICATION n. 3, 4 Mapei notched trowel CONSUMPTION depending on the strip used for the repairing work COLOUR green PACKAGING 300 ml cartridge in 12 pcs boxes.

Ultrabond Turf Tape 100

Jointing strip for fixing synthetic turf.

152



CHECK THE

TECHNICAL

DATASHEET

on mapei.con

THICKNESS	0.10 mm
HEIGHT	roll 400 mm
LENGTH	roll 300 m



Ultrabond Turf Tape 300

Jointing strip for fixing synthetic turf rolls and lines for various sporting disciplines.



CHECK THE TECHNICAL DATASHEET on mapei.com



Ultrabond Turf Tape LS

0.50 mm

300 mm roll

300 m roll

THICKNESS

HEIGHT

LENGTH

THICKNESS

HEIGHT


LENGTH

THICKNESS

HEIGHT

LENGTH

Jointing butyl self-adhesive strip for decorative turf.



CHECK THE
TECHNICAL
DATASHEET
on mapei.con



Ultrabond Turf Tape Pro

1 mm

140 mm

10 m roll

Jointing strip for fixing synthetic turf.



CHECK THE TECHNICAL DATASHEET on mapei.com





Back to the table of contents


Back to the alphabetical index

0.36 mm

300 mm roll

300 m roll



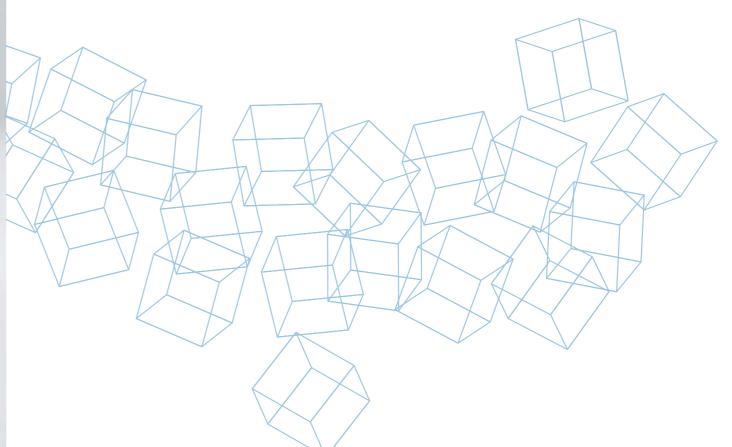



COMPLEMENTARY
PRODUCTS
FOR CERAMIC TILES,
STONE MATERIAL,
PARQUET, RESILIENT
AND TEXTILE
COVERINGS

1. COMPLEMENTARY PRODUCTS FOR CERAMIC TILES AND STONE MATERIAL

Mapeguard Board

Multi-purpose, lightweight waterproof panel used to create room partitions, a background substrate for furnishing features and to line walls internally for the installation of all types of ceramic and natural stone finishes.

APPLICATION	See TDS
SIZE	60x130 cm, thickness from 7 to 10 mm, 60x260 cm, thickness 10, 20, 30 or 48 mm
PACKAGING	standard pallet: 16 60x130 cm panels thickness 7 mm 16 60x130 cm panels thickness 10 mm 8 60x260 cm panels thickness 10 mm 8 60x260 cm panels thickness 20 mm 6 60x260 cm panels thickness 30 mm 2 60x260 cm panels thickness 48 mm



CHECK THE TECHNICAL DATASHEET on mapei.com



Mapeguard Roller

Roller with handle and bag support to maintain even and correct pressure when applying Mapeguard UM Membranes.



CHECK THE TECHNICAL DATASHEET on mapei.con



PACKAGING 1 pc box

Mapeguard UM 35

Waterproofing, uncoupling and anti-fracture membrane for cracked and damp substrates and substrates that are not fully cured before installing ceramic and stone tiles for internal and external surfaces without having to copy the layout of distribution joints in the substrate.

APPLICATION	See TDS
WIDTH	1 m
LENGTH	30 m
THICKNESS	35 mm
PACKAGING	30 m rolls



CHECK THE TECHNICAL DATASHEET on mapei.com



MapeLevel EasyWDG

CONSUMPTION

PACKAGING

Levelling wedges for MapeLevel EasyWDG System wedge tile levelling system for ceramic tiles and stone slabs on floors and on walls with thickness from 3 to 12 mm.



TECHNICAL DATASHEET on mapei.com



MapeLevel EasyWDG Spacer M

make reference to the TDS

boxes with 12 bags x 100 pcs.

Spacer clips for MapeLevel EasyWDG System tile levelling system for ceramic tiles and stone slabs on floors and on walls with thickness from 3 to 12 mm.

depending on the installation layout and tile flatness



SIZE	30x42 mm, hight 41 mm, available in 7 thicknesses
	(0.5, 1, 1.5, 2, 3, 4 and 5 mm)

CONSUMPTION depending on the installation layout and tile flatness make reference to the TDS

PACKAGING boxes 14 bags x 250 pcs.





MapeLevel EasyWDG Pushing-Pliers

Plier to insert the MapeLevel ProWDG wedges into the MapeLevel ProWDG Spacer C or MapeLevel ProWDG Spacer C-H spacer clips and, if necessary, for inserting mechanically the MapeLevel EasyWDG wedges into the MapeLevel EasyWDG Spacer M spacers.



TECHNICAL DATASHEET on mapei.com

Back to the alphabetical index



PACKAGING 15 pc box

MapeLevel Easy Cap

Spinning cap for MapeLevel Easy System, quick-thread screw tile levelling system for ceramic tiles and stone slabs on floors and on walls with thickness from 3 to 21 mm.



CHECK THE
TECHNICAL
DATASHEET
on mapei.com

depending on the installation layout and tile flatness CONSUMPTION make reference to the TDS

PACKAGING boxes with 16 bags x 50 pcs

MapeLevel EasyClick Cap

Spinning cap with special click system for MapeLevel EasyClick System, quick insertion-ejection screw tile levelling system for ceramic tiles and stone slabs on floors and on walls with thickness from 3 to 21 mm.



TECHNICAL DATASHEET on mapei.com



CONSUMPTION depending on the installation layout and tile flatness make reference to the TDS

PACKAGING boxes with 10 bags x 50 pcs.

MapeLevel Easy Spacer L - I

Linear spacers (for linear grout joints) for screw tile levelling system MapeLevel Easy System and MapeLevel EasyClick System for ceramic tiles and stone slabs on floors and on walls with thickness from 3 to 21 mm.



CHECK THE TECHNICAL

DATASHEET

on mapei.com

SIZE	available in 5 thicknesses (1, 1.5, 2, 3, 5 mm)	
CONSUMPTION	depending on the installat	

depending on the installation layout and tile flatness make reference to the TDS

PACKAGING boxes with 25 bags x 100 pcs.

158



MapeLevel Easy Spacer L - T

T-shaped spacers (for T-shaped grout joints) for screw tile levelling system MapeLevel Easy System and MapeLevel EasyClick System for ceramic tiles and stone slabs on floors and on walls with thickness from 3 to 21 mm.



available in 5 thicknesses (1, 1.5, 2, 3, 5 mm) **TECHNICAL** depending on the installation layout and tile flatness DATASHEET on mapei.com



MapeLevel Easy Spacer L - X

CONSUMPTION

PACKAGING

X-shaped spacers (for cross joints grout joints) for screw tile levelling system MapeLevel Easy System and MapeLevel EasyClick System for ceramic tiles and stone slabs on floors and on walls with thickness from 3 to 21 mm.

make reference to the TDS

boxes with 25 bags x 100 pcs



SIZE available in 5 thicknesses (1, 1.5, 2, 3, 5 mm)

CONSUMPTION depending on the installation layout and tile flatness make reference to the TDS

PACKAGING boxes 25 bags x 100 pcs



MapeLevel Easy Shield

Anti-scratch disk to be applied on the cap MapeLevel Easy Cap to prevent scratches when levelling tiles or removing the spacers and o protect the surface of the tile.



TECHNICAL DATASHEET on mapei.com



PACKAGING boxes with 35 bags x 50 pcs

Back to the table of contents Back to the alphabetical index

159

MapeLevel Easy T

Self-levelling, reusable system for ceramic tiles and stone slabs on floors and on walls with thickness up to 17 mm. Suitable for small adjustments during the tile application operations.

SIZE	for joints from 1.5 to 6 mm wide, when used in combination
	with conventional leveling systems (when used as a single

leveling system, only for joints 1.5 mm wide)

CONSUMPTION depending on the installation layout and use (if used in combination with conventional leveling systems

or as a single leveling system)

PACKAGING boxes with 10 bags x 50 pcs



CHECK THE TECHNICAL DATASHEET on mapei.com



MapeLevel ProWDG

Levelling wedges for MapeLevel ProWDG System wedge tile levelling system to be inserted with pliers for ceramic tiles and stone slabs on floors and on walls with thickness from 3 to 20 mm (with 2 disposable elements).



CHECK THE TECHNICAL DATASHEET on mapei.com



depending on the installation layout and tile flatness, CONSUMPTION

make reference to the TDS

PACKAGING boxes with 14 bags with 100 pcs

MapeLevel ProWDG Spacer C

Spacers clips for MapeLevel ProWDG System wedge tile levelling system to be inserted with pliers for ceramic tiles and stone slabs on floors and on walls with thickness from 3 to 12 mm.

SIZE	available in 7 thicknesses
	(0.5 - 1 - 1.5 - 2 - 3 - 4 - 5 mm)

CONSUMPTION depending on the installation layout and tile flatness,

make reference to the TDS

PACKAGING boxes with 12 bags with 250 pcs



TECHNICAL DATASHEET on mapei.con



MapeLevel ProWDG Spacer C-H

Spacers clips for MapeLevel ProWDG System wedge tile levelling system to be inserted with pliers for ceramic tiles and stone slabs on floors and on walls with thickness from 12 to 20 mm.

available in 4 thicknesses (1 - 2 - 3 - 5 mm)

depending on the installation layout and tile flatness,



CHECK THE TECHNICAL DATASHEET on mapei.com



Mapetex System

SIZE

CONSUMPTION

PACKAGING

Anti-fracture system for laying ceramic and stone flooring. It can be used together with Mapetex Strip, for the creation of removable ceramic tiles flooring.

make reference to the TDS

boxes with 40 bags with 50 pcs



APPLICATION	See TDS

WIDTH Mapetex: 200 cm, 100 cm Mapetex Strip: 50 mm

PACKAGING Mapetex: 2 m x 50 m and 1 m x 50 m rolls

Mapetex Strip: 50 mm x 25 m rolls




TECHNICAL DATASHEET on mapei.com



Mapetiles Removable System

Removable soundproofing and uncoupling system for installing ceramic flooring.






161





Mapei Tile Spacer 7-in-1

7 spacers in 1 single element. For ceramic tiles and stone slabs on floors and on walls.



1	S	in	gle	5	spa	icei	r wi	th	7	different thicknesses	
	_	_	_	_	_	_	_		_		

(0.5 - 1 - 1.5 - 2 - 3 - 4 - 5 mm)

CONSUMPTION depending on the installation layout and the operational requirements

PACKAGING boxes with 12 bags x 200 pcs





Mapei Tile Spacer T

SIZE

T-shaped spacers for the running/staggered patterns of ceramic and stone tiles.

SIZE available in the following sizes

1 - 1.5 - 2 - 2.5 - 3 - 4 - 5 - 6 - 7 - 10 mm

CONSUMPTION according to tiling layout/pattern

and specific operational requirements

PACKAGING 1mm: boxes 30 bags x 200 pcs.

1.5 mm: boxes 30 bags x 200 pcs. 2 mm: boxes 30 bags x 200 pcs.

2.5 mm: boxes 30 bags x 200 pcs. 3 mm: boxes 25 bags x 200 pcs. CE .

TECHNICAL
DATASHEET
on mapei.com

4 mm: boxes 20 bags x 200 pcs.

5 mm: boxes 20 bags x 200 pcs.

6 mm: boxes 20 bags x 200 pcs.

7 mm: boxes 12 bags x 200 pcs.

10 mm: boxes 10 bags x 200 pcs.



Mapei Tile Spacer Wedge S

Wedge spacers to rectify and level-off small lippage when installing ceramic and stone tiles.



SIZE available in sizes from 0 to 5 mm

CONSUMPTION according to tiling layout/pattern

and specific operational requirements

PACKAGING boxes with 40 bags x 200 pcs

162



Mapei Tile Spacer X

X-shaped spacers for the traditional installation of ceramic and stone tiles.

SIZE available in the following sizes 1 - 1.5 - 2 - 2.5 - 3 - 4 - 5 - 6 - 7 - 10 mm

CONSUMPTION according to tiling layout/pattern and

specific operational requirements

PACKAGING 1mm: boxes 45 bags x 200 pcs. 1.5 mm: boxes 45 bags x 200 pcs.

2 mm: boxes 35 bags x 200 pcs. 2.5 mm: boxes 35 bags x 200 pcs. 3 mm: boxes 30 bags x 200 pcs.

4 mm: boxes 30 bags x 200 pcs. 5 mm: boxes 25 bags x 200 pcs. 6 mm: boxes 25 bags x 200 pcs. 7 mm: boxes 20 bags x 200 pcs. 10 mm: boxes 15 bags x 200 pcs. CHECK THE TECHNICAL DATASHEET on mapei.com





Mapei Tile Spacer Y

Y-shaped spacers for hexagonal tiles.



5	Z	Ε	ava	ila	b	е	in	sizes	2	and	3	mm	

CONSUMPTION according to tiling layout/pattern

and specific operational requirements

PACKAGING boxes with 35 bags x 200 pcs



on mapei.com



Mapesept Gel

Detergent and hand sanitizer gel.



CHECK THE TECHNICAL DATASHEET on mapei.com



PACKAGING 6 1000

6 1000 ml bottles and 6 dispensers



Mapesept Liquid

Cleaning and hygienizing liquid for hands and small areas of surfaces for domestic and professional use.



CHECK THE TECHNICAL DATASHEET on mapei.com



PACKAGING 5 I tanks

Mapetherm Tile-EJOT SBV-P 8/90 K

Additional washer to be used together with the anchor Mapetherm Tile-EJOT SDF-S PLUS Ø 8 UB.



CHECK THE TECHNICAL DATASHEET on mapei.com



DIAMETER washer: 90 mm

PACKAGING 100 pcs boxes

Mapetherm Tile-EJOT SDF-S PLUS Ø 8 UB

High performance screw anchor to be used together with the washer Mapetherm Tile-EJOT SBV-P 8/90 K.

DIAMETER head: 12 mm; hole 8 mm

DEPTH of the anchorage: 70 mm; hole: 80 mm

LENGTH available in the following sizes

100 - 120 - 140 - 160 - 180 - 200 - 220 - 240 - 260, 280, 300 mm

PACKAGING 100 pcs boxes

CERTIFICATIONS
AND MARKINGS

164







CHECK THE TECHNICAL DATASHEET on mapei.com



2. COMPLEMENTARY PRODUCTS FOR LAYING RESILIENT, LVT AND TEXTILE COVERINGS

Fix & Grout Brick

Ready to use, high-performance adhesive paste with **BioBlock®** mould-resistant technology for bonding brick slips and light weight cementitious and synthetic resin conglomerate decorative elements on internal and external surfaces.



CHECK THE
TECHNICAL
DATASHEET
on mapei.com



APPLICATION

notched trowel or brush

CERTIFICATIONS AND MARKINGS





Flexcolor 4 LVT

Ready to use grout for Luxury Vinyl Tiles.

APPLICATION rubber trow

CONSUMPTION depending on the width of the joint

5 and 1 kg drums

COLOUR 103 moon white, 112 medium grey, 114 anthracite, 120 black, 130 jasmine, 134 silk, 146 rich brown

CERTIFICATIONS AND MARKINGS

PACKAGING









CHECK THE TECHNICAL DATASHEET on mapei.com



Mapecoat 4 LVT

Two-component aliphatic, anti-slip polyurethane finish in water dispersion for LVT.

APPLICATION short pile roller

PACKAGING 1.2 kg kit A + B

CERTIFICATIONS AND MARKINGS

CONSUMPTION



80-100 g/m²















Mapecoat Decor Easy

APPLICATION

CONSUMPTION

PACKAGING

One component aliphatic, polyurethane finish in water dispersion for decorative fibre-glass and wall paper in dry areas.



	CHECK THE TECHNICAL DATASHEE on mapei.c
--	--

short pile roller (such as T3 or T5)	CHE
80-100 g/m ²	DA ¹
1 bottles	

Mapecoat Decor Protection

Two component aliphatic, finish in water dispersion for decorative fibre-glass and wall paper in wet areas.



short pile roller (such as T3 or T5)	CHECK THE TECHNICAL
80-100 g/m ²	DATASHEET on mapei.co
10 kg kit A + D	



CONSUMPTION 80-100 g/m²

APPLICATION

PACKAGING 1.2 kg kit A + B

Mapecoat Wet & Dry R11

Two component aliphatic, anti-slip polyurethane finish in water dispersion for resilient floor-coverings.

IIXING RATIO 5/

OVERLAYING

min. 2 h- max. 48 h (after more than 48 hours, the surface will need to be adequately prepared with a red or green **Ultracoat Pad**)

SET TO FOOT TRAFFIC

166

16 h

CERTIFICATIONS AND MARKINGS











CHECK THE TECHNICAL DATASHEET on mapei.com



Mapelay

THICKNESS

LENGTH

WIDTH

PACKAGING


CONSUMPTION

WEIGHT

COLOUR

PACKAGING

PVC waterproofing and uncoupling sheet, reinforced with glass fibres, for laying internal resilient and fabric floors on substrates which have cracks, which are particularly dirty or damp or which are subject to capillary-action rising damp.



TECHNICAL DATASHEET on mapei.com



Mapelectric CP1

1.2 mm

25 m

2 m

25 m rolls

see TDS

black

2.5 kg tanks

Solvent-free, conductive additive added to primers, smoothing compounds, adhesives and grouting mortars for laying ceramic floors.



CHECK THE
TECHNICAL
DATASHEET
on mapei.c



Planiprep 4 LVT

Ready-to-use grout smoother before installing LVT floors.

density 1.05 kg/dm³

For smoothing over (down to a feather edge up to up to 2 mm thick) existing interior ceramic and stone surfaces. It fills the joints between the tiles and forms a fine-textured, smooth finish suitable for the very quick (2 hours) installation of loose-lay LVT SPC and rigid LVT, or bonded LVT with reactive adhesives, such as Ultrabond ECO MS 4 LVT Wall &Floor.

APPLICATION	trowel
CONSUMPTION	approx. 80-100 g/m ²
COLOUR	white
PACKAGING	10 kg drums
CERTIFICATIONS	7.50





CHECK THE TECHNICAL DATASHEET on mapei.com





Planiprep Remove 4 LVT

Ready-to-use grout smoother for existing substrates before the application of looselay LVT. Easy to remove without leaving any residual. For levelling off and smooth over (also down to a feather edge or in layers up to 2 mm thick) existing interior ceramic and stone surfaces. It fills joints and gaps between tiles and forms a fine, smooth finish suitable for loose-lay LVT tiles and planks.

	APPLICATION	trowel
	CONSUMPTION	approx. 80-100 g/m²
	COLOUR	white
	PACKAGING	10 kg drums
	CEDTIFICATIONS	(FMICA)







Primer G Conductive

Dark-coloured, solvent-free conductive synthetic resin primer in water dispersion.



CHECK THE TECHNICAL DATASHEET on mapei.com



Pulicol 2000

APPLICATION

CONSUMPTION

COLOUR

PACKAGING

Solvent gel for removing adhesive and paint.

brush

black

0.1-0.15 kg/m²

10 kg drums.



APPLICATION	trowel
CONSUMPTION	0.3 kg/m ²
COLOUR	transparent
PACKAGING	2.5 kg drums.



Back to the table of contents

Spacers 4 LVT

Spacers for calibrating grout lines in LVT, SPC and rigid LVT. For 2 mm, 3 mm and 4 mm grouts.



PACKAGING

200 pcs sachet

3. ACCESSORIES, ABRASIVE DISKS AND PRODUCTS FOR THE MAINTENANCE OF PARQUET

Cleaner H

Damp wipes for cleaning hands.



CHECK THE TECHNICAL DATASHEET on mapei.com



PACKAGING

plastic bottles with 80 damp wipes (20x30 cm).

Cleaner L

Cleaning solution for pre-finished parquet.



PACKAGING	1 I bottle (0.85 kg) boxes with 12 bottles.
COLOUR	transparent
CONSUMPTION	5-20 g/m ²
APPLICATION	cotton rag







169

Back to the alphabetical index

Mapei Spray Mop

Compact and light with an innovative design, specifically developed for cleaning domestic areas quickly and efficiently. May be used for daily cleaning operations on wooden floors using specific detergent, as well as for extra maintenance work to remove old wax and apply new wax.



PACKAGING

6 pc box


Ultrabond P-R9

One-component, moisture curing, expansive polyurethane adhesive used by injection, for fastening and repairing parquet elements which are not perfectly bonded to the substrate.



HECK THE]
ECHNICAL	1
ATASHEET	,
n mapei.com	:



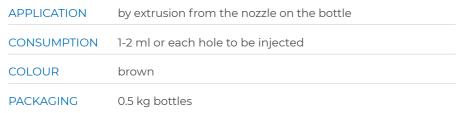

Ultracoat Cleaner

Hygienising detergent for wooden floors. Used neat it removes the most stubborn dirt. When diluted with water, it is the ideal detergent for daily cleaning operations in rooms where maximum hygiene is required. Gets rid of dirt from parquet without removing the finishing treatments. Leaves floors clean and hygienised with a pleasant fragrance.



CHECK THE TECHNICAL DATASHEET on mapei.com



Ultracoat Oil Pad

Special fabric pad for applying **Ultracoat Hard Oil Fast**, **Ultracoat Oil Plus**, **Ultracoat Oil Color**. Specific for removing the products.



Ultracoat Pad

Pads used for polishing and cleaning parquet floors.



CHECK THE TECHNICAL DATASHEET on mapei.com



PACKAGING

6 pcs boxes

Ultracoat Pad Special Stripper

Pads used for polishing and sanding of Ultracoat base coats and paints.



PACKAGING

10 pcs boxes



Ultracoat Polish Anti-Slip

Natural anti-slip protection for wooden floors. Ready-to-use natural wax made from Carnauba extract and water developed specifically for the maintenance of wooden floors using natural products. Also makes surfaces non-slip.



TECHNICAL DATASHEET on mapei.com



Ultracoat Polish Matt

Protective wear and stain-resistant polish for wooden floors. Ready-to-use product for all types of varnished wooden floor. Provides effective protection against the penetration of stains and reduces absorption of oil, grease, coffee, wine and paint. Also protects against wear from footsteps and abrasion and prevents surface scratches.

Brightens up varnished floors to restore them to their original condition and makes the surface of floors less slippery.



TECHNICAL DATASHEET on mapei.com



Ultracoat Remover Plus

Detergent to remove old wax and stubborn dirt; brings out the natural veining of wood. Reacts with old wax by breaking it down to make removal easier.



CHECK THE TECHNICAL DATASHEET on mapei.con



Ultracoat Roller Base Sport

Roller for premium base application of the first coat of **Ultracoat HT Sport** on playing surfaces.



Ultracoat Roller Finish Sport

Roller for applying Ultracoat HT Sport and Ultracoat Sport Color.



Ultracoat Roller MT8

Handle for Ultracoat Roller T3, Ultracoat Roller T5 and Ultracoat Roller T10 rollers.





Back to the alphabetical index

Ultracoat Roller MT Sport

Handle for **Ultracoat Roller Base Sport** and **Ultracoat Roller Finish Sport**



Ultracoat Roller T3

Roller for applying Ultracoat Hard Oil Fast, Ultracoat Oil Plus, Ultracoat Oil Wax and Ultracoat Oil Color.



Ultracoat Roller T5

5 mm fabric roller for applying the second coat of all **Ultracoat** finishing cycles on low porosity wood; after checking its suitability it may also be used for applying the first coat directly on wood.




Ultracoat Roller T10

Roller for applying all base coats and undercoats from the **Ultracoat** line or the first coat of all finishes from the **Ultracoat** line; particularly recommended for absorbent wood and for treating old floors.



Ultracoat SR

Abrasive mesh disks in silica carbide for sanding parquet floors.



Ultracoat Steel Spatula


Special spatula recommended for spreading Ultracoat Aqua Plus and **Ultracoat Oil Wax**. Made entirely from stainless steel, when used to apply **Ultracoat Aqua Plus**. It avoids staining the floor due to discolouring of the high quantity of tannin in certain types of wood. Adjustable flexibility to make grouting operations easier and to guarantee correct filling of even larger joints. Its special shape with rounded corners helps to avoid the formation of streaks of material on the surface of the floor, which makes it particularly recommended for spreading on Ultracoat Oil Wax and Ultracoat Premium Base.





Back to the alphabetical index



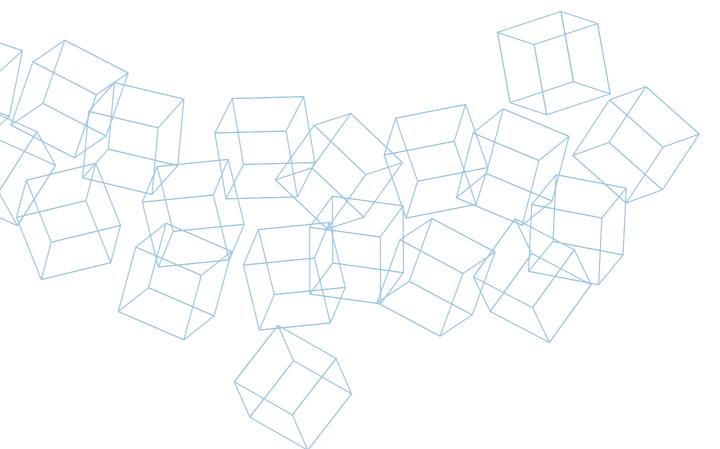



PRODUCTS
FOR RESIN AND
CEMENTITIOUS
FLOORS

1. RESIN-BASED PRODUCTS

Mapecoat DW 25

Two-component epoxy paint for coating concrete surfaces, suitable for contact with drinking water and foodstuff.

APPLICATION	roller, brush or spray
CONSUMPTION	0.2-0.3 kg/m² (per coat)

COLOUR white

PACKAGING 5 kg kit (A+B)

CERTIFICATIONS AND MARKINGS









CHECK THE TECHNICAL DATASHEET on mapei.com



Mapecoat EPN 24

Coloured two-component, epoxy-novolac resin-based coating product with high resistance to chemicals and high solids content.

APPLICATION	medium pile roller, steel straight trow
CONSUMPTION	 When used to form a thick coating r

When used to form a thick coating resistant to chemicals: 0.2-0.3 kg/m² per coat
When used as a final coat on multi-layered coatings:

 When used as a final coat on multi-layered coating 0.3-0.4 kg/m²

COLOURS RAL colours - For the complete colour range please contact the Head Office.


CERTIFICATIONS AND MARKINGS

PACKAGING



5 kg kit (A+B)





CHECK THE TECHNICAL DATASHEET on mapei.com



Mapecoat I 24

Two-component epoxy paint for anti-acid coating concrete surfaces.

APPLICATION roller, brush or airless spray

CONSUMPTION 0.4-0.6 kg/m² per coat

COLOURS RAL colours e neutral to be coloured with Mapecolor Paste

PACKAGING 5 kg and 15 kg kits (A+B)

CERTIFICATIONS AND MARKINGS

178







CHECK THE TECHNICAL DATASHEET on mapei.com



Mapecoat I 62 W

Two-component epoxy coating in water dispersion with a gloss finish to form smooth films of resin coating. Specifically developed for coating the surface of walls and ceilings in clean rooms.

APPLICATION short pile roller in two coats or by airless spray system.

CONSUMPTION film coating approx. 0.2-0.25 kg/m² per coat

COLOURS RAL colours. For the complete colour range please

contact the Head Office

PACKAGING 11 kg kit (A + B)

CERTIFICATIONS AND MARKINGS















e De Bull

Mapecoat I 600 W

Two-component, transparent epoxy primer in water dispersion.

APPLICATION roller, spray or airless spray

CONSUMPTION 0.15-0.25 kg/m²,
depending on the absorption of the substrate

COLOUR opalescent

PACKAGING 5.9 kg and 11.8 kg kits (A+B)



CHECK THE TECHNICAL DATASHEET on mapei.com



Mapecoat I 600 W Lucido

Two-component transparent glossy epoxy primer in water dispersion.

APPLICATION	roller, spray or airless spray
CONSUMPTION	0.15-0.25 kg/m², depending on the absorption of the substrate
COLOUR	opalescent
PACKAGING	5.9 kg kit (A+B)



CHECK THE TECHNICAL DATASHEET on mapei.com





179

Mapecoat I 620 W

Two-component, shiny epoxy finish in water dispersion for anti-dust and anti-grease treatments on concrete floors, cementitious substrates and as a finishing coat on epoxy systems.

APPLICATION short or medium pile roller, or airless spray

CONSUMPTION 0.10-0.25 kg/m² per coat, depending on the absorbency

of the substrate

COLOUR opalescent

PACKAGING 15 kg kit (A+B)

CERTIFICATIONS **AND MARKINGS**







CHECK THE TECHNICAL DATASHEET on mapei.com



Mapecoat I 650 WT

Two-component epoxy paint in water dispersion with a ceramic-effect finish and low dirt-retaining surface for finishing support walls in tunnels.

APPLICATION roller, brush or airless spray

CONSUMPTION


approx. 0.25 kg/m² per coat. The consumption depends on the characteristics of the substrate and the application method used. It may increase if the surface on which it is applied is uneven

PACKAGING 15 kg kit (A+B)

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.com



Mapecoat Universal

Two-component transparent epoxy binder for internal decorative coatings from the Mapefloor Compact System range.

- APPLICATION
- used as primer: by roller, steel straight trowel;
 used for Mapefloor Compact System MF: straight steel trowel, straight rake;
 used for Mapefloor Compact System HD:
- screed-box, straight edge with shims
- CONSUMPTION
- used as primer: 0.2-0.4 kg/m²;
- per Mapefloor Compact System MF 3 mm thickness: 1.4-1.6 kg/m²
- per Mapefloor Compact System HD 7 mm thickness: 2.0-2.5 kg/m²

COLOURS

transparent and straw

PACKAGING

15 kg kit (A+B)

CERTIFICATIONS AND MARKINGS

180







CHECK THE TECHNICAL DATASHEET on mapei.com



Mapecolor CPU+

Pigment in paste for colouring the products from the Mapefloor CPU+ range.



TECHNICAL DATASHEET on mapei.com



Mapecolor Paste

APPLICATION

COLOURS

PACKAGING

Pigment in paste for colouring the Mapefloor system.

0.23 kg sachet

APPLICATION	mix with resin-based formulates during the preparation
CONSUMPTION	depending on the resin-based formulate
COLOURS	19 colours - other RAL colours upon request for a minimum quantity of 25 kg
PACKAGING	0.7 kg can

mix with polyurethane/cement-based formulates

grey, beige, ochre, red, green, blue



TECHNICAL DATASHEET on mapei.com



Mapecrete Creme Protection

Solvent-free, silane-based, thixotropic water repellent in water dispersion, ideal for hydrophobic treatments on concrete.

APPLICATION	squeegee, airless spray, brush or roller
CONSUMPTION	0.1-0.4 kg/m² depending on the level of absorption of the concrete
COLOUR	yellowish white

CERTIFICATIONS AND MARKINGS

PACKAGING



25 kg drums





TECHNICAL DATASHEET on mapei.com





Mapecrete LI Hardener

Surface treatment based on lithium silicate in liquid form with a consolidating effect for new or old concrete floors and concrete surfaces with a dry-shake hardener finishing.

spray or low-pressure pump

of the concrete

25 kg tanks



CHECK THE
TECHNICAL
DATASHEET
on mapei.com

Mapecrete Lithium +

APPLICATION

CONSUMPTION

PACKAGING

182

Water-repellent and protective surface treatment in liquid form with a consolidating effect for new or old concrete floors and concrete surfaces with a dry-shake hardener finishing.

0.2-0.4 kg/m² depending on the level of porosity



CHECK THE	
TECHNICAL	
DATASHEET	
on mapei.com	



APPLICATION spray or low-pressure pump CONSUMPTION 0.05-0.3 kg/m² depending on the type of substrate, its absorbency and on the environmental conditions PACKAGING 25 kg tanks

Mapecrete Lithium Cure

Water-repellent and protective surface treatment in liquid form with anti-evaporation function and a consolidating effect for new concrete floors and concrete surfaces with a dry-shake hardener finishing.



APPLICATION	spray or low-pressure pump
CONSUMPTION	1-4 kg/m² depending on the type of substrate, its absorbency and on the environmental conditions
PACKAGING	25 kg tanks





Mapecrete Lithium Protector

Water-repellent and protective surface treatment in liquid form with a consolidating effect for natural concrete floors and concrete surfaces with a dry-shake hardener finishing. It is used for the protection of coloured concrete or with exposed aggregates concrete such as Mapei Color Paving®.

spray or low-pressure pump

0.05-0.4 kg/m² depending on the type of substrate,

its absorbency and on the environmental conditions.



TECHNICAL DATASHEET on mapei.com



Mapecrete Stain Protection

25 kg tanks

APPLICATION

PACKAGING

PACKAGING

CONSUMPTION

Hydro-oil repellent and anti-stain treatment for concrete, natural stone and cementitious and stone surfaces made from modified organic polymers in water solution.



CHECK THE
TECHNICAL
DATASHEET
on mapei.com



APPLICATION	airless spray or brush
CONSUMPTION	0.1-0.3 kg/m² depending on the level of porosity of the concrete fix

Mapecrete U-Protector

25 kg tanks

Water-repellent and protective surface treatment in liquid form for new or old concrete floors. It is used for the protection of concrete with a natural, polished or sanded finish and on **Ultratop** systems.



APPLICATION	spray or low-pressure pump
CONSUMPTION	0.05-0.4 kg/m² depending on the type of substrate, its absorbency and on the environmental conditions.
PACKAGING	25 kg tanks







Mapefloor Binder 930

One-component aliphatic polyurethane binder for decorative made with natural open-pore aggregates.

APPLICATION	rake, straight-edge, straight metal trowel, vibrating plate compactor
COLOUR	transparent
CONSUMPTION	0.8-1.0 kg/m² per cm of thickness
PACKAGING	5 kg drums



CHECK THE TECHNICAL DATASHEET on mapei.com



Mapefloor CPU/TC Glossy

Three-component polyurethane/cement-based coloured glossy formulate for coating walls and as a finishing coat on polyurethane/cementitious systems for industrial floors.

APPLICATION	short or medium pile roller, metal or rubber trowel
COLOUR	red, beige, greed, grey, ochre
PACKAGING	6.3 kg kit (A+B+C)

CERTIFICATIONS AND MARKINGS









CHECK THE TECHNICAL DATASHEET on mapei.com



Mapefloor CPU+/COVE

Three-component, antimicrobial polyurethane/cement-based mortar for making covings and details.

APPLICATION	suitable plastic or metal tools
CONSUMPTION	depending on the shape and volume of the detail approx. 2 kg/l
COLOUR	to be coloured with Mapecolor CPU+
PACKAGING	29.16 kg kit (A+B+C)

CERTIFICATIONS

184













CHECK THE **TECHNICAL** DATASHEET on mapei.com



Mapefloor CPU+/HD

Three-component, antimicrobial high-strength polyurethane-cement mortar with high resistance to chemicals for industrial floors, applied in thicknesses from 6 to 12 mm.

Complies with standards applied in the foodstuffs sector.

APPLICATION straight metal trowel CONSUMPTION 2 kg/m² per mm of thickness COLOUR to be coloured with Mapecolor CPU+ **PACKAGING** 24.66 kg kit (A+B+C)

CERTIFICATIONS AND MARKINGS













TECHNICAL DATASHEET on mapei.com



Mapefloor CPU+/MF

Three-component, antimicrobial, self-levelling polyurethane-cement mortar with high resistance to chemicals for industrial floors, applied in thicknesses from 3 to 6 mm. Complies with standards applied in the foodstuffs sector

iii tile loodstalis sectol.		
APPLICATION	straight metal trowel or rake with spacers	

1.7 kg/m² per mm of thickness

COLOUR to be coloured with Mapecolor CPU+

PACKAGING 14.16 kg kit (A+B+C)

CERTIFICATIONS AND MARKINGS

CONSUMPTION















Mapefloor CPU+/NZ

Three-component, easy-to-apply, antimicrobial high-strength polyurethane-cement mortar with high resistance to chemicals for industrial floors, applied in thicknesses from 4 to 6 mm. Complies with standards applied in the foodstuffs sector.

CONSUMPTION 1.9 kg/m² per mm of thickness

COLOUR to be coloured with Mapecolor CPU+

PACKAGING 21.16 kg kit (A+B+C)

CERTIFICATIONS AND MARKINGS





















Back to the table of contents Back to the alphabetical index

185

Mapefloor CPU+ Primer

Polyurethane-cement primer for Mapefloor CPU+ systems.



0.3-0.4 kg/m² CONSUMPTION

PACKAGING 6.66 kg kit (A+B+C)

CERTIFICATIONS AND MARKINGS









Mapefloor CPU+/RT

Three-component, antimicrobial, high-strength, polyurethane-cement mortar with high resistance to chemicals for coating industrial floors applied in thicknesses from 6 to 9 mm.

Complies with standards applied in the foodstuffs sector.

CONSUMPTION 1.9 kg/m² per mm of thickness

COLOUR to be coloured with Mapecolor CPU+

PACKAGING 22.66 kg kit (A+B+C)

CERTIFICATIONS AND MARKINGS



















TECHNICAL DATASHEET on mapei.com



Mapefloor CPU+/SR

Three-component, antimicrobial, polyurethane/cement-based mortar for industrial floors with high anti-slip level, applied in thicknesses from 6 to 12 mm. Complies with standards applied in the foodstuffs sector.

APPLICATION	straight metal trowel
CONSUMPTION	2 kg/m² per mm of thickness
COLOUR	to be coloured with Mapecolor CPU+

CERTIFICATIONS AND MARKINGS

PACKAGING

186





23.16 kg kit (A+B+C)











CHECK THE **TECHNICAL** DATASHEET on mapei.com



Mapefloor CPU+/TC

Three-component, antimicrobial, polyurethane/cement-based formulate for coating walls and as a finishing coat on polyurethane/cementitious systems for industrial floors.

APPLICATION metal or rubber trowel or short or medium pile roller

CONSUMPTION • 0.2-0.25 mm as finishing coat: 0.3-0.35 kg/m²;

• finishing coat: on Mapefloor CPU+/MF broadcast with quartz sand: 0.3-0.6 kg/m²

COLOUR to be coloured with Mapecolor CPU+

PACKAGING 6.66 kg kit (A+B+C)

CERTIFICATIONS AND MARKINGS















Mapefloor CPU+/UD

Three-component, antimicrobial, high-strength, polyurethane/cement-based mortar for industrial floors with high resistance for industrial floors in thicknesses from 6 to 12 mm. Complies with standards applied in the foodstuffs sector.

APPLICATION straight metal trowel

CONSUMPTION 2 kg/m² per mm of thickness

COLOUR to be coloured with Mapecolor CPU+

PACKAGING 23.16 kg kit (A+B+C)

CERTIFICATIONS AND MARKINGS













TECHNICAL DATASHEET on mapei.com



Mapefloor Decor 700

Two-component, epoxy paste in water dispersion to create highly attractive resin systems with a trowel-effect or mottled finish with 1.5 to 3 m thickness.

APPLICATION straight steel trowel

CONSUMPTION from 1 to 1.5 kg/m² per layer, depending on the characteristics of the substrate and the type of decorative effect desired

COLOUR to be coloured with Mapecolor Paste

PACKAGING 10 kg kit (A+B+C)

CERTIFICATIONS AND MARKINGS







TECHNICAL DATASHEET on mapei.com





Mapefloor EP19

Three-component acid and wear-resistant epoxy mortar for floors.

CERTIFICATIONS AND MARKINGS





CHECK THE TECHNICAL DATASHEET on mapei.com



Mapefloor Finish 50 N

Semi-gloss, aliphatic, transparent polyurethane finish.

APPLICATION	mohair roller or airless spray
CONSUMPTION	0.08-0.30 kg/m 2 per coat, depending on the absorbency of the substrate
COLOUR	transparent
PACKAGING	10 kg kit (A+B)



CHECK THE **TECHNICAL** DATASHEET on mapei.com



Mapefloor Finish 52 W

Two-component, polyurethane finishing product in water dispersion with low yellowing properties, for anti-dust and anti-oil treatments.

APPLICATION	mohair roller or airless spray
CONSUMPTION	0.05-0.15 kg/m² per coat depending on the absorbency of the substrate
COLOUR	opalescent
PACKAGING	5.4 kg kit (A+B)
CERTIFICATIONS	RADITATINATION (IN 1984-21G)

AND MARKINGS





CHECK THE TECHNICAL DATASHEET on mapei.com



Mapefloor Finish 53 W/L

Two-component, NMP-free, aliphatic, transparent, glossy polyurethane finish in water dispersion with no NMP for protecting resin and cementitious flooring.

APPLICATION	mohair roller or airless spray
CONSUMPTION	0.1-0.2 $\mbox{kg/m}^2$ according to the grade of finish required to the coating
COLOUR	transparent
PACKAGING	2 kg unit: 5 + 0.5 l (A+B).



TECHNICAL DATASHEET on mapei.com



Mapefloor Finish 54 W/S

Two-component, NMP-free, aliphatic, transparent, satin polyurethane finish in water dispersion with no NMP for protecting resin and cementitious flooring.

APPLICATION	mohair roller or airless spray
CONSUMPTION	0.1-0.2 kg/m² according to the grade of finish required to the coating
COLOUR	transparent
PACKAGING	2 kg unit: 5 + 0.5 l (A+B).



CHECK THE TECHNICAL DATASHEET on mapei.com



Mapefloor Finish 58 W

Two-component, aliphatic, water-based, transparent, matt polyurethane finish.

APPLICATION	mohair roller or airless spray
CONSUMPTION	0.1-0.2 kg/m² depending on the level of roughness and porosity of the substrate
COLOUR	transparent
PACKAGING	5.5 kg kit (A+B)
CERTIFICATIONS	S COMPARING SIND





CHECK THE TECHNICAL DATASHEET on mapei.com





Mapefloor Finish 59 W

Two-component, aliphatic, water-based, coloured, matt polyurethane finish, suitable for flexible systems.

APPLICATION	mohair roller or airless spray
CONSUMPTION	0.1-0.2 kg/m² per coat depending on the level of roughness and porosity of the substrate
COLOURS	RAL colours - for the complete colour range please contact the Head Office.

PACKAGING 5.5 kg kit (A+B)

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.com



Mapefloor Finish 59 W TRP

Two-component, aliphatic, water-based, transparent, matt polyurethane finish, suitable for flexible systems.

APPLICATION	mohair roller or airless spray
CONSUMPTION	0.1-0.2 kg/m² per coat depending on the level of roughness and porosity of the substrate
COLOUR	transparent
PACKAGING	5.5 kg kit (A+B)

CERTIFICATIONS AND MARKINGS









TECHNICAL DATASHEET on mapei.com



Mapefloor Finish 415

Two-component, aromatic, flexible, wear-resistant coloured polyurethane finish.

APPLICATION	roller, steel straight trowel or rubber trowel
CONSUMPTION	theoretical 0.5-0.8 kg/m²
COLOURS	RAL colours - for the complete colour range please contact the Head Office.
PACKAGING	12.5 kg kit (A+B)

CERTIFICATIONS AND MARKINGS





CHECK THE TECHNICAL DATASHEET on mapei.con



Back to the table of contents

Mapefloor Finish 450 EU

Two-component, aliphatic, flexible, wear and UV resistant, elastic, coloured, polyurethane finish.

APPLICATION roller, steel straight trowel or rubber trowel CONSUMPTION theoretical 0.6-0.8 kg/m² depending on the roughness of the substrate, temperature and the tools used for application.

COLOURS RAL colours - for the complete colour range please contact the Head Office.

PACKAGING 20 kg kit (A+B)

CERTIFICATIONS AND MARKINGS











TECHNICAL DATASHEET on mapei.com



Mapefloor Finish 451

Two-component, aliphatic, flexible, wear and UV resistant, elastic, coloured, polyaspartic finish.

APPLICATION roller, steel straight trowel or rubber trowel theoretical 0.6-0.8 kg/m² CONSUMPTION

RAL colours - for the complete colour range **COLOURS** please contact the Head Office.

PACKAGING 20 kg kit (A+B)

CERTIFICATIONS AND MARKINGS









CHECK THE TECHNICAL DATASHEET on mapei.com



Mapefloor Finish 630

Two-component, protective acrylic filming agent in water dispersion for concrete, **Ultratop** and **Ultratop Living** floors.

APPLICATION	waxing mop, mohair roller or airless spray
CONSUMPTION	0.15-0.2 kg/m² depending on the level of porosity and absorption of the substrate
COLOURS	transparent milky white
PACKAGING	2 kits unit (A+B): 10 + 0.150 kg



TECHNICAL DATASHEET on mapei.con





Back to the alphabetical index

Mapefloor Finish HTR

Two-component, aliphatic, glossy and transparent elastic finish, with high resistance to chemicals and tyre plasticisers.

APPLICATION	mohair roller or airless spray
CONSUMPTION	0.05- 0.15 kg/m² per coat, depending on the type of substrate to be covered
COLOUR	transparent
PACKAGING	10 kg kit (A+B)







Mapefloor I 300 SL

Two-component, multi-purpose, epoxy formulate for industrial floor coatings up to 4 mm thick. Complies with standards applied in the foodstuffs sector and to the radon gas tightness.

|--|

CONSUMPTION • 2.0 kg/m² as self-levelling coating with 2 mm thickness*

• 0.9 kg/m² as intermediate layer in anti-slip coating with 3 mm thickness*

• 0.6 kg/m² as finishing layer of the anti-slip coating both with 1 mm, or 3 mm thickness*

* over a substrate primed with **Primer SN**

to be coloured with **Mapecolor Paste** (if the neutral version is used) COLORE

PACKAGING 20 kg kit (A+B)

CERTIFICATIONS AND MARKINGS

192













CHECK THE TECHNICAL DATASHEET on mapei.com



Mapefloor I 300 SL TRP

Two-component, transparent, low-yellowing epoxy coatings applied at a thickness of 1 mm for finishing coats on epoxy resin systems.



CHECK THE

TECHNICAL

DATASHEET

APPLICATION	n. 7 notched trowel
CONSUMPTION	approx. 1.1 kg/m² for a 1 mm thick coat
COLOUR	transparent
PACKAGING	18 kg kit (A+B)



Mapefloor I 302 SL

Two-component multipurpose epoxy formulate for industrial floors in compliance with standards applied to the drinks and foodstuffs industry and clean rooms and to the radon gas tightness.

APPLICATION roller, straight and notched trowel

2.0 kg/m² as self-levelling coating with 2 mm thickness*
0.9 kg/m² as an intermediate coat in anti-slip coating with CONSUMPTION

3 mm thickness*

0.6 kg/m² as finishing layer of the anti-slip coating both with 1 mm, or 3 mm thickness*
 * over a substrate primed with Primer SN

RAL colours - for the complete colour range please contact the Head Office

PACKAGING 20 kg kit (A+B)

CERTIFICATIONS AND MARKINGS

COLOURS















TECHNICAL DATASHEET on mapei.com



Mapefloor I 306 CR

Two-component, low emission epoxy formulate for self-levelling floor coatings in clean rooms.

APPLICATION straight or notched trowel (with V-notches)

CONSUMPTION smooth self-levelling coating

average thickness 2 mm: 2.3 kg/m²

COLOURS RAL colours - for the complete colour range please contact the Head Office

20 kg kit (A + B)

CERTIFICATIONS AND MARKINGS

PACKAGING











TECHNICAL DATASHEET on mapei.com



Mapefloor I 309 CR

Two-component, very low emission epoxy formulate for self-levelling floor coatings in clean rooms.

APPLICATION straight or notched trowel (with V-notches)

CONSUMPTION smooth self-levelling coating average thickness 2 mm: 2.3 kg/m²

COLOURS RAL colours - for the complete colour range

please contact the Head Office

PACKAGING 19.5 kg kit (A + B)

CERTIFICATIONS AND MARKINGS















TECHNICAL DATASHEET on mapei.com





Mapefloor I 320 SL CONCEPT

Self-levelling epoxy coating with a coloured granular finish for decorative floors.

APPLICATION	straight trowel
CONSUMPTION	2.7-3 kg/m ²
COLOURS	light grey, dark grey, light azure, dark azure, red
PACKAGING	16.8 kg kit (A+B)
CERTIFICATIONS	SE.







Mapefloor I 324

AND MARKINGS

Two-component, coloured formulate, based on epoxy-novolac resin for self-levelling resin systems to be used in industrial floors with very high resistance to chemicals.

	APPLICATION	notched trowel (with V-notches)
	CONSUMPTION	2.3-2.5 kg/m ²
	COLOURS	RAL colours - For the complete colour range please contact the Head Office
	PACKAGING	20 kg kit (A+B)







AND MARKINGS

CERTIFICATIONS





Mapefloor I 357 ESD

Two-component, self-levelling epoxy formulate for conductive and dissipative coatings in compliance with ESD standard.

APPLICATION	notched trowel (with V-notches)
CONSUMPTION	1.8-2.0 kg/m² per 1.5 mm of self-levelling layer. The maximum consumption is 2.5 kg/m²
COLOURS	RAL colours - For the complete colour range please contact the Head Office
PACKAGING	20 kg kit (A+B)
CEDTIFICATIONS	



CHECK THE TECHNICAL DATASHEET on mapei.com



Mapefloor I 360 AS

Two-component, self-levelling epoxy formulate used to form strong, anti-static, conductive coatings.

APPLICATION	rake or notched trowel (with V-notches)
CONSUMPTION	max. 2.4 kg/m²
COLOURS	RAL colours - For the complete colour range please contact the Head Office
PACKAGING	20 kg kit (A+B)



CHECK THE TECHNICAL DATASHEET



CERTIFICATIONS AND MARKINGS







Mapefloor I 370 SL

Two-component multipurpose epoxy formulate for self-levelling or multi-layered industrial floors from 0.8 mm up to 3.5 mm thickness.

APPLICATION	roller, straight trowel, notched trowel
CONSUMPTION	0.6-2.0 kg/m² depending on the system to be applied
COLOURS	RAL colours - For the complete colour range please contact the Head Office
PACKAGING	20 kg kit (A+B)
CERTIFICATIONS AND MARKINGS	(E SR B20



TECHNICAL DATASHEET on mapei.com



Mapefloor I 390 EDF

Two-component, self-levelling epoxy formulate used to form strong, dissipative coatings.

APPLICATION	rake or notched trowel (with V-notches)
CONSUMPTION	max. 2.5 kg/m ²
COLOURS	RAL colours - For the complete colour range please contact the Head Office
PACKAGING	20 kg kit (A+B)



CHECK THE DATASHEET on mapei.com



AND MARKINGS







CERTIFICATIONS AND MARKINGS











Back to the table of contents

Mapefloor I 500 W

Two-component, vapour-permeable, neutral-coloured epoxy formulate in water dispersion for industrial floors.

CONSUMPTION • as 2 mm thick smooth self-levelling coating on substrates primed with Mapecoat I 600 W: 4 kg/m²

• as 5 mm thick multi-layered anti-slip coating: as first layer Mapefloor I 500 W - 2-2.5 kg/m² / Quartz 0.5 - 5 kg/m²

Mapefloor I 500 W - 2-2.5 kg/m² / Quartz 0.5 - 5 kg/m² as finishing layer Mapefloor I 500 W - 0.7 kg/m²

COLOUR to be coloured with Mapecolor Paste

PACKAGING 26 kg kit (A+B)

CERTIFICATIONS AND MARKINGS





CHECK THE TECHNICAL DATASHEET on mapei.com



Mapefloor I 900

Two-component epoxy binder used for preparing trowelled mortar with a damp earth consistency for industrial floors.

APPLICATION

- as adhesion promoter: roller, straight metal trowel;
- for mortars: rake, aluminium straight edge

CONSUMPTION

- as adhesion promoter: 0.5-0.7 kg/m²;
- as mortar: suggested mixing ratio for the preparation of mortars: 1 kg of Mapefloor I 900 (A+B) every 8-13 kg of Quartz 1.9. The consumption depends on the application thickness

COLOURS

PACKAGING

CERTIFICATIONS AND MARKINGS





transparent amber



CHECK THE TECHNICAL DATASHEET on mapei.com



Mapefloor I 910

Two-component low-yellowing epoxy binder for trowelled mortar or bonding promoter for resin coatings.

APPLICATION

- as primer: roller, straight metal trowel;
- for mortars: rake, aluminium straight edge

CONSUMPTION

- as adhesion promoter: 0.5-0.7 kg/m²;
- as mortar: suggested mixing ratio for the preparation of mortars: 1 kg of **Mapefloor I 910** (A+B) every 8-13 kg of Quartz 1.9 The consumption depends

on the application thickness

COLOURS

transparent and straw

PACKAGING

15 kg kit (A+B)

CERTIFICATIONS AND MARKINGS

196





TECHNICAL DATASHEET on mapei.com



Mapefloor I 914

Two-component epoxy protective coating for concrete, with priming function on skim coats and substrates before waterproofing bridge decks with membranes or before installing asphalt layer.

Also suitable for injections, reparation and protection of concrete structure in compliance with requirements defined by EN 1504-5 standard.

APPLICATION

rubber trowel, roller or brush

CONSUMPTION

(depending on the absorption of the substrate)

COLOUR

yellow transparent

PACKAGING

28 kg kit (A+B)

0.25-0.70 kg/m²

CERTIFICATIONS AND MARKINGS











TECHNICAL DATASHEET on mapei.com



Mapefloor JA

Two-component thixotropic epoxy adhesive for installing Mapejoint 100/25 and Mapejoint 100/12 prefabricated polymer jointing profiles. For carrying out small repairs and grouting on concrete surfaces. Also available in the Mapefloor JA Fast version.

APPLICATION

straight trowel, notched trowel

CONSUMPTION

- 1.60-1.65 kg/m² per mm of thickness
- for bonding Mapejoint 100/25: 5-6 kg per metre of joint, depending on the roughness of the substrate
 • for bonding Mapejoint 100/12: 2.5-3 kg per metre of joint,
- depending on the roughness of the substrate

PACKAGING

6 kg kit (A+B)

CERTIFICATIONS AND MARKINGS







Mapefloor Pore Filler

Two-component, flexible polyurethane resin-based adhesive and pore filler/smoothing compound for Mapefloor Comfort System AL/X and Mapefloor Comfort System AR/X.

APPLICATION

- as adhesive: 3-4 mm notched trowel;
- as pore filler/smoothing compound: plastic or steel straight trowel

CONSUMPTION

approx.0.4-0.8 kg/m² as adhesive. The real consumption is strongly influenced by the substrate type. 0.4-0.5 kg/m² per coat, as smoothing compound on Mapecomfort FL

COLOUR

beige

PACKAGING

12.2 kg kit (A+B)



TECHNICAL DATASHEET on mapei.com





PRODUCTS FOR RESIN AND CEMENTITIOUS FLOORS

Mapefloor PU 400 LV

Two-component, self-levelling, fillerized, highly flexible and low-viscosity polyurethane binder.

APPLICATION	notched trowe	اد
-------------	---------------	----

CONSUMPTION from 1.5 to 2 kg/m² according to the absorption

of the substrate

COLOUR beige - grey

PACKAGING 20 kg kit (A+B)

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.com



Mapefloor PU 406

Two-component, coloured, self-levelling, flexible polyurethane binder.

APPLICATION straight or notch rake or steel trowel

CONSUMPTION • as protective/wear layer for parking lots: \sim 1,0 kg/m²

• flexible membrane for Terrazzo systems:

0.5-0.7 kg/m² per layer

COLOURS RAL colours - For the complete colour range

please contact the Head Office

PACKAGING 18 kg kit (A+B)

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.com



Mapefloor PU 410

Two-component, neutral-coloured, self-levelling, flexible polyurethane fillerized binder.

APPLICATION straight trowel and notched trowel

CONSUMPTION as intermediate layer of

Mapefloor Parking System HE:

Mapefloor PU 410 + Mapecolor Paste: 1.0 kg/m²

COLOUR to be coloured with Mapecolor Paste

PACKAGING 19.9 kg kit (A+B)

CERTIFICATIONS AND MARKINGS

198







CHECK THE TECHNICAL DATASHEET on mapei.com



Mapefloor PU 460


Two-component elastic, coloured, aromatic, self-levelling polyurethane resin used to create Mapefloor Comfort System AR and Mapefloor Comfort System AR/X.

APPLICATION	notched trowel
CONSUMPTION	approx. 2.5 kg/m² for a 2 mm thick coat
COLOURS	RAL colours - For the complete colour range please contact the Head Office
PACKAGING	20 kg kit (A+B)

CERTIFICATIONS AND MARKINGS







TECHNICAL
DATASHEET
on mapei.com



Mapefloor PU 461

Two-component elastic, coloured, UV-resistant, aliphatic, self-levelling polyurethane resin used to create **Mapefloor Comfort System AL** and **Mapefloor Comfort System AL/X**.

APPLICATION	notched trowel
CONSUMPTION	approx. 2.8 kg/m² for a 2 mm thick coat
COLOURS	RAL colours - For the complete colour range please contact the Head Office
PACKAGING	20 ka kit (A+B)

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.com



Mapefloor PU 470

 $\label{two-component} Two-component multipurpose, coloured, semi-elastic polyurethane formulate for industrial floors coatings.$

APPLICATION notched trowel, steel or rubber straight trowel

- self-levelling smooth coating: 1.8-1.9 kg/m²
 multi-layered non-slip coating:
 - middle layer: 0.9-1.0 kg/m²
 - finishing coat: 0.5-0.6 kg/m²

RAL colours - For the complete colour range please contact the Head Office

PACKAGING 20.1 kg kit (A+B)

CERTIFICATIONS AND MARKINGS

COLOURS







TECHNICAL
DATASHEET
on mapei.con





Primer EP Rustop

APPLICATION

COLOUR

PACKAGING

CONSUMPTION

Two-component epoxy primer for metal surfaces.

0.2 kg/m²

5 kg kit (A+B)

white

roller, brush or airless spray



CHECK TH
TECHNICA
DATASHEE
on mapei .



Primer Grip White

Universal, ready-to-use, synthetic resin-based bonding promoter in water dispersion with silica aggregates and very low emission of volatile organic compounds (VOC). For indoor floors and walls. It promotes the bond of decorative cementitious skimming mortars from the **Ultratop Loft** range.

APPLICATION	roller, brush
CONSUMPTION	from 0.20 to 0.3 kg/m² depending on the absorption of the substrate
COLOUR	white
PACKAGING	10 kg drums
CERTIFICATIONS	(S) LEMICON





CHECK THE TECHNICAL DATASHEET on mapei.com



Primer LT

Acrylic adhesion promoter for **Ultratop Loft** and cementitious skimming mortars. For indoor surfaces.

APPLICATION	roller, brush
CONSUMPTION	approx. 0.1 kg/m² between the coats of Ultratop Loft ; from 0.1 to 0.2 kg/m² for other substrates, depending on the porosity
COLOUR	light blue
PACKAGING	5 kg tanks

CERTIFICATIONS AND MARKINGS

200





CHECK THE TECHNICAL DATASHEET on mapei.com



Primer SN

Two-component epoxy primer with fillers. It complies with standards applied to the Radon gas tightness.

APPLICATION	straight metal trowel or straight rake
CONSUMPTION	0.3-0.7 kg/m² per coat, depending on the absorbency and the characteristics of the substrate
COLOUR	to be coloured with Mapecolor Paste
PACKAGING	20 kg and 5 kg kits (A+B)

CERTIFICATIONS AND MARKINGS







TECHNICAL


DATASHEET

on mapei.com



Primer SN Rasante

Two-component, epoxy skimming product for cementitious surfaces, also on vertical surface.

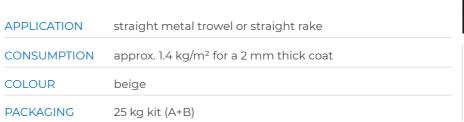



CHECK THE TECHNICAL DATASHEET on mapei.com



Primer W-AS N

Two-component epoxy water-based primer for antistatic conductive and dissipative systems.

APPLICATION	short pile roller
CONSUMPTION	80-100 g/m ²
COLOUR	black
PACKAGING	5 units (A+B)



CHECK THE TECHNICAL DATASHEET on mapei.com





Mapetop N AR6

Pre-blended, ready-to-use hardener for concrete floors made from special quartz in grain-size distribution curve, Portland cement and special additives.

APPLICATION	broadcast
CONSUMPTION	 manual application: from 1.5 to 2.5 kg/m² per coat; mechanical application: from 3 to 5 kg/m²
COLOUR	grey, light grey, anthracite, green, brown, red
PACKAGING	25 kg bags
CERTIFICATIONS	







Mapetop N AR9

AND MARKINGS

Pre-blended, ready-to-use hardener for concrete floors made from special quartz in grain-size distribution curve, Portland cement and special additives.

APPLICATION	broadcast
CONSUMPTION	 manual application: from 1.5 to 2.5 kg/m² per coat mechanical application: from 3 to 5 kg/m²
COLOUR	grey, light grey, other colours available upon request
PACKAGING	25 kg bags





CHECK THE
TECHNICAL
DATASHEET
on mapei.com

Mapetop S AR3

Pre-blended dry-shake hardener for concrete floors made of special aggregates based on corundum, Portland cement and special additives.

APPLICATION broadcast CONSUMPTION • manual application: from 2.5 to 5.5 kg/m² per coat; • mechanical application: from 5 to 8 kg/m² COLOUR grey, other colours available upon request PACKAGING 25 kg bags		
CONSUMPTION • manual application: from 2.5 to 5.5 kg/m² per coat; • mechanical application: from 5 to 8 kg/m²	PACKAGING	25 kg bags
CONSUMPTION • manual application: from 2.5 to 5.5 kg/m² per coat;	COLOUR	grey, other colours available upon request
APPLICATION broadcast	CONSUMPTION	
	APPLICATION	broadcast

CERTIFICATIONS AND MARKINGS

202





CHECK THE TECHNICAL DATASHEET on mapei.com



Mapetop S AR6

Ready-to-use hardener for concrete floors made of special aggregates based on quartz and corundum, Portland cement and special additives.

APPLICATION	broadcast
CONSUMPTION	 manual application: from 2.5 to 5.5 kg/m² per coat; mechanical application: from 5 to 8 kg/m²
COLOUR	light grey, other colours available upon request
PACKAGING	25 kg bags
CERTIFICATIONS	



CHECK THE TECHNICAL DATASHEET on mapei.com



Ultratop

AND MARKINGS

Self-levelling, ultra-quick hardening mortar with special hydraulic binders, applied at a thickness between 5 and 40 mm to create abrasion-resistant floors.

APPLICATION	manual or pump
APPLICATION	manual of pump
CONSUMPTION	16.5-17.5 kg/m² per cm of thickness
COLOUR	white, beige, light grey, red, anthracite, standard
PACKAGING	25 kg hags











CHECK THE TECHNICAL DATASHEET on mapei.com



Ultratop Base Coat

One-component acrylic formulation in water dispersion used as a base coat before applying protective finishes on **Ultratop**, **Ultratop Living** and **Ultratop Loft**.

APPLICATION waxing mop, mohair roller CONSUMPTION 50-80 g/m² depending on the level of porosity of the substrate COLOURS transparent milky white PACKAGING 10 kg tanks		
of the substrate COLOURS transparent milky white	APPLICATION	waxing mop, mohair roller
	CONSUMPTION	3. 1 3
PACKAGING 10 kg tanks	COLOURS	transparent milky white
12.13.12.11.1	PACKAGING	10 kg tanks



CHECK THE TECHNICAL DATASHEET on mapei.com





Ultratop Easycolor

Ready-mixed pigment for colouring cementitious-based **Ultratop Loft** system.

APPLICATION	mixed with Ultratop Loft F or Ultratop Loft W using a low-speed electric mixer to form an evenly coloured, lump-free mix
CONSUMPTION	1 pc 1.5 l per 5 kg of Ultratop Loft
COLOURS	various - for the complete colour range please contact the Head Office
PACKAGING	1.5 l can







Ultratop Industrial

Ultra-rapid hardening, self-levelling mortar based on special hydraulic binders for creating substrates and industrial, abrasion-resistant flooring, with thickness from 5 to 40 mm.

APPLICATION	manual or pump
CONSUMPTION	16.5-17.5 kg/m² per cm of thickness
COLOUR	standard
PACKAGING	25 kg bags



CERTIFICATIONS

AND MARKINGS

Ultratop Living

Self-levelling, ultra-quick hardening mortar with special hydraulic binders, applied at a thickness between 5 and 15 mm to create abrasion-resistant indoor floors.

APPLICATION	manual or pump
CONSUMPTION	16.5-17.5 kg/m² per cm of thickness
COLOURS	white, light grey, anthracite, neutral
PACKAGING	25 kg bags

CERTIFICATIONS AND MARKINGS

204









CHECK THE TECHNICAL DATASHEET on mapei.com




Ultratop Loft F

One-component trowellable coarse-textured cementitious paste applied in layers up to 2 mm thick to create decorative floors with a trowelled or mottled effect.

APPLICATION	rubber, Teflon, or steel straight trowel
CONSUMPTION	0.7-1 kg/m²
COLOUR	white, neutral
PACKAGING	20 kg bags. Units of 4 kg Alupack bags of 5 kg each





HE 型形面下M CAL EET 記 記 ei.com

CERTIFICATIONS AND MARKINGS





Ultratop Loft W

One-component trowellable fine-textured cementitious paste applied in layers up to 2 mm thick to create decorative floors with a trowelled or mottled effect.

APPLICATION	rubber, Teflon, or steel straight trowel
CONSUMPTION	0.7-1 kg/m ²
COLOUR	white, neutral
PACKAGING	20 kg bags. Units of 4 kg Alupack bags of 5 kg each.









Ultratop Outdoor

Rapid-hardening, cementitious smoothing compound for the reparation or creation of outdoor floors up to 20 mm of thickness.

APPLICATION	straight trowel and straight rake
CONSUMPTION	16.5-17.5 kg/m² per cm of thickness
COLOUR	standard

CERTIFICATIONS AND MARKINGS









Ultratop Screed

Thixotropic, rapid-hardening cementitious mortar applicable in layers up to 20 mm thick for levelling off surfaces, including vertical surfaces, before applying **Mapefloor** or **Mapecoat** resin coating systems or **Ultratop Loft** system.

APPLICATION	straight metal trowel
CONSUMPTION	1.6 kg/m² per mm of thickness
COLOUR	grey or white
PACKAGING	25 kg bags
CERTIFICATIONS AND MARKINGS	ECT







Ultratop Stucco

Grout made from special hydraulic binders for sealing micro-porosity which forms after the first polishing phase of **Ultratop**.



CHECK THE TECHNICAL DATASHEET on mapei.com



APPLICATION rubber trowel CONSUMPTION depending on the micro-porosity

COLOURS white, beige, light grey, red, anthracite, standard


PACKAGING 5 kg drums

3. COMPLEMENTARY PRODUCTS FOR RESIN AND CEMENTITIOUS FLOORS

320 Mesh

206

Glass fibre mesh for reinforcing **Mapefloor System** epoxy systems and **Ultratop System** cementitious systems.



CHECK THE

TECHNICAL

DATASHEET

on mapei.con

 WEIGHT
 350 g/m²

 MESH SIZE
 15.7 x 10.1 mm

 PACKAGING
 50 x 1 m rolls



Additix PE

Admixture to make epoxy and polyurethane products thicker with a thixotropic consistency.

1.5-5% by the weight of the resin



TECHNICAL
DATASHEET
on mapei.com



Copper Band

white

1 kg drums

CONSUMPTION

COLOUR

PACKAGING

Self-adhesive copper strip to make conductive and dissipative coatings.



LENGTH	16.5 metres	_
HEIGHT	10 mm	
PACKAGING	cardboard box containing 20 bags with 1 roll of 16.5 m x 10 mm Copper Band per bag	

Dynastone TZ

Mix of aggregates for Terrazzo resin-based systems.



CONSUMPTION	for a Terrazzo system of approx. 10 mm of thickness: 15-19 kg/m² (depending on the resin binder used)
COLOUR	yellowish white

PACKAGING 25 kg bags







Epoxy Speed

PACKAGING

Accelerator for epoxy primers.



CHECK THE
TECHNICAL
DATASHEET
on mapei.com



CON	NSUMPTION	2-3% of the total weight of the epoxy binder used (A+B)
COL	_OUR	light yellow

Gravel Bardiglio CENE Grey 2-4 mm

5 kg drums

Dried Bardiglio CENE grey aggregate in a special granulometric curve from 2 to 4 mm to make decorative surfaces with good drainage properties. Use in combination with **Mapefloor Binder 930** one-component, aliphatic, polyurethane binder.


APPLICATION	mixed with Mapefloor Binder 930 one-component aliphatic polyurethane binder
CONSUMPTION	20 kg of Gravel Bardiglio CENE Grey 2-4 mm per 1 kg of Mapefloor Binder 930
COLOUR	bardiglio cene grey
PACKAGING	25 kg bags



CHECK THE TECHNICAL DATASHEET on mapei.com

Gravel Carrara White 2-4 mm

Dried Carrara white marble aggregate in a special granulometric curve from 2 to 4 mm to make decorative surfaces with good drainage properties. Use in combination with **Mapefloor Binder 930** one-component, aliphatic, polyurethane binder.

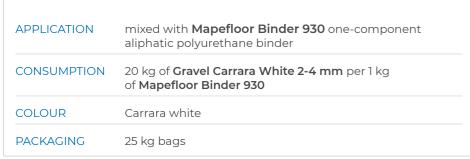



CHECK THE TECHNICAL DATASHEET on mapei.com

Gravel Ebony Black 2-4 mm

Dried ebony black aggregate in a special granulometric curve from 2 to 4 mm to make decorative surfaces with good drainage properties. Use in combination with **Mapefloor Binder 930** one-component, aliphatic, polyurethane binder.

APPLICATION	mixed with Mapefloor Binder 930 one-component aliphatic polyurethane binder
CONSUMPTION	20 kg of Gravel Ebony Black 2-4 mm per 1 kg of Mapefloor Binder 930
COLOUR	ebony black
PACKAGING	25 kg bags



Mapecomfort FL

Rubber matting made from granules of recycled rubber for creating **Mapefloor Comfort System AL/X** and **Mapefloor Comfort System AR/X**. Thickness 4 mm.



APPLICATION	bond to the substrate with the specific polyurethane adhesive Mapefloor Pore Filler	
COLOUR	black	
PACKAGING	1 m x 20 m rolls, 4 mm thickness	





Mapefibre Glass HP

Alkali-resistant glass fibres for reinforcing cementitious mortar and resin.

LENGTH	6 mm
DIAMETER OF FIBRE	14 μm
CONSUMPTION	max. 5 kg/m³
PACKAGING	18 kg polyethylene bags



CHECK THE TECHNICAL DATASHEET on mapei.com





Back to the table of contents

Back to the alphabetical index

209

Mapefloor Cleaner ED

Detergent for normal degreasing operations of floors.



CHECK THE		
TECHNICAL		
DATASHEET		
on mapei.com		



COLOUR CONSUMPTION from 1 to 3% (0.1-0.3 kg per 10 l of water) PACKAGING 10 kg tanks

manual or with cleaning machine

Mapefloor Filler

APPLICATION

Micrometric fillers to be added to epoxy and polyurethane finishes to form a non-slip finish.



CHECK THE TECHNICAL DATASHEET on mapei.com



CONSUMPTION 5-10 g/m² COLOUR white PACKAGING 0.3 kg can

Mapefloor Maintenance Kit

Essential products for cleaning and periodic maintenance of resin and cement floors.



CHECK THE

TECHNICAL

DATASHEET

on mapei.com


PACKAGING

Mapefloor Maintenance Kit is made up of:

- Mapefloor Lucida: 1x5 kg;
- Mapefloor Wax Remover: 1x5 kg;
- Mapefloor Cleaner ED: 2x5 kg

Mapefloor Wax Remover

De-waxing, multi-action detergent for removing all types of metallic wax including the double-reticulation type, such as Mapelux Lucida and Mapelux Opaca.

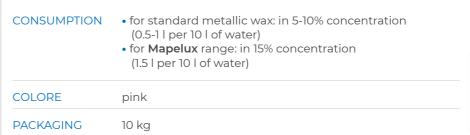



TECHNICAL DATASHEET on mapei.com



Mapejoint 100/12

Precast composite polymeric joint to be inserted in old, damaged and worn joints, including those with large amounts of movement or subject to intense traffic in industrial settings.

LENGTH	1000 mm
WIDTH	120 mm
THICKNESS	25 mm
COLOUR	grey
PACKAGING	1000 mm pcs



CHECK THE DATASHEET on mapei.com



Mapejoint 100/25

Precast composite polymeric joint to be inserted in old, damaged and worn joints, including those with large amounts of movement or subject to intense traffic in industrial settings.

LENGTH	1000 mm
WIDTH	250 mm
THICKNESS	25 mm
COLOUR	grey
PACKAGING	1000 mm pcs



CHECK THE TECHNICAL DATASHEET on mapei.com





Back to the alphabetical index

Mapelux Lucida

Double-reticulation, high-strength shiny metallic wax.

specific waxing mop

white-light blue

10 kg tanks

50 g/m²



CHECK THE	
TECHNICAL	
DATASHEET	
:	



Mapelux Opaca

APPLICATION

COLOUR

PACKAGING

CONSUMPTION

Double-reticulation, high-strength matt metallic wax.

specific waxing mop

white-light blue

10 kg tanks

50 g/m²



CHECK THE TECHNICAL DATASHEET on mapei.com



PU Catalyst

CONSUMPTION

PACKAGING

APPLICATION

CONSUMPTION

COLOUR

PACKAGING

Accelerator for polyurethane Mapefloor Parking System products.

formulate used (a+b)

5 kg drums

0.5-1.5% of the total weight of the polyurethane



CHECK THE TECHNICAL DATASHEET on mapei.com



Quartz 0.25

Quartz sand used as a "filler" and/or for broadcasting on epoxy and polyurethane systems.

grain size up to 0.25 mm

yellowish-white

25 kg bags



TECHNICAL DATASHEET on mapei.com



Ouartz 0.5

SIZE

COLOUR

PACKAGING

Quartz sand used as a "filler" and/or for broadcasting on epoxy and polyurethane systems.



grain size up to 0.5 mm	TE
yellowish-white	D _i or
25 kg bags	



Quartz 0.9

SIZE

SIZE

COLOUR

PACKAGING

COLOUR

PACKAGING

Quartz sand used as a "filler" and/or for broadcasting on epoxy and polyurethane systems.



grain size up to 0.9 mm	CHECK THE TECHNICAL
yellowish-white	on mapei.c







Back to the table of contents Back to the alphabetical index

25 kg bags

Quartz 1.2

Quartz sand used as a "filler" and/or for broadcasting on epoxy and polyurethane systems.



CHECK THE TECHNICAL DATASHEET on mapei.com



SIZE	grain size up to 1.2 mm
COLOUR	yellowish-white
PACKAGING	25 kg bags

Quartz 1.9

Mixture of calibrated spherical quartz used as a filler in **Mapefloor I 900** or **Mapefloor I 910** for preparing mortar with a consistency similar to a mortar screed.



CHECK THE
TECHNICAL
DATASHEET
on mapei.com



Triblock WTS

SIZE

COLOUR

PACKAGING

Two-component fillerized epoxy formulate for skimming cementitious sublayers and filling pores before applying resin coating.

grain size up to 1.9 mm

yellowish-white

25 kg bags



APPLICATION	metal trowel
CONSUMPTION	approx 1.5 kg/m² per mm of thickness - the consumption depends strongly on the roughness of the substrate
PACKAGING	5 kg units (A+B)


CHECK THE TECHNICAL DATASHEET on mapei.com





Back to the table of contents



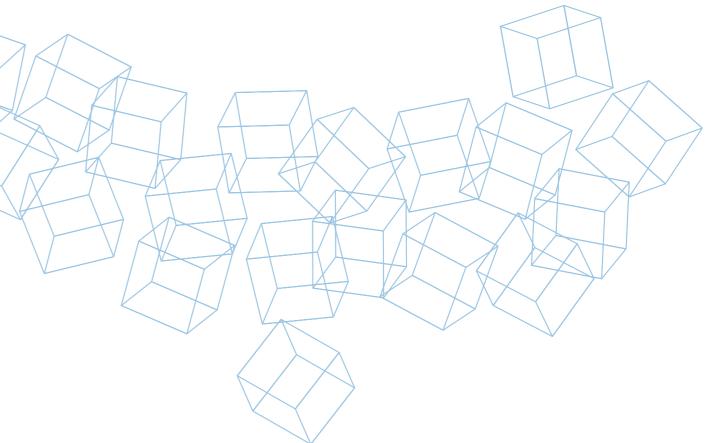



PRODUCTS FOR REPAIRING ASPHALT **PRODUCTS FOR AND HIGHWAY MAINTENANCE**

Mape-Asphalt Repair 0/8

One-component, ready to use, cold-applied reactive asphalt for the repair of potholes.



CHECK THE TECHNICAL DATASHEET on mapei.com



APPLICATION	gauging trowel, trowel, rake, or shovel
CONSUMPTION	approx. 23 kg/m² per cm of thickness.
PACKAGING	25 kg drums

Mapefloor EP 90

Three-component high performance epoxy screed consistency mortar for repairing concrete flooring and forming support layers for beams and joints.

APPLICATION	gauging trowel

approx. 20 kg/m² per cm of thickness CONSUMPTION

PACKAGING

26.75 kg kit:

- 1.95 kg bottles (comp. A);
- 0.80 kg bottles (comp. B);
- 24 kg vacuum-packed polyethylene bags (comp. C)

CERTIFICATIONS AND MARKINGS













TECHNICAL DATASHEET on mapei.com



Mapegrout Betontech HPC 10

Rheoplastic cementitious mortar reinforced with structural fibres, with a strain hardening effect for restoring concrete requiring a high level of ductility.

APPLICATION	pouring into formwork
CONSUMPTION	approx. 21 kg/m² per cm of thickness
PACKAGING	25 kg vacuum-packed polyethylene bags and 1000 kg big bags

CERTIFICATIONS AND MARKINGS

218







CHECK THE TECHNICAL DATASHEET on mapei.com



Mapegrout Colabile TI 20

High-flowing, shrinkage compensated, fibre-reinforced with rigid steel fibres, high-ductility cementitious mortar for restoring concrete.

APPLICATION pouring into formwork CONSUMPTION approx. 20 kg/m² per cm of thickness **PACKAGING** 25 kg vacuum-packed polyethylene bags

CERTIFICATIONS AND MARKINGS







TECHNICAL DATASHEET on mapei.com



Mapegrout SV

High-flowing, quick-setting and hardening, shrinkage compensated high-flowing mortar for repairing concrete and fixing drains, manholes and urban architectural fittings in place.

APPLICATION	pouring into formwork
CONSUMPTION	20 kg/m² per cm of thickness
COLOUR	grey or black
PACKAGING	25 kg vacuum-packed polyethylene bags

CERTIFICATIONS AND MARKINGS









CHECK THE TECHNICAL DATASHEET on mapei.con



Mapegrout SV Fiber

High-flowing, quick-setting and hardening, shrinkage compensated, fibre-reinforced with rigid steel fibres, high-ductility cementitious mortar for restoring concrete. For application at temperatures up to -5°C.

APPLICATION	pouring into formwork
CONSUMPTION	approx. 20 kg/m² per cm of thickness
PACKAGING	25 kg vacuum-packed polyethylene bags

CERTIFICATIONS AND MARKINGS









DATASHEET on mapei.con





Mapegrout SV T

CERTIFICATIONS AND MARKINGS

Thixotropic, quick-setting and hardening, shrinkage compensated high-flowing mortar for repairing concrete and fixing drains, manholes and urban architectural fittings in place.

APPLICATION	trowel or gauging trowel
CONSUMPTION	20 kg/m² per cm of thickness
COLOUR	black
PACKAGING	25 kg vacuum-packed polyethylene bags






CHECK THE TECHNICAL DATASHEET on mapei.com







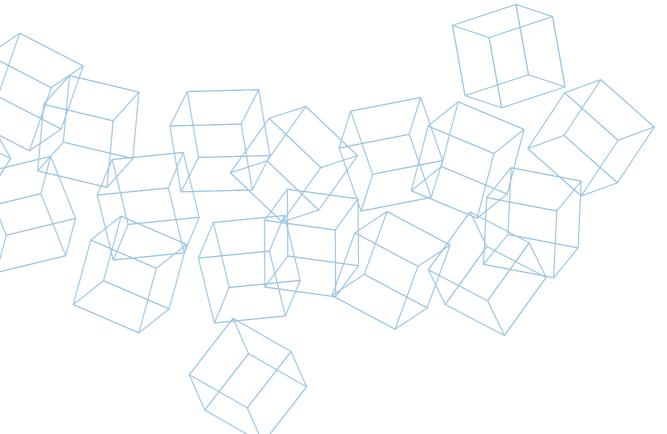



PRODUCTS FOR
THE RESTORATION
OF MASONRY
BUILDINGS

Consolidante 8020

Reversible consolidating product in solvent for the conservative restoration and consolidation of porous stone substrates, lime render and layers of paint.



The Management of the Control of the
CHECK THE TECHNICAL DATASHEET on mapei.co



Consolidante ETS

APPLICATION

CONSUMPTION

PACKAGING

PACKAGING

224

Consolidator based on silicic acid ethyl ester in solvent for the conservative renovation and consolidation of porous stone, bricks, terracotta and render.

roller, brush or low-pressure manual pumped sprayer

its porosity and on the depth of the area to be treated)

0.1-1.0 kg/m² (depending on the type of substrate,





APPLICATION	roller, brush, manual pumped sprayer, injection using manual or power pumps
CONSUMPTION	0.1-1.0 kg/m² (depending on the type of substratits porosity and on the depth of the area to be t

10 kg metal drums

10 kg metal drums



Consolidante ETS WR

Consolidator with water-repellent effect, based on silicic acid ethyl ester in solvent for the conservative renovation and consolidation of porous stone, bricks, terracotta and render.



CHECK THE TECHNICAL

DATASHEET

on mapei.con

APPLICATION	roller, brush, manual pumped sprayer, injection using manual or power pumps
CONSUMPTION	0.1-1.0 kg/m² (depending on the type of substrate, its porosity and on the depth of the area to be treated)
PACKAGING	10 kg metal drums



Primer 3296

Consolidating and anti-dust acrylic primer in water dispersion.



APPLICATION	roller, brush or watering can
CONSUMPTION	0.1-0.5 kg/m² (depending on the absorption and the porosity of the surface to be treated)
PACKAGING	5 and 10 kg drums



2. RECONDITIONING AND CONSOLIDATING MASONRY WITH FREE-FLOWING MORTAR

Mape-Antique Colabile

Salt-resistant, high-flow, cement-free natural hydraulic lime and Eco-Pozzolan-based masonry mortar for reconditioning and consolidating masonry.

APPLICATION	pouring or pumping
CONSUMPTION	1.83 kg/dm³ of cavity to be filled
DACKAGING	25 kg hags





CHECK THE **TECHNICAL** DATASHEET on mapei.cor



3. CONSOLIDATING MASONRY AND RENDER BY INJECTING SLURRY

Mape-Antique F21

Super-fluid, cement-free, salt-resistant, fillerized hydraulic binder, based on **lime** and Eco-Pozzolan, for making injection slurries for consolidating masonry and render, including the frescoed one.



APPLICATION	injection or pouring
CONSUMPTION	1.04 kg/dm³ of cavity to be filled
PACKAGING	17 kg bags







PRODUCTS FOR THE RESTORATION OF MASONRY BUILDINGS

Mape-Antique I

Salt-resistant, ,cement-free fillerized hydraulic binder, based on lime and Eco-Pozzolan, for making injection slurries for consolidating masonry.



CHECK THE TECHNICAL DATASHEET on mapei.cc



APPLICATION	injection or pouring
CONSUMPTION	1.04 kg/dm³ of cavity to be filled
PACKAGING	20 kg bags

Mape-Antique I-15

Salt-resistant, cement-free, fillerized hydraulic binder, based on lime and Eco-Pozzolan, for making injection slurries for consolidating masonry.



CHECK THE	Ī
TECHNICAL	Ę
DATASHEET	į
on mapei.com	1
	=
	Ŀ

CHECK THE

TECHNICAL

DATASHEET





MapeWall Inject & Consolidate

20 kg bags

injection or pouring

Reactive natural hydraulic lime-based inorganic binder with very low emission of VOC used to make superfluid injection slurry for consolidating masonry.

1.50 kg/dm³ of cavity to be filled



CERTIFICATIONS **AND MARKINGS**

226

APPLICATION

CONSUMPTION

PACKAGING







4. HORIZONTAL CHEMICAL BARRIERS AGAINST CAPILLARY RISING DAMP

Mapestop

APPLICATION

Concentrated silicone micro-emulsion, based on silane and siloxane used to form a chemical barrier against capillary rising damp.



CHECK THE **TECHNICAL** DATASHEET on mapei.com



CONSUMPTION	depending on the masonry absorption.
	approx. 8-9 kg/m of solution for a 40 cm thick masonry,
	which corresponds to 0.4-0.6 kg/m of pure product

gravity or suitable injection pump

PACKAGING 1 kg and 10 kg metal can with integrated spout

Mapestop Cream

Monomeric silane-based creamy emulsion for creating chemical barriers against capillary rising damp.

APPLICAZIONE

- sealant gun for 280 ml cartridge
- 600 ml sausage gun such as Mapei Gun 600 Pro
- low-pressure pump for products in 20 kg plastic drum

CONSUMPTION according to type and thickness of masonry.

Approx. 10 ml per metre per cm of thickness of masonry

for 12 mm diam. holes

COLOUR white

PACKAGING

- 12 280 ml cartridges box
- 10 600 ml sausage box with 1 injection tool included
- 20 kg plastic drum



CHECK THE TECHNICAL DATASHEET on mapei.con



Mapestop Cream Tool 280

Injection tube for Mapestop Cream to be used with manual extrusion guns for 280 ml cartridges.



CHECK THE TECHNICAL DATASHEET on mapei.com



PACKAGING 12 pcs boxes

Mapestop Cream Tool 600

Injection tube for Mapestop Cream to be used with manual extrusion guns for 600 ml sausages and Mapei Gun Pro 600.



CHECK THE TECHNICAL DATASHEET on mapei.com



PACKAGING

4 pcs sachet

Mapestop Injectors

Spare parts kit for Mapestop Kit Diffusion



PACKAGING

cardboard box containing 8 of each of the following item:

- Ø 12 mm injectors;
- 50 cm long diffusing tube (outside diameter 12 mm);
- sealing plug

CHECK THE TECHNICAL DATASHEET on mapei.com



Mapestop Kit Diffusion

Complete kit to create a slow-diffusion chemical barrier against capillary rising damp.



PACKAGING

228

cardboard box containing 8 of each of the following item:

- 1.5 litre diffuser in PE HD;
- galvanized support brackets;
- 100 cm long PVC tube (outside diameter 7 mm);
- Ø 12 mm injectors;
- 50 cm long diffusing tube (outside diameter 11 mm);
- sealing plug






5. DE-HUMIDIFYING MASONRY WITH BINDERS AND MORTARS FOR RENDER

Mape-Antique LC

Salt-resistant, cement-free, hydraulic binder based on lime and Eco-Pozzolan, to be mixed with aggregates in various grain sizes to make dehumidifying renders and masonry mortars.



CONSUMPTION per cm of thickness approx.:

- 5.0 kg/m² (with fine sand 0.5-2.5 mm); • 4.5 kg/m² (with coarse sand 0.5-5 mm);
- 4.0 kg/m² (with gravel 0-8 mm)

20 kg bags



TECHNICAL DATASHEET on mapei.com



Mape-Antique MC

PACKAGING

Macroporous, cement-free, salt-resistant dehumidifying render, based on lime and Eco-Pozzolan, for restoring old masonry, including on buildings of historical interest.

APPLICATION	gauging trowel
COLOUR	white
CONSUMPTION	15 kg/m² (per cm of thickness)

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.com



Mape-Antique MC Macchina

Macroporous, cement-free, salt-resistant dehumidifying render, based on lime and Eco-Pozzolan, for restoring old masonry, including on buildings of historical interest.

APPLICATION continuous feed rendering machine CONSUMPTION 16 kg/m² (per cm of thickness) COLOUR white

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS









DATASHEET on mapei.com





6. PRODUCTS FOR OF BREATHABLE RENDERS

Mape-Antique Eco Rinzaffo

Salt-resistant, **cement-free**, breathable, natural hydraulic **lime** and Eco-Pozzolan scratch-coat mortar used as a base layer before applying de-humidifying, breathable and "structural" render".

APPLICATION gauging trowel, or continuous feed rendering machine

CONSUMPTION 7.5 kg/m² (per 5 mm of thickness)

PACKAGING 20 kg bags

CERTIFICATIONS AND MARKINGS





DATASHEET

on mapei.com



PoroMap Deumidificante

Salt-resistant single-product dehumidifying render for renovating masonry with rising damp.

APPLICATION gauging trowel, or continuous feed rendering machine

CONSUMPTION 11-12 kg/m² (per cm of thickness)

PACKAGING 20 kg bags

CERTIFICATIONS AND MARKINGS









CHECK THE TECHNICAL DATASHEET on mapei.com



PoroMap Rinzaffo Plus

Salt-resistant, breathable scratch-coat mortar, based on hydraulic pozzolanic reaction binder, to be used as first layer to improve the bond of the render and even out the absorption of the substrate.

APPLICATION gauging trowel, or continuous feed rendering machine

CONSUMPTION 7.5 - 8 kg/m² (per 5 mm of thickness)

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS









CHECK THE TECHNICAL DATASHEET on mapei.com



Mape-Antique Intonaco NHL

Breathable base render made from **natural hydraulic lime** and Eco-Pozzolan, **cement-free**, for application on existing masonry work including those of historical interest, and on new constructions.

APPLICATION gauging trowel, or continuous feed rendering machine

CONSUMPTION 14.5 kg/m² (per cm of thickness)

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS









TECHNICAL
DATASHEET
on mapei.com



Mape-Antique NHL ECO Restaura

Cement-free, pure natural **hydraulic lime-based** breathable multi-purpose mortar applied in layers from 3 to 30 mm thick, also on existing paint, for restoring and levelling off substrates, renders and coated surfaces.

APPLICATION gauging trowel, continuous feed rendering machine or straight metal trowel

CONSUMPTION 1.4 kg/m² (per mm of thickness)

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS











TECHNICAL

DATASHEET
on mapei.com



MapeWall Intonaco Base

Breathable **natural hydraulic lime**-based base render for indoor and outdoor use; to be applied by trowel or with a rendering machine.

APPLICATION gauging trowel, or continuous feed rendering machine

CONSUMPTION 15 kg/dm² (per cm of thickness)

PACKAGING 25 kg bags

CERTIFICATIONS
AND MARKINGS











PRODUCTS FOR THE RESTORATION OF MASONRY BUILDINGS

7. PRODUCTS FOR STRUCTURAL AND "REINFORCED" RENDERS

Mape-Antique Strutturale NHL

High-performance, **cement-free**, mortar for breathable render and masonry work, based on **pure natural hydraulic lime** and Eco-Pozzolan, particularly suitable for making "reinforced" and installation mortar.

APPLICATION gauging trowel, or continuous feed rendering machine

CONSUMPTION approx. 17 kg/m² (per cm of thickness)

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS









CHECK THE TECHNICAL DATASHEET on mapei.com



MapeWall Render & Strengthen

High-performance mortar for breathable render and masonry work, based on **natural hydraulic lime** and Eco-Pozzolan, with very low emission of VOC, particularly suitable for making "reinforced" and installation mortar.

APPLICATION gauging trowel, or continuous feed rendering machine

COLOUR beige and grey

CONSUMPTION approx. 16 kg/m² (per cm of thickness)

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS













CHECK THE TECHNICAL DATASHEET on mapei.com



8. SKIMMING OF DE-HUMIDIFYING, BREATHABLE AND STRUCTURAL RENDERS

Mape-Antique FC Civile

Salt-resistant, fine-grained, **cement-free**, **lime** and Eco-Pozzolan, breathable skimming mortar, for a natural finish on render.

APPLICATION straight metal trowel

CONSUMPTION approx. 1.4 kg/m² (per mm of thickness)

COLOUR white

PACKAGING 25 kg bags

232









CHECK THE TECHNICAL DATASHEET on mapei.com



Mape-Antique FC Grosso

Salt-resistant, fine-grained, **cement-free**, **lime** and Eco-Pozzolan, breathable skimming mortar, for a coarse finish on render.

APPLICATION straight metal trowel

CONSUMPTION approx. 1.4 kg/m² (per mm of thickness)

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS









TECHNICAL
DATASHEET
on mapei.com



Mape-Antique FC Ultrafine

Salt-resistant, fine-grained, **cement-free**, **lime** and Eco-Pozzolan, breathable skimming mortar, for a smooth finish on render.

APPLICATION straight metal trowel

CONSUMPTION approx. 1.3 kg/m² (per mm of thickness)

PACKAGING 20 kg bags

CERTIFICATIONS AND MARKINGS









CHECK THE TECHNICAL DATASHEET on mapei.com



Mape-Antique ECO Rasante Civile

Fine-grained, breathable, pure **natural hydraulic lime**, **cement free**, smoothing and levelling eco-mortar for a natural finish on render.

APPLICATION straight metal trowel

CONSUMPTION approx. 1.4 kg/m² (per mm of thickness)

PACKAGING 25 kg bags

CERTIFICATIONS
AND MARKINGS







TECHNICAL
DATASHEET
on mapei.com





Mape-Antique NHL ECO Rasante Grosso

Coarse-grained, breathable, pure natural hydraulic lime, cement free, smoothing and levelling eco-mortar for a coarse finish on render.

APPLICATION straight metal trowel approx. 1.4 kg/m² (per mm of thickness) CONSUMPTION PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS







TECHNICAL DATASHEET on mapei.com



Mape-Antique NHL ECO Restaura

Cement-free, pure natural hydraulic lime-based breathable multi-purpose mortar applied in layers from 3 to 30 mm thick, also on existing paint, for restoring and levelling off substrates, renders and coated surfaces.

gauging trowel, continuous feed rendering machine APPLICATION or straight metal trowel

CONSUMPTION 1.4 kg/m² (per mm of thickness)

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS











TECHNICAL DATASHEET on mapei.com



Mape-Antique NHL ECO Rinzaffo

Cement-free, based on pure natural hydraulic lime and eco-Pozzolan scratch-coat eco-mortar. To be used as first layer to improve the bond of the render and even out the absorption of the substrate.

APPLICATION gauging trowel, or continuous feed rendering machine

CONSUMPTION 8 kg/m² (per 5 mm of thickness)

PACKAGING 20 kg bags

CERTIFICATIONS **AND MARKINGS**

234







CHECK THE TECHNICAL DATASHEET on mapei.com



Mape-Antique NHL ECO Risana

One-component, cement-free, salt-resistant, dehumidifying eco-render made from pure natural hydraulic lime, with recycled materials for restoring old masonry with rising damp, including masonry of buildings of historical interest.

APPLICATION gauging trowel, or continuous feed rendering machine

CONSUMPTION 11 kg/m² (per cm of thickness)

PACKAGING 20 kg bags

CERTIFICATIONS AND MARKINGS









TECHNICAL DATASHEET on mapei.com



PoroMap Finitura Civile

Fine-grained, lime-based, breathable skimming mortar for a natural finish of de-humidifying renders.

APPLICATION straight metal trowel

CONSUMPTION approx. 1.3 kg/m² (per mm of thickness)

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS









CHECK THE **TECHNICAL** DATASHEET on mapei.com



PoroMap Finitura Granello

Fine-grained, lime-based, breathable skimming mortar for a natural finish of de-humidifying renders.

APPLICATION straight metal trowel

approx. 1.3 kg/m² (per mm of thickness) CONSUMPTION

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS









DATASHEET on mapei.com





Mape-Antique Allettamento

Salt-resistant masonry mortar, made from **natural hydraulic lime** and eco-Pozzolan, **cement-free**, for installation layers and pointing on "natural finish" masonry.

APPLICATION	gauging trowel
CONSUMPTION	16.5 kg/m² (per cm of thickness)
COLOURS	tuff, grey, ivory and cream
PACKAGING	25 kg bags
CERTIFICATIONS	C C C CONTRACTOR AND







AND MARKINGS

Mape-Antique Strutturale NHL

High-performance breathable mortar for render and masonry work made from **natural hydraulic lime** and eco-Pozzolan, **cement-free**, particularly suitable for making "reinforced" and installation mortar.

APPLICATION	gauging trowel, or continuous feed rendering machine
CONSUMPTION	approx. 17 kg/m² (per cm of thickness)

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS











CHECK THE TECHNICAL DATASHEET on mapei.com



MapeWall Render & Strengthen

High-performance mortar for breathable render and masonry work, based on **natural hydraulic lime** and Eco-Pozzolan, with very low emission of VOC, particularly suitable for making "reinforced" and installation mortar.

APPLICATION	gauging trowel, or continuous feed rendering machine
COLOURS	beige and grey

CONSUMPTION approx. 16 kg/m² (per cm of thickness)

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS

236













CHECK THE TECHNICAL DATASHEET on mapei.com



MapeWall Muratura Fine

High-strength, breathable, **natural hydraulic lime**-based masonry mortar with very low emission level of VOC for general building work, reinforced masonry and patching and plumbing walls.

APPLICATION gauging trowel

COLOURS tuff, grey and ivory

CONSUMPTION 1.65 kg/dm³ of cavity to be filled

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS









TECHNICAL
DATASHEET
on mapei.com



10. PRODUCTS FOR BONDING AND SMOOTHING MINERAL AND/OR NATURAL PANELS AND BLOCKS

Mape-Antique NHL ECO Raso Fix

Adhesive, skimming, cement-free **pure hydraulic lime** based masonry mortar, for use on wood fibre panels and blocks, hempcrete, calcium silicate or other natural and/or mineral materials. Suitable for application in green building and historical building.

APPLICATION

gauging trowel or straight or notched metal trowel

CONSUMPTION

- as skim coat: 1.4 kg/m (per mm of thickness)
- as bedding mortar for blocks: 4.2 kg/m² (per 3 mm of thickness)
- as mortar of bonding panels: 3-7 kg/m² (depending on the substrate and the type of application)

PACKAGING 23 kg units

CERTIFICATIONS
AND MARKINGS











11. PRODUCTS FOR WATERPROOFING AND PROTECTING CONSTRUCTION ELEMENTS

Mape-Antique Ecolastic

Two-component, elastic, salt-resistant, **cement-free**, **lime** and eco-Pozzolan-based coating for waterproofing and protecting construction features, including in building of historical and artistic interest.

APPLICATION brush, roller, trowel or rendering machine with a skim-coat lance

CONSUMPTION

- roller: 1.65 kg/m² per mm of thickness;
- spray: 2.2 kg/m² per mm of thickness

PACKAGING

15 kg units:

- comp. A: 10 kg bags;
- comp. B: 5 kg tanks

CERTIFICATIONS AND MARKINGS
























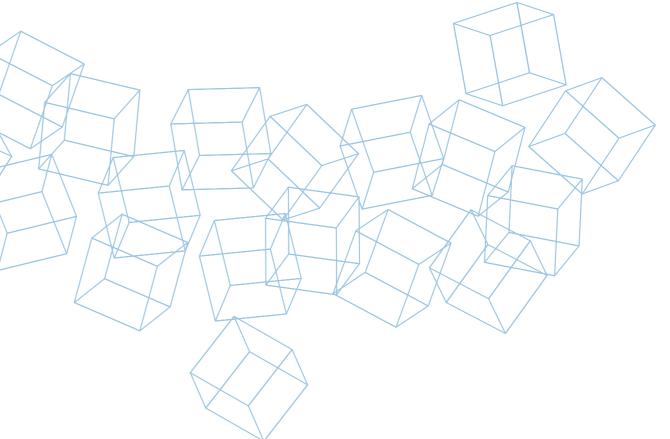



REPAIRING, CONSOLIDATING AND STRENGTHENING WOODEN STRUCTURES

Mapewood Gel 120

Gel epoxy adhesive for restoring wooden structural elements.



APPLICATION	pouring or special extruder
CONSUMPTION	1.01 kg/dm³ of cavity to be filled
PACKAGING	2.5 kg units (comp. A = 2 kg; comp. B = 0.5 kg)





Mapewood Paste 140

Thixotropic epoxy adhesive for restoring wooden structural elements.



APPLICATION metal trowel 1.59 kg/dm³ of cavity to be filled CONSUMPTION PACKAGING 3 kg units:(comp. A = 2 kg; comp. B = 1 kg.

CHECK THE **TECHNICAL** DATASHEET on mapei.com



Mapewood Primer 100

Fluid epoxy impregnator in water dispersion for consolidating and priming wooden structures.

approx. 150 g/m²



CHECK THE

TECHNICAL DATASHEET

on mapei.com

roller, brush spray or bottle brush 1 kg units: (comp. A 0.5 = kg; comp. B = 0.5 kg)



Back to the table of contents



241


Back to the alphabetical index

APPLICATION

CONSUMPTION

PACKAGING



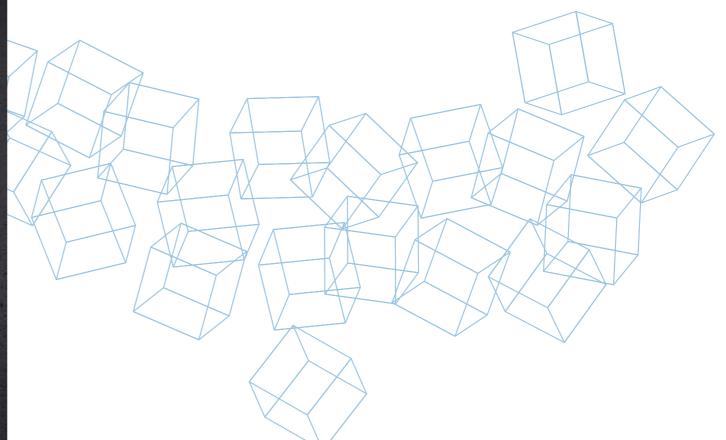



ADHESIVES
AND SMOOTHING
COMPOUNDS
FOR CELLULAR
CONCRETE BLOCKS

Porocol

Cementitious adhesive mortar for foamed block masonry.

APPLICATION straight or notched trowel

CONSUMPTION • as adhesive for flat block walls: 5-7 kg/m²;

 \bullet as skimming layer for flat block walls: 1.4 kg/m 2

per mm of thickness

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS











Porocol FF

One-component, fine-grained, white cementitious mortar for laying cellular concrete blocks and for smoothing over the surface in layers of up to 10 mm thick.

Fire resistance class according to EN 1364-1 EI 240 - E 120.

APPLICATION straight or notched trowel

CONSUMPTION

- as adhesive for flat block walls: 2-4 kg/m²;
- as skimming layer for flat block walls: 1.2 kg/m² per mm of thickness

PACKAGING

25 kg bags

CERTIFICATIONS AND MARKINGS












CHECK THE TECHNICAL DATASHEET on mapei.com






Back to the alphabetical index



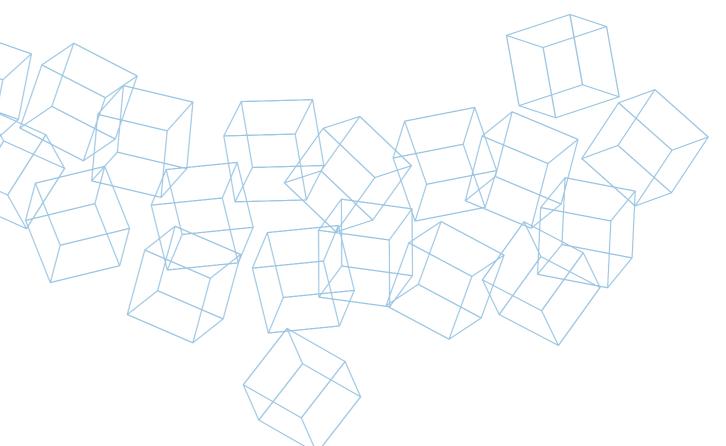



PRODUCTS FOR THE RESTORATION OF CONCRETE

1. PROTECTION OF STEEL REINFORCEMENT RODS

Mapefer

Two-component, anti-corrosion cementitious mortar for steel reinforcement rods.

APPLICATION brush in two coats

CONSUMPTION 120 g/m for an 8 mm rebar (2 mm of product applied)

PACKAGING 2 kg kit:

• 1.5 kg sachets (comp. A);

• 0.5 kg bottles (comp. B).

CERTIFICATIONS AND MARKINGS







TECHNICAL DATASHEET on mapei.com



Mapefer 1K Zero

One-component, anti-corrosion cementitious mortar for steel reinforcement rods.

APPLICATION brush in two coats

CONSUMPTION 100 g/m for an 8 mm rebar

(2 mm of product applied)

PACKAGING

boxes containing 4, 5 kg plastic sachets

CERTIFICATIONS AND MARKINGS

APPLICATION

CONSUMPTION

PACKAGING

248











CHECK THE **TECHNICAL** DATASHEET on mapei.com




Mapeshield E 25

Self-adhesive zinc plates applied directly on the structure to provide galvanic cathodic protection for rebar and prevent corrosion.

on the external surfaces of concrete

depending on the density of the masonry

1 carton box containing 25 cm x 25 m rolls



CHECK THE DATASHEET on mapei.com



Mapeshield Corrosion Control

Self-adhesive 12 cm zinc plates applied directly on the surface of concrete to provide galvanic cathodic protection for rebar and prevent corrosion.





CHECK THE **TECHNICAL** DATASHEET on mapei.com



Mapeshield I

Pure zinc anodes coated with a special conductive paste, for galvanic cathodic protection against corrosion of steel reinforcement in new structures and in structures requiring repair.



APPLICATION directly on the rebar depending on the density of the masonry CONSUMPTION PACKAGING 12 pcs boxes





2. REPAIRS TO CONCRETE WITH SHRINKAGE COMPENSATED MORTARS AND BINDERS

Gravel 0-8 mm

Aggregate with an assorted grain size for cementitious mortar, particularly suitable as a filler for Stabilcem.

APPLICATION	added as an aggregate
AGGREGATE SIZE	particle size range from 0 to 8 mm
PACKAGING	20 kg bags

CERTIFICATIONS AND MARKINGS







DATASHEET on mapei.con





Gravel 0-15

Aggregate with an assorted grain size for cementitious mortar, particularly suitable as a filler for Stabilcem.

APPLICATION added as an aggregate **AGGREGATE** SIZE particle size range from 0 to 15 mm PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS



Gravel 3-5

Aggregate with an assorted grain size for cementitious mortar, to be mixed with repair mortars from the Mapegrout range.

APPLICATION added as an aggregate **AGGREGATE** SIZE particle size range from 3 to 5 mm

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS





Gravel 6-10

Aggregate with an assorted grain size for cementitious mortar, to be mixed with repair mortars such as Mapegrout High-Flow and Mapegrout SV or with expansive mortars such as Mapefill.

APPLICATION added as an aggregate

AGGREGATE

SIZE particle size range from 6 to 10 mm

PACKAGING 25 kg bags

CERTIFICATIONS **AND MARKINGS**





Curing admixture for cementitious mortar and concrete to reduce hydraulic shrinkage and the formation of micro-cracks.



TECHNICAL DATASHEET on mapei.com



CONSUMPTION • mortars: 0.25% by weight of the ready-mixed mortar; • concrete and beton: 5-8 l/m³

PACKAGING 20 kg tanks

Mapefill MF 610

Expansive mortar for precision anchoring in thick layers.

APPLICATION pouring

CONSUMPTION approx. 21 kg/m² per cm of thickness

25 kg vacuum-packed polyethylene bags PACKAGING

and 1000 kg big bags

CERTIFICATIONS AND MARKINGS









CHECK THE TECHNICAL DATASHEET on mapei.com



Mapegrout 430 Zero

Fine-grained, fibre-reinforced, normal-setting thixotropic mortar for repairing concrete. Can also be applied with continuous-feed rendering machine.

APPLICATION trowel, gauging trowel, or rendering machine, also continuous feed rendering machine

CONSUMPTION 17 kg/m² per cm of thickness

PACKAGING 25 kg vacuum-packed polyethylene bags

CERTIFICATIONS AND MARKINGS











TECHNICAL DATASHEET on mapei.com





251

Mapegrout Betontech HPC10

Rheoplastic cementitious mortar reinforced with structural fibres, with a strain hardening effect for restoring concrete requiring a high level of ductility.

APPLICATION pouring into formwork

CONSUMPTION approx. 21 kg/m² per cm of thickness

PACKAGING 25 kg vacuum-packed polyethylene bags and 1000 kg big bags

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.com



Mapegrout BM

Two-component cementitious mortar with a low modulus of elasticity for repairing concrete.

APPLICATION trowel, gauging trowel or rendering machine

CONSUMPTION approx. 21 kg/m² per cm of thickness

PACKAGING 29.7 kg kit:

• 25 kg vacuum-packed polyethylene bags (comp. A);

• 4.7 kg tanks (comp. B)

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.com



Mapegrout Hi-Flow Zero

Fibre-reinforced, compensated-shrinkage, mortar for repairing concrete.

APPLICATION pouring into formwork

CONSUMPTION approx. 20.5 kg/m² per cm of thickness

PACKAGING 25 kg vacuum-packed polyethylene bags

CERTIFICATIONS AND MARKINGS

252

















CHECK THE TECHNICAL DATASHEET on mapei.com



Mapegrout High-Flow B2

Shrinkage-compensated high-flowing fibre-reinforced micro-concrete for repairs to concrete structures.

APPLICATION pouring into formwork

CONSUMPTION approx. 21 kg/m² per cm of thickness

PACKAGING 25 kg vacuum-packed polyethylene bags

CERTIFICATIONS (

AND MARKINGS





and 1000 kg big bags



TECHNICAL
DATASHEET
on mapei.com



Mapegrout Colabile GF

High-flowing, shrinkage-compensated cementitious mortar reinforced with inorganic fibres, for repairing concrete structures where higher ductility is required.

APPLICATION pouring into formwork

CONSUMPTION approx. 21 kg/m² per cm of thickness

PACKAGING 25 kg vacuum-packed polyethylene bags

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.com



Mapegrout Colabile TI 20

High-flowing, shrinkage compensated, fibre-reinforced with rigid steel fibres, high-ductility cementitious mortar for restoring concrete.

APPLICATION pouring into formwork

CONSUMPTION approx. 20 kg/m² per cm of thickness

PACKAGING 25 kg vacuum-packed polyethylene bags

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.com





Mapegrout FMR-PP

Shrinkage-compensated, sulphate-resistant thixotropic mortar with work-hardening behaviour reinforced with structural polymer fibres, particularly suitable for repairing concrete structures where high ductility is required.

APPLICATION trowel, gauging trowel or rendering machine

CONSUMPTION 18 kg/m² per cm of thickness

PACKAGING 25 kg vacuum-packed polyethylene bags

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.com



Mapegrout GF Betoncino B1

High-flowing, shrinkage-compensated cementitious micro-concrete reinforced with inorganic fibres, for repairing concrete structures where higher ductility is required.

APPLICATION pouring into formwork

CONSUMPTION approx. 21 kg/m² per cm of thickness

PACKAGING 25 kg vacuum-packed polyethylene bags

and 1000 kg big bags

CERTIFICATIONS AND MARKINGS







CHECK THE
TECHNICAL
DATASHEET
on mapei.com



Mapegrout LM2K

Two-component, thixotropic, fibre-reinforced, cementitious mortar with a low modulus of elasticity and added organic corrosion inhibitor for repairing concrete, applied in a single layer at a thickness of 3 to 20 mm.

APPLICATION trowel, gauging trowel or rendering machine

CONSUMPTION approx. 21 kg/m² per cm of thickness

PACKAGING 30.25 kg kit:

• 25 kg vacuum-packed polyethylene bags (comp. A);

• 5.25 kg tanks (comp. B)

CERTIFICATIONS AND MARKINGS

254







CHECK THE TECHNICAL DATASHEET on mapei.com



Mapegrout Fast-Set

Fibre-reinforced, rapid-setting and hardening, shrinkage-compensated, mortar for repairing concrete.

APPLICATION trowel or gauging trowel

CONSUMPTION 18 kg/m² per cm of thickness

PACKAGING 25 kg vacuum-packed polyethylene bags

CERTIFICATIONS AND MARKINGS









TECHNICAL
DATASHEET
on mapei.com



Mapegrout Easy Repair Zero

Normal-setting thixotropic mortar for repairing deteriorated concrete. Can also be applied with continuous-feed rendering machine.

APPLICATION trowel, gauging trowel or rendering machine

CONSUMPTION 17 kg/m² per cm of thickness

PACKAGING 25 kg vacuum-packed polyethylene bags

CERTIFICATIONS AND MARKINGS











TECHNICAL

DATASHEET

on mapei.com



Mapegrout SV

High-flowing, quick-setting and hardening, shrinkage compensated high-flowing mortar for repairing concrete and fixing drains, manholes and urban architectural fittings in place.

APPLICATION pouring into formwork

PACKAGING 25 kg vacuum-packed polyethylene bags

CERTIFICATIONS AND MARKINGS

CONSUMPTION





20 kg/m² per cm of thickness





TECHNICAL
DATASHEET
on mapei.com





Mapegrout SV Fiber

High-flowing, quick-setting and hardening, shrinkage compensated, fibre-reinforced with rigid steel fibres, high-ductility cementitious mortar for restoring concrete. For application at temperatures up to -5°C.

APPLICATION	pouring into formwork
CONSUMPTION	approx. 20 kg/m² per cm of thickness
PACKAGING	25 kg vacuum-packed polyethylene bags

CERTIFICATIONS AND MARKINGS









CHECK THE TECHNICAL DATASHEET on mapei.com



Mapegrout SV T

High-flowing, quick-setting and hardening, shrinkage compensated high-flowing mortar for repairing concrete and fixing drains, manholes and urban architectural fittings in place.

APPLICATION	trowel or gauging trowel
CONSUMPTION	20 kg/m² per cm of thickness
PACKAGING	25 kg vacuum-packed polyethylene bags

CERTIFICATIONS AND MARKINGS









CHECK THE TECHNICAL DATASHEET on mapei.com



Mapegrout T40

Medium-strength (40 MPa), shrinkage-compensated, fibre-reinforced thixotropic mortar for repairing concrete.

APPLICATION	trowel, gauging trowel or rendering machine
CONSUMPTION	approx. 18.5 kg/m² per cm of thickness
PACKAGING	25 kg vacuum-packed polyethylene bags

CERTIFICATIONS AND MARKINGS

256







CHECK THE TECHNICAL DATASHEET on mapei.com



Mapegrout T60

Fibre-reinforced, shrinkage-compensated, sulphate-resistant thixotropic mortar for repairing concrete.

APPLICATION trowel, gauging trowel or rendering machine

CONSUMPTION 18.5 kg/m² per cm of thickness

PACKAGING 25 kg paper bags

CERTIFICATIONS AND MARKINGS







TECHNICAL
DATASHEET
on mapei.com



Mapegrout Thixotropic Zero

Fibre-reinforced, compensated-shrinkage, mortar for repairing concrete.

APPLICATION trowel, gauging trowel or rendering machine

CONSUMPTION 19 kg/m² per cm of thickness

PACKAGING 25 kg paper bags

CERTIFICATIONS AND MARKINGS









CHECK THE TECHNICAL DATASHEET on mapei.com



Mapetard ES

Set-retarding admixture for rapid-setting cementitious mortar.

CONSUMPTION 1 0.25 kg bottle per 25 kg bag of Planitop Smooth & Repair or Planitop Smooth & Repair R4

PACKAGING boxes containing 25 0.25 kg bottles

CERTIFICATIONS AND MARKINGS





CHECK THE TECHNICAL DATASHEET on mapei.com





Planitop Smooth & Repair Zero

R2-class, rapid-setting shrinkage-compensated, thixotropic, fibrereinforced, cementitious mortar for repairing and smoothing concrete, to be applied in a single layer from 3 mm to 40 mm.

APPLICATION trowel or gauging trowel

CONSUMPTION approx. 16.5 kg/m² per cm of thickness

PACKAGING 25 kg vacuum-packed polyethylene bags, 20 kg boxes

four 5 kg Alupack bags

CERTIFICATIONS AND MARKINGS

















TECHNICAL DATASHEET on mapei.com



Planitop Smooth & Repair R4 Zero

R4-class, rapid-setting shrinkage-compensated, thixotropic, fibrereinforced, cementitious structural mortar for repairing and smoothing concrete, to be applied in a single layer from 3 mm to 40 mm.

trowel or gauging trowel APPLICATION

CONSUMPTION approx. 17 kg/m² per cm of thickness

PACKAGING 25 kg vacuum-packed polyethylene bags

CERTIFICATIONS AND MARKINGS

























Stabilcem

Very fluid, expanding cementitious binder for injection or anchoring slurries, mortars, micro-concrete and concrete.

APPLICATION injection and pouring into formwork

CONSUMPTION • as injection slurry: 1.6 kg/l of cavity to be filled;

• as mortar and beton: 350-550 kg/m³;

• as concrete: 400 kg/m³

PACKAGING 20 kg vacuum-packed polyethylene bags

CERTIFICATIONS AND MARKINGS








CHECK THE TECHNICAL DATASHEET on mapei.com





Back to the alphabetical index



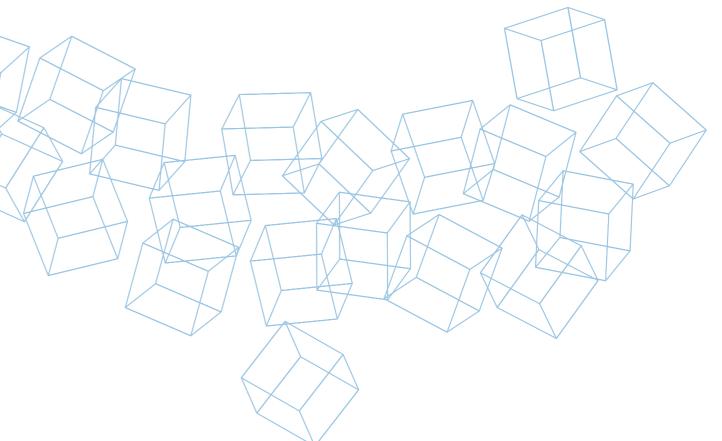



WATER-REPELLENT PRODUCTS FOR THE PROTECTION OF CONCRETE

Planiseal WR 40

Ready-mixed, 40% silane-based, hydrophobising, migrating liquid in watery emulsion applied on the surface of reinforced concrete structures in two coats.

APPLICAZIONE	low-pressure airless pump or roller
CONSUMPTION	0.1- 0.2 kg/m² per coat, depending on the porosity of the substrate
PACKAGING	5 kg tanks

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.com



Planiseal WR 85 Gel

Ready-mixed, hydrophobising, protective, migrating, silane-based, thixotropic gel applied on the surface of reinforced concrete structures.

PACKAGING	5 and 15 kg drums
CONSUMPTION	0.35 kg/m² (may vary depending on roughness, and porosity of the substrate
APPLICAZIONE	high pressure airless pump or roller

CERTIFICATIONS AND MARKINGS







CHECK THE **TECHNICAL** DATASHEET on mapei.com



Planiseal WR 100

Ready-mixed pure silane-based, hydrophobising, protective, migrating liquid applied on the surface of reinforced concrete structures in two coats.

APPLICAZIONE	low-pressure airless pump or roller
CONSUMPTION	0.1- 0.2 kg/m² per coat, depending on the porosity of the substrate
PACKAGING	5 kg tanks

CERTIFICATIONS AND MARKINGS EN 1504-2






CHECK THE **TECHNICAL** DATASHEET on **mapei.com**







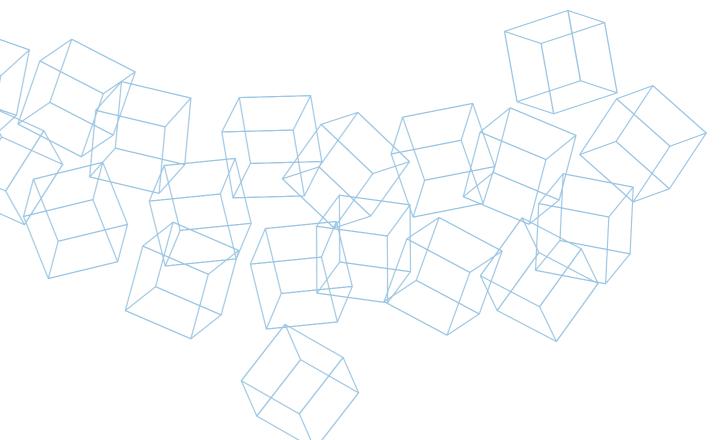



RENDERING AND INSTALLATION MORTARS

Intomap Allettamento

Hydrated lime and cement-based masonry mortar for installing and pointing bricks and concrete blocks.

APPLICATION	gauging trowel
CONSUMPTION	approx. 18 kg/m² per cm of thickness
PACKAGING	25 kg bags

CERTIFICATIONS AND MARKINGS





CHECK THE TECHNICAL DATASHEET on mapei.com



Intomap Allettamento H

Hydrophobic hydrated lime and cement-based masonry mortar for installing and pointing bricks and concrete blocks.

CONSUMPTION approx. 17.5 kg/m² per cm of thickness	APPLICATION	gauging trowel
	CONSUMPTION	approx. 17.5 kg/m² per cm of thickness

CERTIFICATIONS AND MARKINGS

PACKAGING



25 kg bags





CHECK THE TECHNICAL DATASHEET on mapei.com



Intomap Maxi Fibro

Coarse-textured, fibre-reinforced lime and hydraulic binder-based base render, for internal and external use.

APPLICATION gauging trowel, or continuous feed rendering machine

CONSUMPTION approx. 14.5 kg/m² per cm of thickness

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS





CHECK THE TECHNICAL DATASHEET on mapei.com



Intomap R2

Air lime and hydraulic binder-based base render for internal and external use.

APPLICATION gauging trowel, or continuous feed rendering machine

CONSUMPTION approx. 14 kg/m² per cm of thickness

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.com



Intomap R2 Fibro

Fibre-reinforced air lime and hydraulic binder-based base render, for internal and external use.

APPLICATION gauging trowel, or continuous feed rendering machine

CONSUMPTION approx. 14 kg/m² per cm of thickness

25 kg bags

CERTIFICATIONS AND MARKINGS

PACKAGING







CHECK THE TECHNICAL DATASHEET on mapei.com






Back to the table of contents

Back to the alphabetical index

267



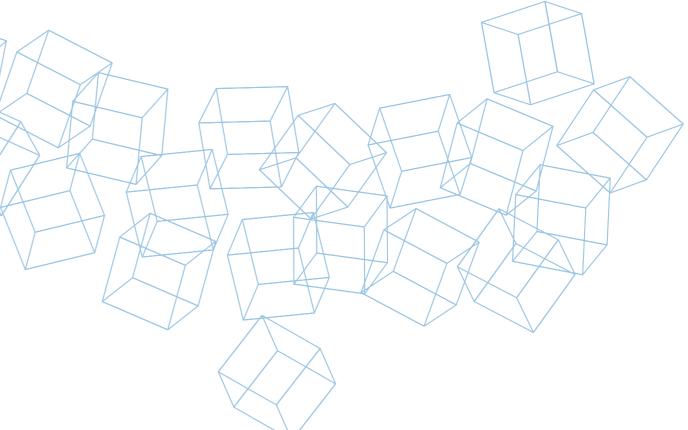



SMOOTHING AND PROTECTIVE PRODUCTS FOR CONCRETE AND RENDER SURFACES

Let

Duresil EB

Anti-acid epoxy paint modified with hydrocarbon resin for protecting concrete and steel surfaces.

APPLICATION	roller, brush or spray
CONSUMPTION	040-0.5 kg/m² per approx 250 μm of thickness
COLOURS	black and grey
PACKAGING	10 kg kit (A+B)

CHECK THE TECHNICAL DATASHEET on mapei.com



CERTIFICATIONS AND MARKINGS

Mapefinish

Two-component cementitious mortar for finishing concrete.

APPLICATION	trowel
-------------	--------

CONSUMPTION 1.8 kg/m² per mm of thickness

PACKAGING 30 kg kit:

• 24 kg bags (comp. A); • 6 kg tanks (comp. B)

CERTIFICATIONS AND MARKINGS











CHECK THE **TECHNICAL** DATASHEET on mapei.com



Mapelastic Guard

Two-component, elastic cementitious mortar for protecting large concrete structures subjected to high stress.

APPLICATION trowel, or spray with a rendering machine

CONSUMPTION • approx. 1.7 kg/m² per mm of thickness (by trowel);

• approx. 2.2 kg/m² per mm of thickness (by spray)

PACKAGING 32 kg kit:

• 24 kg bags (comp. A);

• 8 kg tanks (comp. B)

CERTIFICATIONS AND MARKINGS

270







CHECK THE TECHNICAL DATASHEET on mapei.com



Monofinish

One-component, normal-setting cementitious mortar for smoothing concrete and cementitious render.

APPLICATION trowel

CONSUMPTION 1.4 kg/m² per mm of thickness

PACKAGING 22 kg bags

CERTIFICATIONS AND MARKINGS











Nivoplan

Smoothing mortar for walls and ceilings in interior and exterior.

APPLICATION gauging trowel or trowel

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS

CONSUMPTION





14 kg/m² per cm of thickness



CHECK THE TECHNICAL DATASHEET on mapei.com



Planitop 100

Quick-setting, light-grey coloured fine mortar for repairing and smoothing concrete and render.

APPLICATION trowel

CONSUMPTION 1.3 kg/m² per mm of thickness

PACKAGING 25 kg bags.

CERTIFICATIONS AND MARKINGS









CHECK THE TECHNICAL DATASHEET on mapei.com





Let Let

Planitop 200

Water-repellent cementitious skimming mortar with a fine, natural finish for concrete, plastic, glass and porcelain coatings.

APPLICATION	trowel
CONSUMPTION	1.3 kg/m² per mm of thickness
COLOURS	grey or white
PACKAGING	25 kg bags
CERTIFICATIONS AND MARKINGS	C E Segment C E C E C C C C C C C C C C C C C C C







Planitop 207

Water-repellent cementitious skimming mortar with a medium-grain, natural finish for concrete, plastic, glass and porcelain coatings.

	IN COMPAUNCE WITH IN COMPAUNCE WITH INCOME WHICH INCOME W
PACKAGING	25 kg bags
COLOURS	grey or white
CONSUMPTION	1.5 kg/m² per mm of thickness
APPLICATION	trowel



CHECK THE TECHNICAL DATASHEET on mapei.com



CERTIFICATIONS AND MARKINGS







Planitop 210

Water-repellent cementitious skimming mortar with a fine, natural finish for concrete and plastic coatings.

	DI COMPALINCE WITH DISCOVERY TREASURED TO THE DISCOVERY TREASURED TREASURED TO THE DISCOVERY TREASURED TREASURED TO THE DISCOVERY TREASURED TREASURED TO THE
PACKAGING	25 kg bags
COLOURS	grey or white
CONSUMPTION	1.3 kg/m² per mm of thickness
APPLICATION	trowel

272











CHECK THE TECHNICAL DATASHEET on mapei.com



Planitop 217

Water-repellent cementitious skimming mortar with a coarse, natural finish for concrete and plastic coatings.

APPLICATION	trowel
CONSUMPTION	1.3 kg/m² per mm of thickness
COLOURS	grey or white
PACKAGING	25 kg bags





TECHNICAL DATASHEET



Planitop 510

CERTIFICATIONS AND MARKINGS

Lime-cement skimming mortar with a fine, natural finish for render.

APPLICATION	trowel
CONSUMPTION	1.3 kg/m² per mm of thickness
COLOURS	grey or white
PACKAGING	25 kg bags
CERTIFICATIONS AND MARKINGS	C E GP-CSI



CHECK THE TECHNICAL DATASHEET on mapei.com



Planitop 517


Lime-cement skimming mortar with a coarse, natural finish for render.

APPLICATION	trowel
CONSUMPTION	1.3 kg/m² per mm of thickness
COLOURS	grey or white
PACKAGING	25 kg bags

CERTIFICATIONS AND MARKINGS







DATASHEET on mapei.com





Let Let

Planitop 525

Natural-finish, white-coloured lime and cement smoothing compound for "fresh" or hardened internal and external render, applied in layers up to 3 mm thick.

APPLICATION	trowel
CONSUMPTION	1.3 kg/m² per mm of thickness
COLOUR	white
PACKAGING	25 kg bags
CERTIFICATIONS	Comment and Commen



TECHNICAL DATASHEET



Planitop 530

AND MARKINGS

Lime-cement skimming mortar with a fine, natural finish for render and concrete.

APPLICATION	trowel
CONSUMPTION	1.25 kg/m² per mm of thickness
COLOURS	grey or white
PACKAGING	25 kg bags

CERTIFICATIONS AND MARKINGS

274











CHECK THE **TECHNICAL** DATASHEET on mapei.com



Planitop 540

Water-repellent cementitious skimming mortar with a fine, natural finish for render and concrete.

CEDILEICATIONS	IN COMPLINES WITH INCIDENCE STREET, INCIDENCE ST
PACKAGING	25 kg bags
COLOURS	grey or white
CONSUMPTION	approx. 1.2 kg/m² per mm of thickness
APPLICATION	trowel





TECHNICAL DATASHEET on mapei.com



Planitop 560

Lime-cement skimming mortar with ultra-fine finish for render.

APPLICATION	trowel
CONSUMPTION	1.1 kg/m² per mm of thickness
COLOUR	white
PACKAGING	20 kg bags
CEDTIFICATIONS	A command still be a command still be a command still be a command still be a command at the command still be a command at the



TECHNICAL DATASHEET



Planitop 565

AND MARKINGS

Fine-grained, white-coloured lime-cement skimming compound for finishing "fresh" or hardened internal and external cementitious render, applied in layers up to 1 mm thick.

APPLICATION	trowel
CONSUMPTION	approx. 1.2 kg/m² per mm of thickness
COLOUR	white
PACKAGING	20 kg bags





CHECK THE TECHNICAL DATASHEET on mapei.com



Planitop 600 RasaGesso

Lime-gypsum skimming mortar for internal render.

APPLICATION	trowel
CONSUMPTION	approx. 1 kg/m² per mm of thickness
COLOUR	white
PACKAGING	15 kg bags
	IN COMPLIANCE WITH

CERTIFICATIONS AND MARKINGS







CHECK THE DATASHEET on mapei.com





La Contraction of the Contractio

Planitop 610 RasaGesso M

Gypsum-based skimming mortar for internal render.

APPLICATION	trowel
CONSUMPTION	approx. 1 kg/m² per mm of thickness
COLOUR	white
PACKAGING	15 kg bags
CERTIFICATIONS AND MARKINGS	() () () () () () () () () ()



TECHNICAL DATASHEET on mapei.com



Planitop Fast 330

Quick-setting, fibre-reinforced cementitious levelling mortar for internal and external floors and walls, applied in layers from 3 to 30 mm to even out irregularities.

APPLICATION	trowel
CONSUMPTION	14.5 kg/m² per cm of thickness
PACKAGING	25 kg vacuum-packed polyethylene bags
CERTIFICATIONS AND MARKINGS	EN 998-1 C C C C C C C C C



CHECK THE **TECHNICAL** DATASHEET on mapei.com



Planitop Fine Finish

AND MARKINGS

276

Ultra fine textured skimming mortar for concrete; recommended for exposed finish surfaces.

APPLICATION	rubber or metal trowel
CONSUMPTION	approx. 1.2 kg/m² per mm of thickness
PACKAGING	20 kg bags
CERTIFICATIONS	C C C C C C C C C C C C C C C C C C C



CHECK THE TECHNICAL DATASHEET on mapei.com

Planitop Raso Max

Smooth-textured, fibre-reinforced, waterproof, lime-cement smoothing and levelling mortar applied in layers from 2 to 10 mm thick over cementitious render, concrete and plastic coatings.

APPLICATION	trowel
CONSUMPTION	approx. 1.45 kg/m² per mm of thickness
COLOUR	white
PACKAGING	25 kg bags







TECHNICAL DATASHEET on mapei.con



Planitop Superfine

Ultra fine-textured cementitious smoothing/skimming compound for finishing "fresh" or hardened internal and external cementitious render, applied in layers up to 1 mm thick.

APPLICATION	trowel
CONSUMPTION	approx. 1.3 kg/m² per mm of thickness
COLOUR	white
PACKAGING	20 kg bags
CERTIFICATIONS	A command and a command a command and a command a command and a command a command and a command and a command and a command and a command a command and a command a command and a command and a command a comm







Triblock Finish

AND MARKINGS

Three-component, epoxy-cementitious mortar for smoothing damp substrates.

APPLICATION	gauging trowel or rendering machine	

PACKAGING 31.25 kg kit:

• 1.5 kg drums (comp. A);

2 kg/m² per mm of thickness


• 4.75 kg drums (comp. B); • 25 kg bags (comp. C)

CERTIFICATIONS AND MARKING

CONSUMPTION








CHECK THE DATASHEET on mapei.com







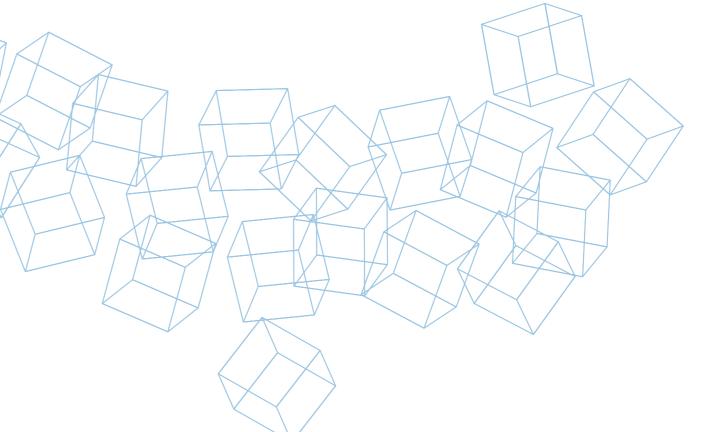



PRODUCTS
FOR ANCHORING
AND RAPID FIXING

Lampocem

Ready-to-use, quick-setting and hardening, anti-shrinkage hydraulic binder.

APPLICATION	gauging trowel or trowel
CONSUMPTION	1.8 kg/dm³ of cavity to be filled
PACKAGING	25 kg bag, boxes with 4 sachets 5 kg, packs 91 kg packaging

CERTIFICATIONS AND MARKINGS







TECHNICAL DATASHEET on mapei.com



Mapefill F

High-performance mortar for anchoring and sealing.

APPLICATION	pouring
CONSUMPTION	1.8 kg/dm³ of cavity to be filled
PACKAGING	25 kg vacuum-packed polyethylene bags

CERTIFICATIONS AND MARKINGS







CHECK THE **TECHNICAL** DATASHEET on mapei.com



Mapefill R

Fluid, rapid-hardening, expansive mortar for anchoring objects in place.


	INCOMPLIANCE WITH
PACKAGING	25 kg vacuum-packed polyethylene bags
CONSUMPTION	1.95 kg/dm³ of cavity to be filled
APPLICATION	pouring

CERTIFICATIONS AND MARKINGS

280







CHECK THE TECHNICAL DATASHEET on mapei.com



Mapefill Zero

Fluid mortar with positive internal tension.

APPLICATION pouring

CONSUMPTION 2 kg/dm³ of cavity to be filled

PACKAGING 25 kg paper bags

CERTIFICATIONS AND MARKINGS















TECHNICAL DATASHEET on mapei.com



Mapefix Metal Sleeve

Cylindrical perforated metal sleeve for applying chemical anchors in drilled substrates. 1 m long cylinder to be cut to size.



DIAMETER

Ø 20 x 1000 mm x 25 pcs. AND LENGTH

Ø 15 x 1000mm x 50 pcs. Ø 11 x 1000mm x 50 pcs.

TO BE USED WITH Mapefix range



Cylindrical perforated plastic sleeve for applying chemical anchors in drilled substrates.

DIAMETER AND LENGTH

Ø 12 x 80 Ø 16 x 85 Ø 16 x 130 Ø 16 x 130+200 Ø 20 x 85 Ø 20 x 130 Ø 20 x 200

TO BE USED WITH

Mapefix range 10 pcs sachet

PACKAGING





 $\langle \not \! \! \rangle$

Mapefix Combibox VE SF Kit

Styrene-free, vinyl ester, hybrid resin-based chemical fastener for structural loads. Certified for threaded rods, rebar, C1 seismic performance. Kit made up of 12 cartridges of Mapefix VE SF 300 or

Mapefix VE SF 420, 24 mixers, 5 T-shirts, 1 pair of work pants.

APPLICATION

extrusion gun (Mapei Gun 310 PRO, Mapei Gun 420 2K,

Mapei Gun 420 Electric M)

PACKAGING

300 ml, 420 ml

CERTIFICATIONS AND MARKINGS













Mapefix EP 50

Solvent-free, pure epoxy resin-based chemical anchor for structural loads. High bond strength, also for core-drilled and/or flooded holes. Certified for threaded rods, rebars.

APPLICATION

extrusion gun (Mapei Gun 585 2K, manual; Mapei Gun 585 Electric,

battery; Mapei Gun 585 Air, pneumatic)

COLOUR

PACKAGING 585 ml

CERTIFICATIONS AND MARKINGS













TECHNICAL DATASHEET on mapei.com



Mapefix EP 100

Solvent-free pure epoxy resin-based chemical anchor for structural loads. High bond strength, also for core-drilled and/or flooded holes, 100 years service life. Certified for threaded rods, rebar, C1 C2 seismic performance.

APPLICATION

extrusion gun (Mapei Gun 585 2K, manual; Mapei Gun 585 Electric, battery; Mapei Gun 585 Air, pneumatic)

COLOUR grey

PACKAGING 585 ml

CERTIFICATIONS AND MARKINGS



282

















CHECK THE TECHNICAL DATASHEET on mapei.com



Mapefix EP Mixer

Spare static mixers for chemical epoxy anchoring.



Mapefix EP 50, Mapefix EP 100 **USABLE WITH**

PACKAGING 12 pcs sachet

Mapefix PE + VE Mixer

Spare static mixers for chemical anchoring.



USABLE WITH Mapefix PE SF, Mapefix VE SF, Mapefix VinyBond, Mapefix PolyBond, Mapefix UM-H

PACKAGING 12 pcs sachet

Mapefix PE SF

Styrene-free, polyester resin-based chemical fastener for heavy loads. Certified for threaded rods in concrete and masonry.

APPLICATION

extrusion gun (Mapei Gun 310 PRO, Mapei Gun 420 2K and

Mapei Gun 420 Electric M)

PACKAGING

CERTIFICATIONS AND MARKINGS



300 ml, 420 ml













Mapefix PolyBond

Polyester resin-based chemical fastener for heavy loads. Certified for threaded rods in concrete

APPLICATION extrusion gun (Mapei Gun 310 PRO, Mapei Gun 420 2K and Mapei Gun 420 Electric M)

COLOUR grey

PACKAGING 300 ml and 420 ml

CERTIFICATIONS AND MARKINGS







Mapefix UM-H 420

Solvent-free methane-methacrylate resin-based chemical fastener for structural loads. High bond strength, high thermal resistance. Certified for threaded rods, rebar, C1 and C2 seismic performance.

APPLICATION extrusion gun (Mapei Gun 420 2K and Mapei Gun 420 Electric M)

COLOUR grey

PACKAGING 420 ml

CERTIFICATIONS AND MARKINGS

















Mapefix VE SF

Styrene-free, vinyl ester, hybrid resin-based chemical fastener for structural loads. Certified for threaded rods, rebar, C1 seismic performance.

APPLICATION

extrusion gun (Mapei Gun 310 PRO, Mapei Gun 420 2K and Mapei Gun 420 Electric M)

PACKAGING

300 ml, 420 ml

CERTIFICATIONS AND MARKINGS



284















CHECK THE TECHNICAL DATASHEET on mapei.com



Mapefix VinyBond

Styrene-free, vinyl ester, hybrid resin-based chemical fastener for structural loads. Certified for threaded rods in concrete and rebar in reinforced concrete.

APPLICATION extrusion gun (Mapei Gun 310 PRO, Mapei Gun 420 2K and Mapei Gun 420 Electric M)

COLOUR grey

PACKAGING 300 ml and 420 ml

CERTIFICATIONS AND MARKINGS













CHECK THE **TECHNICAL** DATASHEET on mapei.com



Mapefix V LP

Styrene-free, vinyl ester, hybrid resin-based chemical fastener for structural loads. Certified for threaded rods, rebar, C1 and C2 seismic performance.

extrusion gun (Mapei Gun 310 PRO, Mapei Gun 420 2K and **APPLICATION** Mapei Gun 420 Electric M)

PACKAGING 300 ml, 420 ml

CERTIFICATIONS AND MARKINGS















on mapei.con



Planibond BA 100

Two-component fluid epoxy resin for anchoring steel bars.

APPLICATION pouring

CONSUMPTION approx. 2 kg/dm³

PACKAGING

• 2.88 kg drums (comp. A);

• 0.12 kg bottles (comp. B)

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.com





Back to the table of contents Back to the alphabetical index

285

 $\langle \not \! \! \rangle$

Planigrout 300

Three-component fluid epoxy mortar for anchorage work.

APPLICATION pouring

CONSUMPTION 2 kg/m² per mm of thickness

PACKAGING

12.2 kg kit:
• 1.6 kg drums (comp. A);

- 0.6 kg drums (comp. B);
- 10 kg vacuum-packed polyethylene bags (comp. C)

36.6 kg unit:

- 4.8 kg drums (comp. A);
- 1.8 kg drums (comp. B);
- 30 kg vacuum-packed polyethylene bags (comp. C)

CERTIFICATIONS AND MARKINGS











Planigrout 310

Three-component free-flowing high-strength rapid-hardening epoxy mortar applied in layers up to 10 cm thick for anchoring and grouting structures.

APPLICATION pouring

CONSUMPTION 2.2 kg/l of cavity to be filled

PACKAGING

96.1 kg units:

- 10.5 kg drums (comp. A);
- 1.6 kg bottles (comp. B);
- 84 kg vacuum-packed polyethylene bags (four 21 kg bags - comp. C)

CERTIFICATIONS AND MARKINGS









CHECK THE TECHNICAL DATASHEET on mapei.com



Planigrout 350

Three-component free-flowing high-strength rapid-hardening epoxy grout applied in layers up to 50 cm thick for anchoring and grouting structures.

APPLICATION

pouring

CONSUMPTION

2.38 kg/l of cavity to be filled

PACKAGING

94.4 kg units:

- 7.0 kg drums (comp. A);
- 3.4 kg drums (comp. B);
- 84 kg vacuum-packed polyethylene bags (four 21 kg bags - comp. C))

CERTIFICATIONS AND MARKINGS









CHECK THE TECHNICAL DATASHEET on mapei.com



Ultrabond Super Grip

Deformable, acrylic assembly adhesive for interior and exterior use, with a high initial sucker effect.

APPLICATION extrusion gun

CONSUMPTION 15 meters of bead, triangular section

COLOUR white

PACKAGING 310 ml cartridges











287



Adesilex PG1

Two-component, thixotropic epoxy adhesive for structural bonds.

APPLICATION trowel

1.65-1.75 kg/m² per mm of thickness CONSUMPTION

PACKAGING 2 kg kit:

• 1.5 kg drums (comp. A);

• 0.5 kg drums (comp. B)

6 kg kits:

• 4.5 kg drums (comp. A);

• 1.5 kg drums (comp. B)

CERTIFICATIONS AND MARKINGS







CHECK THE

TECHNICAL

DATASHEET

on mapei.com



Adesilex PG1 Rapido

Two-component, rapid-setting, thixotropic epoxy adhesive for structural bonds.

APPLICATION trowel

1.65-1.75 kg/m² per mm of thickness CONSUMPTION

PACKAGING 6 kg kit:

• 4.5 kg drums (comp. A);

• 1.5 kg drums (comp. B)

CERTIFICATIONS AND MARKINGS













TECHNICAL DATASHEET on mapei.com



Adesilex PG2

Two-component, thixotropic epoxy adhesive with long workability for structural bonds.

APPLICATION trowel

CONSUMPTION 1.65-1.75 kg/m² per mm of thickness

PACKAGING

6 kg kit:

• 4.5 kg drums (comp. A);

• 1.5 kg drums (comp. B)

CERTIFICATIONS **AND MARKINGS**







CHECK THE TECHNICAL DATASHEET on mapei.com



Adesilex PG4

Two-component, thixotropic epoxy adhesive with modified rheology for bonding Mapeband, Mapeband TPE, PVC strips and Hypalon and for structural bonds.

APPLICATION

1.60-1.65 kg/m² per mm of thickness CONSUMPTION

PACKAGING

- 2 kg kit: 1.5 kg drums (comp. A); 0.5 kg drums (comp. B);
- 6 kg kit: 4.5 kg drums (comp. A); 1.5 kg drums (comp. B);
- 30 kg kit: 22.5 kg drums (comp. A); 7.5 kg drums (comp. B)

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.com



Epojet

Two-component, super-fluid epoxy resin for injection and anchoring.

APPLICATION injection or pouring

CONSUMPTION • sealing cracks: 1.1 kg/l of cavity to be filled;

• bonding steel to concrete: 1.1 kg/m² per mm

PACKAGING

2.5 ka kit:

- 2 kg drums (comp. A);
- 0.5 kg drums (comp. B)
- 3.2 kg drums (comp. A);
- 0.8 kg drums (comp. B)

CERTIFICATIONS AND MARKINGS











TECHNICAL DATASHEET on mapei.com



Epojet LV

Two-component epoxy resin, with very low viscosity for injection in microcracks, also on wet surfaces.

APPLICATION injection or pouring

• sealing cracks: 1.1 kg/l of cavity to be filled; • bonding steel to concrete: 1.1 kg/m² per mm

PACKAGING

CONSUMPTION

2.5 kg kit:

• 2 kg drums (comp. A);

• 0.5 kg drums (comp. B)

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.com





Back to the table of contents Back to the alphabetical index

291

Eporip

Two component solvent-free epoxy adhesive for construction joints and for monolithic sealing of cracks in screeds.

APPLICATION	brush, trowel or pouring
CONSUMPTION	1.35 kg/dm³ for bonding

PACKAGING • 10 kg kit:

component A 7.5 kg + component B 2.5 kg

• 2 kg kit:

component A 1.5 kg + component B 0.5 kg

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.com



Eporip SCR

Rapid-hardening, silicate-urethane resin for sealing cracks in screeds and carrying out small repairs.

APPLICATION by extrusion from the nozzle on the bottle

CONSUMPTION 1.7 kg/l of cavity to be filled

PACKAGING box containing 6 300 ml A+B 6 kits, + 6 sachets

containing curved steel clamps

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.com



Eporip Turbo

Rapid-hardening, polyester resin for sealing cracks in screeds and carrying out small repairs.

APPLICATION brush or pouring

CONSUMPTION 1.7 kg/l of cavity to be filled

PACKAGING

6 508 g kits (A+B):

• 500 g metal cans (comp. A);

• 8 g tubes (comp. B)

CERTIFICATIONS AND MARKINGS






CHECK THE **TECHNICAL** DATASHEET on mapei.com







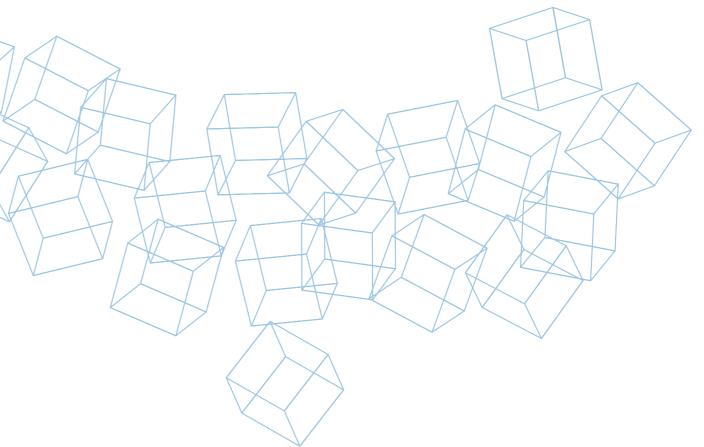



PRODUCTS FOR GALVANIC CATHODIC PROTECTION

Mapeshield Corrosion Control

Self-adhesive 12 cm zinc plates applied directly on the surface of concrete to provide galvanic cathodic protection for rebar and prevent corrosion.

APPLICATION	on the external surfaces of the repaired concrete, new or existing	
CONSUMPTION	apply the plates continuously along the entire length of the reinforced concrete	
PACKAGING	1 carton box containing 12 cm x 15 m rolls	








Mapeshield E 25

Self-adhesive 12 cm zinc plates applied directly on the surface of concrete to provide galvanic cathodic protection for rebar and prevent corrosion.







Mapeshield I

APPLICATION

CONSUMPTION

PACKAGING

Pure zinc anodes coated with a special conductive paste, for galvanic cathodic protection against corrosion of steel reinforcement in new structures and in structures requiring repair.

on the external surfaces of concrete

depending on the density of the masonry

1 carton box containing a 25 cm x 25 m roll




APPLICATION	directly on the rebar
CONSUMPTION	depending on the density of the masonry
PACKAGING	12 pcs boxes









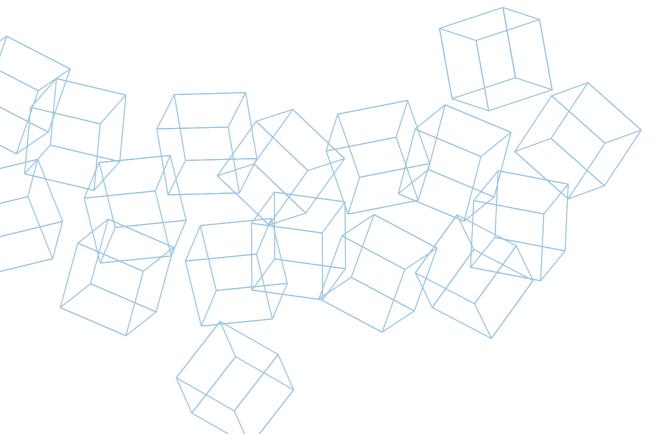



COMPOSITE SYSTEMS FOR STRUCTURAL STRENGTHENING

1. PRODUCTS FOR COMPOSITE SYSTEMS FOR STRUCTURAL STRENGTHENING

Adesilex PG1

Two-component, thixotropic epoxy adhesive for structural bonds.

APPLICATION trowel

CONSUMPTION 1.65-1.75 kg/m² per mm of thickness

PACKAGING 2 kg kit:

> • 1.5 kg drums (comp. A); • 0.5 kg drums (comp. B)

6 kg kits:

• 4.5 kg drums (comp. A);

• 1.5 kg drums (comp. B)

CERTIFICATIONS AND MARKINGS









CHECK THE TECHNICAL DATASHEET on mapei.com



Adesilex PG1 Rapido

Two-component, rapid-setting, thixotropic epoxy adhesive for structural bonds.

APPLICATION trowel

1.65-1.75 kg/m² per mm of thickness CONSUMPTION

PACKAGING 6 kg kit:

• 4.5 kg drums (comp. A);

• 1.5 kg drums (comp. B)

CERTIFICATIONS AND MARKINGS













Adesilex PG2

Two-component, thixotropic epoxy adhesive with long workability for structural bonds.

APPLICATION trowel

CONSUMPTION 1.65-1.75 kg/m² per mm of thickness

PACKAGING

• 4.5 kg drums (comp. A);

• 1.5 kg drums (comp. B)

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.com



Back to the table of contents

Carboplate

Pultruded carbon fibre plate with a protective plastic film on both faces.





TECHNICAL DATASHEET on mapei.com



Carboplate W

Pultruded carbon fibre plate with a protective plastic film on both faces.

MODULUS OF ELASTICITY	170 - 200 - 250 GPa
THICKNESS	1.4 mm
WIDTH	50 - 100 - 150 mm
PACKAGING	25 m rolls



CHECK THE **TECHNICAL** DATASHEET on mapei.com



Carbotube

TENSILE

MODULUS

OF ELASTICITY

PACKAGING

Pultruded carbon fibre tube preformed with epoxy resin with a protective plastic film for reinforced stitching in masonry.

boxes with 10 pcs of 2 m

170 GPa



CHECK THE TECHNICAL DATASHEET on mapei.com





Back to the alphabetical index

Epojet

Two-component, super-fluid epoxy resin for injection and anchoring.

APPLICATION injection or pouring

CONSUMPTION • sealing cracks: 1.1 kg/l of cavity to be filled;

• bonding steel to concrete: 1.1 kg/m² per mm

PACKAGING

2.5 kg kit:

• 2 kg drums (comp. A);

• 0.5 kg drums (comp. B)

4 kg kits:

• 3.2 kg drums (comp. A);

• 0.8 kg drums (comp. B)

CERTIFICATIONS AND MARKINGS









TECHNICAL DATASHEET on mapei.com



Mapegrid B 250

Alkali-resistant, primed basalt-fibre mesh for structural "reinforced" strengthening of stone masonry, brick, tuff surfaces.



CHECK THE TECHNICAL DATASHEET on mapei.com



TYPE OF FIBRE basalt


WEIGHT	250 g/m ²

SIZE 6 x 6 mm mesh

PACKAGING 50 x 1 m rolls

Mapegrid B 300

Pre-primed alkali-resistant basalt fibre mesh for structural "reinforced" strengthening of stone masonry, brick, tuff surfaces.



TYPE OF FIBRE	basalt
WEIGHT	300 g/m ²
SIZE	8 x 8 mm mesh
PACKAGING	50 x 1 m rolls





Mapegrid B 400

Pre-primed alkali-resistant basalt fibre mesh for structural "reinforced" strengthening of stone masonry, brick, tuff surfaces.



TECHNICAL DATASHEET on mapei.com



Mapegrid C 170

basalt

400 g/m²

50 x 1 m rolls

TYPE OF FIBRE

WEIGHT


PACKAGING

TYPE OF FIBRE

WEIGHT

PACKAGING


High-strength carbon fibre mesh for "reinforced" structural strengthening of masonry and concrete structures.



high-strength carbon	
170 g/m ²	

10 x 10 mm mesh SIZE

PACKAGING 50 x 1 m rolls



CHECK THE TECHNICAL DATASHEET on mapei.com



Mapegrid C 200

High-strength carbon fibre mesh for "reinforced" structural strengthening of masonry and concrete structures.



TYPE OF FIBRE	high-strength carbon
WEIGHT	200 g/m ²
SIZE	10 x10 mm mesh








Back to the table of contents Back to the alphabetical index

50 x 1 m rolls

Mapegrid G 120

Pre-primed, alkali-resistant (A.R.) glass fibre mesh, for localised reinforced "strengthening" of masonry substrates.



TYPE OF FIBRE	A.R. type glass fibre
WEIGHT	125 g/m ²
SIZE	10.5 x 11.5± 2% mesh
PACKAGING	25 x 0,45 m rolls, 50 x 1 m rolls

CHECK THE TECHNICAL DATASHEET on mapei.com



Mapegrid G 220

Pre-primed alkali-resistant glass fibre mesh for structural "reinforced" strengthening of stone masonry, brick, tuff and mixed masonry surfaces.



WEIGHT 250 g/m² SIZE 21 x 21 mm mesh PACKAGING 50 m x 1.33 m rolls	TYPE OF FIBRE	A.R. type glass fibre
2.7.2	WEIGHT	250 g/m ²
PACKAGING 50 m x 1.33 m rolls	SIZE	21 x 21 mm mesh
	PACKAGING	50 m x 1.33 m rolls





Mapei Steel Bar 304

Ultra high-strength helical bars in AISI 304 stainless-steel for reinforced pointing on masonry structures.



CHECK THE

TECHNICAL DATASHEET

on mapei.com

ultra high-strength AISI 304 steel
6 mm
10 mm rolls



Mapei Steel Bar 316

Ultra high-strength helical bars in AISI 316 stainless steel for reinforced pointing on masonry structures.

ultra high-strength AISI 316 steel



TECHNICAL
DATASHEET
on mapei.com



 $6\,mm$

10 m rolls

Mapei Steel Dry 316

Ultra high-strength "dry-applied" helical AISI 316 stainless-steel bars for strengthening reinforced concrete, masonry and wooden structural

members. Available with 6, 8 and 10 mm diameter. Available upon request in AISI 304 stainless steel.

TIPOLOGIA

LENGTH

TIPOLOGIA

DIAMETER

PACKAGING

ultra high-strength AISI 316 steel

• Ø 6 mm: lengths of 40, 60 and 100 cm;

Ø 8 mm: lengths of 40, 60, 80 e 100 cm;
Ø 10 mm: lengths of 40, 60, 80 cm and 100 cm

PACKAGING

• 50 pcs boxes lengths of 40 and 60 cm;

• 50 pcs tubes lengths of 80 and 100 cm

CERTIFICATIONS AND MARKINGS





CHECK THE TECHNICAL DATASHEET on mapei.com



Mapenet EM 30

Pre-impregnated alkali-resistant A.R. glass fibre mesh (FRP) used to make "reinforced" structural render on concrete and masonry structures.

TYPE OF FIBRE	A.R. type glass fibre
WEIGHT	420 g/m ²
SIZE	30 x 30 mm mesh
PACKAGING	25 x 1 m rolls



CHECK THE TECHNICAL DATASHEET on mapei.com





Back to the table of contents

Back to the alphabetical index

TIPOLOGIA

DIAMETER

PACKAGING

Mapenet EM 40

Pre-impregnated alkali-resistant A.R. glass fibre mesh (FRP) used to make "reinforced" structural render on concrete and masonry structures.




A \$ 12 2 / Amontonionist
CHECK THE
TECHNICAL
DATASHEET
on mapei.com

TYPE OF FIBRE A.R. type glass fibre WEIGHT 270 g/m² SIZE 40 x 40 mm mesh PACKAGING 50 x 1 m rolls

Mapenet EM Connector

Pre-formed "L" shaped fasteners made from alkali-resistant glass fibre and thermo-setting vinylester-epoxy resin, to be used together with **Mapenet EM 30-40** meshes available in different lengths (20, 50, 70 cm).



TYPE OF FIBRE	A.R. type glass fibre
SIZE	• 7 mm 200x100 mm • 7 mm 380x100 mm • 7 mm 500x100 mm • 7 mm 700x100 mm
PACKAGING	100 pcs boxes

Mapenet EMR 33

306

Pre-formed glass fibre mesh (GFRP) with high chemical resistance impregnated with thermosetting resin used to make "reinforced" structural render on concrete and masonry structures.



TYPE OF FIBRE	E-CR glass fibres
WEIGHT	920 g/m ²
SIZE	33 x 33 mm mesh
PACKAGING	13 m x 2 m rolls



Mapenet EMR 33 Angolare

E-CR glass fibres

33 x 33 mm mesh

720 g/m

Pre-formed glass fibre corner element (GFRP) with high chemical resistance impregnated with thermosetting resin used, to be used together with **Mapenet EMR 33** mesh to make "reinforced" structural render on concrete and masonry structures.



CHECK THE TECHNICAL DATASHEET on mapei.com



Mapenet EMR 66

TYPE OF FIBRE

WEIGHT

PACKAGING

SIZE

Pre-formed glass fibre mesh (GFRP) with high chemical resistance impregnated with thermosetting resin used to make "reinforced" structural render on concrete and masonry structures.

2 m height x 33 cm x 33 cm, 10 pcs



CHECK THE TECHNICAL DATASHEET on mapei.com



TYPE OF FIBRE	E-CR glass fibres
WEIGHT	465 g/m ²
SIZE	66 x 66 mm mesh
PACKAGING	25 m x 2 m rolls

Mapenet EMR 66 Angolare

Pre-formed glass fibre corner element (GFRP) with high chemical resistance impregnated with thermosetting resin used, to be used together with **Mapenet EMR 66** mesh to make "reinforced" structural render on concrete and masonry structures.



TYPE OF FIBRE	E-CR glass fibres
WEIGHT	380 g/m
SIZE	66 x 66 mm mesh
PACKAGING	2 m height x 33 cm x 33 cm, 10 pcs







Mapenet EMR 99

Pre-formed glass fibre mesh (GFRP) with high chemical resistance impregnated with thermosetting resin used to make "reinforced" structural render on concrete and masonry structures.



CHECK THE
TECHNICAL
DATASHEET
on manei.com

Tarabal Assemble
1条765000000000000000000000000000000000000
(1) (1) (1) (1) (1) (1) (1) (1) (1) (1)
ELPERTURE OF THE PROPERTY OF T
1999年1998年199
T K#4 73.7 (30 mag)

TYPE OF FIBRE E-CR glass fibres WEIGHT 300 g/m² SIZE 99 x 99 mm mesh PACKAGING 25 m x 2 m rolls

Mapenet EMR 99 Angolare

Pre-formed glass fibre corner element (GFRP) with high chemical resistance impregnated with thermosetting resin used, to be used together with **Mapenet EMR 99** mesh to make "reinforced" structural render on concrete and masonry structures.



CHECK THE
TECHNICAL
DATASHEET
on mapei.com



WEIGHT 250 g/m

E-CR glass fibres

SIZE 99 x 99 mm mesh

TYPE OF FIBRE

PACKAGING

Mapenet EMR Connector

Pre-formed glass fibre L-shape fasteners (GFRP) with high chemical resistance, impregnated with thermosetting resin used, to be used together with **Mapenet EMR** range of mesh and corner elements to make "reinforced" structural render on concrete and masonry structures.

2 m height x 33 cm x 33 cm, 10 pcs



TYPE OF FIBRE	E-CR glass fibres
SIZE	7 mm 200x100 mm7 mm 400x100 mm7 mm 800x100 mm
PACKAGING	100 pcs

CHECK THE TECHNICAL DATASHEET on mapei.com

Maperod C

High tensile pultruded carbon fibre rebars pre-formed with epoxy resin for structural strengthening of damaged concrete, wooden and masonry elements.



CHECK THE TECHNICAL DATASHEET on mapei.com



Maperod G

MODULUS

DIAMETER

PACKAGING

OF ELASTICITY

155 GPa

nominal 8 - 10 - 12 mm

boxes with 10 pcs of 2 m

Pultruded glass fibre rebar pre-formed with epoxy-modified vinylester resin for structural reinforcement of damaged reinforced concrete, brick, stone and tuff elements.



MODULUS OF ELASTICITY	40.8 GPa
DIAMETER	nominal 10 - 12 mm
PACKAGING	boxes with 10 pcs of 6 m



MapeWrap 11

CERTIFICATIONS

AND MARKINGS

Two-component, normal-setting, thixotropic epoxy grout for evening out concrete surfaces and for structural bonding.

APPLICATION	trowel
CONSUMPTION	1.55 kg/m² per mm of thickness
PACKAGING	6 kg kit: • 4.5 kg drums (comp. A);

• 1.5 kg drums (comp. B)







MapeWrap 12

Two-component, slow-setting, thixotropic epoxy grout for evening out concrete surfaces and for structural bonding.

APPLICATION trowel

CONSUMPTION 1.55 kg/m² per mm of thickness

PACKAGING 6 kg kit:

• 4.5 kg drums (comp. A);

• 1.5 kg drums (comp. B)

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.com



MapeWrap 21

Two-component superfluid epoxy resin for impregnation of **MapeWrap** with "wet system".

APPLICATION: impregnation through immersion

CONSUMPTION depending on the type and the height of fabrics

PACKAGING 5 kg kit:

• 4 kg drums (comp. A);

• 1 kg drums (comp. B)

CERTIFICATIONS AND MARKINGS







CHECK THE
TECHNICAL
DATASHEET
on mapei.com



MapeWrap 31

Two-component, medium-viscosity, epoxy adhesive for impregnation of **MapeWrap** with "wet system".

APPLICATION roller or brush

CONSUMPTION depending on the type and the height of fabrics

PACKAGING 5 k

5 kg kit:

• 4 kg drums (comp. A);

• 1 kg drums (comp. B)

CERTIFICATIONS
AND MARKINGS

310







CHECK THE TECHNICAL DATASHEET on mapei.com



MapeWrap 31 T

Thixotropic epoxy adhesive for impregnating **MapeWrap** fabrics using the "dry system".

APPLICATION trowel

CONSUMPTION depending on the type of fabrics and the height

PACKAGING 5 kg kit:

• 4 kg drums (comp. A);

• 1 kg drums (comp. B)

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.com



MapeWrap B FIOCCO

Unidirectional high strength basalt fibre cord to be impregnated with **MapeWrap 21** (two-component superfluid epoxy resin) to make "structural connections".

TYPE OF FIBRE high-strength basalt

DIAMETER 10, 12 mm

MODULUS

OF ELASTICITY 85 GPa

PACKAGING 10 m rolls



CHECK THE TECHNICAL DATASHEET on mapei.com



MapeWrap B UNI-AX

Unidirectional, high strength basalt fibre fabric.

WEIGHT	400-600 g/m ²
THICKNESS	equivalent thickness of dry fabric 0.143-0.215 mm
WIDTH	40 cm
MODULUS OF ELASTICITY	70 GPa
PACKAGING	50 m rolls



CHECK THE TECHNICAL DATASHEET on mapei.com






MapeWrap C BI-AX W

Bidirectional, balanced, high strength carbon fibre fabric.

WEIGHT	300 g/m ²
THICKNESS	equivalent thickness of dry fabric (per direction) 0.082 mm
WIDTH	40-50 cm
MODULUS OF ELASTICITY	252 GPa ± 2%
PACKAGING	50 m rolls



TECHNICAL DATASHEET on mapei.com



MapeWrap C Connector

20/15/8 mm - 20/15/10 mm - 40/15/8 mm - 30/15/10 mm

Pultruded carbon fibre connector for anchoring with one end to be impregnated with MapeWrap 21.

TYPE OF FIBRE	high-strength carbon
DIAMETER	8,10 mm
LENGTH	pre-formed bar 20, 30, 40 cmcord 15 cm
MODULUS OF ELASTICITY	150 GPa
PACKAGING	50 pcs boxes



CHECK THE **TECHNICAL** DATASHEET on mapei.com



MapeWrap C FIOCCO

Unidirectional high strength carbon fibre cord to be impregnated with MapeWrap 21 (two-component superfluid epoxy resin) to make "structural connections".

TYPE OF FIBRE	high-strength carbon
DIAMETER	6 - 8 - 10 - 12 mm
MODULUS OF ELASTICITY	234 GPa
PACKAGING	10 m rolls



CHECK THE TECHNICAL DATASHEET on mapei.com



MapeWrap C FIOCCO W

Unidirectional high strength carbon fibre cord to be impregnated with MapeWrap 21 (two-component superfluid epoxy resin) to make "structural connections".


TYPE OF FIBRE	high-strength carbon
DIAMETER	8 - 10 - 12 mm
MODULUS OF ELASTICITY	245 GPa
PACKAGING	10 m rolls



MapeWrap C QUADRI-AX

Quadriaxial, balanced, high strength carbon fibre fabric, with high modulus of elasticity.

WEIGHT	380 g/m²
THICKNESS	equivalent thickness of dry fabric (per direction): 0.053 mm
WIDTH	30, 42, 48 cm
MODULUS OF ELASTICITY	230 GPa
PACKAGING	50 m rolls



CHECK THE DATASHEET on mapei.com



MapeWrap C UNI-AX

Unidirectional, high strength carbon fibre fabric, with high modulus of elasticity.

WEIGHT	300-600 g/m ²
THICKNESS	equivalent thickness of dry fabric 0.164-0.337 mm
WIDTH	10, 20, 40 cm
MODULUS OF ELASTICITY	252 GPa ± 2%
PACKAGING	50 m rolls
CERTIFICATIONS AND MARKINGS	ICC ICC



TECHNICAL DATASHEET on mapei.com





Back to the alphabetical index

MapeWrap C UNI-AX HM

Unidirectional, high strength carbon fibre fabric with very high modulus of elasticity.

WEIGHT	300-600 g/m ²
THICKNESS	equivalent thickness of dry fabric 0.164-0.329 mm
WIDTH	10, 20, 40 cm
MODULUS OF ELASTICITY	390 GPa
PACKAGING	50 m rolls



TECHNICAL DATASHEET on mapei.com



MapeWrap EQ Adhesive

One-component, ready-to-use, polyurethane-based adhesive in watery dispersion with very low emission level of volatile organic compounds (VOC) for impregnating MapeWrap EQ Net bi-directional, primed glass fibre fabric.

CONSUMPTION	0.5-0.6 kg/m ²
PACKAGING	6 kg drums





CHECK THE **TECHNICAL** DATASHEET on mapei.com



MapeWrap EQ Net

Bi-directional, primed glass fibre fabric to protect secondary partition walls in buildings from seismic activity and to prevent brick-cement floors collapsing.

TYPE OF FIBRE	E glass fibres
WEIGHT	286 g/m ²
THICKNESS	Equivalent thickness of dry fabric: 0.057 mm
WIDTH	100 cm
PACKAGING	50 m rolls



CHECK THE TECHNICAL DATASHEET on mapei.com



MapeWrap G FIOCCO

Unidirectional high strength glass fibre cord to be impregnated with MapeWrap 21 (two-component superfluid epoxy resin) to make "structural connections".

TYPE OF FIBRE	E glass fibres
DIAMETER	6, 8, 10, 12 mm
MODULUS OF ELASTICITY	81.4 GPa
PACKAGING	10 m rolls



TECHNICAL DATASHEET on mapei.com



MapeWrap G UNI-AX

Unidirectional, glass fibre fabric.

TYPE OF FIBRE	E glass fibres
WEIGHT	900 g/m²
THICKNESS	equivalent thickness of dry fabric: 0.342 mm
WIDTH	30-60 cm
MODULUS OF ELASTICITY	80.7 GPa
PACKAGING	50 m rolls



CHECK THE **TECHNICAL** DATASHEET on mapei.com



MapeWrap Primer 1

Two-component epoxy primer specifically formulated for the **MapeWrap** system.

• 0.5 kg drums (comp. B)

APPLICATION	roller or brush	
CONSUMPTION	250-300 g/m ²	CHECK THE TECHNICAL
PACKAGING	2 kg kit: • 1.5 kg drums (comp. A);	DATASHEET on mapei.com





315

MapeWrap SG FIOCCO

High-strength galvanized steel fibre cord for structural strengthening.









Planitop HDM Maxi

Two-component ready-mixed, high ductility pozzolan-reaction, fibre-reinforced mortar for structural "reinforced" strengthening work, when used in combination with mesh from the **Mapegrid** range, and for smoothing and levelling concrete and masonry.

approx. 1.85 kg/m² per mm of thickness

APPLICATION	trowel, gauging trowel or rendering machine

PACKAGING 31.25 kg kit:

• 25 kg bags (comp. A);

• 6.25 kg tanks (comp. B)

CERTIFICATIONS
AND MARKINGS

CONSUMPTION











CHECK THE
TECHNICAL
DATASHEET
on mapei.com



Planitop HDM Restauro

Two-component, pre-blended, high-ductility, fibre-reinforced, cement-free hydraulic lime (NHL) and **Eco-Pozzolan**-based light-coloured mortar, particularly recommended for "reinforced" structural strengthening of masonry substrates in combination with the **Mapegrid** meshes and for evening out stone, brickwork and tuff substrates.

APPLICATION trowel, gauging trowel or rendering machine

CONSUMPTION approx. 1.9 kg/m² per mm of thickness

PACKAGING 29.75 kg kit:

• 25 kg bags (comp. A);

• 4.75 kg tanks (comp. B)

CERTIFICATIONS
AND MARKINGS

316











CHECK THE TECHNICAL DATASHEET on mapei.com



Planitop HPC

Two-component ultra high-performance shrinkage-compensated free-flowing, high ductility fibre-reinforced cementitious mortar with stiff steel fibres for restoring and repairing concrete.

Note: **Planitop HPC** is sold with **Fibre HPC** (1.625 kg of **Fibre HPC** per 25 kg bag of **Planitop HPC** to be ordered separately).

APPLICATION pouring into formwork

CONSUMPTION approx. 20 kg/m² per cm of thickness

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS











TECHNICAL

DATASHEET

on mapei.com



Planitop HPC Floor

One-component, ultra-high strength, highly ductile, highly fluid, fibre-reinforced with steel fibres, compensated shrinkage cementitious mortar for strengthening the external face of floor slabs.

approx. 21 kg/m² per cm of thickness

APPLICATION pouring

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS

CONSUMPTION









TECHNICAL
DATASHEET
on mapei.com



Planitop HPC Floor 46

Ultra-high performance, high ductility, free-flowing cementitious micro-concrete reinforced with steel fibres.

APPLICATION pouring

CONSUMPTION approx. 22 kg/m² per cm of thickness

PACKAGING 25 kg bags and 1000 kg big bags

CERTIFICATIONS AND MARKINGS







TECHNICAL
DATASHEET
on mapei.com





Planitop HPC Floor 46 T

Ultra-high performance, high ductility, semi-fluid cementitious micro-concrete reinforced with steel fibres.

APPLICATION	pouring
CONSUMPTION	approx. 22.5 kg/m² per cm of thickness
PACKAGING	25 kg bags and 1000 kg big bags
CERTIFICATIONS	C C RESERVED







Planitop HPC Floor T

AND MARKINGS

One-component, ultra-high strength, highly ductile, semi-fluid, fibre-reinforced with steel fibres, compensated shrinkage cementitious mortar for strengthening the external face of floor slabs. Particularly suitable for warped wooden floors.

APPLICATION	pouring
CONSUMPTION	approx. 21 kg/m² per cm of thickness
PACKAGING	25 kg bags





CHECK THE TECHNICAL DATASHEET on mapei.com



Planitop HPC LV

CERTIFICATIONS

AND MARKINGS

Ultra high-performance self-compacting expanding cementitious micro-concrete.



CERTIFICATIONS AND MARKINGS











CHECK THE on mapei.com



Planitop HPC Tixo

Two-component, thixotropic, ultra-high performance, fibre-reinforced cementitious mortar, with a work-hardening effect, with steel fibres for restoring and repairing concrete structures.

Note: Planitop HPC Tixo is sold with Fibre HPC (1.625 kg of Fibre HPC per 25 kg bag of Planitop HPC Tixo to be ordered separately).

APPLICATION with spreader, trowel, also without formworks in vertical application or on ceiling

CONSUMPTION approx. 21 kg/m² per cm of thickness

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS







TECHNICAL DATASHEET on mapei.com



Planitop Intonaco Armato

Two component, ready-mixed, cement-free, high-ductility fibre-reinforced natural hydraulic lime (NHL) and Eco-Pozzolan mortar, containing 30% of recycled raw material, particularly recommended for levelling off the surface of stone, bricks and tuff, and for the structural strengthening of existing facing walls, including when extra strengthening mesh is not applied.

APPLICATION with metal straight trowel or rendering machine

CONSUMPTION approx. 1.8 kg/m² per mm of thickness

PACKAGING

• comp. A (powder): 25 kg bags

• 5 kg tanks comp. B (liquid)

CERTIFICATIONS AND MARKINGS











CHECK THE DATASHEET on mapei.com



Planitop U-HPC Floor

Fibre-reinforced, shrinkage-compensated, high-strength, high-ductility, highly-fluid cementitious mortar.

Note: Planitop U-HPC Floor is sold with Fibre HPC (1.625 kg of Fibre HPC per 25 kg bag of Planitop U-HPC Floor to be ordered separately).

APPLICATION pouring

CONSUMPTION approx. 21.5 kg/m² per cm of thickness

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS







Back to the alphabetical index

318

319

2. COMPLEMENTARY FIBRES

Fibre HPC

Stiff steel fibres used in combination with **Planitop HPC**, **Planitop HPC Tixo** and **Planitop U-HPC Floor** mortars.



CONSUMPTION 1.625 kg per 25 kg bag of **Planitop HPC, Planitop HPC Tixo**

and Planitop U-HPC Floor

PACKAGING 6.5 kg boxes

3. ACCESSORY ITEMS

Injectors Ø 23

Plastic injectors with non-return valve for injecting epoxy resins.



DIAMETER external diameter 23 mm, injection hole 5 mm

LENGTH 80 mm

MapeWrap Roller

Metal roller for laminating **MapeWrap** fabrics with epoxy resins .



PACKAGING boxes with 1 pc

320

Spindle for Mapei Steel Dry

Special spindle for inserting **Mapei Steel Dry AISI 316** helical bars. Complete with adapter for SDS hammer drill for dry application.




DIAMETER 8 mm, 10 mm, 12 mm

PACKAGING boxes with 1 pc





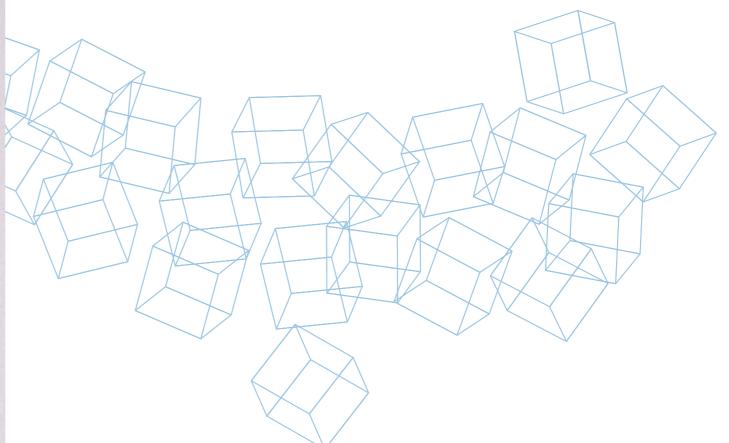



PRODUCTS
EXTERNAL
INSULATION
SYSTEMS

ADHESIVES AND SMOOTHING COMPOUNDS

Mapetherm AR1

One-component cementitious mortar for bonding and smoothing of thermal insulating panels and for external thermal insulation systems.

APPLICATION trowel

CONSUMPTION • 4.0-6.0 kg/m² depending on the bonding technique.

• 1.3-1.55 kg/m² per mm of thickness as smoothing compound (recommended: approx. 4 mm in 2 coats)

COLOUR grey

PACKAGING 25 kg

CERTIFICATIONS AND MARKINGS





CHECK THE TECHNICAL DATASHEET on mapei.com



Mapetherm AR1 GG

One-component cementitious mortar with coarse grain size for bonding and smoothing of thermal insulating panels and for external thermal insulation systems.

APPLICATION

• 4.0-6.0 kg/m² depending on the bonding technique. CONSUMPTION

• 1.35-1.55 kg/m² per mm of thickness as smoothing

compound (recommended: approx. 4 mm in 2 coats)

COLOURS white and grey

PACKAGING 25 kg

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.con



Mapetherm AR1 Light

One-component light-weight cementitious mortar with increased grain size for bonding and smoothing of thermal insulating panels and for external thermal insulation systems.

APPLICATION

• 3.0-5.0 kg/m² depending on the bonding technique.

• 1.20-1.40 kg/m² of thickness as smoothing compound (recommended: approx. 4 mm coats)

COLOUR white

PACKAGING 23 kg

CERTIFICATIONS AND MARKINGS

CONSUMPTION









CHECK THE TECHNICAL DATASHEET on mapei.com



Mapetherm AR1 Maxi

One-component cementitious mortar with increased grain size for bonding and smoothing of thermal insulating panels and for external thermal insulation systems.

APPLICATION trowel

CONSUMPTION

• 4.0-6.0 kg/m² depending on the bonding technique.

• 1.35-1.55 kg/m² per mm of thickness as smoothing compound (recommended: approx. 4 mm in 2 coats)

COLOURS white and grey

PACKAGING 25 kg

CERTIFICATIONS AND MARKINGS









Mapetherm Flex RP

Cement-free, fibre-reinforced, lightweight elastic flexible skimming paste resistant to biological agents for internal and external use. Available in the following grain sizes: 0.5 mm and 1.5 mm.

APPLICATION trowel

• 0.5 mm: 1.9- 2.1 kg/m² per 1 mm of thickness CONSUMPTION

• 1.5 mm: 4.0- 5.0 kg/m² per 3- 4 mm of thickness

white or various colours using the ColorMap®

automatic colouring system

PACKAGING 20 kg drums

CERTIFICATIONS AND MARKINGS

COMPOSITION

COLOUR

PACKAGING

COLOURS



100% glass fibre

50 x 1 m rolls

white







CHECK THE TECHNICAL DATASHEET on mapei.com



Mapetherm Net

Alkali-resistant glass fibre mesh suitable for reinforced skimming layers when repairing façades, or for the installation of Mapetherm thermal insulation systems.



TECHNICAL DATASHEET on mapei.com





Back to the alphabetical index

324

325

2. INSULATING PANELS AND ACCESSORIES

Mapetherm EPS 100 CAM

EPS insulating panel (Sintered Expanded Polystyrene), for external thermal insulation systems.



100x50 cm panels from 2 to 20 cm thick

PACKAGING from 1.5 to 15 m cm² (depending on the thickness)

CERTIFICATIONS AND MARKINGS

SIZE







Mapetherm EPS G CAM

EPS insulating panel (Sintered Expanded Polystyrene) with graphite, for external thermal insulation systems.



100x50 cm panels from 2 to 20 cm thick

PACKAGING from 1.5 to 15 m cm² (depending on the thickness)

CERTIFICATIONS AND MARKINGS

SIZE







Mapetherm EPS G 100 CAM

EPS insulating panel (Sintered Expanded Polystyrene) with graphite, for external thermal insulation systems.



SIZE 100x50 cm panels from 2 to 20 cm thick

PACKAGING from 1.5 to 15 m cm² (depending on the thickness)

CERTIFICATIONS
AND MARKINGS







Mapetherm - Etics Fixing Plugs

Fixing plugs for external thermal insulation systems. **Mapetherm - Ejotherm** series for articles details make reference to the **Mapetherm System - Accessories** catalist.



Mapetherm Fixing Elements

Fixing and mounting elements for external thermal insulation systems. **Mapetherm - Ejotherm** series for articles details make reference to the **Mapetherm System - Accessories** catalist.



Mapetherm PF CAM

PF insulating panel (phenolic resine foram) for external thermal insulation systems.



SIZE 120x60 and 120x120 cm panels

PACKAGING from 2.16 to 25.92 m² (depending on the thickness)

CERTIFICATIONS AND MARKINGS









327


Mapetherm Profiles


Profiles and starter profiles for external thermal insulation systems.

Mapetherm - Ejotherm series for articles details make reference to the Mapetherm System - Accessories catalist.



Back to the alphabetical index

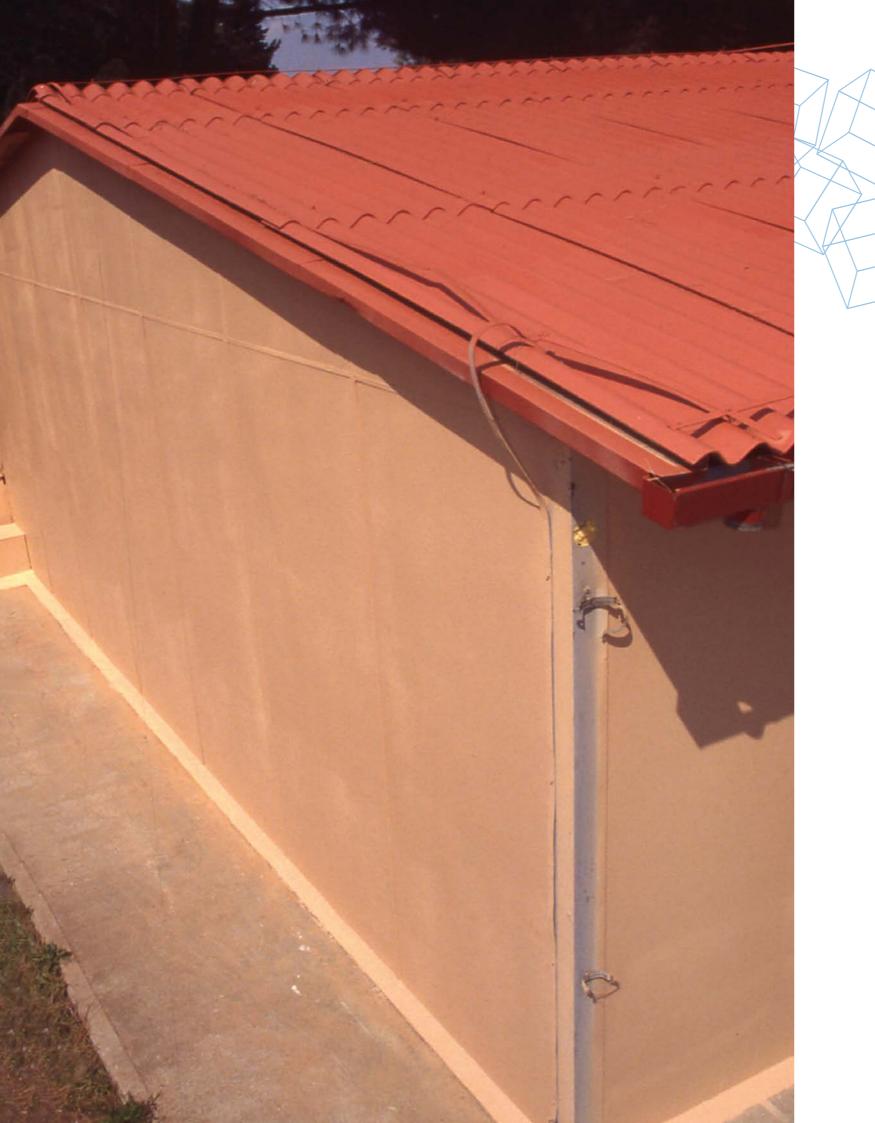

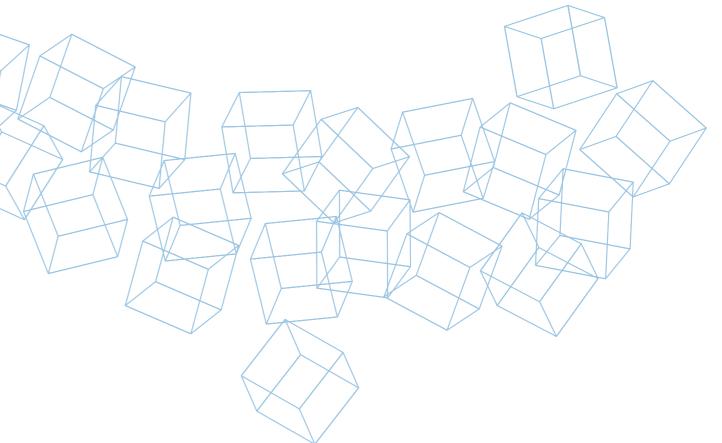



PRODUCTS FOR TREATING ASBESTOS CEMENT SLABS

Aquaflex System

Liquid membrane for permanent encapsulation of asbestos cement and to create a waterproofing membrane for mineral substrates.

APPLICATION	roller, brush, trowel, or spray
CONSUMPTION	from 0.25 to 0.7 kg/m² per coat, depending on the type of application.
COLOURS	white, red, and grey
PACKAGING	5 and 20 kg drums



CHECK THE TECHNICAL DATASHEET on mapei.com



Vinavil 03V Special Asbestos


Temporary encapsulation for asbestos-cement panels.



APPLICATION	roller, brush or pump
COLOUR	red
CONSUMPTION	approx. 0.2-0.3 kg/m²
PACKAGING	5, 10 and 25 kg





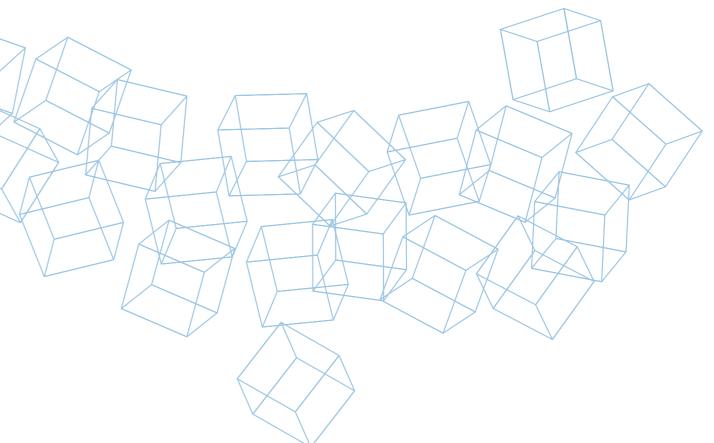



WALL PROTECTIVE AND DECORATIVE COATINGS

Antipluviol

Colourless water-repellent impregnator treatment based on silicon compounds in water solution.

APPLICATION	roller, brush or spray
CONSUMPTION	0.2-1 kg/m² (depending on the porosity of the substrate)
COLOUR	transparent
PACKAGING	5 and 25 kg

CERTIFICATIONS AND MARKINGS





TECHNICAL DATASHEET on mapei.com



Antipluviol S

Colourless water-repellent impregnator treatment based on silane and siloxane compounds in solvent solution.

APPLICATION	roller, brush or spray
CONSUMPTION	0.1-1 kg/m² (depending on the porosity of the substrate)

COLOUR transparent

CERTIFICATIONS **AND MARKINGS**

PACKAGING



5 and 10 kg







CHECK THE **TECHNICAL** DATASHEET on mapei.com



Antipluviol W

Colourless water-repellent impregnator treatment based on silane and siloxane compounds in water emulsion.

APPLICATION	roller, brush or spray
CONSUMPTION	0.2-1 kg/m² (depending on the porosity of the substrate)
COLOUR	milky white
PACKAGING	10 kg

CERTIFICATIONS AND MARKINGS





CHECK THE TECHNICAL DATASHEET on mapei.com



Colorite Beton

Semi-transparent, anti-carbonatation acrylic paint with a smooth finish for interior and exterior surfaces.

PPLICATION	roller, brush or spray	

CONSUMPTION 0.25-0.3 kg/m² (per two coats)

COLOURS colour chart or various colours using the ColorMap®

automatic colouring system

PACKAGING 20 kg

CERTIFICATIONS AND MARKINGS







TECHNICAL DATASHEET on mapei.com



Colorite Performance

Protective acrylic paint with high resistance to UV rays interior and exterior surfaces, available in a wide range of colours.

CONSUMPTION 0.3-0.4 kg/m² (per two coats)

COLOURS white or various colours using the ColorMap® automatic colouring system

PACKAGING 5 and 20 kg

CERTIFICATIONS AND MARKINGS







CHECK THE **TECHNICAL** DATASHEET on mapei.com



Dursilac Base Filler

Water-based acrylic undercoat for interior and exterior use with high opacity and filling properties.

APPLICATION	roller, brush or spray
COVERAGE	6-8 m²/litre per coat
COLOURS	white or various colours using the ColorMap® automatic colouring system
PACKAGING	0.75 and 2.5 litres



CHECK THE TECHNICAL DATASHEET on mapei.com





Dursilac Gloss

Water based acrylic urethane enamel paint for interior and exterior use, with excellent flow and providing a hard-wearing, appearance. Gloss Finish.





APPLICATION	roller, brush or spray
COVERAGE	10-12 m²/litre per coat
COLOURS	white or various colours using the ColorMap® automatic colouring system
PACKAGING	0.75 and 2.5 litres

Dursilac Matt

APPLICATION


COVERAGE

COLOURS

PACKAGING

Water based acrylic urethane enamel paint for interior and exterior use, with excellent flow and providing a hard-wearing. Matt finish.

white or various colours using the **ColorMap**®







Dursilac No Rust

Anti-rust solvent-based primer, for interior and exterior application, with excellent adhesion and anti-corrosive power.

roller, brush or spray

10-12 m²/liter per coat

0.75 and 2.5 litres

automatic colouring system



APPLICATION roller, brush or spray COVERAGE 6-8 m²/liter per coat COLOUR grey PACKAGING 0.75 and 2.5 litres



Dursilac No Rust WB

Water-based, odourless, colourable anti-rust primer for application in interior.

APPLICATION	roller, brush or spray
COVERAGE	8-10 m²/litre per coat
COLOURS	white or various colours using the ColorMap ® automatic colouring system
PACKAGING	0.75 and 2.5 litres



TECHNICAL DATASHEET on mapei.com



Dursilac Satin

Water based acrylic urethane enamel paint for interior and exterior use, with excellent flow and providing a hard-wearing. Satin finish.

APPLICATION	roller, brush or spray
COVERAGE	10-12 m²/liter per coat
COLOURS	white or various colours using the ColorMap ® automatic colouring system
PACKAGING	0.75 and 2.5 litres



CHECK THE TECHNICAL DATASHEET on mapei.cor



Dursilite

Highly washable water-based interior paint with high opacity. Ideal for colour design.

APPLICATION	roller, brush or spray
COVERAGE	8-10 m²/litre per coat
COLOURS	white or various colours using the ColorMap® automatic colouring system
PACKAGING	1.4 and 14 litres
CERTIFICATIONS AND MARKINGS	TESTED according to EN 13300









Back to the table of contents

338

Dursilite Base Coat

Smooth, pigmented and colourable uniforming base coat. Ideal for non-homogeneous substrates.

APPLICATION	roller, brush or spray
COVERAGE	5-8 m²/liter per coat
COLOURS	white or various colours using the ColorMap ® automatic colouring system
PACKAGING	1.4 and 14 litres



CHECK THE TECHNICAL DATASHEET on mapei.com



Dursilite Gypsos

Mould resistant, highly washable and hiding water-based interior paint. Ideal for plasterboards and modern construction systems.

APPLICATION	roller, brush or spray
COVERAGE	11-12 m²/liter per coat
COLOURS	white or various colours using the ColorMap ® automatic colouring system
PACKAGING	1.4 and 14 litres





CHECK THE **TECHNICAL** DATASHEET on mapei.com



Dursilite Igea

CERTIFICATIONS

AND MARKINGS

Mould resistant, breathable water-based interior paint. Ideal for kitchens and bathrooms and rooms subject to condensation.

APPLICATION	roller, brush or spray
COVERAGE	9-11 m²/litre per coat
COLOURS	white or various colours using the ColorMap® automatic colouring system
PACKAGING	1.4 and 14 litres
CERTIFICATIONS AND MARKINGS	TESTED according to EN 13300 EN 15457



CHECK THE TECHNICAL DATASHEET on mapei.com



Back to the table of contents

Dursilite Level

Grouting and skimming paste for interiors, ideal for high quality grouting and skimming applications.

APPLICATION	trowel
YELD	4 -6 m²/kg per layert
COLOURS	white
PACKAGING	0.25 - 1 - 4 - 20 kg





TECHNICAL DATASHEET on mapei.com



Dursilite Master

Breathable water-based paint with good opacity. Ideal for large surfaces.

APPLICATION	roller, brush or spray
COVERAGE	9-11 m²/litre per coat
COLOURS	white or various colours using the ColorMap® automatic colouring system
PACKAGING	1.4 and 14 litres
CERTIFICATIONS	TESTED according to



TECHNICAL DATASHEET on mapei.com



Dursilite Matt

AND MARKINGS

Washable water-based paint with good opacity. Ideal for extra matt surfaces.

APPLICATION	roller, brush or spray
COVERAGE	8-10.5 m²/litre per coat
COLOURS	white or various colours using the ColorMap ® automatic colouring system
PACKAGING	1.4 and 14 litres
CERTIFICATIONS AND MARKINGS	TESTED according to EN 13300







Back to the alphabetical index

Elastocolor Net

Alkali-resistant glass fibre mesh for reinforcing fine-graded skimming pastes.



CHECK THE TECHNICAL DATASHEET on mapei.com



COMPOSITION	100% glass fibre
COLOUR	white
PACKAGING	50 x 1 m rolls.

Elastocolor Paint

Elastomeric, crack-bridging, permanently flexible, protective paint with high resistance to chemicals for interior and exterior surfaces.

APPLICATION	roller, brush or spray
CONSUMPTION	0.2-0.4 kg/m² per coat
COLOURS	white or various colours using the ColorMap® automatic colouring system
PACKAGING	20 kg

CERTIFICATIONS AND MARKINGS







CHECK THE **TECHNICAL** DATASHEET on mapei.com



Elastocolor Pittura Plus

Elastomeric hygienic paint with crack-bridging ability, for internal and external use, with long-lasting elasticity and mould and algae resistant.

APPLICATION	roller, brush or spray
CONSUMPTION	0.2-0.4 kg/m² per coat
COLOURS	white or various colours using the ColorMap® automatic colouring system
PACKAGING	20 kg

CERTIFICATIONS

AND MARKINGS







DATASHEET on mapei.com



Back to the table of contents

Elastocolor Primer

Solvent-based high-penetration consolidating primer to even out surfaces.



CHECK THE **TECHNICAL** DATASHEET on mapei.com



Elastocolor Rasante

Fibre-reinforced, elastomeric, high flexibility finishing filling coat with high hiding capacity, for interior and exterior applications.

APPLICATION

trowel, roller, brush or spray

roller, brush or spray

0.10-0.15 kg/m²

transparent

10 kg

CONSUMPTION

APPLICATION

COLOUR

PACKAGING

CONSUMPTION

- trowel: 0.3-0.4 kg/m² (per coat)
- brush or roller: approx. 0.4 kg/m² (per coat)
- spray: 0.4-0.7 kg/m² (per coat)

COLOURS

white or various colours using the ColorMap® automatic colouring system

PACKAGING

20 kg

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.con



Elastocolor Rasante SF

High thickness fibre-reinforced elastomeric coating with high filling properties for interior and exterior applications.

APPLICATION

trowel, roller, brush or spray

CONSUMPTION

- trowel: 0.7-0.8 kg/m² (per coat)
- brush or roller: approx. 0.5 kg/m² (per coat)
- spray: 0.8-1.0 kg/m² (per coat)

COLOURS

white or various colours using the ColorMap® automatic colouring system

PACKAGING

20 kg

CERTIFICATIONS AND MARKINGS





CHECK THE TECHNICAL DATASHEET on mapei.com





Back to the alphabetical index

342

Elastocolor Tonachino Plus

Elastic, water-repellent, algae and mould-resistant, hygienising, elastomeric coating product for interior and exterior surfaces. Available in the following grain sizes: 1.2 mm.

APPLICATION trowel CONSUMPTION 1.2 mm,1.9. 2.3 kg/m² **COLOURS** white or various colours using the ColorMap® automatic colouring system PACKAGING 20 kg

CERTIFICATIONS AND MARKINGS













TECHNICAL DATASHEET on mapei.com



Elastocolor Waterproof

Waterproof, easy-to-clean acrylic paint for interior and exterior surfaces in permanent contact with water.

APPLICATION

(spray only for structures which are not immersed in water)

CONSUMPTION

• 0.3-0.5 kg/m² (for two coats) for structures which are not immersed in water)

• 0.6-0.8 kg/m² (for two/three coats)

for structures which are immersed in water)

COLOURS

white or various colours using the ColorMap®

automatic colouring system

PACKAGING 20 kg

CERTIFICATIONS AND MARKINGS





TECHNICAL DATASHEET on mapei.com



Malech


Water-based acrylic undercoat and bonding promoter with a smooth finish.

APPLICATION roller, brush or spray CONSUMPTION 0.10-0.15 kg/m² COLOUR transparent

PACKAGING CERTIFICAZIONI E MARCATURE



2 and 10 kg



CHECK THE TECHNICAL DATASHEET on mapei.com



Back to the table of contents

Mapecoat ACT Matt

Wall enamel, resistant to stains, mould, viruses and bacteria.

APPLICATION roller, brush or spray COVERAGE 8.5-12.5 m²/litre per coat **COLOURS** white or various colours using the ColorMap® automatic colouring system **PACKAGING** 1.4 and 14 litres

CERTIFICATIONS AND MARKINGS











Mapecoat ACT Satin

Wall enamel, resistant to stains, mould, viruses and bacteria.

roller, brush or spray **APPLICATION** COVERAGE 8-10 m²/litre per coat COLOURS white or various colours using the ColorMap® automatic colouring system **PACKAGING** 1.4 and 14 litres

CERTIFICATIONS AND MARKINGS









CHECK THE TECHNICAL DATASHEET on mapei.com



Mapecoat AF

Highly cleanable and durable colourless fluorinated acrylic polymer-based protective finish in water dispersion.

APPLICATION roller, brush or spray 0.05-0.15 kg/m² per coat CONSUMPTION COLOURS white or various colours using the ${\bf ColorMap}^{\rm @}$ automatic colouring system PACKAGING 5 kg

CERTIFICATIONS AND MARKINGS







TECHNICAL DATASHEET on mapei.com







Mapecoat DW 25

Two-component epoxy paint for coating concrete surfaces, suitable for contact with drinking water and foodstuff.

	APPLICATION	roller, brush or spray
	CONSUMPTION	0.4-0.6 kg/m² (per single coat)
	COLOUR	comp. A: white; comp. B: transparent
	PACKAGING	5 kg kit (A+B)
	CEDTIFICATIONS	(RESTRINGED SP



CHECK THE TECHNICAL DATASHEET on mapei.com



Quarzolite Base Coat

AND MARKINGS

Coloured acrylic base coat with a homogeneous finish and good filling and adhesion promoting properties, for interior and exterior applications.

APPLICATION	roller, brush or spray
CONSUMPTION	0.3-0.5 kg/m² per coat
COLOURS	white or various colours using the ColorMap ® automatic colouring system
PACKAGING	20 kg



CHECK THE TECHNICAL DATASHEET on mapei.com



Quarzolite HF Plus

AND MARKINGS

Durable acrylic hygienising paint with granular quartz fillers with filling properties, resistant to mould and algae for interior and exterior applications.

APPLICATION	roller, brush or spray
CONSUMPTION	0.35-0.45 kg/m² (per two coats)
COLOURS	white or various colours using the ColorMap® automatic colouring system
PACKAGING	20 kg
CERTIFICATIONS	



CHECK THE TECHNICAL DATASHEET on mapei.com



Quarzolite Paint

Acrylic paint with micro-granular quartz with a homogeneous finish for long-lasting protection of interior and exterior surfaces.

APPLICATION	roller, brush or spray
CONSUMPTION	0.3-0.4 kg/m² for two coats
COLOURS	white or various colours using the ColorMap® automatic colouring system
PACKAGING	5 and 20 kg



CHECK THE TECHNICAL DATASHEET on mapei.com



Quarzolite Tonachino

High-protection, thick-layered acrylic coating product with high filling properties for interior and exterior surfaces. Available in the following grain sizes: 0.7 mm, 1.2 mm, 1.5 mm and 2.0 mm.

gram 3/203. 0.7 mm, 1.2 mm, 1.3 mm and 2.0 mm.	
APPLICATION	trowel
CONSUMPTION	• 0.7 mm: 1.7-2.0 kg/m ² • 1.2 mm: 1.9-2.3 kg/m ² • 1.5 mm: 2.2-2.6 kg/m ² • 2.0 mm: 3.0-3.5 kg/m ²
COLOURS	white or various colours using the ColorMap® automatic colouring system
PACKAGING	25 kg



CERTIFICATIONS AND MARKINGS





CHECK THE TECHNICAL DATASHEET on mapei.com



Quarzolite Tonachino Plus

High-protection, acrylic coating plaster for the hygiene of walls in interior and exterior applications, mould and algae resistant. Available in the following grain sizes: 1.2 mm and 1.5 mm.

APPLICATION	trower
CONSUMPTION	• 1.2 mm: 1.9-2.3 kg/m ² • 1.5 mm: 2.2-2.6 kg/m ²
COLOURS	white or various colours using the ColorMap® automatic colouring system
PACKAGING	25 kg

CERTIFICATIONS AND MARKINGS

ADDI ICATIONI







CHECK THE TECHNICAL DATASHEET on mapei.com





Quarzolite Tonachino Pro

High-thickness acrylic coating plaster for interior and exterior applications. Special external insulation system with high protection. Available in the following grain sizes: 1.2 mm and 1.5 mm.

APPLICATION	roller, brush or spray
CONSUMPTION	• 1.2 mm: 1.9-2.3 kg/m ² • 1.5 mm: 2.2-2.6 kg/m ²
COLOURS	white or various colours using the ColorMap® automatic colouring system
PACKAGING	25 kg

CERTIFICATIONS AND MARKINGS





TECHNICAL DATASHEET on mapei.com



Ouarzolite Tonachino Pro S

High-thickness acrylic-siloxane coating plaster for interior and exterior applications. Special external insulation system with high protection and water-repellent properties. Available in the following grain sizes: 1.2 mm and 1.5 mm.

APPLICATION	roller, brush or spray
CONSUMPTION	• 1.2 mm: 1.9-2.3 kg/m ² • 1.5 mm: 2.2-2.6 kg/m ²
COLOURS	white or various colours using the ColorMap® automatic colouring system

PACKAGING

CERTIFICATIONS **AND MARKINGS**

348





CHECK THE **TECHNICAL** DATASHEET on mapei.com



Silancolor AC Paint

Water-repellent acrylic-siloxane paint with high resistance to UV rays for interior and exterior applications.

APPLICATION	roller, brush or spray
CONSUMPTION	0.3-0.4 kg/m² for two coats
COLOURS	white or various colours using the ColorMap® automatic colouring system
PACKAGING	20 kg



CHECK THE TECHNICAL DATASHEET on mapei.con




Silancolor AC Paint Plus

Acryl-siloxane paint for the hygiene of walls in internal and external applications, water repellent, mould and algae resistant.

APPLICATION	roller, brush or spray
CONSUMPTION	0.3-0.4 kg/m² for two coats
COLOURS	white or various colours using the ColorMap® automatic colouring system
PACKAGING	20 kg

CERTIFICATIONS AND MARKINGS





TECHNICAL DATASHEET on mapei.com



Silancolor AC Tonachino

Water-repellent, thick-layered acrylic-siloxane coating with high filling properties for interior and exterior applications. Available in the following grain sizes: 1.2 mm and 1.5 mm.

APPLICATION	trowel
CONSUMPTION	• 1.2 mm: 1.9-2.3 kg/m ² • 1.5 mm: 2.2-2.6 kg/m ²
COLOURS	white or various colours using the ColorMap® automatic colouring system

PACKAGING

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.con



Silancolor AC Tonachino Plus

trowel

Acryl-siloxane plaster for the hygiene of walls in internal and external applications, water repellent, mould and algae resistant Available in the following grain sizes: 1.2 mm and 1.5 mm.

CONSUMPTION	• 1.2 mm: 1.9-2.3 kg/m ² • 1.5 mm: 2.2-2.6 kg/m ²
COLOURS	white or various colours using the ColorMap® automatic colouring system

PACKAGING

CERTIFICATIONS AND MARKINGS

APPLICATION







CHECK THE TECHNICAL DATASHEET on mapei.com





Silancolor Base Coat

Coloured siloxane base coat with filling and hydrophobic properties, for interior and exterior applications for a uniform finish.

APPLICATION	roller, brush or spray
CONSUMPTION	0.3-0.5 kg/m² per coat
COLOURS	white or various colours using the ColorMap® automatic colouring system
PACKAGING	20 kg



CHECK THE TECHNICAL DATASHEET on mapei.com



Silancolor Base Coat Plus

Hygienising siloxane based pigmented base coat, for internal and external application, evens out the surfaces and water repellent, mould and algae resistant.

	APPLICATION	roller, brush or spray
	CONSUMPTION	0.2-0.3 kg/m² per coat
	COLOURS	white or various colours using the ColorMap® automatic colouring system
	PACKAGING	20 kg

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.com



Silancolor Cleaner Plus

High penetration and mould-and algae resistant hygienising treatment in water solution.

APPLICATION	manual low-pressure pump or brush
CONSUMPTION	0.2-1 kg/m² of ready-to-use solution
COLOUR	transparent
PACKAGING	1 and 5 kg
CERTIFICATIONS	

AND MARKINGS

350





CHECK THE TECHNICAL DATASHEET on mapei.com



Silancolor Pittura

Breathable, water-repellent, siloxane paint resistant to aggressive environments for interior and exterior applications.

APPLICATION	roller, brush or spray
CONSUMPTION	0.3-0.4 kg/m ² for two coats
COLOURS	white or various colours using the ColorMap ® automatic colouring system
PACKAGING	5 and 20 kg
CERTIFICATIONS AND MARKINGS	Drop g Effect:



TECHNICAL
DATASHEET
on mapei.com




Silancolor Paint Plus

Breathable, water-repellent, algae and mould-resistant, siloxane paint for interior and exterior applications.

APPLICATION	roller, brush or spray
CONSUMPTION	0.3-0.4 kg/m² (per two coats)
COLOURS	white or various colours using the ColorMap® automatic colouring system
PACKAGING	5 and 20 kg

CERTIFICATIONS
AND MARKINGS





CHECK THE TECHNICAL DATASHEET on mapei.com



Silancolor Primer

Breathable siloxane primer for homogenous substrates.

APPLICATION	roller, brush or spray
CONSUMPTION	0.10-0.15 kg/m ²
COLOUR	milky white
PACKAGING	10 kg



CHECK THE TECHNICAL DATASHEET on mapei.com








Silancolor Primer Plus

Hygienising siloxane primer, resistant to algae and mould for homogenous substrates.

APPLICATION	roller, brush or spray
CONSUMPTION	0.1-0.3 kg/m ²
COLOUR	milky white
PACKAGING	2 and 10 kg
CERTIFICATIONS	Drop € Effect



CHECK THE TECHNICAL DATASHEET on mapei.com



Silancolor Tonachino

Water-repellent, breathable, thick-layered siloxane coating with high filling properties for interior and exterior applications. Available in the following grain sizes: 0.7 mm, 1.2 mm, 1.5 mm and 2.0 mm.

APPLICATION	trowel
CONSUMPTION	 0.7 mm: 1.7-2.0 kg/m² 1.2 mm: 1.9-2.3 kg/m² 1.5 mm: 2.2-2.6 kg/m² 2.0 mm: 3.0-3.5 kg/m²
COLOURS	white or various colours using the ColorMap® automatic colouring system

PACKAGING 25 kg

CERTIFICATIONS AND MARKINGS

AND MARKINGS









CHECK THE TECHNICAL DATASHEET on mapei.com



Silancolor Tonachino Plus

Siloxane plaster coating for the hygiene of walls in interior and exterior applications, breathable, water repellent, mould and algae resistant. Available in the following grain sizes: 1.2 mm, 1.5 mm and 1.5 mm.

APPLICATION	trowel
CONSUMPTION	 0.7 mm: 1.7-2.0 kg/m² 1.2 mm: 1.9-2.3 kg/m² 1.5 mm: 2.2-2.6 kg/m²
COLOURS	white or various colours using the ColorMap® automatic colouring system
PACKAGING	25 kg
CERTIFICATIONS	THE CONTRACTOR STORMAN

AND MARKINGS

352











CHECK THE TECHNICAL DATASHEET on mapei.com



Silexcolor Base Coat

Coloured silicate filling base coat, for a homogenous surface in interior and exterior applications, highly breathable in compliance with DIN 18363 standard.

APPLICATION	roller, brush or spray
CONSUMPTION	0.3-0.5 kg/m² per coat
COLOURS	white or various colours using the ColorMap ® automatic colouring system
PACKAGING	20 kg

CERTIFICATIONS AND MARKINGS



CHECK THE TECHNICAL DATASHEET on mapei.com



Silexcolor Marmorino

Highly decorative, fine-grained, silicate mineral coating product form with high chemical resistance for interior and exterior surfaces, in compliance with DIN 18363 standard.

APPLICATION	trowel
CONSUMPTION	0.8-1.0 kg/m² (depending on the effect desired)
COLOURS	white or various colours using the ColorMap ® automatic colouring system
PACKAGING	5 and 20 kg
CERTIFICATIONS	COMPLLE





Silexcolor Paint

AND MARKINGS

Highly breathable silicate paint with a high chemical bond for interior and exterior surfaces, in compliance with DIN 18363 standard.

APPLICATION	roller, brush or spray
CONSUMPTION	0.35-0.45 kg/m² for two coats
COLOURS	white or various colours using the ColorMap® automatic colouring system
PACKAGING	20 kg
	_

CERTIFICATIONS AND MARKINGS





CHECK THE TECHNICAL DATASHEET on mapei.com





Silexcolor Primer

Highly breathable silicate primer for a homogenous surface in compliance with DIN 18363 standard.

APPLICATION	roller, brush or spray
CONSUMPTION	0.1-0.15 kg/m ²
COLOUR	transparent colourless
PACKAGING	10 kg
CEDTIEICATIONS	OMPLIA



CHECK THE TECHNICAL DATASHEET on mapei.com



WallGard Graffiti Remover Gel

APPLICATION


CONSUMPTION

PACKAGING

Gel detergent for cleaning surfaces damaged by graffiti.

0.1-0.2 kg/m² per coat

5 kg



TECHNICAL DATASHEET on mapei.con



Silexcolor Tonachino

AND MARKINGS

Highly breathable, thick-layered silicate coating with high filling properties for interior and exterior surfaces, in compliance with DIN 18363 standard. Available in the following grain sizes: 0.7 mm, 1.2 mm, 1.5 mm and 2.0 mm.

APPLICATION	trowel
CONSUMPTION	• 0.7 mm: 1.7-2.0 kg/m ² • 1.2 mm: 1.9-2.3 kg/m ² • 1.5 mm: 2.2-2.6 kg/m ² • 2.0 mm: 3.0-3.5 kg/m ²
COLOURS	white or various colours using the ColorMap ® automatic colouring system
PACKAGING	20 kg
CERTIFICATIONS AND MARKINGS	C C C C C C C C C C



CHECK THE **TECHNICAL** DATASHEET on mapei.com



WallGard Graffiti Barrier

Reversible graf ti-resistant protective barrier.



CHECK THE

TECHNICAL DATASHEET

brush, roller or spray	
0.03-0.15 kg/m² per coat	
5 and 20 kg	





Back to the alphabetical index

Back to the table of contents


354

APPLICATION

CONSUMPTION

PACKAGING



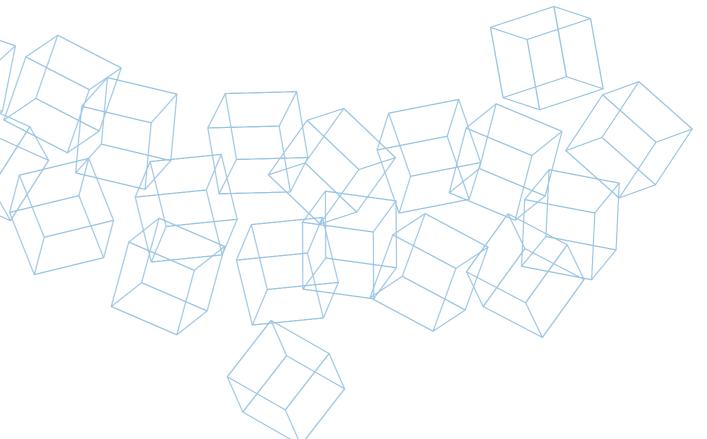



RODUCTS FOR WATERPROOFING

WATERPROOFING PRODUCTS FOR UNDERGROUND STRUCTURES

Idrosilex

Powdered or liquid bulk waterproofer for cementitious mortars.

- CONSUMPTION 25 mm thick render
 - 2% dosage: 250 g/m³
 - 3% dosage: 350 g/m³
 - 4% dosage: 500 g/m³
 - 5% dosage: 600 g/m³
 - 40 mm thick screed

 - 2% dosage: 400 g/m³
 - 3% dosage: 500 g/m³ 4% dosage: 700 g/m³
 - 5% dosage: 850 g/m³

PACKAGING

- Idrosilex Liquid: 25 and 6 kg and 12x1 kg drums
- Idrosilex Powder: 25 x 1 kg boxes



CHECK THE TECHNICAL DATASHEET on mapei.com



Lamposilex

Ultra-fast setting and curing hydraulic binder for stopping water leaks.



CHECK THE **TECHNICAL** DATASHEET on mapei.com



CONSUMPTION

1.8 kg/dm³ of cavity to be filled

PACKAGING

5 kg drums

CERTIFICATIONS AND MARKINGS

CONSUMPTION

PACKAGING



3% by cement weight

5 kg drums

Mapei Waterproofer

Waterproofing agent for render and normal-setting waterproofing mixes.



CHECK THE TECHNICAL DATASHEET on mapei.com



Mapelastic Foundation

Two-component, flexible cementitious mortar for waterproofing concrete surfaces subject to negative and positive hydraulic lift.

APPLICATION

roller or spray

CONSUMPTION

• roller: 1.65 kg/m² per mm of thickness;

• spray: 2.2 kg/m² per mm of thickness

PACKAGING

32 kg kit: (comp. A: 22 kg bag, comp. B: 10 kg tanks)

CERTIFICATIONS AND MARKINGS











TECHNICAL DATASHEET on mapei.com



Mapeproof

Bentonite waterproofing sheets for structures below ground level, suitable for both horizontal and vertical surfaces.

PACKAGING

- 1.1 m x 5 m rolls
- 2.5 m x 22.5 m rolls
- 5 m x 40 m rolls

1 m x 20 m rolls

CERTIFICATIONS AND MARKINGS

PACKAGING





CHECK THE TECHNICAL DATASHEET on mapei.com



Mapeproof AL 1200 AP

HDPE self-adhesive membrane to waterproof underground structures after pouring concrete.





TECHNICAL DATASHEET on mapei.com







Back to the table of contents

Mapeproof AL AP

Fully bonded HDPE membrane for waterproofing underground structures.



CHECK THE TECHNICAL DATASHEET on mapei.com



PACKAGING

1 m x 20 m rolls

CERTIFICATIONS AND MARKINGS



Mapeproof AL Tape D10 AP

Double-sided adhesive tape for jointing, sealing and strengthening the **Mapeproof AL AP** system.



CHECK THE TECHNICAL DATASHEET on mapei.com



PACKAGING

PACKAGING

4 carton box containing 0.1 m x 20 m rolls

Mapeproof AL Tape S15

0.15 m x 20 m rolls

Adhesive tape to form joints between the upper-facing sides of adjacent membranes in the **Mapeproof AL AP** systems.



CHECK THE TECHNICAL DATASHEET on mapei.com



Mapeproof CD

Fixing washers for the bentonite sheets Mapeproof.



TECHNICAL
DATASHEET
on mapei.com



PACKAGING

500 pcs boxes

Mapeproof FBH

Fully-bonded waterproof HDPE sheet membrane, laminated with non-woven fabric for waterproofing underground structures.



PACKAGING

1 m x 20 m rolls

CERTIFICATIONS AND MARKINGS



TECHNICAL
DATASHEET
on mapei.com



Mapeproof FBT

Synthetic fully bonded waterproof sheet membrane, laminated with non-woven fabric for waterproofing underground structures.



CHECK THE TECHNICAL DATASHEET on mapei.com



PACKAGING

1 m x 20 m rolls

CERTIFICATIONS AND MARKINGS





Back to the table of contents

Mapeproof FBT Tape 600

Adhesive tape to form sealed joints over the top of adjacent sheets of Mapeproof FBT System.



CHECK THE TECHNICAL DATASHEET on mapei.com

PACKAGING

0.15 m x 20 m rolls

Mapeproof Fix Tape

Double-sided adhesive tape to hold sheets of Mapeproof FTB in place during installation.



CHECK THE TECHNICAL DATASHEET on mapei.com



PACKAGING

362

0.2 m x 25 m rolls

Mapeproof Liquid Membrane

Two-component polyurethane liquid waterproofing membrane for sealing, detailing and repairing Mapeproof AL AP membranes (before pouring concrete), and Mapethene HT/LT, Mapeproof SA and Mapeproof AL 1200 AP membranes (after pouring concrete)



APPLICATION	metal trowel or gauging trowel.
CONSUMPTION	1.2 kg/m²/mm (consumption on smooth concrete surfaces). Minimum thickness 2.5 mm

PACKAGING 3.5 kg units (A+B)





Mapeproof Mastic

Bentonite paste made from natural sodium bentonite and plasticising additives for sealing elements which pass through surfaces.



TECHNICAL DATASHEET on mapei.com



APPLICATION gauging trowel

CONSUMPTION 1.5 kg/m²/mm of fresh product

PACKAGING 15 kg drums

Mapeproof SA

Self-adhesive fully bonded HDPE membrane for waterproofing underground structures.



PACKAGING

1 m x 20 m rolls

CERTIFICATIONS AND MARKINGS

APPLICATION

PACKAGING

CONSUMPTION







Mapeproof SA Primer

One-component rapid-drying primer for treating surfaces prior to applying self-adhesive membranes from the Mapeproof and Mapethene ranges.



DATASHEET on mapei.com







Back to the table of contents Back to the alphabetical index

0.3-0.5 kg/m²

10 kg drums

roller

Mapeproof SA Tape

Adhesive tape to form sealed joints under adjacent sheets of **Mapeproof FBT** System.



CHECK THE TECHNICAL DATASHEET on mapei.com



PACKAGING

0.2 m x 20 m rolls

Mapeproof Seal

Natural sodium bentonite in powder form for localised strengthening of waterproofing layers made using **Mapeproof** bentonite sheets.



CHECK THE TECHNICAL DATASHEET on mapei.com



PACKAGING

25 kg bags

Mapeproof SW

Bentonite sheet for waterproofing structures below ground level where saline water is present.



PACKAGING

364

5 m x 40 m rolls

CERTIFICATIONS AND MARKINGS







Mapeproof Swell

Hydro-expansive, rubber-based hydrophilic sealant paste in tubes, applied using an extrusion gun.



CHECK THE TECHNICAL DATASHEET on mapei.com



CONSUMPTION approx. 320 ml for 3 m.

PACKAGING

boxes containing 6 320 ml cartridges

Mapethene HT

Self-adhesive bitumen membrane suitable for application at high temperatures up to 45°C for waterproofing underground structures and coverings.



PACKAGING

1 m x 20 m rolls

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.com



Mapethene HT AP

Self-adhesive bitumen membrane suitable for application at high temperatures up to +35°C for waterproofing underground structures and coverings.



PACKAGING 1 m x 20 m rolls

CERTIFICATIONS AND MARKINGS





CHECK THE TECHNICAL DATASHEET on mapei.com





Mapethene LT

Self-adhesive bitumen membrane suitable for application at low temperatures up to -5°C for waterproofing underground structures and coverings.



CHECK THE TECHNICAL DATASHEET on mapei.com



PACKAGING

1 m x 20 m rolls

CERTIFICATIONS AND MARKINGS



Mapethene LT AP

Self-adhesive bitumen membrane suitable for application at low temperatures up to +5°C for waterproofing underground structures and roofs.



PACKAGING

boxes with 1 m x 20 m rolls

CERTIFICATIONS AND MARKINGS

APPLICATION

PACKAGING

366

CONSUMPTION





roller, brush or spray

0.1-0.2 kg/m²

10 kg drums





Mapethene Primer

Solvent-free bitumen primer for membranes from the Mapethene line.



CHECK THE TECHNICAL DATASHEET on mapei.com
onmapeneo



Mapethene Primer W

One-component primer for membranes from the **Mapethene** line applied at low temperatures.



TECHNICAL
DATASHEET
on mapei.com



APPLICATION roller, brush or spray

CONSUMPTION 0.1-0.15 kg/m²

PACKAGING 10 kg drums

Planiseal 88 (former Idrosilex Pronto)

Osmotic cementitious mortar suitable for contact with drinking water, for waterproofing masonry and concrete structures.

APPLICATION	roller, brush or spray
CONSUMPTION	1.5 kg/m² per mm of thickness
COLOURS	white and grey
PACKAGING	25 kg hags

CERTIFICATIONS AND MARKINGS EN 1504-2



CHECK THE TECHNICAL DATASHEET on mapei.com



Planiseal 288

Two-component cementitious mortar for waterproofing structures below ground level and storage tanks.

APPLICATION	trowel, roller or brush
CONSUMPTION	approx. 1.9 kg/m² per mm of thickness
COLOUR	grey or white
PACKAGING	25 kg kit: (comp. A: 20 kg bag, comp. B: 5 kg tanks)

CERTIFICATIONS AND MARKINGS







TECHNICAL
DATASHEET
on mapei.com





Plastimul

Bitumen waterproofing emulsion for general purpose use.

APPLICATION	trowel, brush or spray	
CONSUMPTION	approx. 1.7 kg/m² per mm of dry product depending on the substrate	
PACKAGING	30 and 12 kg drums	

CERTIFICATIONS AND MARKINGS





TECHNICAL DATASHEET on mapei.com



Plastimul 1K Super Plus

One-component, solvent-free, quick-drying, low-shrinkage, high-yield, high flexibility bitumen waterproofing emulsion containing polystyrene spheres.

APPLICATION	trowel or rake	

CONSUMPTION approx. 0.8 kg/m² per mm of thickness of dry product depending on the substrate

PACKAGING 19.5 and 7.8 kg drums

CERTIFICATIONS AND MARKINGS








CHECK THE **TECHNICAL** DATASHEET on mapei.con



Plastimul 2K Plus

Two-component, solvent-free, quick-drying, low-shrinkage, high flexibility bitumen waterproofing emulsion containing cellulose fibres.

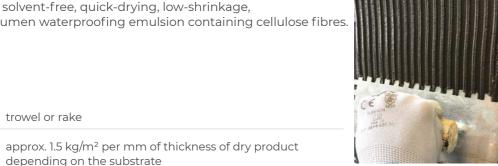

30 kg units (A+B)

CERTIFICATIONS AND MARKINGS

APPLICATION

PACKAGING

CONSUMPTION



trowel or rake





Plastimul 2K Reactive

Two-component, solvent-free, eco-compatible, with high elasticity, instant bitumen waterproofing emulsion, applied by airless spray.

APPLICATION spray

1.3 kg/m² per mm of thickness of dry product CONSUMPTION

depending on the substrate

PACKAGING • 30 kg drums and 1000 kg bottle


• comp. B: 25 kg tanks

CERTIFICATIONS AND MARKINGS









TECHNICAL DATASHEET on mapei.com



Plastimul 2K Super

Two-component, solvent-free, quick-drying, low-shrinkage, high flexibility bitumen waterproofing emulsion containing cellulose fibres.

APPLICATION trowel or rake

CONSUMPTION approx. 0.8 kg/m² per mm of thickness of dry product depending on the substrate

CERTIFICATIONS AND MARKINGS

PACKAGING





roller, brush or spray

approx. 0.1-0.2 kg/m²

5 kg drums

22.9 kg units (A+B)



TECHNICAL DATASHEET on mapei.com



Plastimul C

APPLICATION

PACKAGING

CONSUMPTION

Solvent-free concentrated bitumen emulsion for treating substrates before applying waterproofing products from the Plastimul range.



DATASHEET on mapei.com





Back to the table of contents

Plastimul High Flex Plus

Universal, ready-to-use, water-based bituminous waterproofing membrane.

APPLICATION	roller, brush trowel or spray
	,
CONSUMPTION	approx. 1.5-2 kg/m²
PACKAGING	10 kg drums
	IN COMPLIANCE WITH

CERTIFICATIONS AND MARKINGS





CHECK THE TECHNICAL DATASHEET on mapei.com



Plastimul Primer

Solvent-free, bituminous primer for treating substrates before applying waterproofing products from the **Plastimul** range.



APPLICATION	roller, brush
CONSUMPTION	0.1-0.2 kg/m ²
PACKAGING	10 kg drums





Plastimul Primer SB

High-performance rapid-drying solvent-based bituminous primer for treating concrete surfaces before applying **Plastimul 2K Reactive**.



APPLICATION roller, brush or spray

CONSUMPTION 0.2 kg/m² (depending on the absorbency of the substrate)

COLOUR black

PACKAGING 20 kg drums



Resfoam 1K-M

One-component, ultra-fluid polyurethane resin applied by injection for waterproofing structures and ground and rocks subject to intense percolating water. The reaction time may be regulated.

PPLICATION	injection
ONSLIMPTION	in the open air

in the open air, a mixture of 1 kg of **Resfoam 1K-M** (resin) + 0.1 kg of **Resfoam 1K-M AKS** (catalyser)

forms 50 litres of foam upon contact with 0.1 litre of water

• Resfoam 1K-M (resin): 20 kg plastic drums

• Resfoam 1K-M AKS (catalyser): 1 kg plastic drums



CHECK THE TECHNICAL DATASHEET on mapei.com



2. WATERPROOFING PRODUCTS FOR STRUCTURES ABOVE GROUND LEVEL

Additix P

Thixotropising agent for **Purtop Easy**.



CHECK THE TECHNICAL DATASHEET on mapei.com



CONSUMPTION 0.9 kg every 25 kg of **Purtop Easy**

PACKAGING 0.9 kg boxes

Aquaflex Primer

Synthetic resin-based primer in solvent solution for bituminous, cement-asbestos or loose substrates.



APPLICATION	roller, brush or spray
CONSUMPTION	approx. 0.20 kg/m² per coat
PACKAGING	6 kg drums and 6 x 1 kg box







Aquaflex Roof

Ready-to-use flexible liquid membrane with fibres for continuous waterproofing layers on exposed external surfaces.

APPLICATION long pile roller, brush or spray

CONSUMPTION • as waterproofing membrane: at least 2 kg/m²;

- protective finish on bituminous substrates:
- approx. 0.5 kg/m² on smooth membranes
- approx. 0.9 kg/m² on membranes with a slate-chip face

COLOUR according to RAL colour available

PACKAGING 5 and 20 kg drums

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.com



Aquaflex Roof HR

Fibre-filled liquid membrane in water emulsion with high solar reflectance and thermal emittance with a solar reflectance index (SRI) of 105.

APPLICATION long pile roller, brush or spray

CONSUMPTION

- as waterproofing membrane: at least 2 kg/m²
- protective finish on bituminous substrates:
- approx. 0.5 kg/m² on smooth membranes
- approx. 0.9 kg/m² on membranes with a slate-chip face

COLOUR highly reflective white

PACKAGING 20 kg drums

CERTIFICATIONS AND MARKINGS









CHECK THE **TECHNICAL** DATASHEET on mapei.com



Aquaflex Roof Plus

Ready-mixed, high-elasticity, quick-drying, UV-resistant liquid waterproofing membrane.

APPLICATION long pile roller, brush or spray

CONSUMPTION

- as waterproofing membrane: at least 2 kg/m²;
- protective finish on bituminous substrates:
- approx. 0.5 kg/m² on smooth membranes
- approx. 0.9 kg/m² on membranes with a slate-chip face

COLOUR highly reflective white and according to RAL colour available

PACKAGING 5 and 20 kg drums

CERTIFICATIONS AND MARKINGS

372









CHECK THE TECHNICAL DATASHEET on mapei.com



Aquaflex S 1K

One-component, solvent-free, liquid waterproofing membrane based on silane-terminated polymers.

APPLICATION roller, brush or trowel

CONSUMPTION approx. 1.6 kg/m² per mm of dry thickness (final dry thickness at least 1.5 mm)

PACKAGING 5 and 15 kg drums

CERTIFICATIONS AND MARKINGS









CHECK THE **TECHNICAL** DATASHEET on mapei.com

Aquaflex System

Liquid membrane for permanent encapsulation of asbestos cement and to create a waterproofing membrane for mineral substrates.

APPLICATION roller, brush, trowel, or spray CONSUMPTION from 0.25 to 0.7 kg/m² per coat, depending on the type of application COLOURS white, red, and grey PACKAGING 5 and 20 kg drums



CHECK THE **TECHNICAL** DATASHEET on mapei.com



Drain Front

COLOURS

PACKAGING

TPE angular pipe union for terraces and balconies.

ivory and copper

5 pcs boxes



CHECK THE **TECHNICAL** DATASHEET on mapei.com





Back to the alphabetical index

Back to the table of contents

Drain Vertical/Drain Lateral

Complete kit to install floor drains.

Ideal for draining off water from terraces, balconies boiler rooms, wash-rooms, etc.



CHECK THE TECHNICAL DATASHEET on mapei.com



PACKAGING

box containing 1 kit with:

- vertical or lateral polypropylene drain-pipe available in 3 diameters (50-75-90 mm for Drain Lateral) and 5 diameters (50-75-82-90-100 mm for Drain Vertical), with a welded 400x400 mm polypropylene drain-cover;
- telescopic extension;
- "anti-odour" plug;
- removable stainless-steel grate

Isamite

Bitumen paint in solvent.



CHECK THE **TECHNICAL** DATASHEET on mapei.com



APPLICATION

roller, brush or spray

CONSUMPTION

- 0.1-0.15 kg/m² per coat on metal or non-absorbent surfaces;
- 0.25-0.3 kg/m² per coat over concrete and wood

PACKAGING

CONSUMPTION

PACKAGING

374

10 kg drum, ADR-approved packaging

Mapecoat Filler

Micrometric filler material used to create surfaces with a non-slip finish.

5-8% by weight over Mapecoat PU 20 N

2 kg can



CHECK THE TECHNICAL DATASHEET on mapei.com



Mapecoat Filler 250

Micrometric filler material used to create surfaces with a non-slip finish.



CHECK THE TECHNICAL DATASHEET on mapei.com



2 kg can PACKAGING

Mapecoat PU 20 N

CONSUMPTION

Two-component coloured aliphatic polyurethane topcoat for membranes from the **Purtop** range.

5-8% by weight over Mapecoat PU 20 N

APPLICATION	roller or spray
CONSUMPTION	approx. 0.15-0.2 kg/m².
COLOUR	according to RAL colour available
PACKAGING	15 kg kit: (component A : 12.9 kg, component B : 2.1 kg)
CERTIFICATIONS AND MARKINGS	- SRI - RI



CHECK THE TECHNICAL DATASHEET on mapei.com



Mapecoat TC

Wear-resistant coloured aliphatic polyurethane finish for membranes from the **Purtop** range.



CHECK THE

TECHNICAL

DATASHEET

APPLICATION	roller or spray
CONSUMPTION	0.5-0.6 kg/m² per two coats
COLOUR	according to RAL colour available
PACKAGING	18 kg kit (component A = 15 kg, component B = 3 kg)







Back to the alphabetical index

Back to the table of contents

Mapeguard WP 200

Alkali-resistant waterproofing and anti-fracture membrane for internal use; suitable for overlaying with ceramic, natural stone and LVT floors.



CHECK THE TECHNICAL DATASHEET on mapei.com



MATERIAL 3 layers of polypropylene/polyethylene

PACKAGING 30 m x 1 m and 5 m x 1 m rolls

Mapeguard WP Adhesive

Two-component, rapid-drying, elastic cementitious adhesive for bonding and sealing overlaid **Mapeguard WP 200** and its related special pieces.



CHECK THE TECHNICAL DATASHEET on mapei.com



PACKAGING

PACKAGING

376

6.65 kg kit (component A = 3.5 kg, component B = 3.15 kg)

CERTIFICATIONS AND MARKINGS



Mapegum EPX

Two-component epoxy-polyurethane resin used to form flexible waterproof and chemical-resistant coats before bonding ceramic.

10 kg units (A+B)



APPLICATION	trowel	CHECK THE TECHNICAL
CONSUMPTION	1.4 kg/m² per mm of thickness	DATASHEET on mapei.co



Mapegum EPX-T

Two-component epoxy-polyurethane resin used to form flexible waterproof and chemical-resistant coats before bonding ceramic.



CHECK THE TECHNICAL DATASHEET on mapei.com



APPLICATION trowel

CONSUMPTION 1.4 kg/m² per mm of thickness

PACKAGING 10 kg units (A+B)

Mapegum WPS

Quick-drying, flexible liquid membrane for waterproofing internal surfaces.

APPLICATION roller, brush or trowel

CONSUMPTION 1.2 kg/m² per two coats

PACKAGING 5, 10 and 25 kg drums

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.com



Mapelastic AquaDefense

Ready-to-use, ultra quick-drying, flexible liquid membrane for waterproofing internal and external surfaces.

APPLICATION roller, brush or trowel

CONSUMPTION 1.3 kg/m² per mm of thickness


PACKAGING 3.5 kg, 7.5 kg and 15 kg drums

CERTIFICATIONS AND MARKINGS









CHECK THE TECHNICAL DATASHEET on mapei.com





Mapelastic Smart

Two-component, high-flexibility cementitious mortar (with crack-bridging > 2 mm), applied by trowel or with a roller, for waterproofing balconies, terraces, bathrooms and swimming pools.

APPLICATION roller, brush or spray

CONSUMPTION • by roller or trowel approx. 1.6 kg/m² per mm of thickness

• by spray approx. 2.2 kg/m² per mm of thickness

PACKAGING 30 kg kit (component A = 20 kg, component B = 10 kg)

CERTIFICATIONS AND MARKINGS













CHECK THE **TECHNICAL** DATASHEET on mapei.com



Mapelastic Turbo

Two-component rapid-drying elastic cementitious mortar for waterproofing terraces and balconies, including at low temperatures and on substrates not completely dry.

APPLICATION trowel

CONSUMPTION approx. 2.4 kg/m² for two coats of product

PACKAGING • 36 kg kit: (component A: 20 kg, component B: 16 kg)

• 18 kg kit: (component A: 10 kg, component B: 8 kg)

CERTIFICATIONS AND MARKINGS





















Mapelastic Zero

Two-component elastic cementitious mortar for waterproofing balconies, terraces, baths and swimming pool, with fully offset CO₂ emissions.

APPLICATION trowel or spray

CONSUMPTION • approx. 1.7 kg/m² per mm of thickness;

• approx. 2.2 kg/m² per mm of thickness

PACKAGING

• 32 kg kit: (comp. A: 24 kg, comp. B: 8 kg)

• 16 kg units :(A+B)

CERTIFICATIONS **AND MARKINGS**

378















Mapenet 150

Alkali-resistant (according to ETAG 004 guideline) fibre glass mesh used to reinforce waterproof protection layers, antifracture membranes and external thermal insulation systems.



CHECK THE TECHNICAL DATASHEET on mapei.com



PACKAGING

1 m x 50 m rolls

MapeSlope

One-component cementitious levelling mortar for building up slopes on roofs over new and old waterproof sheaths.



CHECK THE DATASHEET on mapei.com




APPLICATION trowel

approx. 1.6 kg/m² per mm of thickness CONSUMPTION

PACKAGING 25 kg bags

Mapetex 50

Non-woven polypropylene fabric (weight 50 g/m²) for reinforcing waterproof membranes.



CHECK THE DATASHEET on mapei.com



PACKAGING

• 0.20 m x 25 m rolls

• 1 m x 25 m rolls



Mapetex FG

Glass fibre reinforcing mesh for Purtop Easy.



CHECK THE TECHNICAL DATASHEET on mapei.com



PACKAGING

ING 1 m x 50 m rolls

Mapetex Sel N

Non-woven polypropylene fabric for reinforcing waterproofing membranes.



CHECK THE TECHNICAL DATASHEET on mapei.com



PACKAGING

1 m x 25 m rolls

Monolastic

One-component cementitious elastic waterproofing mortar, with fully offset ${\rm CO_2}$ emissions.

APPLICATION	trowel

CONSUMPTION 1.1 kg/m² per mm of thickness

PACKAGING 20 kg bags

CERTIFICATIONS

AND MARKINGS

380

CKAGING 20 kg ba













CHECK THE TECHNICAL DATASHEET on mapei.com



Primer BI

APPLICATION

CONSUMPTION

Synthetic resin primer in solvent, specific for improving adhesion of polyurethane coating products (from the **Purtop** range) on existing bituminous membranes.



CHECK THE TECHNICAL DATASHEET on mapei.com



PACKAGING 10 kg drums

Primer EP4 Fast

Two-component solvent-free epoxy primer for damp substrates.

roller, brush or spray

0.20 kg/m² per coat



APPLICATION trowel

CONSUMPTION approx. 0.4-0.5 kg/m²

PACKAGING 15 kg kit (component A = 11.95 kg, component B = 3.05 kg)





Primer EP 100W

PACKAGING

Two-component solvent-free water-based epoxy primer for non-absorbent substrates.



APPLICATION roller, brush or spray

CONSUMPTION approx. 0.15-0.3 kg/m²

CHECK THE TECHNICAL DATASHEET on mapei.com

20 kg kit (component A = 5 kg, component B = 15 kg)





Primer FT

Two-component ultra-rapid primer for **Purtop** waterproofing systems

APPLICATION	roller, trowel or rake
CONSUMPTION	approx. 0.3 kg/m² per coat
PACKAGING	5.4 kg kit ·(component A = 4.7 kg, B = 0.7 kg)

CERTIFICATIONS AND MARKINGS



roller, brush

0.1-0.2 kg/m²

50 kg drums

roller or brush

0.1-0.2 kg/m²

50 kg drums



CHECK THE TECHNICAL DATASHEET on mapei.com



Primer P1

One-component solvent-based primer for polyurea coatings (from the Purtop line) on plastic surfaces such as PVC.



CHECK THE **TECHNICAL** DATASHEET on mapei.com



Primer P2

APPLICATION

CONSUMPTION

PACKAGING

APPLICATION

CONSUMPTION

PACKAGING

One-component solvent-based primer for polyurea coatings (from the **Purtop** line) on plastic surfaces such as TPO.



CHECK THE TECHNICAL DATASHEET on mapei.com



Primer PU 60

Moisture curing solvent polyurethane resin for consolidating and waterproofing screeds.



CHECK THE TECHNICAL DATASHEET on mapei.com



APPLICATION roller or brush

0.4-1.2 kg/m² CONSUMPTION

PACKAGING 10 kg drums

Primer PU Fast

Two-component polyurethane primer for absorbent substrates.



APPLICATION	roller or trowel	CHECK THE
CONSUMPTION	approx. 0.15-0.3 kg/m²	DATASHE on mape
PACKAGING	10 kg kit (component A = 4.5 kg; component B = 5.5 kg)	





Purtop 200

Two-component polyurea-based membrane applied manually for waterproofing roofs.

componente B: 6 kg drums)

	g	
APPLICATION	notched trowel	
CONSUMPTION	2.5 kg/m² per 1.5 mm of thickness	
PACKAGING	14 kg kit: (component A: 8 kg drums,	

CERTIFICATIONS AND MARKINGS







Purtop 400 M

Two-component, solvent-free, hybrid polyurea membrane applied by spray using a high-pressure, bi-mixer type pump to form waterproof coatings on roofs and bridge decks directly on site.

APPLICATION spray using a high-pressure, bi-mixer type pump

CONSUMPTION 2.2 kg/m² per 2 mm of thickness

PACKAGING 445 kg kit: component A: 220 kg bag, component B: 225 kg

CERTIFICATIONS AND MARKINGS









CHECK THE TECHNICAL DATASHEET on mapei.com



Purtop 500 N

Two-component, solvent-free, hybrid polyurea membrane applied by spray using a high-pressure, bi-mixer type pump to form waterproof coatings on roofs directly on site.

APPLICATION spray using a high-pressure, bi-mixer type pump

CONSUMPTION 2.2 kg/m² per 2 mm of thickness

PACKAGING 450 kg kit: component A: 225 kg bag, component B: 225 kg

CERTIFICATIONS AND MARKINGS







TECHNICAL DATASHEET on mapei.com



Purtop 1000

Two-component, solvent-free pure polyurea membrane applied by spray with a high-pressure, bi-mixer type pump, to form waterproof coatings for hydraulic works, roofs and bridge decks directly on site.

APPLICATION spray using a high-pressure, bi-mixer type pump

CONSUMPTION 2.2 kg/m² per 2 mm of thickness

PACKAGING 445 kg kit: component A: 220 kg bag, component B: 225 kg

CERTIFICATIONS AND MARKINGS

384









CHECK THE TECHNICAL DATASHEET on mapei.com



Purtop 1000 N

Two-component, solvent-free pure polyurea membrane applied by spray with a high-pressure, bi-mixer type pump, to form waterproof coatings for hydraulic works, roofs and bridge decks directly on site.

APPLICATION spray using a high-pressure, bi-mixer type pump

2.2 kg/m² per 2 mm of thickness CONSUMPTION

450 kg kit: component A: 225 kg bag, component B: 225 kg **PACKAGING**

CERTIFICATIONS AND MARKINGS











TECHNICAL DATASHEET on mapei.com



Purtop ADY

Admixture for applying **Purtop Easy** waterproofing membranes in just one single coat.



CHECK THE **TECHNICAL** DATASHEET on mapei.com



PACKAGING

boxes containing:

• 6x1.2 l

• 8x2 l

Purtop Easy

One-component, elastic polyurethane waterproofing membrane.

APPLICATION spray or notched trowel

COLOURS white and grey

PACKAGING 15 and 25 kg drums

CERTIFICATIONS AND MARKINGS

Consumption









2 kg/m² corresponds to a dry coat approx. 1.5 mm





CHECK THE TECHNICAL DATASHEET on mapei.com





Purtop Easy DW

Two-component elastic polyurethane membrane for waterproofing drinking water tanks.

APPLICATION	straight or notched trowel
CONSUMPTION	2.5 kg/m² for approx. 2 mm
PACKAGING	15 kg kit (component A = 12.2 kg, component B = 2.8 kg)

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.com



Purtop Easy T

One-component transparent aliphatic polyurethane waterproofing membrane for terraces and balconies.



CHECK THE TECHNICAL DATASHEET on mapei.com



APPLICATION roller or notched trowel CONSUMPTION 1 kg/m² for approx. 1 mm PACKAGING 15 e 20 kg drums

Purtop Easy T Primer

Colourless primer for non-absorbent substrates to be used before laying ${\bf Purtop\ Easy\ T}.$



CHECK THE

TECHNICAL

DATASHEET

on mapei.com

APPLICATION	dry, clean cloth
CONSUMPTION	approx. 0.04-0.06 kg/m²
PACKAGING	4 kg drums6 x 0.9 kg boxes



Back to the table of contents

Purtop FR

Two-component, solvent-free, hybrid polyurea membrane applied by spray using a high-pressure, bi-mixer type pump to form fire-resistant, waterproofing coatings on resisting site.

APPLICATION spray using a high-pressure, bi-mixer type pump

CONSUMPTION 2.2 kg/m² per 2 mm of thickness

CONFEZIONI 450 kg kit: component A: 225 kg bag, component B: 225

CERTIFICATIONS AND MARKINGS








TECHNICAL
DATASHEET
on mapei.com



Purtop Primer Black

One-component solvent primer, specific for improving adhesion of asphalt flooring on surfaces waterproofed with products from the **Purtop** range.



TECHNICAL
DATASHEET
on mapei.com



APPLICATION roller or spray

PACKAGING 20 kg drums

3. SEALING AND WATERPROOFING JOINTS AND FILLETS

Adesilex PG4

Two-component, thixotropic epoxy adhesive with modified rheology for bonding **Mapeband**, **Mapeband TPE**, PVC strips and Hypalon and for structural bonds.

APPLICATION gauging trowel or straight trowel

CONSUMPTION 1.60-1.65 kg/m² per mm of thickness

PACKAGING • 30 kg units (A+B)

6 kg units (A+B)2 kg units (A+B)

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATASHEET on mapei.com






Back to the alphabetical index

Idrostop

Hydrophilic, expanding rubber profiles for waterproof working joints.

APPLICATION	bonding with Idrostop Mastic	
SIZE	 Idrostop 10: 20x10 mm Idrostop 15: 20x15 mm Idrostop 25: 20x25 mm 	
PACKAGING	 Idrostop 10: 6 10 m rolls Idrostop 15: 6 7 m rolls Idrostop 25: 6 5 m rolls 	







Idrostop B25

Hydro-expanding bentonite jointing material for sealing construction joints.



CHECK THE TECHNICAL DATASHEET on mapei.com



Idrostop Mastic

APPLICATION

PACKAGING


SIZE

One-component adhesive for laying Idrostop

nailing

20x25 mm

65 m rolls



CONSUMPTION approx. 300 ml every 5 m of Idrostop

PACKAGING boxes containing 12 300 ml cartridges

CERTIFICATIONS AND MARKINGS







Back to the table of contents

Idrostop PVC

PVC waterstop for sealing expansion and cold joints.

SIZE

second pour joints

- Idrostop PVC RI 15: 150 mm
- Idrostop PVC RI 20: 200 mm
- Idrostop PVC RI 25: 250 mm
- Idrostop PVC RI 30: 300 mm
- Idrostop PVC RE 20: 200 mm
- Idrostop PVC RE 25: 250 mm
- Idrostop PVC BE 25: 250 mm • Idrostop PVC KK: H 120 mm x L 170 mm

• Idrostop PVC BI 20: 200 mm

• Idrostop PVC BI 25: 250 mm • Idrostop PVC BI 30: 300 mm

• Idrostop PVC BI 35: 350 mm

• Idrostop PVC BE 20: 200 mm

rolls of different lengths depending on the waterstop type

structural joints

- Idrostop PVC KR: H 120 mm x L 170 mm







Idrostop Soft

PACKAGING

Hydro-expansive, high-flexibility bentonite jointing profile for waterproofing construction joints and second pours of concrete.



CHECK THE TECHNICAL DATASHEET on mapei.com



APPLICATION bonding with Mapeflex MS 45 or Ultrabond MS Rapid

25 x 20 mm SIZE

PACKAGING 65 m rolls

Mapeband

Rubber tape with alkali-resistant fabric for cementitious waterproofing systems and liquid membranes.

PACKAGING

- 50 m rolls, with 120 mm of total width
- 10 m rolls, with 120 mm of total width
- 90° and 270° corners
- Collars for passing-though pipes 120x120 mm and 400x400 mm
- Special cross and T profiles







CHECK THE TECHNICAL DATASHEET on mapei.com





Back to the alphabetical index

Mapeband Easy

Rubber tape sandwiched between two layers of non-woven fabric to form elastic joints in waterproofing systems.



- 30 m rolls
- 10 m rolls
- 90° and 270° corners
- Collars for passing-though pipes 200x200 mm

and 400x400 mm

CERTIFICATIONS AND MARKINGS





CHECK THE TECHNICAL DATASHEET on mapei.com



Mapeband Flex Roll

Tape for flexible sealing and waterproofing of expansion joints and cracks.



CHECK THE TECHNICAL DATASHEET

on mapei.com



SIZE

200 mm, 300 mm, 400 mm, 600 mm e 800 mm

(thickness: 2 mm thickness)

PACKAGING

20 m rolls

CERTIFICATIONS AND MARKINGS



Mapeband PE 120

 $\ensuremath{\mathsf{PVC}}$ tape for waterproofing systems created using liquid membranes.



- 50 m rolls, with 120 mm of total width
- 10 m rolls, with 120 mm of total width
- 90° and 270° corners
- Collars for passing-though pipes 120x120 mm and 425x425 mm

CERTIFICATIONS AND MARKINGS





CHECK THE TECHNICAL DATASHEET on mapei.com



Mapeband SA

Self-adhesive butyl tape with alkali-resistant, non-woven fabric backing for elastic waterproofing systems.

• collars for passing-though pipes 370x370 mm



TECHNICAL
DATASHEET
on mapei.com



CERTIFICATIONS AND MARKINGS

WIDTH

PACKAGING

Mapeband TPE

100 mm

• 25 m rolls

TPE tape for flexible sealing and waterproofing of expansion joints and cracks subject to movement.



TECHNICAL
DATASHEET
on mapei.com



• 17 cm (Mapeband TPE 170) • 32.5 cm (Mapeband TPE 325)

PACKAGING 30 m rolls (for both 170 and 325)

Mapeflex E-PU 30 NS

Two-component, thixotropic epoxy-polyurethane sealant with high modulus of elasticity and high mechanical and chemical resistance.



APPLICATION	trowel
CONSUMPTION	0.14 kg/meter (10x10 mm section)
COLOUR	grey 113
PACKAGING	5 kg (A+B)



Back to the alphabetical index





Back to the table of contents

Mapeflex PU 40

Polyurethane sealant with low modulus of elasticity, for movements up to 25%.

APPLICATION	extrusion gun
CONSUMPTION	3.0 meters per 300 ml cartridge;6 meters per 600 ml sausage (10x10 mm section)
COLOURS	white, grey 111, grey 112
PACKAGING	300 ml cartridge, 600 ml sausage
CERTIFICATIONS	





CHECK THE TECHNICAL DATASHEET on mapei.com



Mapeflex PU 45 FT

AND MARKINGS

Rapid-hardening paintable polyurethane sealant and adhesive with a high modulus of elasticity for movements up to 20%.

PACKAGING	300 ml cartridge, 600 ml sausage
COLOURS	white, grey 111, grey 113, black
CONSUMPTION	3.0 meters per 300 ml cartridge;6 meters per 600 ml sausage (10x10 mm section)
APPLICATION	extrusion gun









CHECK THE **TECHNICAL** DATASHEET on mapei.com



Mapeflex PU50 SL

Castable polyurethane sealant with low modulus of elasticity, for movements up to 25%.

APPLICATION	pouring, extrusion gun, pressure pump
CONSUMPTION	6.0 meters per 600 ml sausage (10x10 mm section)
COLOUR	grey 111
PACKAGING	20 pcs boxes (600 ml sausage)
CEDITIFICATIONS	

CERTIFICATIONS AND MARKINGS

392





CHECK THE TECHNICAL DATASHEET on mapei.com



Mapefoam

Closed-cell, extruded polyethylene foam cord used as a support for elastomer sealants to gauge the correct size of flexible joints. Supplied in rolls in various lengths according to the diameter of the foam.

COLOUR	grey		
PACKAGING	Ø 6 mm Ø 10 mm Ø 15 mm Ø 20 mm Ø 25 mm Ø 30 mm Ø 40 mm	boxes " " " " "	550 m - 10 m sachet 550 m - 10 m sachet 550 m - 10 m sachet 350 m - 10 m sachet 200 m 160 m 270 m



TECHNICAL DATASHEET on mapei.com



Mapeguard DH-L

Left side corner for waterproofing elements at different heights.



CHECK THE TECHNICAL DATASHEET on mapei.con



available in 4 sizes (step heights 15, 20, 28, 38 mm) SIZE

PACKAGING boxes with 10 pcs

Mapeguard DH-R

Right side corner for waterproofing elements at different heights.



CHECK THE TECHNICAL DATASHEET on mapei.com



SIZE

available in 4 sizes (step heights 15, 20, 28, 38 mm)

PACKAGING

boxes with 10 pcs



Mapeguard IC

Special pieces of Mapeguard WP System for waterproofing inner corners, to be used together with Mapeguard WP 200 and Mapeguard Board.



CHECK THE TECHNICAL DATASHEET on mapei.com



LENGTH 12/12/8.5 - 9/6.5 cm

PACKAGING 25 pcs boxes

Mapeguard EC

Special pieces of Mapeguard WP System for waterproofing outer corners, to be used together with Mapeguard WP 200 and Mapeguard Board.



CHECK THE TECHNICAL DATASHEET on mapei.con



LENGTH 12/12/8.5 - 9 cm

PACKAGING 25 pcs boxes

Mapeguard PC

DIAMETER

PACKAGING

Flexible gaskets of Mapeguard WP 200 and Mapeguard Board or waterproofing around pipes and passing-through drainage systems. Suitable for several pipe-diameters.

> Ø 10- 24 mm Ø 15-38 mm Ø 28-50 mm

Ø 50-75 mm

Ø 75-110 mm

25 pcs boxes

Ø 100-130 mm



CHECK THE TECHNICAL DATASHEET on mapei.com



Back to the table of contents

Mapeguard ST

Waterproofing tape in rolls for sealing angles and horizontal/vertical joints between Mapeguard WP 200 sheets and between Mapeguard Board panels.



TECHNICAL DATASHEET on mapei.com



DIMENSIONS width 12 cm, length 10 m, and 30 m

PACKAGING 10 m x 12 cm and 30 m x 12 m rolls

Mapesil AC

Mould-resistant pure acetic silicone sealant for movements up to 25%.

APPLICATION	extrusion gun	
CONSUMPTION	3.1 meters per 310 ml cartridge (10x10 mm section)	
COLOURS	34 colours and transparent	
PACKAGING	310 ml cartridges	









CHECK THE TECHNICAL DATASHEET on mapei.com



Mapetape

Cold-applied self-adhesive tape for sealing and waterproofing overlapping joints and cracks. Available in various widths (50, 100, 150 and 200 mm) and coloured finishes (aluminium, lead).

SERVICE TEMPERATURE	-20°/+80°C (-20°C/+65°C for applications on surfaces with slope greater than 45°)	
APPLICATION TEMPERATURE	+5°C/+45°C	
PACKAGING	10 m rolls, available in different heights	



CHECK THE TECHNICAL DATASHEET on mapei.com





Back to the alphabetical index

Ultrabond MS Rapid

Rapid-setting, deformable, hybrid assembly adhesive for interior and exterior use, with a high initial sucker effect.

APPLICATION extrusion gun

CONSUMPTION 5 meters of kerb, triangular section

PACKAGING 300 ml cartridges

CERTIFICATIONS AND MARKINGS








CHECK THE TECHNICAL DATASHEET on mapei.com



Back to the alphabetical index



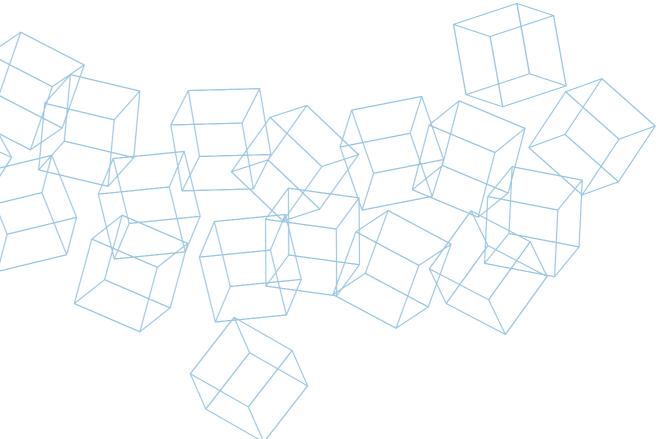



ADMIXTURES FOR CONCRETE

1. ADMIXTURES FOR CONCRETE

Cablejet

Expansive and plasticising admixture the production fluid slurries.



DOSAGE from 2% to 4% by cement weight

PACKAGING 18 kg bags: boxes containing 4, 3 kg water-soluble sachets

CERTIFICATIONS AND MARKINGS







Dynamon SX

Modified acrylic super-plasticiser for concrete, characterised by a low water/cement ratio, very high mechanical strength and long slump retention.

DOSAGE

0.5-2 l every 100 kg of cement, for traditional concrete, or by fines (less than 0.1 mm) for self-compacting concrete

PACKAGING

DOSAGE

PACKAGING

25 kg tanks

CERTIFICATIONS **AND MARKINGS**





CHECK THE TECHNICAL DATASHEET on mapei.com



Expancrete Plus

Expansive agent for controlled-shrinkage concrete.

from 2% to 5% by cement weight

20 kg bags: boxes containing4, 3 kg water-soluble sachets



CHECK THE TECHNICAL DATASHEET on mapei.com



Expanfluid

Expansive admixture for shrinkage-compensating grouting injection.



DOSAGE from 3% to 6% by cement weight

PACKAGING boxes containing 4, 3 kg water-soluble sachets

CERTIFICATIONS AND MARKINGS



CHECK THE TECHNICAL DATASHEET on mapei.com



Idrocrete DM

Bulk water-repellent admixture.

Particularly recommended for concrete with a damp earth consistency.



TECHNICAL DATASHEET on mapei.com



DOSAGE from 0.2 to 0.6 I for every 100 kg of cement

PACKAGING 25 kg tanks

CERTIFICATIONS **AND MARKINGS**



Idrocrete KR 1000

Powdered crystallising admixture for waterproof concrete.



DOSAGE from 1 to 3 kg for every 100 kg of cement

PACKAGING 20 kg bag and 4 kg box containing 4 water-soluble sachets

CERTIFICATIONS AND MARKINGS









401

Idrocrete S

Bulk water-repellent admixture.



TECHNICAL DATASHEET on mapei.com



DOSAGE from 0.6 to 1.2 kg for every 100 kg of cement

PACKAGING

CERTIFICATIONS AND MARKINGS

Mapeair AE1

Air entraining admixture for concrete.

DOSAGE

• from 15 ml to 100 ml every 100 kg of cement

• cement mortar: from 100 to 300 ml every 100 kg

of binder

PACKAGING

DOSAGE

402

PACKAGING

25 and 10 kg drums

25 and 10 kg drums

CERTIFICATIONS AND MARKINGS





CHECK THE **TECHNICAL** DATASHEET on mapei.com



Mapeair LA/P

Liquid admixture for light-weight mortars and concretes.

0.5 kg per m³ of mix

boxes containing 30, 0.5 kg water-soluble sachets



CHECK THE TECHNICAL DATASHEET on mapei.com



Mapecrete Drain P

Powdered admixture for the production of pervious concrete.



CHECK THE TECHNICAL DATASHEET on mapei.con



Mapecure SRA

DOSAGE

PACKAGING

Curing admixture for cementitious mortar and concrete to reduce hydraulic shrinkage and the formation of micro-cracks.

from 0.5% to 3% by cement weight

boxes containing 4, 3 kg water-soluble sachets



TECHNICAL DATASHEET



DOSAGE • mortar: 0.25-0.5% by weight of mortar; • concrete and beton: 5-8 l/m³

Chloride-based admixture to accelerate setting and hardening

PACKAGING 20 kg tanks

Mapefast C

of cementitious mortar.





DOSAGE from 0.75 to 1.5 kg for every 100 kg of cement

PACKAGING 30, 13 and 7 kg tanks

CERTIFICATIONS AND MARKINGS









Back to the table of contents Back to the alphabetical index

Mapefast CF/L

Chloride-free hardening accelerator for concrete and mortar.



CHECK THE TECHNICAL DATASHEET

on mapei.com



DOSAGE from 0.75 to 3 I for every 100 kg of cement

PACKAGING 30, 12 and 6 kg tanks

CERTIFICATIONS **AND MARKINGS**



Mapefast CF/P

Chloride-free hardening accelerator for concrete and mortar.



from 0.5 to 2 kg for every 100 kg of cement

PACKAGING 24x1 kg boxes

CERTIFICATIONS AND MARKINGS

DOSAGE







Mapefibre NS12

Polypropylene microfibres for concrete.



DOSAGE 600 g/m³ of concrete or mortar

PACKAGING boxes containing 30 0,6 kg degradable/pulpable

paper sachets

CERTIFICATIONS AND MARKINGS

404







Mapefibre NS18

Polypropylene microfibres for concrete.

DOSAGE 600 g/m³ of concrete or mortar

> boxes containing 30 0,6 kg degradable/pulpable paper sachets

CERTIFICATIONS AND MARKINGS

PACKAGING





TECHNICAL DATASHEET on mapei.com



Mapefibre Screed 24

24 mm-long polymer fibres specifically designed for the application of screeds.

DOSAGE 0.8-2 kg/m³ of concrete, depending on the performances required

• 6 kg plastic drums

• boxes containing 15 1 kg plastic sachets

CERTIFICATIONS AND MARKINGS

PACKAGING





CHECK THE TECHNICAL DATASHEET on mapei.com



Mapefibre ST 50 Twisted

Structural polymeric fibres of class II, complying with EN 14889-2:2006, developed to improve the performance of conventional and precast concrete and shotcrete.

DOSAGE 1.5-3 kg/m³ of concrete, depending on the performances required

PACKAGING

• 3 kg plastic drums

• carton box containing 10 1.5 kg water-soluble sachets

CERTIFICATIONS AND MARKINGS





TECHNICAL DATASHEET on mapei.com





Mapefibre ST30

Structural polymer macro-fibres for concrete.

DOSAGE

from 1 to 6 kg per cubic metre of mix


PACKAGING

6 kg plastic bags and in boxes containing

15 1 kg plastic bags

CERTIFICATIONS AND MARKINGS





CHECK THE TECHNICAL DATASHEET on mapei.com



Mapefibre ST42

Structural polymer macro-fibres for concrete.

CHECK THE TECHNICAL DATASHEET on mapei.com





from 1 to 5 kg m³ of mix

PACKAGING

5 kg, 6 kg and 1.8 kg plastic bags, with water-soluble pucks

CERTIFICATIONS **AND MARKINGS**



Mapefluid N200

Super-plasticising sulphonated naphthalene admixtures for concrete. Permits the amount of mixing water to be drastically reduced, with a considerable increase in strength, even after short curing periods.



DOSAGE

from 0.5 to 1.5 I for every 100 kg of cement

PACKAGING

25 and 10 kg tanks

CERTIFICATIONS AND MARKINGS







Mapefluid PZ500

Pozzolanic-activity super-plasticiser in powder form for high-quality mortar and concrete.

20 a 60 kg per m³ of mix



TECHNICAL DATASHEET on mapei.com



Mapefluid R104

Super-plasticising retardant admixture for concrete, particularly suitable for use in summer to help maintain the slump retention of the mix.

11 kg vacuum-packed polyethylene bags



DOSAGE from 0.5 to 1.5 l for every 100 kg of cement

PACKAGING

DOSAGE

PACKAGING

CERTIFICATIONS

AND MARKINGS

25 kg tanks

CERTIFICATIONS **AND MARKINGS**







Mapeplast PZ300

Powdered admixture made from micronized Pozzolan-activity materials.



DOSAGE from 50 kg to 250 kg per m³ of concrete depending on the site requirements

PACKAGING

20 kg paper bags

CERTIFICATIONS AND MARKINGS









407

Mapeplast SF

Powdered admixture with pozzolanic action to be used in combination with superplasticizers for high-quality mortar, grout and concrete with thixotropic, plastic, fluid or super-fluid consistency.

DOSAGE from 20 to 60 kg/m³ of concrete depending on the site requirements

PACKAGING • 20 kg bags

• 10 kg water-soluble bags

CERTIFICATIONS AND MARKINGS





on mapei.com

Mapeplast UW

Anti-leaching cohesion-inducing admixture for underwater pours.



CHECK THE TECHNICAL DATASHEET on mapei.com



DOSAGE

from 0.6% to 3% by cement weight

CERTIFICATIONS **AND MARKINGS**

PACKAGING



Mapetard

Retardant admixture for concrete and mortar with a plasticising effect. Retardant action on setting times of cement. Particularly suitable for use in summer to help maintain workability of the mix.

• boxes containing 4, 3 kg water-soluble sachets



DOSAGE from 0.2 to 0.5 I for every 100 kg of cement

PACKAGING 25 kg tanks

CERTIFICATIONS AND MARKINGS







Planicrete

Synthetic rubber latex to improve adhesion of cement mixes.



TECHNICAL DATASHEET on mapei.com



DOSAGE

DOSAGE

PACKAGING

- to prepare bonding slurries: 100-150 g/m²;
- to prepare screeds and renders 50-80 kg/m³

PACKAGING

5-10-25 kg tanks and 12 x 1 kg packages

2. ADMIXTURES FOR SCREEDS

Mapescreed Advance HR

Admixture for high-strength, quick-drying, controlled-shrinkage, cementitious screed mortar with a semi-dry consistency.



CHECK THE TECHNICAL DATASHEET on mapei.con



DOSAGE from 0.5 to 1.5 I for every 100 kg of cement

PACKAGING 25 kg drums and 1000 l IBC containers

Mapescreed Advance MR

Admixture for medium-strength, quick-drying, controlled-shrinkage, cementitious screed mortar with a semi-dry consistency.

25 kg drums and 1000 l IBC containers



TECHNICAL DATASHEET on mapei.com



from 0.5 to 1.5 l for every 100 kg of cement

Back to the alphabetical index

ADMIXTURES FOR CONCRETE

3. FORM RELEASE AGENTS

Mapeform DMA 1000

Emulsifiable form-release agent for wood formwork. Emulsify one part of product with 5-20 parts of water, depending on the type of formwork.



TECHNICAL DATASHEET



CONSUMPTION

10-30 g/m² of undilute product

PACKAGING

23, 9 and 4.5 kg drums

Mapeform DMA 2000

Ready-to-use form-release agent with chemical and physical action for metal formwork.



CHECK THE TECHNICAL DATASHEET on mapei.com



CONSUMPTION

CONSUMPTION

PACKAGING

410

20-40 g/m² depending on the type of formwork

PACKAGING

23 and 4.5 kg drums

Mapeform 1500 Plus

Multi-purpose low viscosity chemical/physical action form-release solution, to easy stripping of formworks.

approx. 20-25 g/m² for every type of formwork

bulk, 1000 I IBC containers, 200 I tanks, 22 I drums



TECHNICAL DATASHEET on mapei.com



4. SURFACE CURING COMPOUNDS

Mapecure E

Anti-evaporation agent in water emulsion for protecting the surface of concrete against quickly drying out when exposed to sunlight and winds.



TECHNICAL DATASHEET on mapei.com



Mapecure S

CONSUMPTION

PACKAGING

Film-forming curing agent in solvent to protect mortar and concrete from drying out too quickly when exposed to sunlight and winds.

• diluted 1:1 with water: 140-200 g/m²

pure: 70-100 g/m²;

25 kg tanks



CHECK THE TECHNICAL DATASHEET on mapei.con




CONSUMPTION 0.10-0.15 kg/m²

PACKAGING 24 kg tanks

Mapecure WG

Film-forming curing agent in aqueous emulsion for concrete. Does not need to be removed from the surface before bonding the floor covering.



on mapei.com



TECHNICAL DATASHEET



CONSUMPTION 150-200 g/m²

PACKAGING 25 kg tanks



5. MAPEI COLOR PAVING

Color Paving Admix

Ready-mixed multi-purpose powdered admixture for exposed-finish architectural floors and surfaces.



25 kg/m³ of concrete	CHECK THE TECHNICAL
neutral, red, sand, yellow	DATASHEET on mapei.cor
10 kg boxes containing2 12.5 kg water-soluble sachets	

om	
OIII	

Color Paving Binder

DOSAGE

COLOURS

PACKAGING

Ready-mixed ready to use screed supplied in big-bags for creating architectural road surfaces in exposed aggregate concrete.



CHECK THE
TECHNICAL
DATASHEET
on mapei.com



COLOURS neutral, red, sand, yellow

PACKAGING 970 kg big bags

Mapecolor Pigment

PACKAGING

Powdered oxides to create an even stable colour in concrete mixes.



DOSAGE	from 1% to 4% by weight of white cement; from 3% to 6% by weight of grey cement
COLOURS	yellow, red, brown, green, black. Other colours available upon request

10 kg boxes containing 2 5 kg water-soluble sachets



Mapewash PO

Biodegradable vegetable oil-based surface set retardant with a curing effect to create architectural floors and surfaces.



YIELD	3.5-4 m ² /l by spray
COLOURS	depending on the type of product: green, blue, violet, yellow, pink, grey
PACKAGING	22 and 2 litres tanks





Mapewash Protex

Temporary protective gel for substrates applied during laying operations to prevent concrete sticking and Mapewash PO from being absorbed.



CHECK THE **TECHNICAL** DATASHEET on mapei.com



CONSUMPTION	from 150 to 300g per m ²

PACKAGING 20 and 5 kg plastic drums





AGGREGATES AND MORTARS FOR THE BUILDING INDUSTRY



1. MORTARS FOR THE BUILDING INDUSTRY

BIOstabilitura

Highly compatible, ecological finishing which responds fully to the construction requirements of eco-friendly building work. Finishing mortar for walls, made entirely with high quality, natural, transpirant,

eco-compatible, raw materials.

Suitable for rendering internal and external surfaces.

YIELD 1.7 kg x m² x mm of render finish

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS





CHECK THE TECHNICAL **DATA SHEET**



FIBROmalta

Special fibre-reinforced render for the best results with the minimum effort. Suitable for render and general wall coatings. The micro-fibres guarantee no crack formation caused by plastic shrinkage when drying out. It is suitable for application with a rendering machine and is even more attractive when applied by hand.

YIELD $18 \text{ kg x m}^2 \text{ x cm of render - } 22 \text{ kg x m}^2 \text{ of wall made}$

of bricks measuring 12x12x24 cm

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS

















FIBROstabilitura

FIBROstabilitura is a transpirant finishing mortar for masonry suitable for internal and external biocompatible render without cracks or crazing. FIBROstabilitura is reinforced with fibres which guarantee that no shrinkage cracks or crazing form during drying, and has unrivalled workability.

FIBROstabilitura is a highly ecological product which responds fully to the construction requirements of ecofriendly building work.

YIELD 1.7 kg x m² x mm of render finish

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS





CHECK THE TECHNICAL DATA SHEET on vagaedilizia.c



Grassello di CALCE

Aerial binder for transpirant, ecological finishing compounds and render. Aerial binder for preparing traditional masonry render and mortar on site, the main ingredient for making natural, transpirant paintwork, final smoothing coats on render (fresh on fresh) and for restoring ancient buildings.

YIELD 1.4 kg x m² x mm of render finish

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS









TECHNICAL DATA SHEET



HR10 Fibro

Ready-mixed high-adhesion rendering mortar in double-sealed bags to form rendered surfaces suitable for bonding ceramic tiles in compliance with EN 11493 standards.

YIELD 1 m³ of already mixed mortar is equal to approx. seventy 25 kg. 19 kg/m²/cm of render

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS









CHECK THE **TECHNICAL DATA SHEET** on vagaedilizia.



HR15

For fire-resistant constructions with high tructural characteristics. HR15 is a **high strength render resistant to fire**. It Is particularly suitable for laying concrete and cement blocks and brickwork and is also suitable for rendering. It may be used for protecting and repairing concrete structures, in compliance with EN 1504-3.

YIELD $20 \text{ kg x m}^2 \text{ x cm of render - } 20 \text{ kg x m}^2 \text{ of wall made}$ of cement blocks measuring 20x20x40 cm

PACKAGING

CERTIFICATIONS AND MARKINGS





















MaltaBASTARDA

The innovative formulate to make masonry and render quickly. Ready-mixed mortar with guaranteed performance figures for internal and external render, load-bearing and partition walls, sealing water pipes and/ or cable runs and for installing shower troughs and sanitary fittings.

YIELD 18 kg x m² x cm of render - 22 kg x m² of wall made of bricks measuring 12x12x24 cm

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS











DATA SHEET



MaltaVISTA

For highly attractive, natural finish resistant to the trials of time. Its special formulation makes **MaltaVISTA** suitable for structurallysolid, natural finish masonry, guarantees insulation against water ingress and reduces the phenomenon of efflorescence, while its high plasticity makes it possible to adjust the position of blocks and bricks when laying.



CHECK THE TECHNICAL DATA SHEET



YIELD 40 kg x m² of wall

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS





VAGAlighTher

Ultra-light rendering mortar, particularly recommended to create **heat-insulating systems** and **protective fireproof** render in compliance with the prescriptions of Ministerial Decree MD 16th February 2007. *Fire-resistance classification of construction products and elements for construction work.*

VAGALighTher is characterised by its ease of use and excellent workability and is the ideal product for all those situations where protective, fireproof render and heat-insulating mortar are required.

YIELD 11 kg x m² x cm of render

PACKAGING 20 kg bags

CERTIFICATIONS AND MARKINGS

418









2. PRE-BLENDED MORTARS FOR THE BUILDING INDUSTRY

INTO+

Ready-mixed hydrated lime and cementbased powdered base render with high workability applied with a rendering machine on internal and external substrates made from: hydrated lime, Portland cement, graded sand and additives to improve its workability and adhesion.



CHECK THE
TECHNICAL
DATA SHEET



YIELD $13.5 \text{ kg x m}^2 \text{ x cm of render}$

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS





INTO+ Fibro

Ready-mixed fibre-reinforced hydrated lime and cement-based powdered base render applied with a rendering machine on internal and external substrates made from: hydrated lime, Portland cement, graded sand, fibres and additives to improve its workability, adhesion and flexural strength.



YIELD $13.5 \text{ kg x m}^2 \text{ x cm of render finish}$

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS









Malta+ Fibro

Ready-mixed fibre-reinforced powdered mortar applied using manual tools on exposed masonry made from: Portland cement, hydraulic lime, graded sand, fibres and additives to improve its application characteristics. Suitable for a wide variety of uses such as general building work and rendering internal and external masonry made from bricks, concrete blocks, stone, etc. Its special formulation facilitates application using manual tools, including by operators not specialised in this type of work. The fibres and special additives in the mortar contrast the effect of hydraulic shrinkage and reduce the risk of crack formation to a minimum, including when rendering heterogeneous substrates.

YIELD 16 kg x m² x cm

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS









CHECK THE TECHNICAL DATA SHEET on vagaedilizia.com





Back to the table of contents

Back to the alphabetical index

RASA+

RASA+ is a one-component waterrepellent normal-hardening fine-textured grey cementitious skimming mortar supplied in powder form made from special high-strength binders, selected aggregates, special admixtures and synthetic polymers.

When **RASA+** is mixed with water, its special composition forms a highly-adhesive mortar with excellent workability which makes it easier to apply with a smooth trowel and easier to finish the surface with a metal or sponge float.

YIELD 1.3 kg x m² x cm of finish

COLOUR grey

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS











CHECK THE TECHNICAL **DATA SHEET**



3. CONCRETE FOR THE BUILDING INDUSTRY

BEtonFLuid

BEtonFLuid is a high-strength (Rck 40 N/mm²), self-compacting concrete (SCC) made by Vaga, ideal for manufacturing all types of structural elements with a natural finish.

BEtonFLuid is particularly suitable for casting into special formwork, including where there is a high density of reinforcement rods, without the risk of segregation.



CHECK THE TECHNICAL DATA SHEET



YIELD $86 \text{ bags} = 1 \text{ m}^3$

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS



CALCESTRUZZO RCK30

CALCESTRUZZO RCK30 by Vaga is ideal for making cast structural elements and members with guaranteed mechanical performance characteristics such as beams, pillars, foundation plinths, floor slabs, etc.; exposed elements and members such as stairs, floors and walls; concrete floors; cast concrete exposed to (EN 206-1): dry surroundings (XC1) and wet surroundings (XC2).



YIELD $86 \text{ bags} = 1 \text{ m}^3$

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS





CALCESTRUZZO RCK40

CALCESTRUZZO RCK40 by Vaga is ideal for making: high strength cast structural elements and members such as beams, pillars, foundation plinths, floor slabs, etc.; exposed elements and members such as stairs, floors and walls; concrete floors; cast concrete exposed to (EN 206-1): moderately damp surroundings (XC3), cyclical wet/dry surroundings (XC4), airborne salt (XS1), other chlorides (XD2), surroundings with freeze/thaw cycles (XF1), chemical attack (XA1).

YIELD $86 \text{ bags} = 1 \text{ m}^3$

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS







TECHNICAL **DATA SHEET**



Dreno

DRENO permeable concrete by Vaga: ideal for making floors with very high drainage capacity (> 640 mm/min), including in those places difficult to reach with conventional casting systems.



CHECK THE TECHNICAL DATA SHEET on vagaedilizia.



YIELD $68 \text{ bags} = 1 \text{ m}^3$

PACKAGING 25 kg bags

ECO-DRENO

Pre-dosed pervious beton, available in 25-kg bags, complying with CAM requirements, with 75 % of recycled material, for highly effective pervious floors, with guaranteed mechanical strengths and very high pervious properties.



YIELD $68 \text{ bags} = 1 \text{ m}^3$

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS





421

Back to the table of contents Back to the alphabetical index

EXTRABETON RCK50

EXTRABETON RCK50 by **Vaga** is ideal for making: high-strength, durable cast structural elements and members such as beams, pillars, foundation plinths and floor slabs, including those resistant to chemicals (to be verified with vaga technical services); floors in industrial **environments and floors with vehicle access** (including those resistant to **freeze/thaw cycles**); all types of **containment basins** (e.g. for drinking water, water with aggressive chemicals, depuration basins, sewer systems, etc.); **structural elements** and members such as stairs and floors; **cast concrete exposed to (EN 206-1)**: cyclical wet/dry surroundings (XC4), airborne salt (XS3), other chlorides (XD3), surroundings with freeze/thaw cycles (XF2 - XF3 - XF4) and chemical attack (XA1 - XA2* - XA3*). (* to be verified with **Vaga technical services**)



YIELD 86 bags = 1 m^3

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS





SAETTA

When time is tight and quality is a must. **SAETTA** ultra high performance quick beton with a low shrinkage rate, "and allows the time required for building work to be considerably reduced thanks to a stripping being time of just 2 hours!".



CHECK THE TECHNICAL DATA SHEET on vagaedilizia.com



YIELD $87 \text{ bags} = 1 \text{ m}^3$

PACKAGING 25 kg bags

VAGAQUARZ

VAGAQUARZ is a mixture of particularly hard, natural mineral aggregates (quartz) which is used to protect concrete floors. It is particularly recommended for use in industrial environments and in warehouses where there is a high volume of vehicles in transit. It may be used to create attractive finishes in a variety of colours.

VAGAQUARZ is supplied ready to use, is pre-mixed with cement, additives and fillers and may be applied either manually or with power tools over wet concrete.

YIELD	manual applpication 5.5 kg x m²; machine application 12 kg x m²	
COLOUR	grey, other colours available upon request	
PACKAGING	25 kg bags	



CHECK THE TECHNICAL DATA SHEET on vagaedilizia.com



4. SCREEDS FOR THE BUILDING INDUSTRY

 $20 \text{ kg x } \text{m}^2 \text{ x cm}$

25 kg bags

SabbiaCEMENTO

Formulate with special acrylic admixtures for any type of high-performance screed. Ready-mixed cementitious screed suitable for laying all types of bonded and floating screeds, including heated screeds. Set to foot traffic after approximately 16 hours, wait 36 hours before laying ceramic tiles and 14 days for parquet and resilient coverings.



CHE





TurboMASS

YIELD

PACKAGING

CERTIFICATIONS

AND MARKINGS

Special formulate for making fibrereinforced quick-drying ready-mixed screed, particularly suitable for laying flooring substrates, including heated floor substrates, when drying times need to be reduced. **TurboMASS** sets to foot traffic after 3-4 hours and dries after 4 days and is ready for laying parquet and resilient floor coverings.



YIELD 20 kg x m² x cm

PACKAGING 25 kg bags

CERTIFICATIONS AND MARKINGS











5. SERVICE PRODUCTS

MB1 Pavicalce

Ready-mixed masonry and rendering mortar with dry aggregates for internal and external render, load-bearing and partition walls and for sealing hydraulic and electrical pipe-work.



CHECK THE TECHNICAL DATA SHEET on vagaedilizia.co



YIELD $18 \text{ kg x m}^2 \text{ x cm of render - } 22 \text{ kg x m}^2 \text{ of wall}$

PACKAGING 25 kg bags



NERO+

NERO+ is a cold, ready to use bitumen conglomerate supplied in bags. It is made from a mixture of aggregates, crushed sand and mineral additives (fillers) hot-blended with bitumen emulsion made with non-toxic flux oils.



CHECK THE TECHNICAL DATA SHEET



PACKAGING 25 kg bags

SABBIASAL

SABBIASAL is a new, freeze-resistant product made from a special mixture of sodium chloride and a calibrated granulometric curve of silica sand, which makes it ideal for protecting road surfaces by reducing the amount of ice and snow that forms and settles on them, thus offering better grip for moving vehicles.







PACKAGING 20 kg bags

VAGASAL

PACKAGING

VAGASAL is high efficiency, damp sodium chloride in a calibrated granulometric curve of 0/10 mm and is used to reduce the amount of ice and snow that forms and settles on the surface of roads.

25 kg bags



CHECK THE TECHNICAL DATA SHEET on vagaedilizia.com



6. DAMP AGGREGATES FOR THE BUILDING INDUSTRY

FRANTUMATA

Crushed washed selected aggregate ideal for coarse and rustic finish render, integrating concrete mixes and making floor screeds.



CHECK THE TECHNICAL DATA SHEET on vagaedilizia.



CERTIFICATIONS AND MARKINGS

PACKAGING



25 kg bagsbulk

• 1.5 t big bags







MISTA

Selected, washed aggregates with the CE symbol, suitable for concrete, bitumen conglomerates and site mortar.

Ideal for preparing beton on site for small building jobs and for all applications which require a blend of calibrated aggregates with a maximum diameter of 10.0 mm.



- 25 kg bags
- bulk
- 1.5 t big bags

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATA SHEET on vagaedilizia.com



TICINO

Selected, washed aggregates with the CE symbol, suitable for concrete, bitumen conglomerates and site mortar.

Ideal for preparing finishing mortar and fine render on site. Also used in horticulture and in all those sectors and applications where the use of extra-fine natural sand is required.



- 25 kg bags
- bulk
- 1.5 t big bags

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL DATA SHEET on vagaedilizia.com





VAGLIATA

Selected, washed aggregates with the CE symbol, suitable for concrete, bitumen conglomerates and site mortar.

Ideal for installation substrates for laying self-locking solid blocks, mixing mortar and rough or rustic-finish render on site, installing floor screeds on site and all applications which require graded sand with a maximum diameter of 4.0 mm.



- 25 kg bags
- bulk
- 1.5 t big bags

CERTIFICATIONS AND MARKINGS







CHECK THE TECHNICAL **DATA SHEET**



VAGLIATA Super

Ideal for installation substrates for laying self-locking solid blocks, mixing mortar and rough or rustic-finish render on site, installing floor screeds on site and all applications which require graded sand with a maximum diameter of 4.0 mm.



PACKAGING

- 25 kg bags
- bulk
- 1.5 t big bags

CERTIFICATIONS **AND MARKINGS**









7. DRY AGGREGATES FOR THE BUILDING INDUSTRY

VG03S

Ideal for sealing and filling joints when laying self-locking solid blocks, building sand for wood and bricks and removing the following from surfaces: smog, graffiti, dirt and carbonatation; mediumabrasion and depth sand-blasting to improve the bond of varnish, render, etc. to surfaces.



• 25 kg bags

• bulk • 1.5 t big bags

CERTIFICATIONS AND MARKINGS

426

PACKAGING







VG15

Ideal for sealing and filling joints when laying self-locking solid blocks, preparing smoothing and finishing compounds on site and for all those applications which require natural fine sand.



TECHNICAL DATA SHEET



PACKAGING

- 25 kg bags
- bulk
- 1.5 t big bags

CERTIFICATIONS AND MARKINGS



VG16SS

Ideal for sealing and filling joints when laying self-locking solid blocks, sandblasting metallic structures when rust and old surface treatments need to be removed, to create clean surfaces and improve the bond of paints.



CHECK THE TECHNICAL DATA SHEET on vagaedilizia.



- PACKAGING
- 25 kg bags • bulk
- 1.5 t big bags

CERTIFICATIONS AND MARKINGS



VG17FS

Ideal for sealing and filling joints when laying self-locking solid blocks, sandblasting ironwork and highly abrasive, deep-down surface treatments to remove residues of tar, deteriorated concrete, etc.



PACKAGING

- 25 kg bags
- bulk
- 1.5 t big bags

CERTIFICATIONS AND MARKINGS






CHECK THE TECHNICAL DATA SHEET on vagaedilizia.c





Back to the table of contents




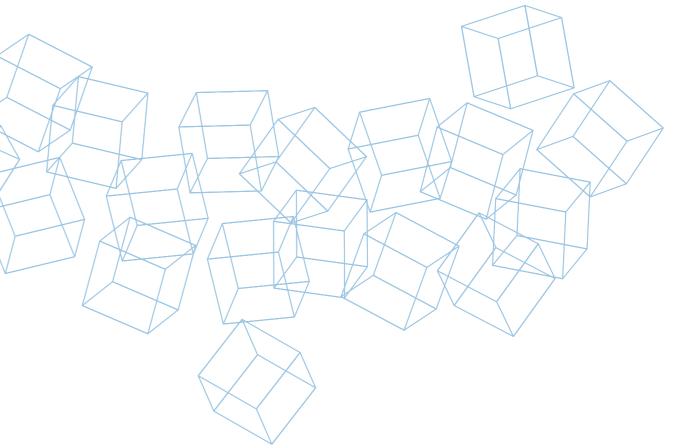




THE GREAT WORKS MAPEI

Linate Airport , Milan - Italy

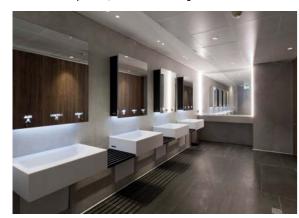



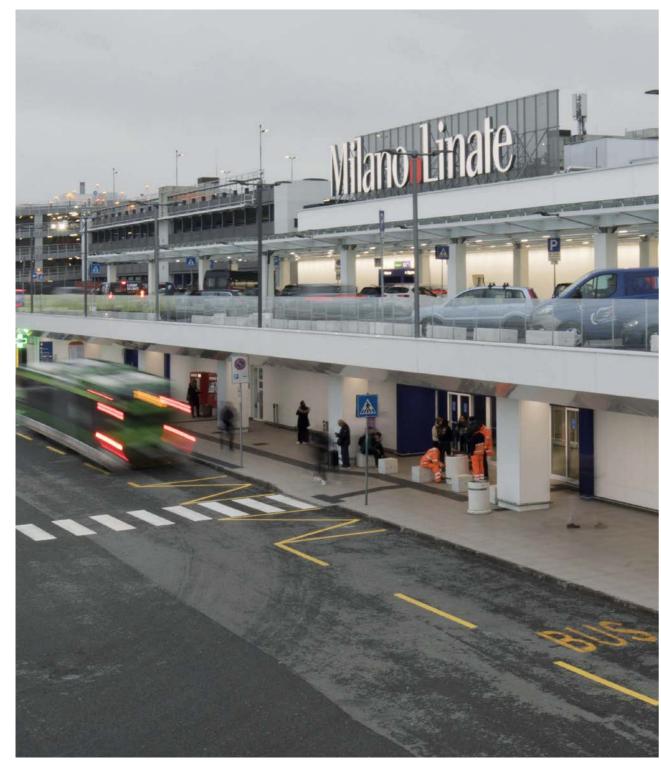

Durst Pothotechnik, Brixen - Italy










Private flat, Milan - Italy



Palazzo Filangeri-Cutò, Palermo - Italy



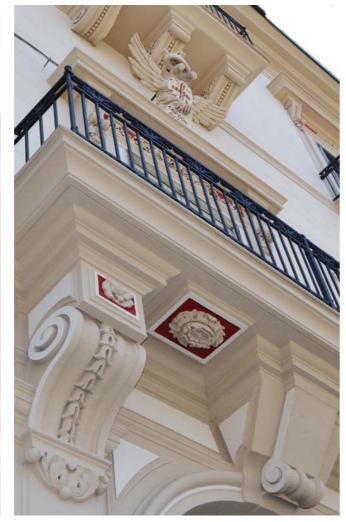

Castel Sismondo, Rimini - Italy









Gran Rondò shopping centre, Crema - Italy




Università Cattolica del Sacro Cuore, Cremona - Italy

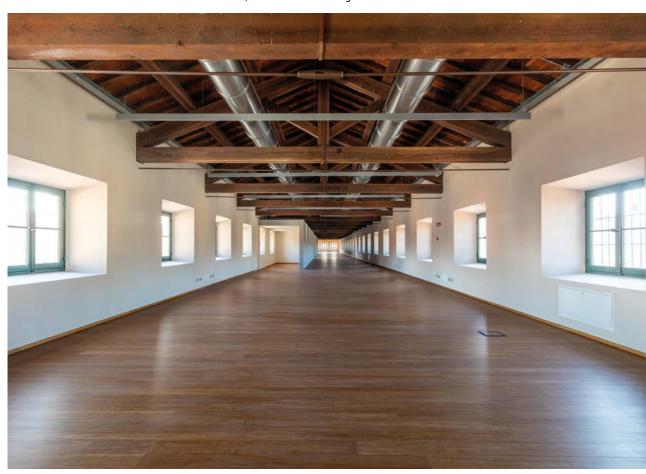

Via del Mare stadium, Lecce - Italy

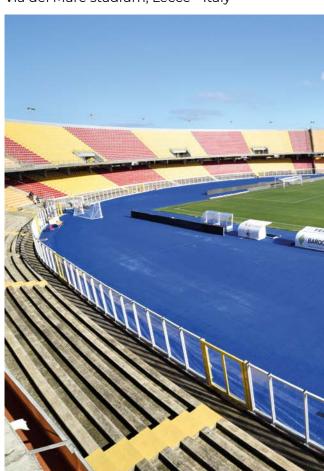

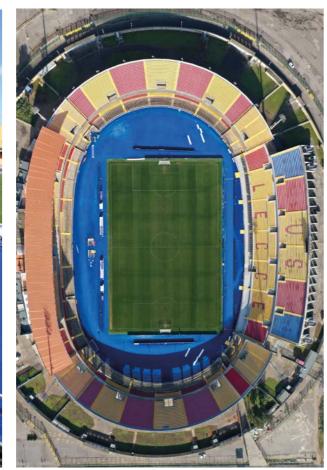


Animal hospital, Berlin - Germany





Fountain of Neptune, Florence - Italy

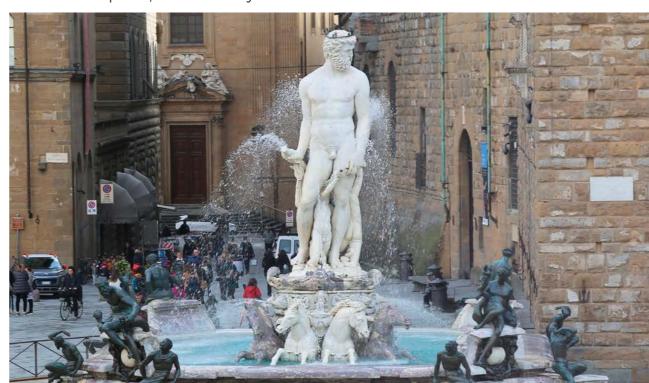




iQ Hotels, Milan - Italy





Swimming pool, Dervio - Italy

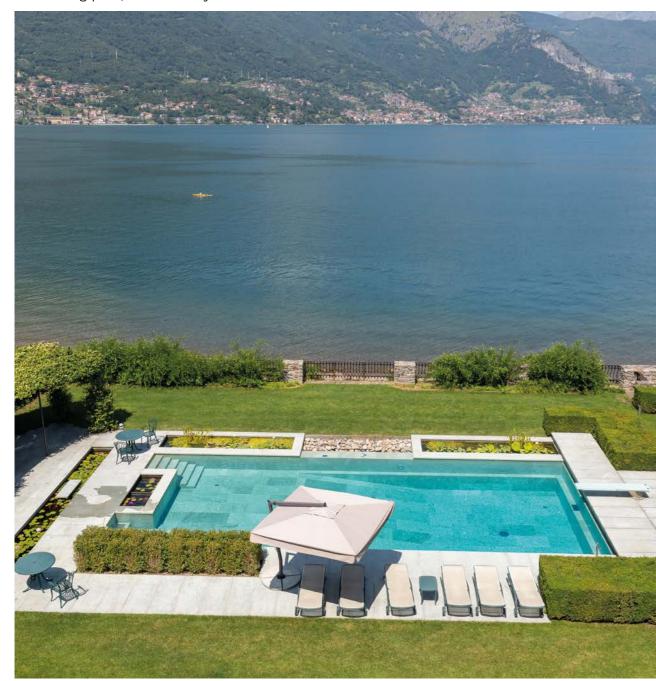

IRRCS Galeazzi hospital, Milan - Italy






Villa Candida tennis club, Foligno - Italy







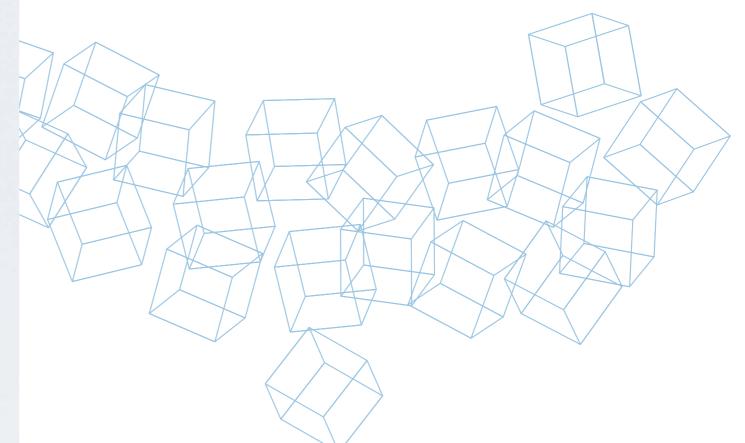



MAPEI HEAD
OFFICES AROUND
THE WORLD

ITALY

MAPEI S.p.A. Con Socio Unico

MILAN

HEADQUARTERS

Via Cafiero, 22 - 20158 Milan Tel. +39 02 37673.1 mapei.com - mapei@mapei.it

OFFICES

- Viale Jenner. 4 20159 Milan
- Via Valtellina, 63 20159 Milan Tel. +39 02 37673.1

MAPEIWORLD MILAN Specification Centre

Viale Jenner, 4 - 20159 Milan Tel. +39 02 37673.1 - training@mapei.it

ROME

OFFICE AND SHOWROOM

Viale Libano 62 - 00144 Rome Tel. +39 06 5929211

LECCE

OFFICE AND SHOWROOM

Via Adriatica, 2 B (ang. viale Porta d'Europa) - 73100 Lecce Tel. +39 0832 246551 ufficio.lecce@mapei.it

CIVITANOVA MARCHE

OFFICE AND SHOWROOM

Viale San Luigi Versiglia, 38/40 62012 Civitanova Marche (MC) Tel. +39 02 376 73 052 ufficio.civitanova@mapei.it

PISA

OFFICE AND SHOWROOM

Via di Gargalone, 9 - 56121 Pisa Tel. +39 338 69 00 793 f.falciani@mapei.it

SASSUOLO

DISTRIBUTION CENTRE OFFICE AND SHOWROOM

Via Valle D'Aosta, 46 41049 Sassuolo (Modena) Tel. +39 0536 803116

PLANTS

- Strada Provinciale, 159 20060 Robbiano di Mediglia (Milan) Tel. +39 02 906911
- Via Mediana S.S. 148, km 81,3 04100 Latina - Tel. +39 0773 2548
- Via del lavoro, 10 41018 San Cesario sul Panaro Tel. +39 059 921462

EUROPE Offices

AUSTRIA Mapei Austria GmbH

Nußdorf ob der Traisen Tel. +43 2783 8891 mapei.at office@mapei.at

BELGIUM and LUXEMBOURG Mapei Benelux SA/NV

Grâce-Hollogne Tel. +32 4 2397070 mapei.be mapei@mapei.be

BULGARIA Mapei Bulgaria E.O.O.D.

Sofia
Tel. +359 (2) 4899775
mapei.bg
info@mapei.bg

CROATIA Mapei Croatia d.o.o.

Sveta Nedelja Tel. +385 1 3647790 mapei.hr mapei@mapei.hr

CZECH REPUBLIC Mapei spol. s r.o.

Olomouc - Hodolany Tel. +420 585 201-151 mapei.cz info@mapei.cz

DENMARK Mapei Denmark A/S

Vejen Tel. +45 69 60 74 80 mapei.dk post@mapei.dk

FINLAND Mapei OY

Espoo Tel. +358 9 867 8900 mapei.fi info@mapei.fi

FRANCE

Mapei France S.A. Saint-Alban

Tel. +33 5 61357305 mapei.fr mapei@mapei.fr

MAPEIWORLD Paris Specification Centre Tel. +33-1-87448032 mapeiworld-paris@mapei.fr

GERMANY MAPEI GmbH

Großostheim Tel. +49 6026 50197-0 mapei.de info@mapei.de

GREECE

Mapei Hellas SA Chalkida

Tel. +30 22620 71906 mapei.gr mapeihellas@mapei.gr

HUNGARYMapei Kft.

Budaörs Tel. +36 23 501670 mapei.hu mapei@mapei.hu

NORWAY Mapei AS

Sagstua Tel. +47 62 97 20 00 mapei.no post@mapei.no

POLAND Mapei Polska Sp. z o.o.

Gliwice
Tel. +48 32 7754450
Commercial office: Warsaw
Tel. +48-22-5954200
mapei.pl
info@mapei.pl

PORTUGAL Lusomapei S.A.

Sacavém
Tel. +351 918 488 620
mapei.pt
geral@mapei.pt
MAPEIWORLD Lisboa
Specification Centre

ROMANIA Mapei Romania SRL

Bucharest Tel. +40 21 311 78 19/20 mapei.ro office@mapei.ro

RUSSIAN FEDERATION AO Mapei

Moscow Tel. +7 495 258 5520 mapei.ru info@mapei.ru Representative office in Almaty (Kazakhstan)

SERBIA MAPEI SRB d.o.o. Beograd

Leštane, Beograd Tel. +381 (0)11 40 46 977 mapei.rs office@mapei.rs

SLOVAK REPUBLIC Mapei SK s.r.o.

Ivanka pri Dunaji Tel. +421 2 4020 4511 mapei.sk office@mapei.sk

SLOVENIA

Mapei d.o.o.

Novo mesto Tel. +386 1 7865050/51 mapei.si mapei@mapei.si

SPAIN

Mapei Spain SA

Santa Perpetua de Mogoda (Barcelona) Tel. +34 93 3435050 mapei.es mapei@mapei.es

SWEDEN Mapei AB

Stockholm Tel. +46 8 52509080 mapei.se info@mapei.se

SWITZERLAND Mapei Suisse SA

Sorens / FR Tel. +41 26 9159000 mapei.ch info@mapei.ch

THE NETHERLANDS Mapei Nederland B.V.

Apeldoorn Tel. +31 85 00 69 200 mapei.nl verkoop@mapei.nl

TURKEY Mapei Yapı Kimyasalları Inşaat San. ve Tic. A.Ş.

Ankara Office: Tel. +90 312 227 84 84 Istanbul Office: Tel. +90 216 455 20 12 Izmir Office: Tel. +90 232 502 35 02 mapei.com.tr info@mapei.com.tr

UKRAINE Mapei Ukraine LLC

Kyiv Tel. +38 044 221 15 01 mapei.com.ua office@mapei.ua

UNITED KINGDOM Mapei U.K. Ltd

Halesowen Tel. +44 121 5086970 mapei.co.uk info@mapei.co.uk

MAPEIWORLD London Specification Centre, Clerkenwell Tel. +44 203 302 9610 clerkenwell@mapei.co.uk

AMERICA Offices

ARGENTINA Mapei Argentina SA

Escobar, Buenos Aires Tel. +54 (348) 443-5000 mapei.com.ar contacto@mapei.com.ar

BRAZIL Manai Brasil M

Mapei Brasil Materiais de Construção Ltda

São Paulo Tel. +55 11 3386-5151 mapei.com.br info@mapei.com.br

CANADA Mapei Inc.

Laval, Québec Tel. +1 450 662 1212 mapei.ca

COLOMBIA Mapei Colombia S.A.S.

La Estrella, Antioquia Tel. +57-4 444 65 15 mapei.com.co info@mapei.com.co

COSTA RICA Mapei Construction

Chemicals Panama S.A. (Costa Rica branch)

San Rafael, Alajuela Tel. +506 2237 3689 mapeicostarica@mapei.com.pa

DOMINICAN REPUBLIC Mapei Dominicana

Santo Domingo Tel. I 800 426 2734 (1 800 42 MAPEI) exportcustomerservice@mapei.com

MEXICO Mapei de Mexico SA de CV

Querétaro, Qro. Tel. +52 442 207 5835 mapei.mx mercadotecniamx@mapei.com

Mapei Construction Chemicals Panama S.A.

Panama City Tel. +507 261 9549 mapei.com.pa mapeipanama@mapei.com.pa

Mapei Perù SAC

Lurín - Lima Tel. +51 1 500 6180 mapei.com.pe info@mapei.com.pe

PUERTO RICO Mapei Caribe Inc.

Dorado
Tel. +1 787 270 4162
mapei.com/PR
caribecustomerservice@mapei.com

U.S.A.

Mapei Corporation

Deerfield Beach, Florida Tel. +1 954 246 8888 mapei.us

VENEZUELA Mapei de Venezuela CA

Cagua Tel. +58 424 2012799 Mob. + 58 412 0455887 info@mapei.com.co

ASIA Offices

CHINA Mapei Construction Materials (Guangzhou) Co. Ltd

Guangzhou Tel. +86 20 8365 3489 mapei.com.cn

Mapei Building Materials Technology (Zhejiang) Co. Ltd

Huzhou Tel. +86 0572 215 9888 mapei.com.cn enquiry@mapei.com.cn

HONG KONG, CHINA Mapei China Ltd

Hong Kong Tel. +852 21486816 mapei.com.hk mapei@mapei.com.hk

INDIA Mapei Construction Products India Pvt Ltd

Bangalore Tel. +91 80 2222 1810 mapei.co.in infoindia@mapei.co.in

INDONESIA PT MAPEI Indonesia Construction Solutions

Jakarta Tel. +62 21 782 6976 mapei.co.id mapei@mapei.co.id

SOUTH KOREA Mapei Korea Ltd

Seoul Tel. +82 2 2199 2000 mapei.co.kr mapeikr@mapei.co.kr

MALAYSIA

Mapei Malaysia Sdn Bhd

Petaling Jaya Tel. +603 7842 9098 mapei.com.my mapei@mapei.com.my

PHILIPPINES Mapei Philippines Inc.

Binan, Laguna Tel. +63 049 250 2427 admin.ph@mapei.com.ph

QATAR Mapei Doha L.L.C

Tel. +974 4404 7718 mapei.qa info@mapei.qa

SAUDI ARABIA Mapei Saudia L.L.C

Riyadh Tel. +966 (O) 112611668 mapei.com.sa info@mapei.com.sa

SINGAPORE Mapei Far East Pte Ltd

Singapore Tel. +65 68623488 mapei.com.sg mapei@mapei.com.sg

UNITED ARAB EMIRATES Mapei Construction Chemicals L.L.C

Dubai Tel. +971 4 815 6666 mapei.ae info@mapei.ae

VIETNAM Mapei Vietnam Ltd

Ho Chi Minh Tel. +84 28 5412 5618 21 mapei.com.vn marketing@mapei.com.vn

OCEANIA Offices

AUSTRALIA Mapei Australia Pty Ltd

Brisbane Tel. +61 7 3276 5000 mapei.com.au sales@mapei.com.au

NEW ZEALAND MBP (NZ) Ltd

Auckland Tel. +64-9-9211994 MBPltd.co.nz enquiries@MBPltd.co.nz

AFRICA Offices

EGYPT Mapei Egypt For Construction Chemicals S.A.E.


Cairo
Tel. +20 2 2537 0000
mapei.eg
info@mapei.eg

KENYA Mapei East Africa Ltd

Nairobi Tel: +254 709045000 mapei.co.ke info@mapei.co.ke

SOUTH AFRICA Mapei South Africa Pty Ltd

Johannesburg Tel. +27 11 552 8476 mapei.co.za info@mapei.co.za

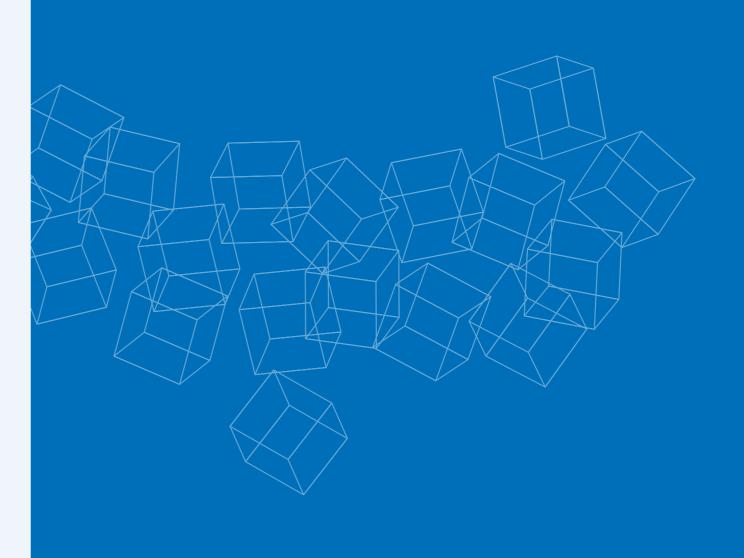

EVERYTHING'S OK, WITH MAPEL

HEAD OFFICE MAPEI SpA Via Cafiero, 22 20158 Milan +39-02-37673.1 mapei@mapei.it mapei.com

