

SUBSTRATE ***preparation products***

NEW



Eporip SCR



TWO-COMPONENT SILICATE-URETHANE RESIN FOR **SEALING CRACKS**

- Simple preparation.
- Easy to apply.
- Variable consistency.
- Ultra-rapid setting.



Boxes containing 6 complete kits A + B; (comp. A: 300 ml; comp. B: 300 ml)

Planipatch Fast Track



FINE-TEXTURED THIXOTROPIC MORTAR FOR **LOCALISED REPAIRS**

- Localised repairs: apply in layers up to 25 mm thick (for thicker layers add 30% of 0.1 to 0.5 mm quartz).
- Smoothing wide areas: layers up to 5 mm thick.
- May be added with LATEX PLUS to improve adhesion and deformability on substrates such as metal, wood, PVC, etc.
- Ultra-rapid installation of floorings sensitive to moisture (including resilients and wood).



23 kg bags and 20 kg boxes containing 4 x 5 kg alu-packs



Planiprep Fast Track




ULTRA FINE THIXOTROPIC SKIM-COATING COMPOUND FOR **FEATHER-EDGE FINISHING**

- High adhesion to various types of substrate, including without primer.
- Ultra-fine textured finish.
- Ultra-rapid installation of flooring sensitive to humidity (including resilients and wood).



16 kg boxes containing 4 x 4 kg sachets

Ultraplan Fast Track

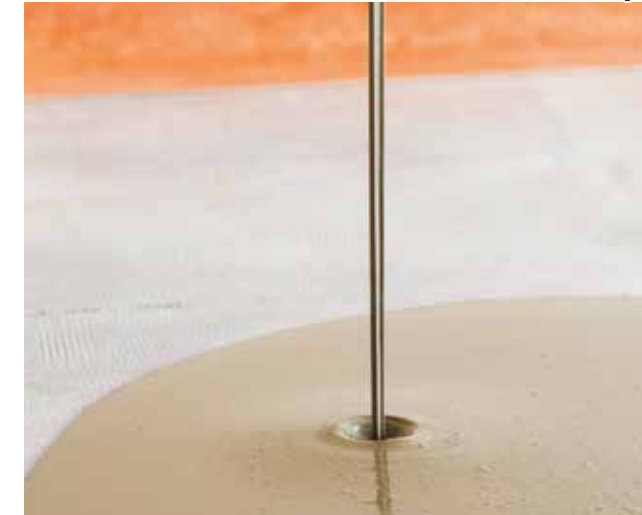

ULTRA FAST DRYING **SELF-LEVELLING** COMPOUND


- Layers 1 to 10 mm thick.
- High resistance and strength.
- Ultra rapid installation of flooring sensitive to moisture (including resilients and wood).



23 kg bags



Ultraplan Renovation

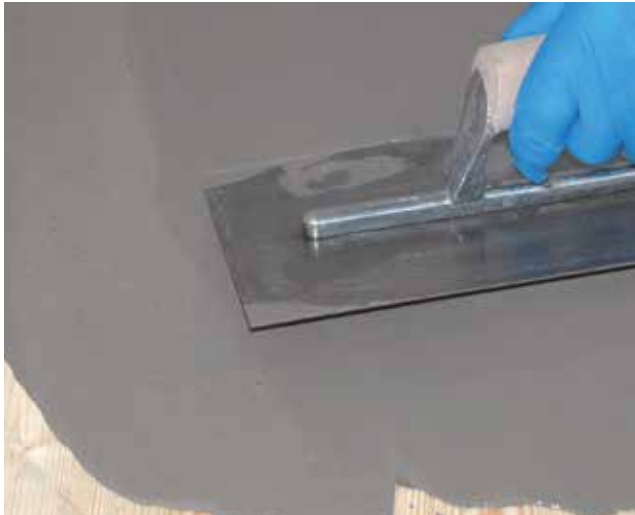

FIBRE-REINFORCED SELF-LEVELLING COMPOUND

- Layers 3 to 40 mm thick per application.
- For all types of floor.
- For various types of substrate:
 - new or old concrete substrates;
 - stone, terrazzo, ceramic;
 - various types of wood-based substrates and panels.



25 kg bags

Planex HR Planex HR Maxi



SELF-LEVELLING COMPOUNDS RESISTANT TO MOISTURE

- Also for external use.
- Also for wet area.
- Also for substrates subject to rising damp.
- For all types of floor.



25 kg bags

Planiprep 4 LVT



READY-TO-USE SKIM-COATING COMPOUND AND GROUT SMOOTHER

- Levelling off existing substrates with grouts before installing LVT.
- Levelling off and grouting various types of substrate and panels (wood, gypsum, plasterboard, fibre-cement, etc.).
- No preparation and mixing
- Dries in 2 hours.



10 kg drums

Planiprep Remove 4 LVT



READY-TO-USE GROUT SMOOTHER; EASY TO REMOVE WITHOUT LEAVING ANY RESIDUAL

- Levelling off existing substrates with grouts before installing loose-lay LVT.
- No preparation and mixing.
- Easy to remove, leaves no traces.



10 kg drums

HEAD OFFICE

MAPEI SpA

Via Cafiero, 22 - 20158 Milan

Tel. +39-02-37673.1

Fax +39-02-37673.214

Internet: www.mapei.com

E-mail: mapei@mapei.it

