



Spreading Ultrabond Eco 530

Advantages of Ultrabond Eco 530

- Excellent trowelability
- Rapid, strong initial tack
- Rapid set development
- Leg effect
- Excellent, rapid final hold
- High dimensional stability
- Makes laying linoleum easy, including around roll ends, rolling marks and folds
- Solvent-free
- Certified EC1 Plus - very low emission level of volatile organic compounds



Laying of linoleum



Laying a roll of linoleum



• Technical documentation

From the technical area menu you can view the technical documentation divided per product lines and type of document.

HEADQUARTERS
MAPEI SpA
 Via Cafiero, 22 - 20158 Milan
 Tel. +39-02-37673.1
 Fax +39-02-37673.214
 Internet: www.mapei.com
 E-mail: mapei@mapei.it



/mapeispa

C.P. MK 707830 - (GB) 12/13

Ultrabond Eco 530

PRODUCTS FOR LINOLEUM





Linoleum adhesive with a rapid, strong initial hold.

AREAS OF USE

Bonding linoleum rolls and tiles up to 4 mm thick, cork-backed linoleum and cork underlay. Suitable for internal absorbent substrates (including heated substrates).

Recommended for:

- normal and heavy traffic and loads in residential, commercial and industrial areas (e.g. shopping centres, airports, offices, schools, etc.)
- loads from wheelchairs in compliance with EN 12529.


Suitable also for resilient wall coverings.

PACKAGING

The product is supplied in 16 kg drums.



Certified as EC1 Plus

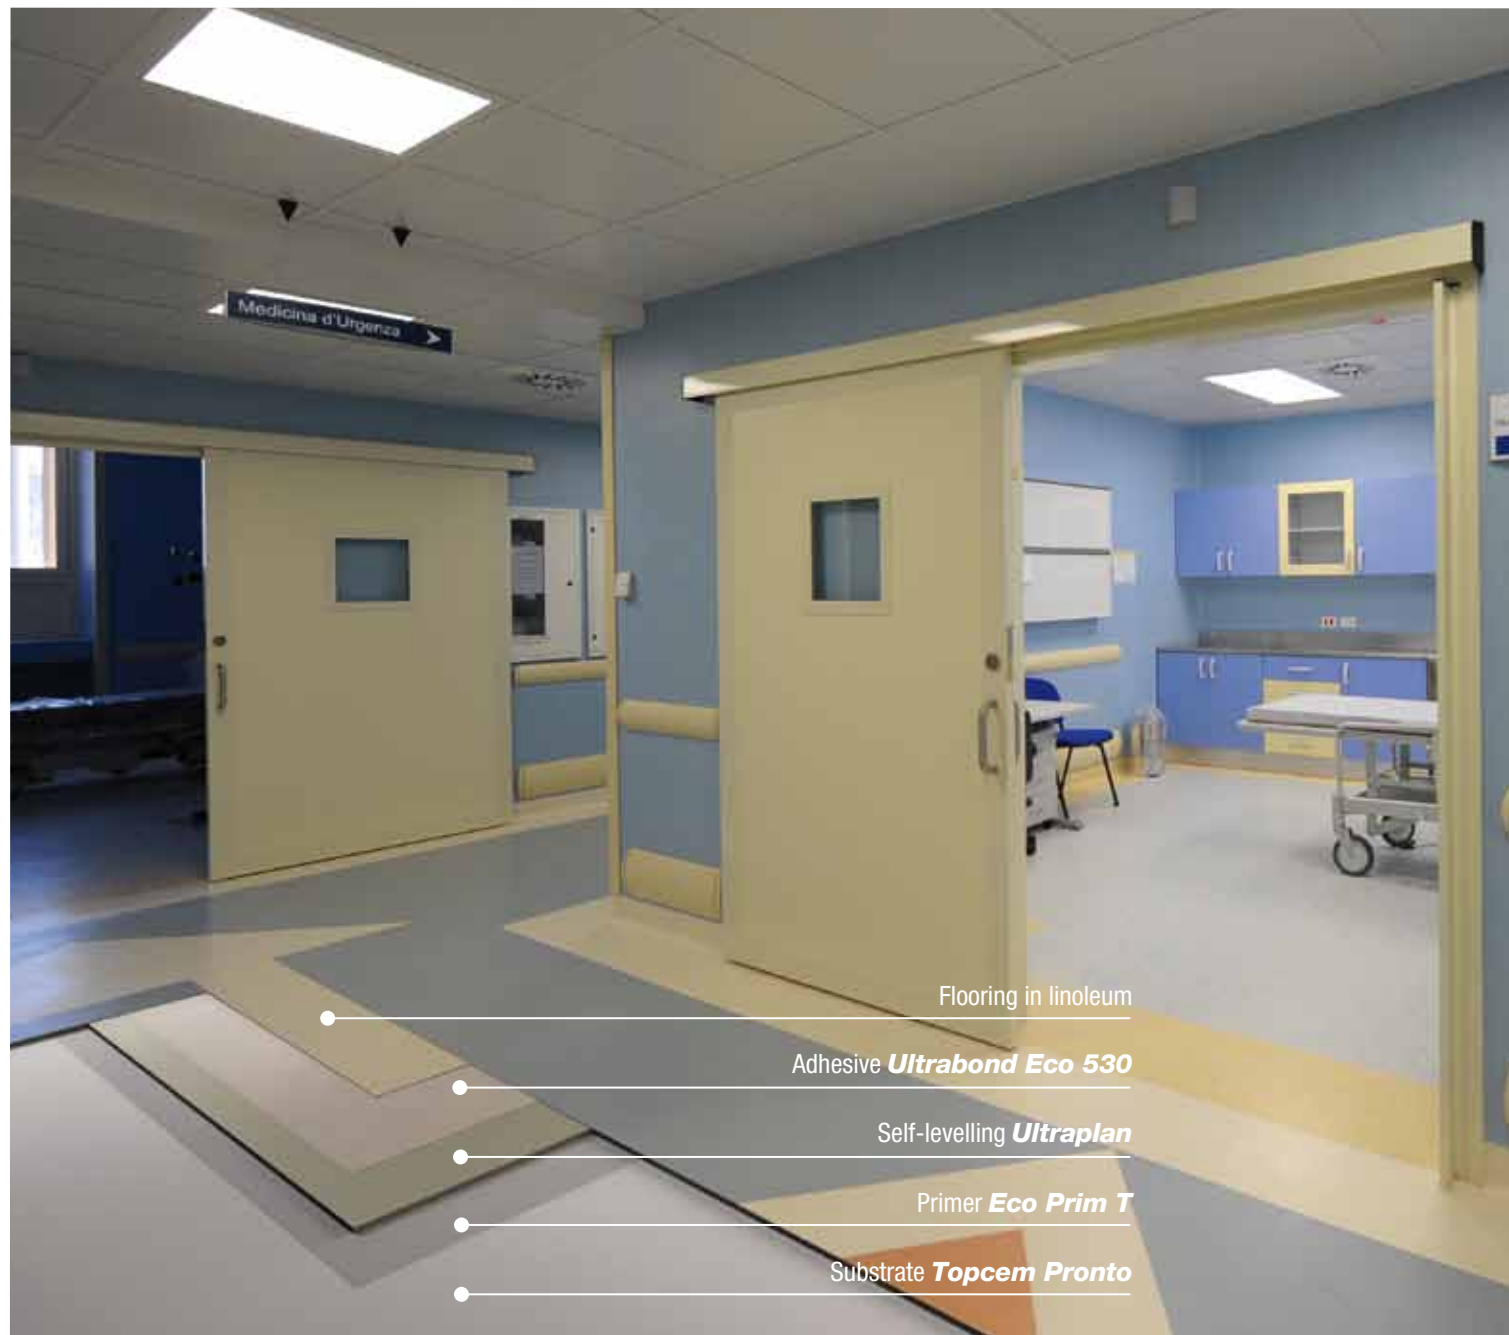

Flooring in linoleum

Adhesive **Ultrabond Eco 530**

Self-levelling **Ultraplan**

Primer **Eco Prim T**

Substrate **Topcem Pronto**