

Kerapoxy CQ

TWO-COMPONENT, ACID-RESISTANT EPOXY GROUT WHICH IS PARTICULARLY EASY TO APPLY AND CLEAN, **WITH A BACTERIOSTATIC AGENT AND BIOBLOCK® TECHNOLOGY**, IDEAL FOR GROUTING CERAMIC TILES AND MOSAICS



Kerapoxy CQ

Maximum performance

- With a bacteriostatic agent and BioBlock® technology: it prevents the proliferation of bacteria and the formation of mould on the surfaces of grouts, making tiled surfaces hygienic and safe
- Can be used also as an adhesive (class R2 in compliance with EN 12004)
- Quick, easy mixing
- Easy to apply and spread
- Easy to clean
- Speeds up grouting operations on large surfaces
- High resistance to acids
- Extremely strong
- No shrinkage or cracking
- Non-absorbent
- Maximum hygiene
- Low dirt pick up
- Suitable for surfaces in direct contact with foodstuffs in compliance with the HACCP system – EC REG. 852/04
- Suitable for any size of joint
- No sinking in floor joints, even with wide joints
- Does not run when applied on walls



Applying **Kerapoxy CQ** with a Mapei trowel

Technical data

Pot life of mix:	45 minutes
Set to light foot traffic:	approx. 24 hours
Ready for use:	after 3 days surfaces may be exposed to chemicals
Colours:	21 (see colour chart)
Application:	Mapei rubber trowel
Finishing:	Mapei cellulose sponge, Mapei joint cleaning kit
Storage:	24 months
Consumption:	according to the size of the joint
Packaging:	3 kg and 10 kg kits, depending on the colour

Colour chart

100	WHITE
111	SILVER GREY
113	CEMENT GREY
114	ANTHRACITE
120	BLACK
130	JASMINE
132	BEIGE 2000
146	RICH BROWN
147	CAPPUCCINO
151	MUSTARD YELLOW
160	MAGNOLIA
163	LILAC
165	CHERRY RED
170	CROCUS BLUE
173	OCEAN BLUE
181	JADE GREEN
182	TORMALINE
183	LIME GREEN
282	BARDIGLIO GREY
283	SEA BLU
290	CREAM

**wide
range**

Due to the printing processes involved, the colours should be taken as merely indicative of the shades of the actual product. For an accurate colour representation, please refer to "The Mapei Coloured Grouts" sample box. Colours can be affected by the surface (where they are used) and the brightness of the environment.

The top in Eco-sustainability


- Very low emission level of volatile organic compounds (VOC)
- Certified EMICODE EC1 R Plus
- Certified A+ in compliance with guide lines issued by the French Committee "GRENELLE DE L'ENVIRONNEMENT"
- Contains recycled raw materials
- Produced by environment-friendly plant equipment in conformity with ISO 14001 standards
- Helps designers and contractors create innovative LEED projects in compliance with the Green Building Council
- Product certified by the University of Modena (Italy) according to ISO 22196:2007 standards as a grouting mortar protected against the formation and proliferation of micro-organisms.
Ideal for grouting anti-bacterial tiles.



Applying **Kerapoxy CQ** with a Mapei trowel on walls



Cleaning with water and a disk cleaner fitted with a "Scotch Brite®" type abrasive disk

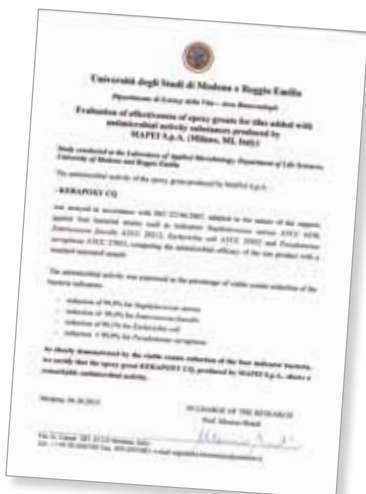

Removing liquid residues with a rubber spreader

The top in aesthetics

- Wide range of colours
- Fashionable colours in line with the latest trends in contemporary design
- Stable, colour-fast tints
- Ideal for bathrooms, kitchens, swimming pools, hot tubs, the foodstuffs industry, worktops, commercial environments and industrial applications





● Technical documentation

From the technical area menu you can view the technical documentation divided per product lines and type of document.

Calculate grout consumption with the **“Product calculator”** at www.mapei.com.

HEADQUARTERS

MAPEI SpA

Via Cafiero, 22 - 20158 Milan

Tel. +39-02-37673.1

Fax +39-02-37673.214

Internet: www.mapei.com

E-mail: mapei@mapei.it



/mapeispa