

Mapetiles Removable System

**REMOVABLE SOUNDPROOFING
AND ISOLATING SYSTEM
FOR LAYING CERAMIC FLOORS**



Mapetiles Removable System



**Removable soundproofing and isolating system
for laying ceramic floors**

WHAT IS THE MAPETILES REMOVABLE SYSTEM?

Mapetiles Removable System is a system for laying removable ceramic floors. The system comprises a double-sided adhesive film and soundproofing sheets. The two sides of the film **Mapecontact Release** have a different degree of tack to guarantee a good bond for the soundproofing sheet **Mapesonic CR** while allowing the film to be easily removed without leaving traces of adhesive on the substrate.

1. Existing ceramic flooring to be protected
2. New ceramic flooring laid using the **Mapetiles Removable System**





INSTRUCTIONS - Phase 1





APPLICATION OF MAPECONTACT RELEASE 50 mm EDGING BAND AND MAPECONTACT RELEASE 750 mm ROLL

1. Clean the existing flooring
2. Apply **Mapecontact Release** edging band along the walls and around doors and openings. Do not remove the protective film. Do not overlap different pieces of **Mapecontact Release** edging band; butt the ends together and trim them to suit.
3. Unroll the **Mapecontact Release** roll in the same direction the soundproofing sheets are to be laid while pressing down lightly on the roll.
4. Where possible, overlap adjacent pieces of film, massage them firmly and trim to suit. The roll of **Mapecontact Release** may overlap the edging band as long as it is then trimmed to suit.
5. Alternatively, butt adjacent pieces of film together (make sure there are no overlaps).

Note: the side with the strongest adhesive is protected by a liner and must face upwards when applied.



INSTRUCTIONS - Phase 2



1



2



3



4



5



6



7



APPLICATION OF MAPESONIC CR SOUNDPROOFING SHEET

1. Lay out the sheets of **Mapesonic CR** over the entire surface, butt them together and trim to suit.
2. Roll up the **Mapesonic CR** sheets for half of their length leaving the remaining half unrolled.
3. Peel off the protective liner from the **Mapecontact Release** rolls and edging band up to roll of **Mapesonic CR**.
4. Cut and remove the protective liner from the **Mapecontact Release**.
5. Lay the first half, previously rolled up, of **Mapesonic CR** (make sure there are no air bubbles or creases) and massage the surface crossways with a firm roller.
6. Roll up the second half of the **Mapesonic CR** sheet and remove the rest of the protective liner.
7. Slowly lay in position the remaining part of the **Mapesonic CR** sheet, massage and go over the surface of the **Mapesonic CR** sheets with a roller and trim the edges around the room.



INSTRUCTIONS - Phase 3





BONDING AND GROUTING CERAMIC FLOORING


1. Bond new ceramic flooring with adhesives such as **Elastorapid** or **Kerabond** mixed with **Isolastic**, **Keraflex Maxi S1** or **Ultralite S2**.
2. Use the double-buttering technique to bond the tiles.
3. Install the new ceramic flooring.
4. Grout the tiles with **Ultracolor Plus**, **Kerapoxy CQ** or **Kerapoxy Design**.
5. Clean the joint with the Scotch-Brite®.
6. Clean the joints with a sponge.
7. Ready for use.



INSTRUCTIONS - Phase 4



and FINALLY...

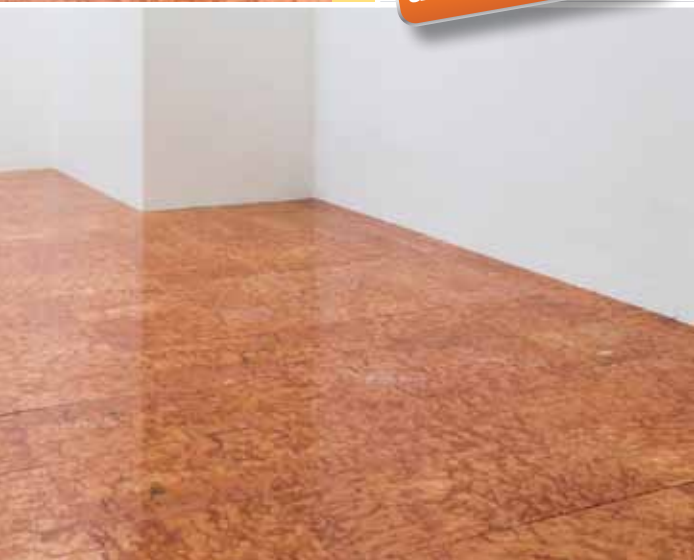



REMOVING FLOORING

1. Break the flooring with a hammer and flat chisel starting from the corner of one of the tiles, use a sucker-cup to remove the broken tiles and then remove the **Mapecontact Release + Mapesonic CR**, taking care not to damage the floor underneath.



● **Technical documentation**

From the technical area menu you can view the technical documentation divided per product lines and type of document.

HEADQUARTERS

MAPEI SpA

Via Cafiero, 22 - 20158 Milan

Tel. +39-02-37673.1

Fax +39-02-37673.214

Internet: www.mapei.com

E-mail: mapei@mapei.it



[/mapeispa](https://www.youtube.com/channel/UC...)