


# A ready-to-use grout with color-coated quartz

Offers faster, easier installation than a cement grout... **with many of the benefits of an epoxy grout:**

- NO** mixing
- NO** cracking
- NO** sealing
- NO** staining
- NO** efflorescence
- NO** callbacks

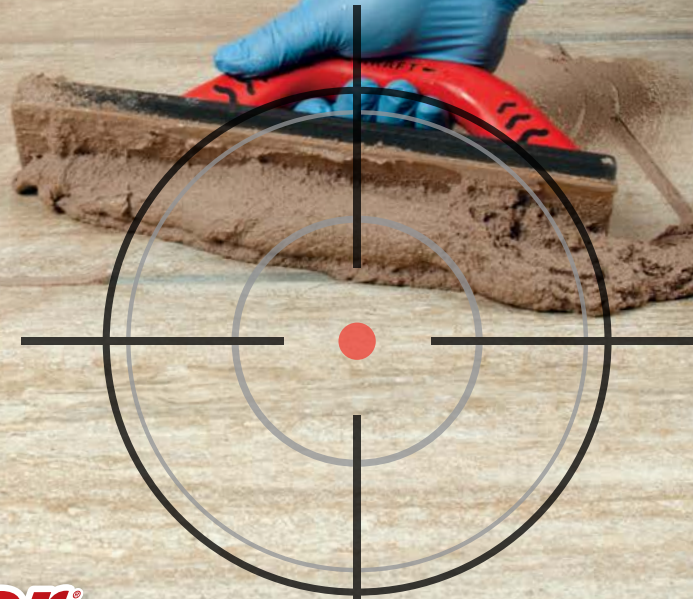

**MAPEI**  
**Flexcolor**  
**CQ**



**MAPEI Flexcolor CQ** is formulated with the latest innovation in quartz aggregate, which ensures color consistency, ease of cleanability and improved workability. The next-generation formula provides flush joints and helps to prevent most stains. This professional-grade, ready-to-use specialty grout was made for precision commercial and residential installations. It is available in 40 designer colors and three packaging sizes – 1-gallon, 2-gallon (U.S. only) and 0.5-gallon (Canada only). **MAPEI Flexcolor CQ** meets or exceeds ANSI A118.19.

Your reputation relies on being precise every time. Trust **MAPEI Flexcolor CQ**!



— MAPEI USA • MAPEI Canada —





## ANSI SPECIFICATIONS

Test Method	Specification Standard	Test Results
ANSI A118.19, Section 5.1 – indentation resistance (hardness)	≥ 1,000 psi (6.90 MPa) at 28 days dry ≥ 500 psi (3.45 MPa) at 7 days wet	Pass
ANSI A118.19, Section 5.2 – abrasion resistance	≤ 500 mm <sup>3</sup>	Pass
ANSI A118.19, Section 5.3 – resistance to mold growth	ASTM G21 – no growth	Pass
ANSI A118.19, Section 5.4 – water cleanability	Visual assessment: Free of visible haze, lumps and dry material	Pass
ANSI A118.19, Section 6.5 – chemical resistance	No deterioration; Indentation resistance: ≥ 500 psi (3.45 MPa)	Pass
ANSI A118.3 – vertical sag in joints	No noticeable change in joint shape	Pass
ASTM C627 – Robinson floor test	Performance level* Extra Heavy: Cycles 1 through 14 Heavy: Cycles 1 through 12 Moderate: Cycles 1 through 10 Light: Cycles 1 through 6 Residential: Cycles 1 through 3	Moderate

\* In accordance with the Performance-Level Requirement Guide of the TCNA Handbook for Ceramic, Glass, and Stone Tile Installation

## CHEMICAL RESISTANCE (ASTM C267)\*\*

Ammonia	Pass
Bleach	Pass
Potassium hydroxide, 3%	Pass
Acetic acid, 3%	Pass
Acetic acid, 10%	Pass
Ammonium chloride	Pass
Citric acid, 3%	Pass
Citric acid, 10%	Pass
Lactic acid	Pass
Peanut oil	Pass
Olive oil	Pass
Phosphoric acid, 3%	Pass
Phosphoric acid, 10%	Pass
Sulfamic acid, 3%	Pass
Sulfamic acid, 10%	Pass
Hydrochloric acid, 3%	Pass
Hydrochloric acid, 10%	Pass
Sulfuric acid, 3%	Pass

\*\* Testing conducted after 28-day full cure, with 24-hour full immersion



## PACKAGING

### Size

Pail: 1 U.S. gal. (3.79 L)

Pail: 2 U.S. gals. (7.57 L) – U.S. only

Pail: 0.5 U.S. gal. (1.89 L) – Canada only

## COLOR PALETTE

Scan below:



Scan for grout calculator

